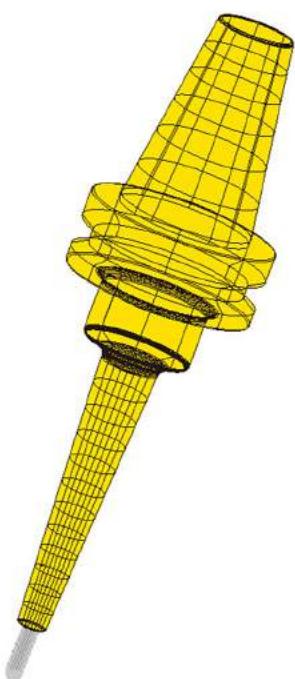


SHRINK-FIT HOLDER **SLIMLINE**



MST corporation


**Vol. 3
1709** ENG

for **High-accuracy**, and
High-efficiency machining

5 Points

1

The shortest
As short as possible




Length becomes **2 times**
Deflection becomes **8 times**

Use shrink-fit holders
with a slim-tip!

Deflection amount is proportional to projection length³.

2

Selection
Choose a tool holder that can clamp a cutting tool securely and with high accuracy.



Stronger than collet holders
Clamping force **3 times**
Run-out accuracy within **3 microns (.0001")**


Use shrink-fit holders
with strong clamping force and high accuracy!

The SLIMLINE shrink-fit holder provides the perfect solution.




A simple chucking mechanism without any parts.

- Stable gripping.
Gripping power 3 times.
- No gaps.
- No parts that could become loose.
- Does not fall off even if vibrated.



Super-slim shape

- Allows the holder to enter a workpiece.
Can be used with a standard tool.



High accuracy

- Twice the tool life.
- Slim tools are also no problem.
- Anyone can use them...


3

Quality

Do not use worn cutting tools.

Machining quality and speed

Drops




Replace!

4

Cleanliness

Clean your tool holders and cutting tools.



Cutting chips and oil are **your main enemies**.


Use a tool holder washing machine,
CLEAN BOX!

⇒ P.247

5

Accuracy

Machine spindle run-out accuracy should be within 10 microns (.0004").




Check the spindle condition

Use a test bar for dedicated machine spindle maintenance,


CHECKMATE!

⇒ P.251

✗ Short cutter life.




✗ Small tools break soon.



✗ Cutter run-out adjustment is troublesome.




✗ The end mill slips or falls off.



The workpiece is ruined.

✗ The applicable tools are special.



✗ The coolant leaks.



SHRINK-FIT HOLDER
SLIMLINE

**SLIMLINE can be used with all high-speed,
high-precision machining centers.**

**SLIMLINE can be used in a wide variety
of applications.**

Fine-precision machining
High speed and high feed
High speed and heavy duty cutting
Simultaneous 5-axis machining
High quality machining
Linear motor drive

NAK81
Inconel Zirconia
HRC62° Ti-6Al-4V
SKD61 STAVAX
Quartz glass

DMG MORI
HSC linear series
MAKINO
MAG, V22/V33; iQ300/iQ500
MAKINO J
J3
MITSUBISHI
μV1/μV5
MITSUI SEIKI
VL30/VL50
ROKU-ROKU
P12-C genesis , Android II
SODICK
UH430L/UH650L, TT1-400A
SUGINO
Xion- III/Xion- II-5AX
YASDA
YMC430 Ver. II ,YMC650

Japan



MIKRON
HSM series / MILL S Precision series / XSM series
WILLEMIN-MACODEL
30/40 series , 508S/MT , 508/528TB

Switzerland

France
FOREST-LINE
Aerostar, Aeromill, Minumac, Vstar, etc.



CINCINNATI MACHINE
SMART-t, MAXOR
HAAS AUTOMATION
VF, UMC
U.S.A.

Italy
FIDIA
D Range , G996 , HS664 , BSEseries , D321
PARPAS
AERO , XS , LHS

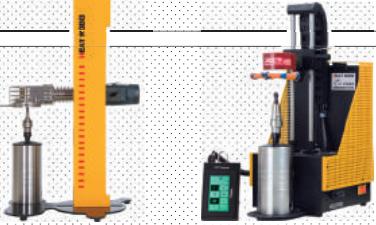
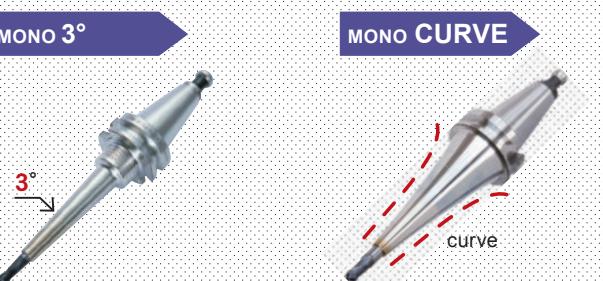



Germany

CHIRON
Series08/12
EXERON
HSC-Line, HSC-MP-Line
HERMLE
C series
KERN
Micro, Evo, Pyramid Nano
OPS-INGERSOLL
V5/9, 550/650
ROEDERS
RXP, RXS, RHP, RXD

Medical
Optical communication
Aerospace
Car · Mobile
Fuel battery
Semiconductor device

Master Index

SLIMLINE Product Overview		4
Shrink-fit Heater ●Hot air heating type Induction heating type		
MONO Series ●Slim, high accuracy and rigidity solid type		 MONO 3° MONO CURVE curve
2 PIECE TYPE ●Master holder and collet exchange modular type		
BLACKUNO ●Ultraprecise run-out accuracy.		 BLACKUNO UNO 0.5 micron 1 micron
HYPER version ●Gripping force and rigidity strengthening type		 Short type Heavy-duty type
Z ●Anti-rotation and anti-pulling out capability		
STRAIGHT arbor ●Straight shank type		
Related products ●Collet holder, Retention knob		
Peripheral equipment ●Washing machine, Work-table, Measuring equipment, Tool protection cover		
Technical Information		
		Specifications · Dimensions 10
Product List	Overview · Model	16
	BT30	18
	BT40	22
	BT50	51
	A40	80
	A50	85
	A63	88
	A100	125
	E25	161
	E32	163
	E40	168
	E50	175
	F63	185
	15T	204
	S20T	205
	RS20	206
	CT50	207
	Overview · Model	213
	6type	214
	8type	215
12type	216	
Overview · Model	221	
Product List	222	
Overview · Model	223	
Product List	Short type 224	
	Heavy-duty type 225	
Overview · Model	227	
Product List	BT 228	
	HSK 230	
	DIN 233	
	CAT. 235	
Overview · Model	237	
Product List	238	
COLLET HOLDER	242	
Face Mill Arbor	242	
DETa-1 Collet Holder	243	
Retention Knob	244	
Coolant duct	246	
TOOL SET UP STATION	247	
TOOL CAP TCC type	248	
TOOL SET UP STAND	249	
Goo CHECKER	250	
TEST BAR CHECKMATE	251	
TOOL HOLDER STORING CABINET	252	
ENDMILL HOUSE	253	
Secure technical support	254	
Instructions for use	255	
Rigidity of SLIMLINE	258	
For high speed rotation	261	
Reference data	262	
Technical data	265	
Overseas sales network	268	




RELIABLE TOOLING

MST's tooling is subject to its own MST's 4 precision standards: taper contact, roundness, surface roughness and heat treatment. These are more precise than JIS or MAS standards. We provide trustworthy products under strict quality control.

● MST's 4 precision standards

1 Taper contact	%	90
2 Roundness	μm	0.8
3 Surface roughness (R_{max})	μm	0.6
4 Heat treatment	Material	SCM415
	Carburized depth	mm
	Quenching hardness	HRC
		0.8 ~ 1.0
		55° ± 2°



INDEX

	CODE	NAME	Page
A	ADH-HSK25	Adapter	12
	AP40-T30V	Adapter for pot	249
	AP50-T30H	Adapter for hanger	249
	AQC-AH-01	Aqua cool	14
B	BAA-01	Base	12
	BAS-01	Adapter	12
C	CBX-01	CLEAN BOX	247
	CD40-01	Coolant duct	246
	CF8-3-45	SLIMLINE collet>Flush type	213
	CLT-GTA3-5	Cleaning tool > Rubber grindstone type	14
	HSK40-CMA20-103	TEST BAR CHECKMATE	251
	CN-103	Container box	14 252
	CR6-3-30	SLIMLINE collet>Regular type	213
	CRB12-6-35	SLIMLINE collet>Regular B type	213
	CS6-3-15	SLIMLINE collet>Slim type	213
E	EMO-SET-01	ENDMILL HOUSE	253
H	HAJ-3	Cutter adjuster	14
	HBX-A40	Tool holder storing cabinet	252
	HF-BT30	Tool set up stand>HF series	249
	HPY-01	Cutter stopper pliers	13
	HRB-01	HEAT ROBO Baby	10
	HRD-01S	HEAT ROBO DENJI	11
	HSA-EF	Cutter stopper>Coil spring type	13
	HSB-6	Cutter stopper>Plate spring type	13
	HSC-3	Cutter stopper>Slit collet type	13
	HTB-01	Heat-resistant gloves	13

	CODE	NAME	Page
M	MY CUBE ₅₀	My Cube	249
N	NOZ-M4	2 PIECE type > Coolant-through nozzle	217
P	P30T-1	Retention knob	244
	PETIT BALL ₄₀	Petit Ball	249
S	SDH-01	Cutter tray	13
	SDKT-RE	Holder stand	13
	BT30-SLK 6-35	2 PIECE type > Master holder	213
	E25-SLRA4-35 UNO	UNO	221
	E25-SLRA3-35 BLACK UNO	BLACK UNO	221
	BT40-SLR6-120 CV	MONO series>MONO CURVE	17
	BT40-SLRB20S-70-M42	HYPER VERSION >Short type	223
	BT40-SLRB20H-110-M42	HYPER VERSION >Heavy-duty type	223
	BT50-SLRA4-90-M22	Mono Series > MONO 3	16
	BT50-SLRB20Z-105	Z	227
	SPY-01	Stopper pliers	13
	ST10-SLSA3-80-M35	STRAIGHT arbor	237
T	TW-4	Wrench	214
	TCC0607-100	TOOL CAP TCC type	248
W	W-135	Wrench	217
Z	BT30-ZPM -165	Goo CHECKER mini	250

O	6SD -01	6S DESK	247
----------	----------------	----------------	------------

MST's SHRINK-FIT HOLDER SLIMLINE is

a system to hold tools (carbide) firmly and accurately by heating and cooling the holder (steel).

It is different from the existing mechanism of chucking, and is a revolutionary holder that uses the science of material expansion and shrinkage. SLIMLINE is made of MST's exclusive material which is developed to shrink-fit (insert/remove tool) easily at low temperatures (300°C on average).

It also has a coefficient of thermal expansion that is 1.6 times higher than that of regular steel. Unlike conventional holders, SLIMLINE does not require any parts such as collets and nuts to hold tools. The simple mechanism can make the nose very thin, even to a thickness

of 1.5mm, and achieve the slimmest holder on the market. It creates less work-piece interference and minimizes cutter projection in order to achieve stable and high-rigidity machining.

Our line-up contains 4,000 kinds to offer the most suitable holder design for a large variety of work-piece shapes. These are benefits that only SLIMLINE can offer.

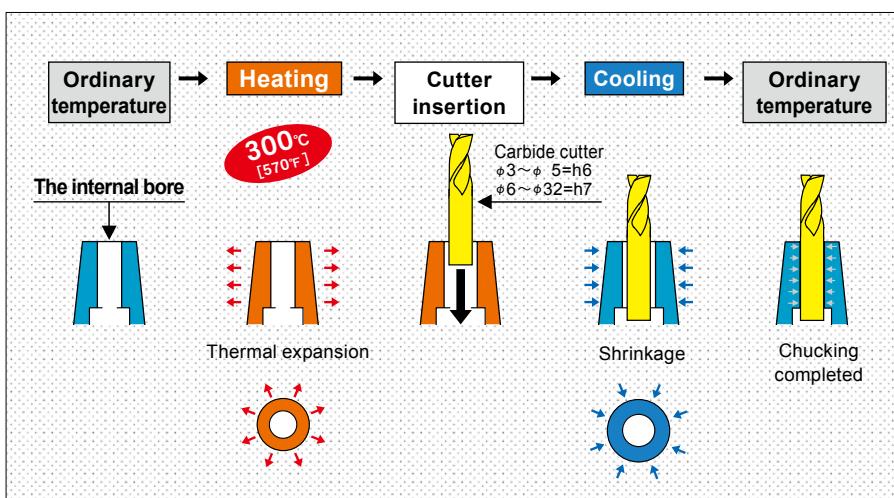
We promise that SLIMLINE will demonstrate its outstanding capabilities in 5-axis, micro-precision, heavy-duty, and many kinds of machining in order to improve accuracy, extend tool life and reduce production cost.

PAT.



Principle of shrinking technology

- A shrink-fit holder is a chucking system that utilizes the difference between the coefficients of thermal expansion of the holder material (steel) and the cutter (carbide).



Special material for shrink-fitting

Thermal expansion coefficient is 1.6 times higher.

- Special material is applied to MST's shrink-fit holders. This material has a higher coefficient of thermal expansion than that of competitor's shrink-fit holders, and you can shrink-fit at lower temperatures than that of competitors. Also, due to its superior heat resistance temperature, the holder doesn't receive any damage by overheating.

Shrink-fitting temperature and heatproof temperature

MST's SLIMLINE

Heatproof temperature

- You can heat it up to 720°C [1310°F] without any issue.

Shrink-fitting temperature

- Since the heating temperature is lower than 430°C [810°F], there is no adverse impact on holder life.

Coefficient of thermal expansion

- Between the holder(special material) and cutter(carbide).
 $\cdots 10.5 \times 10^{-6} \text{ mm/}^{\circ}\text{C}$

1.6 times
(Compared to
competitors'
holders)

The tip of the shrink-fit holder doesn't get burned due to the low heating temperature.



Long service life

Heatproof temperature
720°C
[1310°F]

Safety ratio

Maximum heating
temperature
430°C
[810°F]

Shrink-fitting temperature



Competitors' shrink-fit holder

Heatproof temperature

- Heat resistant temperature 580°C [1080°F], which is 20% lower than that of MST's proprietary material."

Shrink-fitting temperature

- They need 690°C [1270°F] for shrinking operation, and it means overheating. Thus, through repeated heating and cooling cycle, the internal bore of the shrink-fit holder deforms, and then the cutter doesn't go into the internal bore.

Coefficient of thermal expansion

- Between the holder(die steel) and cutter(carbide).
 $\cdots 6.5 \times 10^{-6} \text{ mm/}^{\circ}\text{C}$

The shrink-fit
holder burns due
to the high heating
temperature.

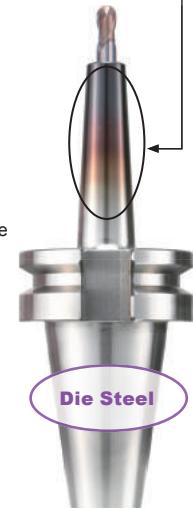
Short life

Maximum heating
temperature
690°C
[1270°F]

Over Heating

Heatproof temperature
580°C
[1080°F]

- Oxidation
- Contraction of a bore dia.
- Reducing hardness





The difference between the maximum heating temperatures of MST's shrink-fit holders and our competitors' (3mm dia. shank cutter).

The lifetime of shrink-fit holder


MST's SLIMLINE

A shrink-fit temperature of a SLIMLINE holder is as low as 430°C maximum. It never exceeds a heatproof temperature of 720°C.

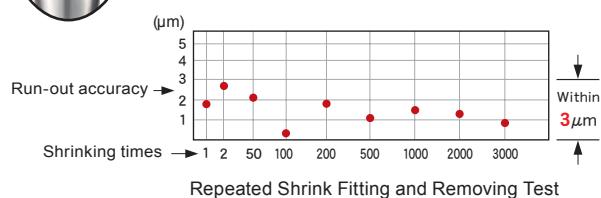
Repetitious shrinkage fitting does not cause the deterioration of a holder.



Competitors' shrink-fit holder



Heating
several times
at 700°C



The cutter is difficult to insert.
Run-out accuracy deteriorations.

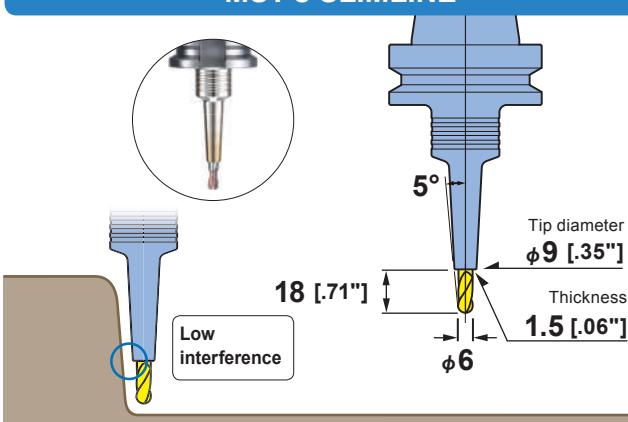
Repeated over-heating causes
change in properties of the
materials, the holder will be
reduced performance.

Super-slim design


Displaying the highest performance at deep machining

- The holder tip thickness with 1.5mm minimizes interference against the workpiece and jig fixtures.

MST's SLIMLINE



Competitors' shrink-fit holder

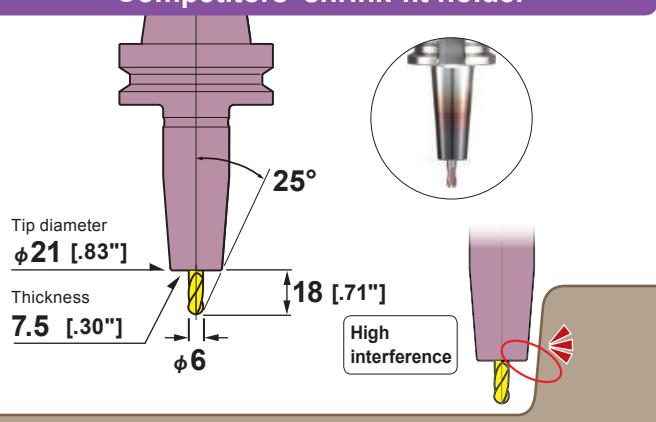


High rigidity


Shortest cutter projection

- The cutting tool life is extended and the finishing surface quality is improved tremendously thanks to reduced deflection.

SLIMLINE



Collet chuck



Deflection amount is proportional to projection length³.

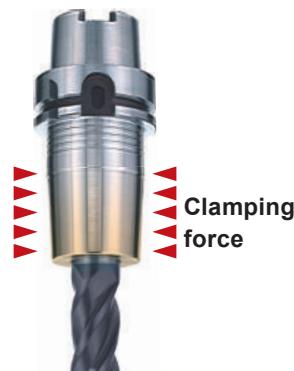

$$\text{Length becomes 2 times} \rightarrow \text{Deflection amount becomes 8 times}$$

$$S = \frac{6.8 \times F \times L^3}{E \times D^4}$$


S : Deflection amount D : Shaft diameter
L : Tool projection E : Young's modulus
F : Load

High clamping force

3 times greater clamping force (compare with a collet chuck)



SLIMLINE

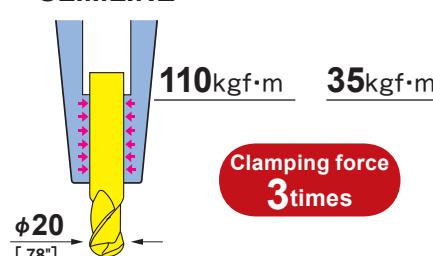

Collet chuck


High run-out accuracy

Stable high run-out accuracy can be achieved at all times.

- There are no tightening parts (such as nuts and collets) to hold cutters. The simple design maintains high-accuracy chucking.

MONO 3°


MONO CURVE





2 PIECE type



UNO



BLACK UNO



A broad line-up

MST's shrink-fit holder, SLIMLINE has an amazing line-up for all kinds of applications!

You can select the optimal holder from a lineup of **4000** types.

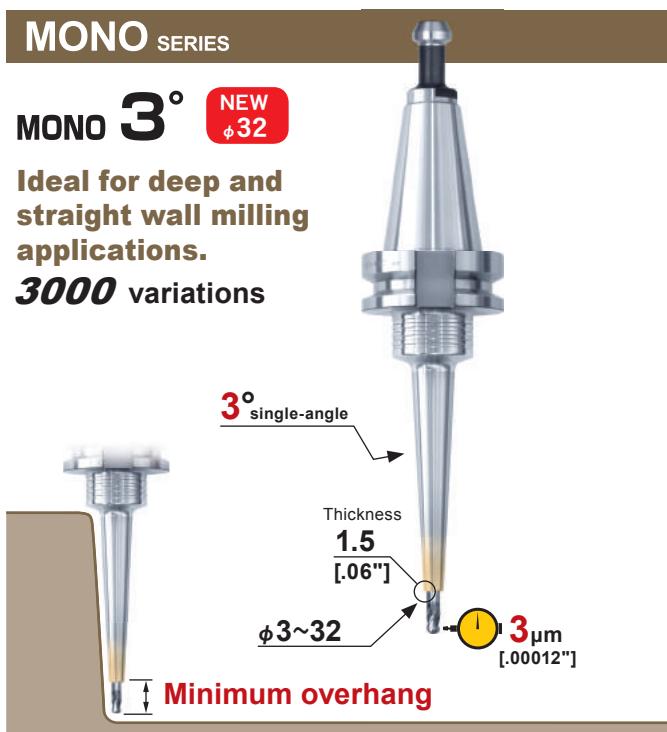


MONO SERIES

→ P.16

MONO 3° NEW $\phi 32$


Ideal for deep and straight wall milling applications.
3000 variations



MONO CURVE

PAT.

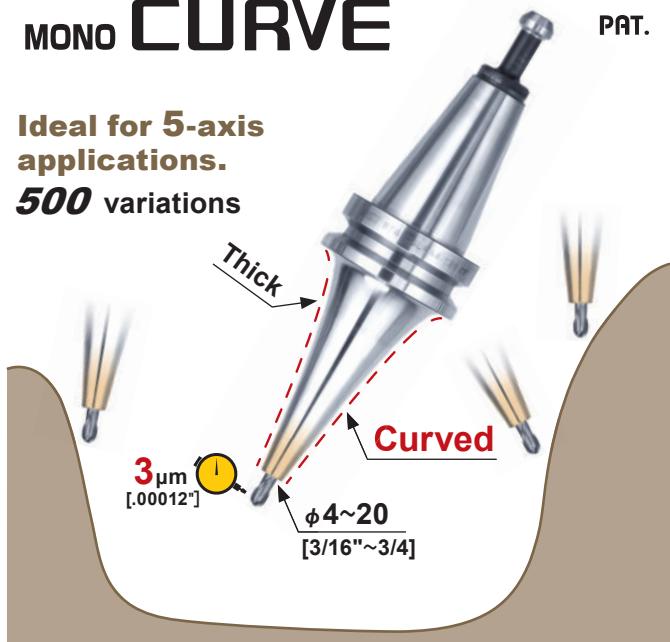Ideal for 5-axis applications.
500 variations




2 PIECE type

→ P.218

Highly versatile
250 variations

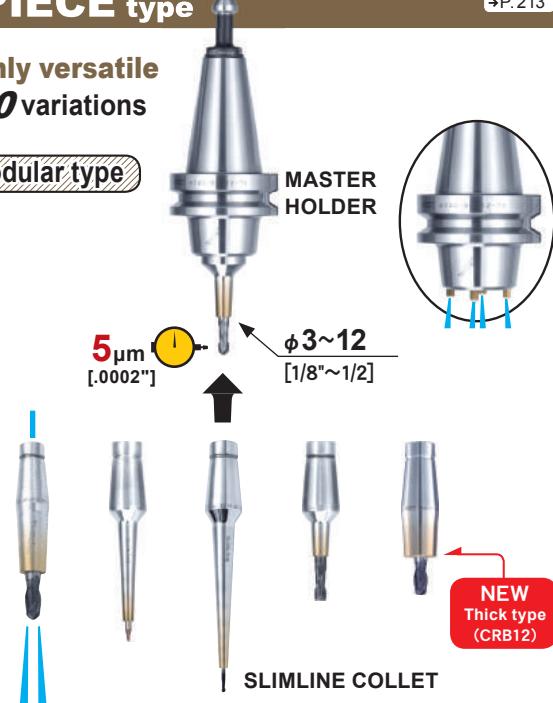Modular type



UNO

→ P.221

Superior accuracy

NEW

BLACK UNO

0.5µm [.00002"]



UNO



PAT.

HYPER VERSION

→ P.223

Heavy-duty endmill holder with high clamping force

φ12~25



Shortest L dimension

NEW BT30



Z

→ P.227

Anti-pulling out and anti-slipage mechanism

φ8~25

[5/16"~1]



PAT.



Cutters never fall out!

- Shrink-fitting temperature is comparatively low, about 300°C, which is safer for the materials.
- Tools can be changed by the inexpensive and compact shrink-fit unit.

Hot-air Heater

- The heater will not over-heat the holder.



3kw HEAT ROBO Baby3000S
\$3,000~



1.2kw HEAT ROBO Baby1200S



1kw HEAT ROBO Baby1000

Induction Heater

- Clean and safe Induction Heater. Desktop type.



1.2kw HEAT ROBO DENJI 1200S
\$9,200~



5kw HEAT ROBO DENJI 5000S

For COOLANT through

- The shrink-fit holder has a very simple configuration without a collet or a tightening nut. It is easily and completely compatible with through spindle coolant.




CUTTER through

From the tip of cutter



FLUSH through

From the tip of holder to the cutting edge



NOZZLE through

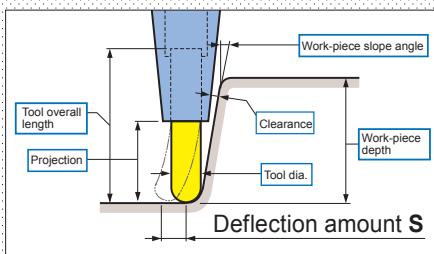
From the nozzle

Withstanding pressure 15MPa



Rigidity calculation software

- Automatically select optimum holders in the order of smaller deflection value S by inputting tool and work-piece information.



Holder automatic selection

⇒ P.260

Output DXF files.

No.	Holder	Deflection amount
1	BT40-SLSA6-150cv	3.2
2	BT40-SLSA6-120cv	4.8
3	BT40-SLSA6-180cv	5.2
4	BT40-SLSA6-125-M42	5.6
⋮	⋮	⋮

This system lists tool holders in descending order of rigidity.

USER Customization

Modifying outer-dimension

- When you have interference using a standard holder, you can customize it yourself.



⇒ P. 257

Production improvement examples

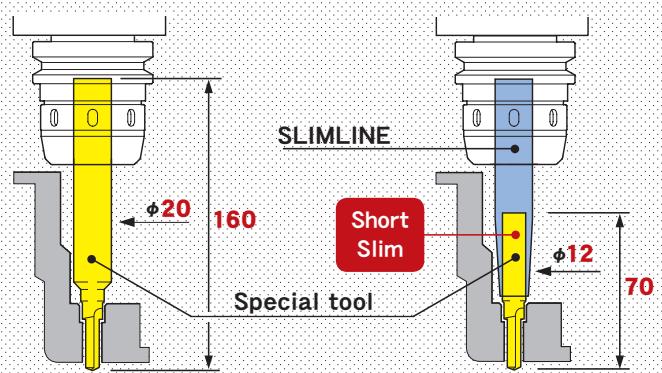
Feature

Examples 1 Improved tool design

- Reducing the overall length and diameter of the special cutting tool.




Special tool cost
50% down
¥60,000 → ¥30,000




Examples 2 Integration of a cutting tool and a holder

- SLIMLINE Solid type with the thinnest body design in the world allows the rigidity improvement tremendously at the straight wall application.




Tool life
3 times longer

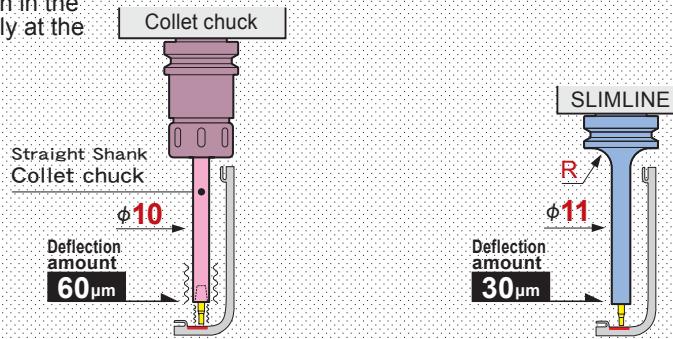


Examples 3 Interference avoidance.

- Replacing the special long drill to the standard drill.




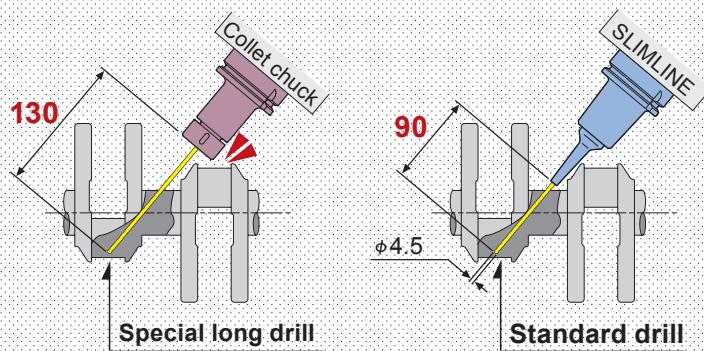Tool cost
reduction
¥23,000 → ¥12,500
Shortens
machining time
1min. → 30sec.




Examples 4 Small-size drilling

- SLIMLINE UNO allows dia. 0.07mm drilling.



From impossible to
possible

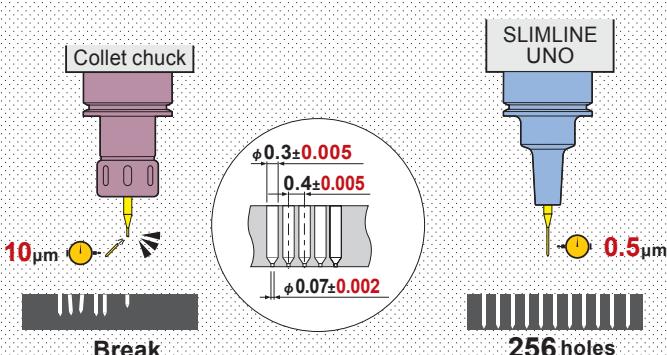

Shrink-fit Heater

MONO 3°
MONO CURVE

MONO series

2PIECE type

UNO

HYPER VERSION

Z

STRAIGHT arbor

OTHERS

PERIPHERALS

Technical data

Shrink-fit Heater **HEAT ROBO**

Feature
Shrink-fit Heater
MONO 3°
MONO CURVE
MONO series
2PIECE type
UNO
HYPER VERSION
Z
STRAIGHT arbor
OTHERS
PERIPHERALS
Technical data

■ Specifications

Shrink-fit Heater Spec.	DENJI 電磁 5000S	DENJI 電磁 1200S	Baby 3000S	Baby 1200S	Baby 1000
CODE	HRD-02S	HRD-01S	HRB-03ST	HRB-02S	HRB-01
Heating method	Induction type		Hot air type		
Output power	5000W	1200W	3000W	1200W	1000W
Cutter dia.	~Φ32 [1"]	~Φ12 [1/2"]	~Φ32 [1"]	~Φ12 [1/2"]	~Φ12 [1/2"]
Heating time	18 sec.		70 sec.	120 sec.	180 sec.

■ Compatibility table by holder type

Shrink-fit Heater Holder type	DENJI 電磁 5000S	DENJI 電磁 1200S	Baby 3000S	Baby 1200S	Baby 1000
MONO series	○	△	○	△	×
2 PIECE type	○	○	○	○	○
UNO	○	○	○	○	×
HYPER VERSION	○	×	○	×	×
Z	○	×	○	×	×
STRAIGHT arbor	○	▲	○	△	×

[○] : Available [×] : Not available [△] : Refer to size chart. [▲] : Requires recombinations of adaptors and bases. *Please verify compatibility for specific holders.

HOT AIR HEATER

No over-heating.
Compact Affordable.

Baby 3000S

CODE	Area	Size (WxDxH)	Power (Single phase)	Kg lbs
HRB-03ST	Japan	430×330×660mm	200V	9.5 (21)
-03ST-230NA	North America		230V	
-03ST-230EU	Europe			
-03ST-230AS	Asia			

■ Std. Access.

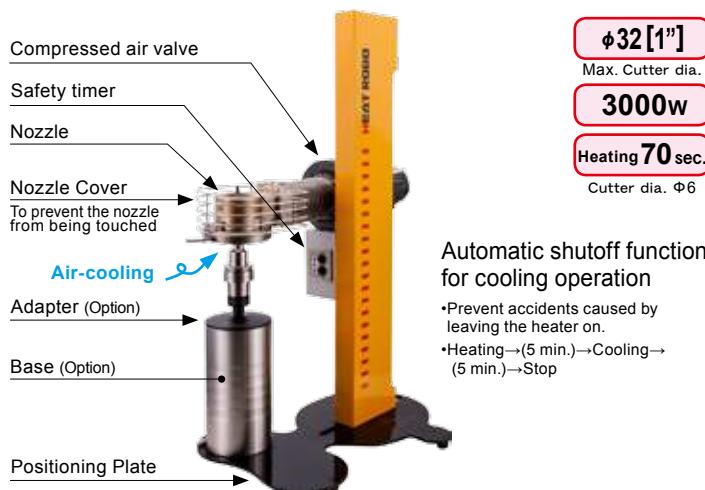
- Safety timer
- Heat-resistant gloves
- Tweezers

■ Option

- Please choose parts on P.12-15

■ Note

- Factory compressed air (5kgf/cm²) is required.(consumption air volume: 245 l/min)
- Prepare an air tube (O.D:8mm) and a connection coupling.
- A type without safety timer is also available. Ex. HRB-03S



Automatic shutoff function for cooling operation

- Prevent accidents caused by leaving the heater on.
- Heating → (5 min.) → Cooling → (5 min.) → Stop

Baby 1200S



φ12 [1/2"]

Max. Cutter dia.

1200W

Heating 120 sec.

Cutter dia. Φ6

Baby 1000



φ12 [1/2"]

Max. Cutter dia.

1000W

Heating 180 sec.

Cutter dia. Φ6

CODE	Area	Size (WxDxH)	Power (Single phase)	Kg lbs
HRB-02S	Japan	370×260×590mm	100V	8.0 (18)
-02S-120NA	North America		120V	

■ Std. Access.

- Timer
- Heat-resistant gloves
- Tweezers

■ Option

- Please choose parts on P.12-15

■ Note

- Some holders cannot be used.

CODE	Area	Size (WxDxH)	Power (Single phase)	Kg lbs
HRB-01	Japan	340×160×410mm	100V	3.5 (8)

■ Std. Access.

- Adapter (ADH-SLK)
- Timer
- Nozzles, 2 pieces (HNZ-17, HNZ-22)
- Heat-resistant gloves
- Tweezers

■ Option

- Please choose parts on P.12-15

■ Note

- A transformer is required in other voltage. Please consult MST about the details of the transformer.

INDUCTION HEATER

Compact desktop type.
Easy operation with touch panel.

DENJI 電磁 5000S

CODE	Size (WxDxH)	Power (3 phases)	Kg lbs
HRD-02SH	340×470×750mm	200-240V	30 (67)


- Std. Access.
 - Heat-resistant gloves
 - Tweezers
- Option
 - Heating coil(HRD2-CL) • Please choose parts on P.12-15
- Note
 - Use type HSB/HSC for cutter stopper.
 - Compressed air required: 5Kgf/cm² (air-consumption volume: 245l/min)
 - The customer should prepare the following items : auxiliary parts including the air tube (O.D: 8mm.) an air filter and a coupler.



φ32 [1"]
Max. Cutter dia.
5000W
Heating 18 sec.
Cutter dia. φ6

Heating coil (Option)

CODE	Holder I.D	Heating time	φ C	H
HRD2-CL1	φ3~6 [1/8" ~ 1/4"]	18 sec.	25	33
-CL2	φ7~12 ^{※1} [5/16" ~ 1/2"]	28 sec.	35	42
-CL3	φ16, 20 ^{※2※3} [5/8", 3/4"]		45	47
-CL4	φ25 [1"]	40 sec.	55	57
-CL5	MONO series (•MONO 3°[SLRB-SLFB8/10/12/16-M22])	35 sec.	fig. 1	
-CL6	HYPER VERSION (•Short type(All sizes) •Heavy-duty type [φ12, 16])	40 sec.	60	47
-CL7	φ32, HYPER VERSION (•Heavy-duty type [φ20, 25])	60 sec.	70	67

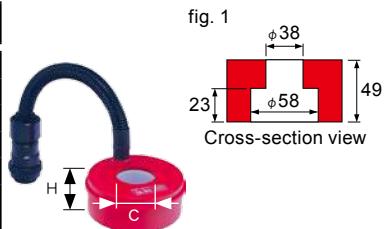

■ Std. Access.

- Protection sheet for heating coil →P.15

■ Note

- The coil protection sheet is a consumable part. Replace the coil protection sheet(option) when you see that it is colored or distorted by the heat.

■ Caution

- To protect the heating coil,don't heat a holder without using a coil protection sheet.
- When ordering, please note that holders for coil CL5, CL6, or CL7 cannot be heated by CL2, CL3, or CL4.
- *1 Use the coil, No.5 for SLRB-SLFB8/10/12-M22.
- *2 Use the coil, No.5 for SLRB-SLFB16-M22.
- *3 Use the coil, No.4 for A50M-SLRB20, F63-SLFB20

DENJI 電磁 1200S

CODE	Area	Size (WxDxH)	Power (Single phase)	Kg lbs
HRD-01S	Japan	230×410×550mm	100V	14 (31)
HRD-01S-120NA	North America	230×410×550mm	120V	19 (42)
-230AS	Asia		230V	

■ Std. Access.

- Heating coil(HRD-CL1, CL2) •Heat-resistant gloves •Tweezers

■ Option

- Please choose parts on P.12-15

■ Note

- Use type HSB/HSC for cutter stopper.
- Compressed air required: 5Kgf/cm² (air-consumption volume: 245l/min)
- The customer should prepare the following items : auxiliary parts including the air tube (O.D: 8mm.) an air filter and a coupler.

• A transformer is required in Europe.

Please consult MST about the details of the transformer.

Heating coil (Standard Accessories)

CODE	Holder I.D	Heating time	φ C
HRD-CL1	φ3~6 [φ 1/8" ~ 1/4"]	18 sec.	18
-CL2	φ7~12 [φ 5/16" ~ 1/2"]	33 sec.	28



φ12 [1/2"]
Max. Cutter dia.
1200W
Heating 18 sec.
Cutter dia. φ6



■ Note

- The coil protection sheet is a consumable part. Replace the coil protection sheet(option) when you see that it is colored or distorted by the heat.



Option**Base**

CODE
BAA-01

**Examples of typical uses****Adapter**

CODE	Dimensions	Holder	Shrink-Fit Heater model for Use																			
			Type	Screw size	HRD-02S	HRD-01S	HRB-03S	HRB-02S	HRB-01													
ADH-SLK	<p>M6 M8 M10 φ88 0.6kg</p>	<p>2 PIECE type SLIMLINE collet</p> <table> <tr><td>6 type</td><td>M6</td></tr> <tr><td>8 type</td><td>M8</td></tr> <tr><td>12 type</td><td>M10</td></tr> <tr><td>STRAIGHT arbor</td><td></td></tr> <tr><td>ST10</td><td>M6</td></tr> <tr><td>ST12</td><td>M8</td></tr> <tr><td>ST16/20/25</td><td>M10</td></tr> </table>	6 type	M6	8 type	M8	12 type	M10	STRAIGHT arbor		ST10	M6	ST12	M8	ST16/20/25	M10	○	○	○	○	○	○
6 type	M6																					
8 type	M8																					
12 type	M10																					
STRAIGHT arbor																						
ST10	M6																					
ST12	M8																					
ST16/20/25	M10																					
○	○	○	○	○	○																	
○	○	○	○	○	○																	
○	○	○	○	○	○																	
○	○	○	○	○	○																	
○	○	○	○	○	○																	
○	○	○	○	○	○																	
ADH-HSK25	<p>E25=φ14 E32=φ17 E40=φ21 E50=φ26 φ88</p>	<p>MONO 3° MONO CURVE UNO HYPER VERSION Z</p>	E25	○	△	○	△	×														
-HSK32			E32	○	△	○	△	×														
-HSK40E			E40	○	△	○	△	×														
-HSK40A			A40	○	△	○	△	×														
-HSK50			A50 / E50 / F63	○	△	○	△	×														
-40	<p>φ63.5 φ88 0.6kg</p>	<p>BT40 / A63 F63 / F80PD DN40 / CT40</p>	BT40 / A63 F63 / F80PD DN40 / CT40	○	△	○	△	×														
-50			BT50 / A100 DN50 / CT50	○	△	○	△	×														
-15TR			15TR3	○	△	○	△	×														
-S20TR			RS20 / S20TR	○	△	○	△	×														
-BT30			BT30	○	△	○	△	×														
BAS-01	<p>M10 M16 M24 φ88 0.7kg</p>	<p>STRAIGHT arbor</p>	ST16/20/25 M10	○	△	○	△	×														
			ST32 M16	○	△	○	△	×														
			ST42 M24	○	△	○	△	×														
-02			Carbide Shank ST○○○C	○	△	○	△	×														

[○] : Available

[×] : Not available

[△] : Restricted use

Φ70 Nozzle (Baby3000S)


CODE
HRB-NZL70

**Holder**

- MONO 3° SLRB32 φ32
- HYPER VERSION Heavy type (All sizes)

Option**■Cutter Stopper**

Used as a stopper in the holder when shrink fitting or removing a cutting tool.

HSA type (Coil Spring type)

CODE	φ D	Set Contents(Q'ty)
HSA-D [Ex.: HSA-6]	3, 3.175[1/8], 4, 5, 6, 7, 8, 9, 10, 11, 12, 16, 20, 25, [3/16, 1/4, 5/16, 3/8, 1/2]	Each size 10 ea. /SET
HSA-E	3, 4, 6, 8, 10, 12	1 ea., 6 pieces in total
-F	3, 4, 5, 6, 7, 8, 9, 10, 11, 12	1 ea., 10 pieces in total
-EF	3, 4, 5, 6, 8, 10, 12, 16, 20, 25	1 ea., 10 pieces in total



■Note • It cannot be used with HEAT ROBO DENJI.

HSB type (Plate Spring type)

CODE	φ D	Set Contents(Q'ty)
HSB-D [Ex.: HSB-3]	3, 3.175[1/8], 4, 5, 6, 7, 8, 9, 10, 11, 12, 16, 20, 25, 32 [3/16", 1/4", 5/16", 3/8", 1/2", 5/8", 3/4", 1"]	1 piece
-E	3, 4, 6, 8, 10, 12	1 ea., 6 pieces in total
-F	3, 4, 5, 6, 7, 8, 9, 10, 11, 12	1 ea., 10 pieces in total
-EF	3, 4, 5, 6, 8, 10, 12, 16, 20, 25	1 ea., 10 pieces in total

HSC type (Slit Collet type)

CODE	φ D
HSC-D [Ex.: HSC-3]	3, 3.175[1/8], 4, 6

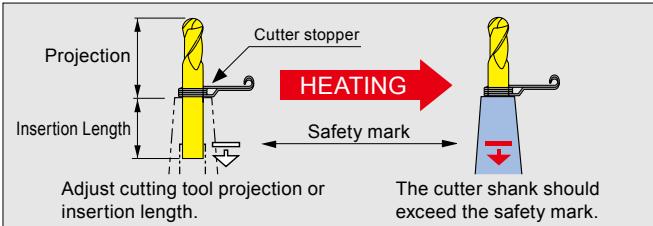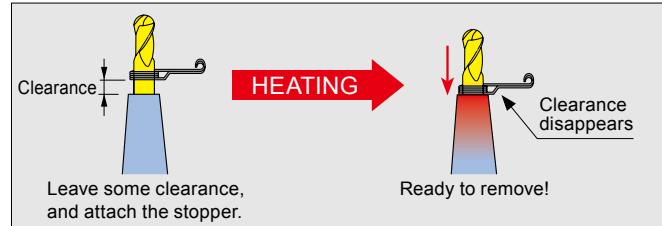**Insertion****Removing****Cutter Pliers**

Easy to hold a cutter.

CODE	
HPY-01	

**Stopper Pliers**

Easy to attach and detach for HSB type.

CODE	
SPY-01	

**Heat-Resistant Gloves**

For additional order

CODE	NOTE
HTB-01	—
-01-R	Right Hand
-01-L	Left Hand

**Cutter Tray**

Cooling Tray for heated cutting tools after removal from a holder.

CODE	
SDH-01	

Size:170×170(mm)

**Holder Stand**

The stand for the SLIMLINE collet, straight arbor and small shank holders (HSK-E25 and E32) is available in four colors, enabling simple color-coding.

CODE	Color	Front face	Back face	max. Q'ty
SDKT-RE	Red	SLIMLINE collet Straight arbor	Small shank holders (HSK-E25 / E32)	25 pieces each
-BL	Blue			
-GR	Green			
-GD	Gold			

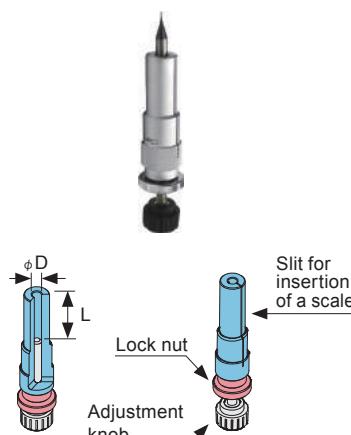
Size:190×190(mm)




Cutter Adjuster

Simply adjustment for cutting tool projection and insertion length.


CODE	ϕD	L
HAJ-3	3	10~ 30
-3.175	3.175 [1/8]	
-4	4	13~ 30
-3/16	[3/16]	
-6	6	19~ 45
-1/4	[1/4]	
-8	8 [5/16]	21~ 55
-10	10 [3/8]	22~ 70
-12	12	23~ 85
-1/2	[1/2]	
-16	16 [5/8]	26~ 90
-20	20 [3/4]	37~100
-25	25	40~100
-1"	[1"]	



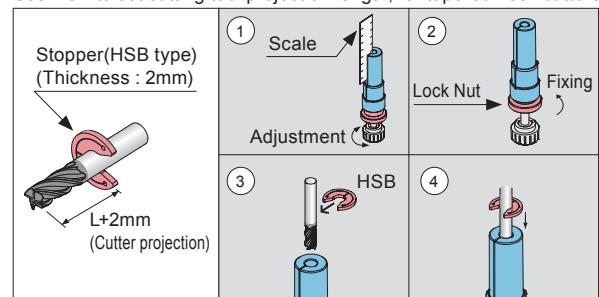Use HSB to set cutting tool projection length, for tapered neck cutters.



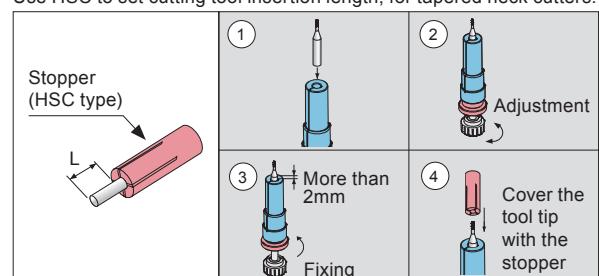Use HSC to set cutting tool insertion length, for tapered neck cutters.



Cleaning tools


Brush type

Nylon brushes for internal bores cleaning.

CODE	I.D
AQC-BR-SET	3 [1/8], 4 [3/16], 6 [1/4], 8 [5/16], 10 [3/8], 12 [1/2], 1 ea. 6 pieces in total
BR 3-5	3 [1/8], 5 pcs.
BR 4-5	4 [3/16], 5 pcs.
BR 6-5	6 [1/4], 5 pcs.
BR 8-5	8 [5/16], 5 pcs.
BR10-5	10 [3/8], 5 pcs.
BR12-5	12 [1/2], 5 pcs.

Caution

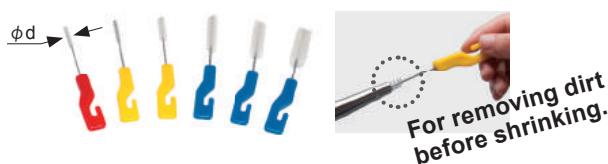- Do not use when holder is hot.



Rubber grinding stone type


To eliminate strong oxidized film, burned-in dust and oil that have been generated in the internal bores.

Standard set

CODE	Note
CLT-GTA-01	1 ea. of below model

Parts

CODE	NAME	ϕd	Q'ty
CLT-GTA-GP	Grip	-	1 pc.
CLT-GTA 3-5 -GTA 4-5 -GTA 6-5 -GTA 8-5 -GTA10-5	Rubber grind stone	3	5 pcs.
		4	5 pcs.
		6	5 pcs.
		8	5 pcs.
		10	5 pcs.



When it is getting hard
to insert cutters!

Aqua Cool


Aqua cool kit

Cooling kit for cooling SLIMLINE holders after shrink fitting or removing

CODE	Note
AQC-KIT-01	1 ea. for below model

Parts


CODE	Name	Note
AQC-EK-01-2	Special Liquid	2 ℥ of undiluted Solution, Use at a dilution ratio of 3%.
-AT-01	Aqua Tray	Drainer plate
-AH-01	Adapter Hanger	Hanger for lowering holders into liquid.
CN -245	Container Box	-
-FT	Lid for Container Box	

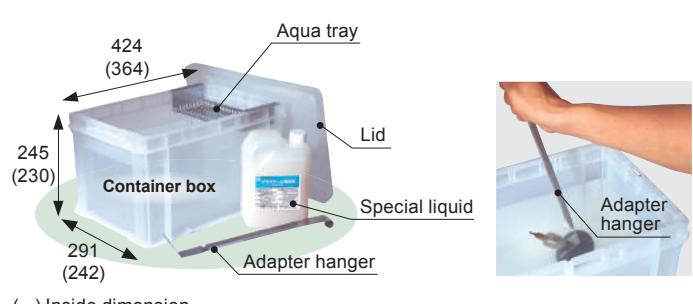


Protection sheet for heating coil (For Induction Heater)

Don't heat holders without using a coil protection sheet.


CODE	Heater model
HRD-DN Coil No.	HEAT ROBO DENJI 1200S
HRD2-DN Coil No.	HEAT ROBO DENJI 5000S



MONO SERIES

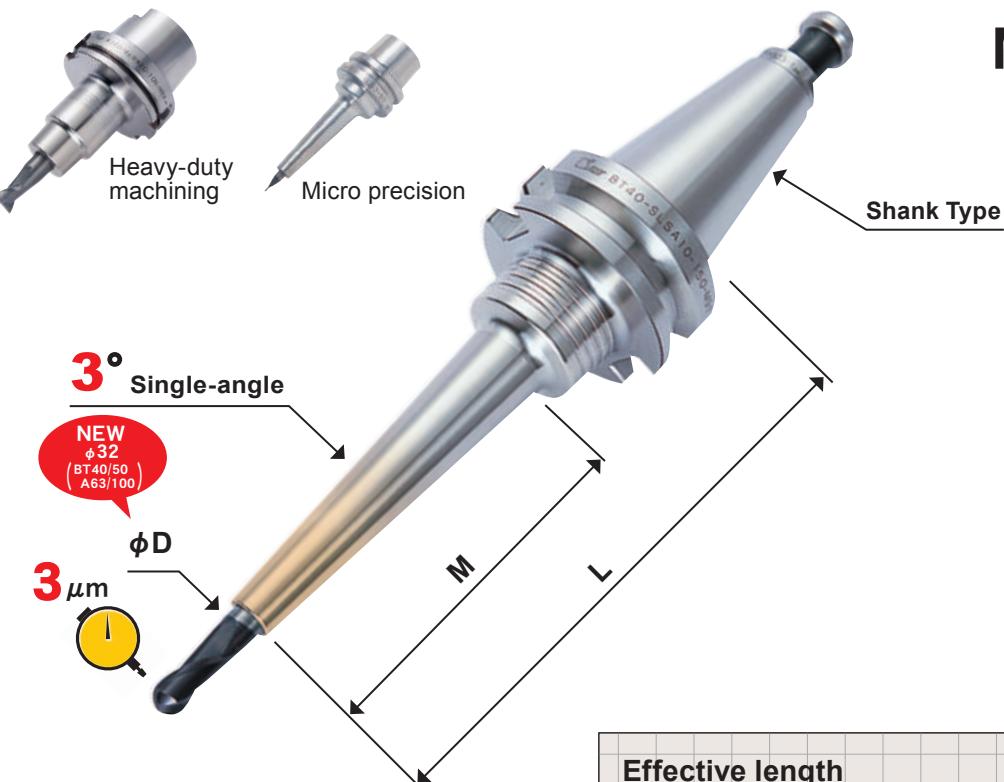

MONO 3°

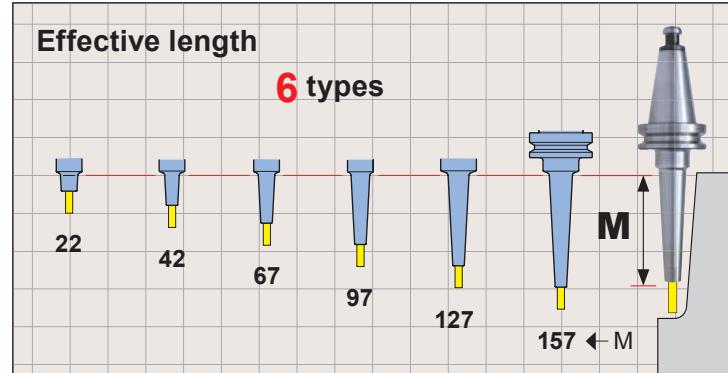

3,000 variations

BT50 – SL SA 3 – 110 – M42

Shank Type

SLIMLINE

ϕD

L

Effective length

PAGE	
18	BT30
22	BT40
51	BT50
80	A40
85	A50
88	A63
125	A100
161	E25
163	E32
168	E40
175	E50
185	F63
204	15T
205	RS20
206	S20T



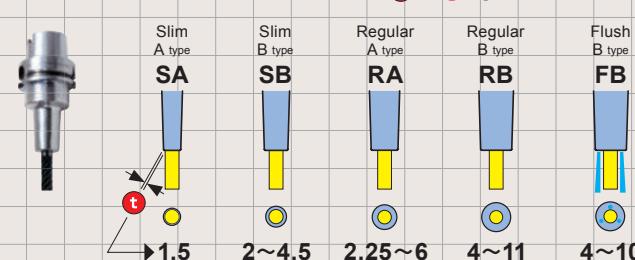
• Inch. size I.D is available upon request.

Coolant-through






Nose shape

Thickness t ... 5 types



• DIN and CAT. shank products are available upon request.

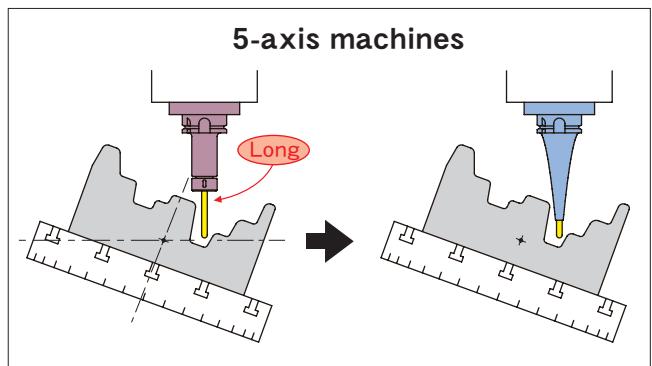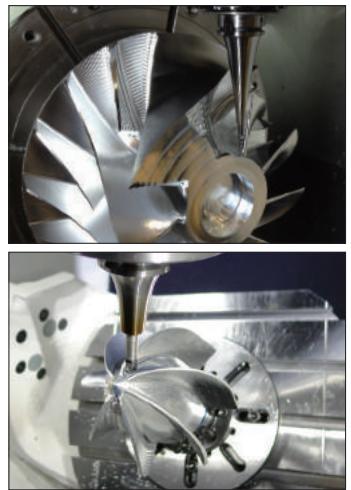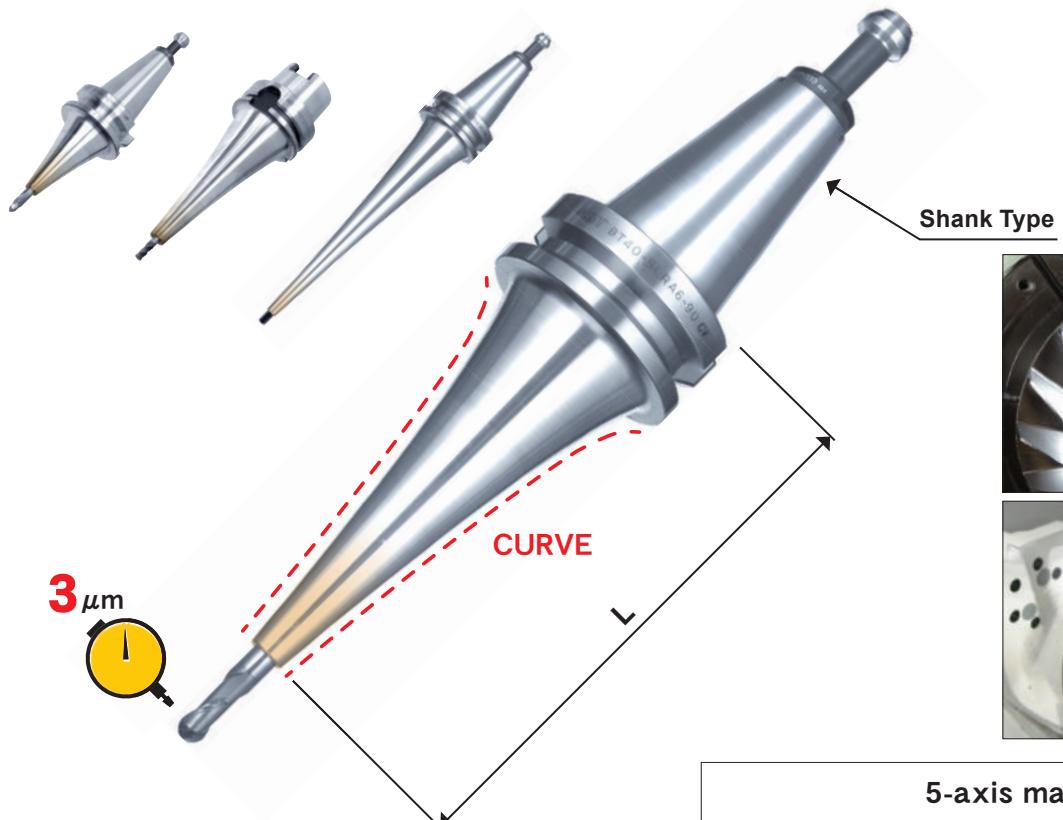MONO CURVE




BT50 - SL SA 4 - 165 cv

Shank Type SLIMLINE ϕD L CURVE

PAGE		Inch
18	BT30	—
22	BT40	—
51	BT50	—
88	A63	○
125	A100	○
163	E32	○
168	E40	○
175	E50	○
185	F63	○
207	CT50	○

● DIN shank products are available upon request.


Coolant-through



Cutter through Flush through

Nose shape

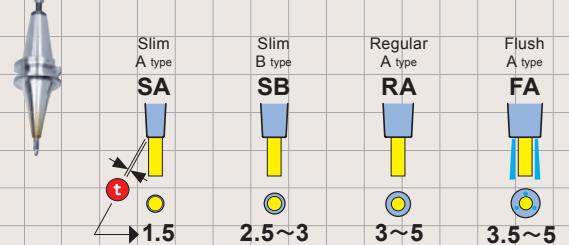Thickness t ... 4 types



Feature
Shrink-fit Heater

MONO 3°
MONO CURVE

MONO Series

2PIECE type

UNO

HYPER VERSION

Z

STRAIGHT arbor

OTHERS

PERIPHERALS

Technical

	Feature
	Shrink-fit Heater
MONO 3°	MONO CURVE
MONO Series	MONO CURVE
2PIECE type	MONO CURVE
UNO	MONO CURVE
HYPER VERSION	MONO CURVE
Z	MONO CURVE
STRAIGHT arbor	MONO CURVE
OTHERS	MONO CURVE
PERIPHERALS	MONO CURVE
Technical data	MONO CURVE

BT30


BT30-SLRA6-75-M22

MONO 3°





BT30-SLSA6-75 cv

MONO CURVE



CV : Curve

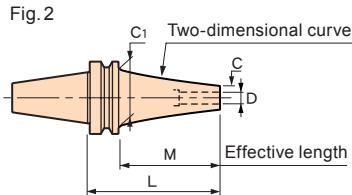


■ Option

- Retention knob → P.244

■ Caution
















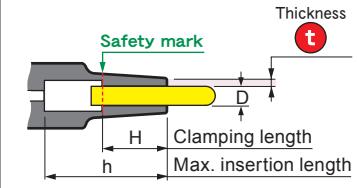
- Retention knob · · · Use a retention knob with hole, or remove the retention knob and heat it.
- Setting cutters · · Be sure to insert the tool beyond the safety mark.







CODE	Fig.	φD	φC	t	L	M	L1	φC1	φC2	H	h	Kg	N	S	Scale model	
BT30-SLSA3- 60-M22	1	3	6	1.5	60	22	16	8.3	20	9	80	0.4	0.8	4.7	1	
					75		31		25		99				2	
					95	42		31	10.4		119				3	
					120	67		13			144	0.5	1.6	14.9	4	
-SLRA3- 75-M22	1	3	7.5	2.25	75	22	31	9.8	25	9	99	0.5	1.6	2.8		
BT30-SLSA3.175-75-M22	1	3.175	6.175	1.5	75	22	31	8.5	25	9	99	0.4	0.8	4.4	5	
					95	42		10.6			119				6	
BT30-SLSA4- 75-M22	1	4	7	1.5	75	22	31	9.3	25	12	99	0.4	0.8	3.6	7	
					95	42		11.4			119				8	
					120	67		14			144	0.5	1.6	11.9	9	
-SLRA4- 75-M22	1	4	10	3	75	22	31	12.3	25	12	99	0.5	1.6	1.8		
-SLSA4- 75 CV	2	4	7	1.5	75	53	—	34	—	12	99	0.5	1	1.8	10	
					90	68					114				11	
					120	98					144				12	
-SLRA4- 90 CV	2	4	10	3	90	68	—	34	—	12	114	0.5	1	2	13	
					120	98					144				14	
BT30-SLSA6- 75-M22	1	6	9	1.5	75	22	31	11.3	25	18	99	0.4	0.9	2.4	15	
					95	42		13.4			119				16	
					120	67		16			144	0.5	1.7	8.3	17	
-SLRA6- 75-M22	1	6	12	3	75	22	31	14.3	25	18	99	0.4	0.9	1.4		
-SLSA6- 75 CV	2	6	9	1.5	75	53	—	34	—	18	99	0.5	1.3	1.5	18	
					90	68					114				19	
					120	98					144				20	
-SLRA6- 90 CV	2	6	13	3.5	90	68	—	34	—	18	114	0.5	1.1	1.6	21	
					120	98					144				22	
BT30-SLRA8- 75-M22	1	8	14	3	75	22	31	16.3	25	24	99	0.4	0.9	1.2	23	
					75	53		34	—		99				24	
					90	68					114	0.6	1.6	2.2	25	
-SLSA8- 75 CV	2	8	11	1.5	75	53	—	34	—	24	99	0.5	1.1	1.3	26	
					90	68					114				27	
					90	68					144				28	
-SLRA8- 90 CV	1	8	16	4	90	68	—	34	—	24	114	0.5	1.2	1.1		29

CODE	Fig.	ϕD	ϕC	t	L	M	L ₁	ϕC_1	ϕC_2	H	h	N Kg	S	Scale model
BT30-SLRA10- 75-M22	1	10	16	3	75	22	31	18.3	25	30	99	0.4	1	1.1
-SLSA10- 75 CV	2	10	13	1.5	75	53	—	34	—	30	99	0.5	1.6	1.2
- 90 CV					90	68					114		1.4	2
-SLRA10- 90 CV	2	10	19	4.5	90	68	—	34	—	30	114	0.6	1.5	1.1
BT30-SLRA12- 75-M22	1	12	20	4	75	22	31	22.3	25	30	99	0.5	1.2	1
BT30-SLRA16- 60-M22		16	26	5	60	22	16	28.3	34	32	60	0.5	1.6	0.5
BT30-SLRA20- 65-M22		20	32	6	65	22	21	34.3	40	38	60	0.6	2.1	0.4

Technical data	PERIPHERALS	OTHERS	STRAIGHT arbor	Z	HYPER VERSION	UNO	2PIECE type	MONO Series	MONO 3° MONO CURVE	Shrink-fit Heater	Feature	Scale model
												30
												31
												32
												33
												34
												35
												36

ϕ 3

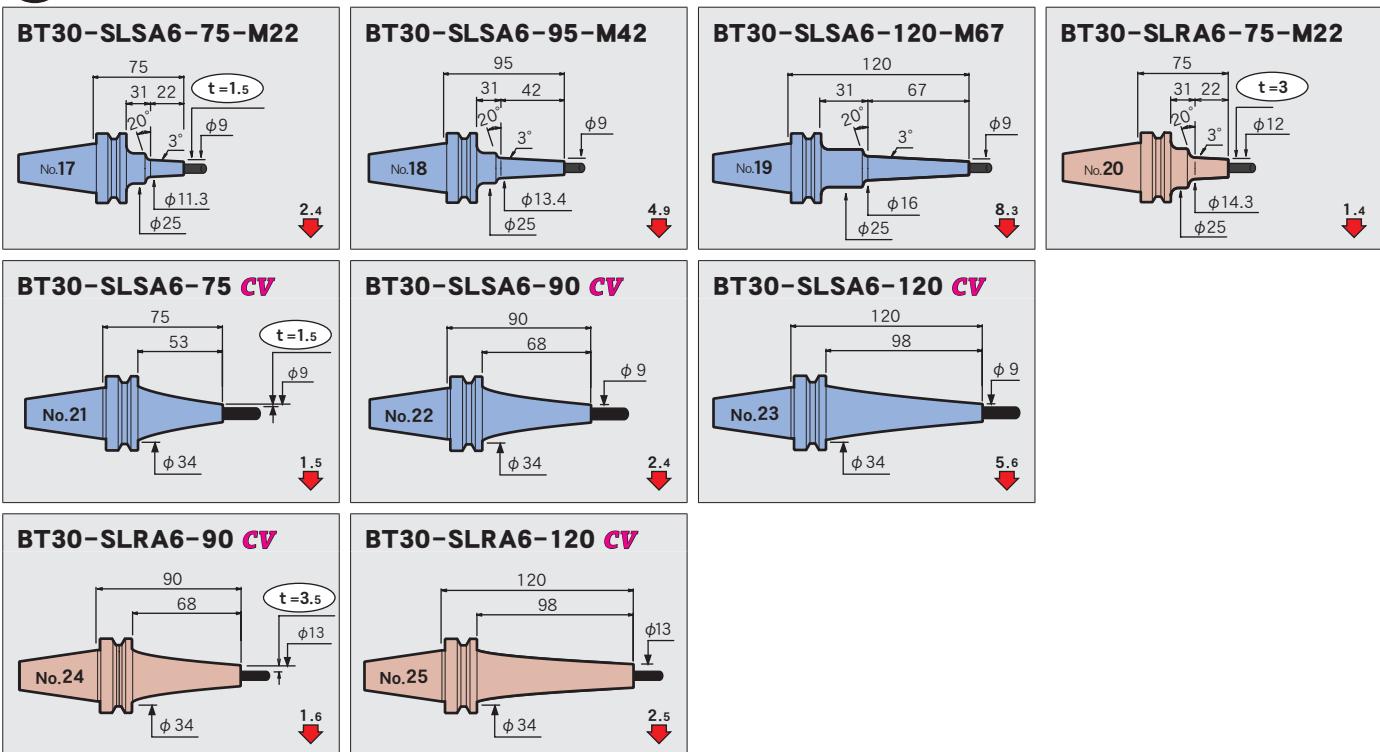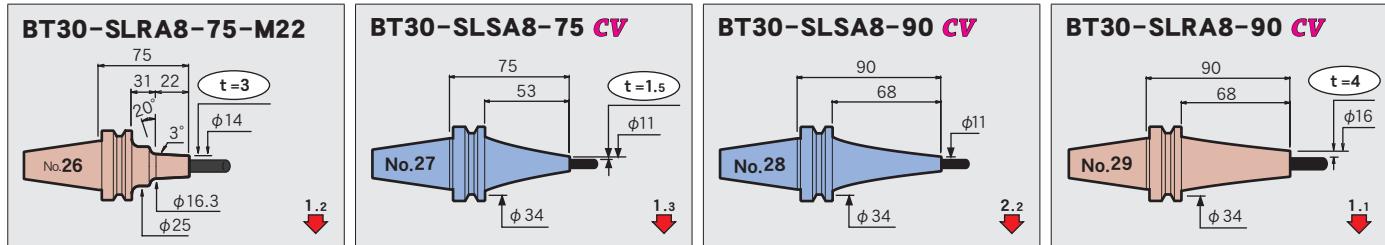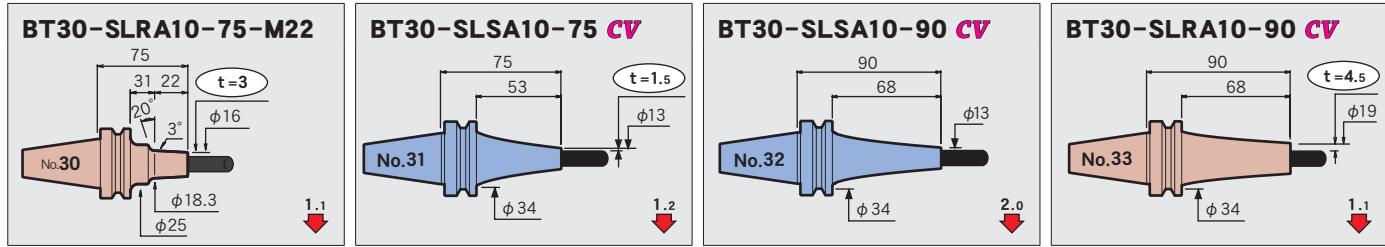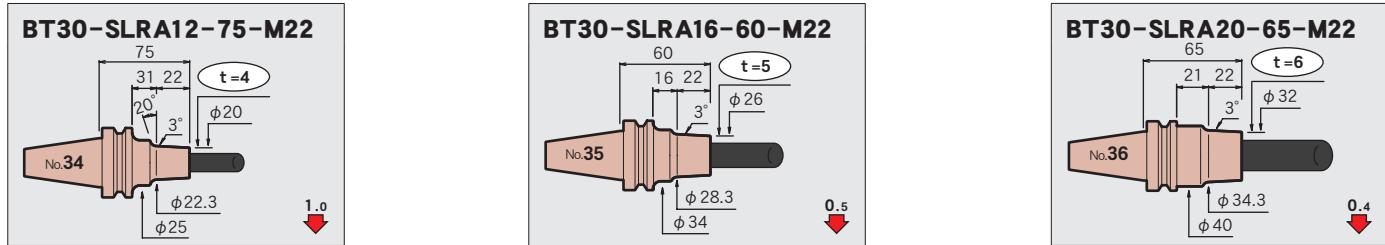φ 6**φ 8****φ 10****φ 12**

BT40

BT40-SLSA10-150-M97

MONO 3°



Fig.1





Fig. 2

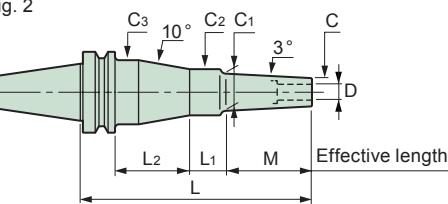

Compatibility table
for HRD-01S

- [○] Available [✗] Not available
- [▲] Usable by raising the heating unit. → P.257

BT40-SLFA6-120cv

MONO CURVE CV





Fig.3

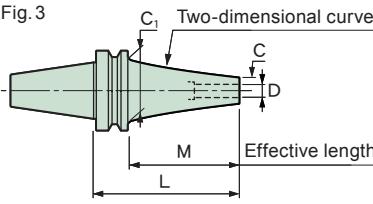

CV: Curve


Thickness

■ Option

- Retention knob → P.244

■ Caution

- Retention knob → Use a retention knob with hole, or remove the retention knob and heat it.
- Setting cutters → Be sure to insert the tool beyond the safety mark.



CODE	Fig.	φD	φC	t	L	M	L1	L2	φC1	φC2	φC3	H	h	Kg	N	S	Scale model	
BT40-SLSA3- 95-M 42	1	3	6	1.5	95	42	26	—	10.4	25	—	9	130	1	2.3	9.1	○	
					120	67			13				155			3.1	14.6	
					125	42	56		10.4				160	1.1		2.5	9.7	
					150	67			13				185			3.2	15.7	
					97	26			16.2				190	1.4		4	20.4	
					155	42	33	53	10.4	26	40		215			2.7	9.9	
					180	67			13							3.4	15.8	
					97	56	—		16.2						1.2	4.1	22.2	
-SLRA3- 75-M 22	1	3	7.5	2.25	75	22	26	—	9.8	25	—	9	110	1	2.6	2.7	○	
					95	42			11.9				130			2.9	5.3	
					105	22	56		9.8				140	1.1		2.7	3.2	
					120	67	26		14.5				155			3.4	8.8	
					125	42	56		11.9				160			3	6	
					135	22	33	53	9.8		39		170	1.4		2.9	3.2	
					150	67	56	—	14.5				185	1.2		3.5	14.5	
					97	26			17.7						1.1	4.1	12.8	
-135-M 22	2	3	7.5	2.25	135	22	33	53	9.8				190	1.4		3.2	6	○
					155	42	33	53	11.9	25	39		215			3.7	9.8	
					180	67			14.5	26	40				1.2	4.2	14.3	
					97	56	—		17.7						1.1	5.4	15.7	
					127	26			20.8	36					1.5	4.4	14.4	
					210	97	33	53	17.7	25	39				1.4	5.5	16.5	
					127	56	—		20.8	32	—				1.8	5.8	16.3	
					240	127	28	58		36	50							
-M 97	1																	
-M127	1																	
-210-M 97	2																	
-M127	1																	
-240-M127	2																	

CODE	Fig.	φD	φC	t	L	M	L ₁	L ₂	φC ₁	φC ₂	φC ₃	H	h	Kg	N	S	Scale model
BT40-SLFB3- 75-M 22	1	3	9.5	3.25	75	22	26	—	11.8	25	—	9	110	1	2.4	1.9	○
- 95-M 42					95	42			13.9				130		2.7	3.2	
-105-M 22					105	22	56		11.8				140	1.1	2.5	2.3	
-120-M 67					120	67	26		16.5				155		3.4	5.3	
-125-M 42					125	42	56		13.9				160		2.8	3.9	
-135-M 22	2				135	22	33	53	11.8		39		170	1.4	2.7	2.3	
-150-M 67	1				150	67	56	—	16.5		—		185	1.2	3.6	6.4	
-155-M 42	2				155	42	33	53	13.9		39		190	1.4	3	3.9	
-180-M 67					180	67			16.5	26	40		215		3.8	6.3	
BT40-SLSA4- 95-M 42	1	4	7	1.5	95	42	26	—	11.4	25	—	12	130	1	3.1	7.1	○
- 120-M 67					120	67			14				155			11.7	
-125-M 42					125	42	56		11.4				160	1.1	3.3	7.9	
-150-M 67					150	67			14				185			12.8	
-M 97					97	26			17.2						4.1	16.5	
BT40					155	42	33	53	11.4		39		190	1.4	3.5	7.9	
-155-M 42	2				180	67			14				215			12.8	
-180-M 67					97	56	—		17.2		—			1.2	4.2	18.3	
-M 97	1				210		33	53			39		245	1.5	4.4	18.2	
-210-M 97	2																
-SLRA4- 75-M 22	1	4	10	3	75	22	26	—	12.3	25	—	12	110	1	2.7	1.7	○
- 95-M 42					95	42			14.4				130		3.1	3.1	
-105-M 22					105	22	56		12.3				140	1.1	2.8	2.2	
-120-M 67					120	67	26		17				155		3.9	5.1	
-125-M 42					125	42	56		14.4				160		3.3	3.8	
-135-M 22	2				135	22	33	53	12.3		39		170	1.4	3	2.2	
-150-M 67	1				150	67	56	—	17		—		185	1.2	4	6.3	
-M 97					97	26			20.2					1.1	4.8	7.7	
-155-M 42	2				155	42	33	53	14.4		39		190	1.4	3.5	3.8	
-180-M 67					180	67			17				215		4.2	6.2	
-M 97	1				97	56	—		20.2		—			1.2	4.9	9.5	
-M127					127	26			23.3	32				1.2	6.8	9.3	
-210-M 97	2				210	97	33	53	20.2	25	39		245	1.5	5.1	9.4	
-M127	1					127	56	—	23.3	32	—			1.4	7	10.3	
-240-M127	2						30	56			46		275	1.8	7.3	10.4	
-SLFB4- 75-M 22	1	4	12	4	75	22	26	—	14.3	25	—	12	110	1	2.5	1.3	○
- 95-M 42					95	42			16.4				130	1.1	3	2.2	
-105-M 22					105	22	56		14.3				140		2.7	1.8	
-120-M 67					120	67	26		19				155		3.8	3.5	
-125-M 42					125	42	56		16.4				160	1.2	3.1	2.9	
-135-M 22	2				135	22	33	53	14.3		39		170	1.4	2.9	1.8	
-150-M 67	1				150	67	56	—	19		—		185	1.2	4	4.7	
-155-M 42					155	42	33	53	16.4		39		190	1.4	3.3	2.9	
-180-M 67					180	67			19				215	1.5	4.2	4.7	
-SLSA4- 90 CV	3	4	7	1.5	90	63	—	—	53	—	—	12	125	1.2	3.3	1.8	○
-120 CV					120	93							155	1.3	3.8	2.7	
-150 CV					150	123							185	1.5	4.4	4	
-180 CV					180	153							215		4.8	6.6	
-210 CV					210	183							245	1.6	4.9	11.6	
-240 CV					240	213							275	1.8	5.8	14	
-SLRA4-120 CV	3	4	10	3	120	93	—	—	53	—	—	12	155	1.3	3.9	1.9	○
-150 CV					150	123							185	1.4	4.3	2.9	
-180 CV					180	153							215	1.5	5.1	4.2	
-210 CV					210	183							245	1.7	5.7	5.7	

	CODE	Fig.	φD	φC	t	L	M	L ₁	L ₂	φC ₁	φC ₂	φC ₃	H	h	N Kg	S ↓	Feature	Scale model
MONO 3° MONO CURVE	BT40-SLSA6- 95-M 42	1	6	9	1.5	95	42	26	—	13.4	25	—	18	130	1	3.3	4.8	○
	-120-M 67					120	67		16				155	1.1	4.4	8		
	-125-M 42					125	42	56	13.4				160		3.5	5.6		
	-150-M 67					150	67		16				185	1.2	4.5	9.2		
	-M 97					97	26		19.2	32			1.1	5.9	11			
	-155-M 42					155	42	33	53	13.4	25	39	190	1.4	3.7	5.6		
	-180-M 67					180	67		16				215		4.7	9.2		
	-M 97					97	56	—	19.2	32	—		1.3	6.1	11.7			
	-210-M 97					210		30	56		46		245	1.7	6.4			
	-SLSB6- 95-M 42					95	42	26	—	14.4	25	—	18	130	1	4	3.6	○
MONO Series	-120-M 67	1	6	10	2	120	67		17				155	1.1	5.4	6.1		
	-125-M 42					125	42	56	14.4				160		4.1	4.5		
	-150-M 67					150	67		17				185	1.2	5.5	7.4		
	-M 97					97	26		20.2	32			190	1.4	4.3	4.4		
	-155-M 42					155	42	33	53	14.4	25	39	215		5.7	7.4		
	-180-M 67					180	67		17	25	39		1.3	7.4	9.2			
	-M 97					97	56	—	20.2	32	—		1.2	8.9	11			
	-M127					127	26		23.3				245	1.7	7.7	9.2		
	-210-M 97					210	97	30	56	20.2	46		275	1.8	9.4	12		
	-M127					127	56	—	23.3		—		1.3	10.6	13.2			
2PIECE type	-M157	1	6	14	4	157	26		26.5				275	1.7	10.8	14.5		▲
	-240-M127					240	127	30	56	23.3	46		305	1.9	11	14.6		
	-M157					157	56	—	26.5	36	—							
	-270-M157					270		30	56		32	46						
	-SLRB6- 75-M 22					75	22	26	—	16.3	32	—	18	110	1.1	3.2	1	
	- 95-M 42					95	42		18.4				130		4.3	1.6		
	-105-M 22					105	22	56	16.3				140	1.2	3.3	1.2		
	-120-M 67					120	67	26	21				155		5.6	2.6		
	-125-M 42					125	42	56	18.4				160	1.3	4.4	1.9		
	-135-M 22					135	22	30	56	16.3	46		170	1.6	3.6	1.2		
UNO	-150-M 67	2	6	14	4	150	67	56	—	21			185	1.3	5.8	3		○
	-155-M 42					155	42	30	56	18.4	46		190	1.6	4.7	1.9		
	-180-M 67					180	67		21				215	1.7	6.1	3.1		
	-SLFB6- 75-M 22					75	22	26	—	16.3	32	—	18	110	1.1	3.2	1	
	- 95-M 42					95	42		18.4				130		4.3	1.6		
	-105-M 22					105	22	56	16.3				140	1.2	3.3	1.2		
	-120-M 67					120	67	26	21				155		5.6	2.6		
	-125-M 42					125	42	56	18.4				160	1.3	4.4	1.9		
	-135-M 22					135	22	30	56	16.3	46		170	1.6	3.6	1.2		
	-150-M 67					150	67	56	—	21			185	1.3	5.8	3		
HYPER VERSION	-155-M 42	2	6	14	4	155	42	30	56	18.4	46		190	1.6	4.7	1.9		○
	-180-M 67					180	67		21				215	1.7	6.1	3.1		
	-SLFB6- 75-M 22					75	22	26	—	16.3	32	—	18	110	1.1	3.2	1	
	- 95-M 42					95	42		18.4				130		4.3	1.6		
	-105-M 22					105	22	56	16.3				140	1.2	3.3	1.2		
	-120-M 67					120	67	26	21				155		5.6	2.6		
	-125-M 42					125	42	56	18.4				160	1.3	4.4	1.9		
	-135-M 22					135	22	30	56	16.3	46		170	1.6	3.6	1.2		
	-150-M 67					150	67	56	—	21			185	1.3	5.8	3		
	-155-M 42					155	42	30	56	18.4	46		190	1.6	4.7	1.9		
Z	-180-M 67	2	6	14	4	180	67		21				215	1.7	6.1	3.1		○
	-SLSA6- 90 CV	3	6	9	1.5	90	63	—	—	53	—	—	18	125	1.2	3.3	1.6	
	-120 CV					120	93						155	1.3	3.8	2.3		
	-150 CV					150	123						185	1.5	4.3	3.6		
	-180 CV					180	153						215		4.9	5.7		
	-210 CV					210	183						245	1.7	5.7	7.3		
	-240 CV					240	213						275	1.8	5.9	12		
OTHERS	-SLRA6- 90 CV	3	6	13	3.5	90	63	—	—	53	—	—	18	125	1.2	3.3	1.2	○
	-120 CV					120	93						155	1.3	4	1.7		
	-150 CV					150	123						185	1.5	4.8	2.1		
	-180 CV					180	153						215	1.7	5.6	2.8		
	-210 CV					210	183						245		5.9	4.8		
	-SLFA6- 90 CV	3	6	13	3.5	90	63	—	—	53	—	—	18	125	1.2	3.3	1.2	○
	-120 CV					120	93						155	1.3	4	1.7		
	-150 CV					150	123						185	1.5	4.8	2.1		
	-180 CV					180	153						215	1.7	5.6	2.8		
	-210 CV					210	183						245		5.9	4.8		

CODE	Fig.	φD	φC	t	L	M	L ₁	L ₂	φC ₁	φC ₂	φC ₃	H	h	N Kg	S ↓	Scale model			
BT40-SLSA8- 95-M 42	1	8	11	1.5	95	42	26	—	15.4	25	—	24	130	1	4.6	3.4			
					120	67			18	32			155	1.1	6.3	5.4			
					125	42	56		15.4	36			160	1.3	4.7	3.4			
					150	67			18	32			185		6.5	5.9			
					97	26			21.2				1.2	8.4	7.9				
	2				155	42	33	53	15.4	25	39	24	190	1.4	5	4.3			
					180	67	30	56	18	32	46		215	1.6	6.7	5.9			
	1				97	56	—	21.2			—	24	1.3	8.6	8.7				
					210		28	58		36	50		245	1.9	8.8	8.4			
	-SLSB8- 95-M 42	8	13	2.5	95	42	26	—	17.4	32	—	24	130	1.1	5.3	2.1			
					120	67			20				155		7.4	3.5			
					125	42	56		17.4	36			160	1.3	5.5	2.3			
					150	67			20	32			185		7.6	4			
					97	26			23.2				1.2	10	5.2				
					155	42	30	56	17.4		46		190	1.6	5.7	2.5			
					180	67			20				215	1.7	7.9	4			
					97	56	—	23.2			—		1.4	10.2	6				
					127	26			26.3				1.3	12.6	7				
					210	97	30	56	23.2		46		245	1.7	10.4	6			
	-M 97				127	56	—	26.3		36	—		1.5	12.7	7.7	▲			
					157	26			29.5				1.4	15.1	8.5				
					240	127	30	56	26.3	32	46		275	1.8	13	8.1			
					157	56	—	29.5	42		—		1.7	15.3	8.6				
					270		28	58			53		305	2.2	15.6	8.7			
	-SLRB8- 75-M 22	1	8	18	5	75	22	26	—	20.3	32	—	24	110	1.1	3.6	0.7		
					95	42			22.4			130		5.3	1.1	×			
					105	22	56		20.3			140	1.2	3.8	0.9	○			
					120	67	26		25	36		155		7.5	1.7	○			
					125	42	56		22.4	32		160	1.3	5.5	1.4	○			
					135	22	30	56	20.3		46	170	1.6	4.1	1	×			
					150	67	56	—	25			185	1.4	7.6	2.2	○			
					155	42	30	56	22.4		46	190	1.7	5.8	1.5	○			
					180	67			25			215	1.8	7.9	2.2				
					75	22	26	—	20.3	32	—	110	1.1	3.6	0.7	×			
	BT40				95	42			22.4			130		5.3	1.1	○			
					105	22	56		20.3			140	1.2	3.8	0.9	×			
					120	67	26		25			155		7.5	1.7	○			
					125	42	56		22.4			160	1.3	5.5	1.4	○			
					135	22	30	56	20.3		46	170	1.6	4.1	1	×			
					150	67	56	—	25			185	1.4	7.6	2.2	○			
					155	42	30	56	22.4		46	190	1.7	5.8	1.5	○			
					180	67	28	58	25	36	50	215	1.9	7.9	2				
	-SLFB8- 75-M 22	1	8	18	5	75	22	26	—	20.3	32	—	24	110	1.1	3.6	0.7		
					95	42			22.4			130		5.3	1.1	○			
					105	22	56		20.3			140	1.2	3.8	0.9	×			
					120	67	26		25			155		7.5	1.7	○			
					125	42	56		22.4			160	1.3	5.5	1.4	○			
					135	22	30	56	20.3		46	170	1.6	4.1	1	×			
					150	67	56	—	25			185	1.4	7.6	2.2	○			
					155	42	30	56	22.4		46	190	1.7	5.8	1.5	○			
					180	67	28	58	25	36	50	215	1.9	7.9	2				
	-SLSA8- 90 CV	3	8	11	1.5	90	63	—	—	53	—	—	24	125	1.2	3.3	1.4		
						120	93							155	1.3	4	2		
						150	123							185	1.5	4.8	2.7		
						180	153							215	1.6	4.9	5		
						210	183							245	1.7	5.8	6.6		
						240	213							275	1.9	6.7	8.3		
	-SLRA8- 90 CV	3	8	16	4	90	63	—	—	53	—	—	24	125	1.2	3.8	0.7		
						120	93							155	1.4	4.2	1.2		
						150	123							185	1.6	4.9	1.8		
						180	153							215	1.7	5.7	2.6		
						210	183							245	1.8	6.5	3.5		
	-SLFA8- 90 CV	3	8	16	4	90	63	—	—	53	—	—	24	125	1.2	3.8	0.7		
						120	93							155	1.4	4.2	1.2		
						150	123							185	1.6	4.9	1.8		
						180	153							215	1.7	5.7	2.6		
						210	183							245	1.8	6.5	3.5		

Technical data	CODE	Fig.	φD	φC	t	L	M	L ₁	L ₂	φC ₁	φC ₂	φC ₃	H	h	N Kg	S ↓	Scale model	
MONO 3°	BT40-SLSA10- 95-M 42	1	10	13	1.5	95	42	26	—	17.4	25	—	30	130	1	5.5	2.6	193
MONO Series	-120-M 67					120	67		20	32			155	1.1	8.1	4	196	
MONO CURVE	-125-M 42					125	42	56	17.4	25			160		5.7	3.6	194	
MONO 3°	-150-M 67					150	67		20	32			185	1.3	8.2	4.6	197	
MONO CURVE	-M 97					97	26		23.2				1.2		6		199	
MONO 3°	-155-M 42	2				155	42	30	53	17.4	25	39		190	1.4	5.9	3.6	195
MONO CURVE	-180-M 67					180	67	28	58	20	36	50		215	1.8	8.5	4.4	198
MONO 3°	-M 97	1				97	56	—	23.2	32	—		1.3		6.9		200	
MONO CURVE	-210-M 97	2				210		30	56		46			245	1.7			201
MONO 3°	-SLSB10- 95-M 42	1	10	16	3	95	42	26	—	20.4	32	—	30	130	1.1	6.3	1.4	202
MONO CURVE	-120-M 67					120	67		23				155	1.2	9.3	2.4	205	
MONO 3°	-125-M 42					125	42	56	20.4				160	1.3	6.4	1.8	203	
MONO CURVE	-150-M 67					150	67		23				185		9.5	3	206	
MONO 3°	-M 97					97	26		26.2				1.2		13	3.6	208	
MONO CURVE	-155-M 42	2				155	42	30	56	20.4		46		190	1.6	6.7	1.9	204
MONO 3°	-180-M 67					180	67	30	56	23				215	1.7	9.8	3	207
MONO CURVE	BT40 -M 97	1				97	56	—	26.2				1.4		13.2	4.5	209	
MONO 3°	-M127					127	26		29.3	42					17.4			211
MONO CURVE	-210-M 97	2				210	97	30	56	26.2	32	46		245	1.8	13.5		210
MONO 3°	-M127					127	56	—	29.3	50			1.2		17.9	4.7	212	
MONO CURVE	-M157					157	26		32.5	42			1.5		21.1	5.6	214	
MONO 3°	-240-M127					240	127	86	29.3	50			2.1		18.5	5	213	
MONO CURVE	-M157					157	56		32.5				1.8		21.7	5.8	215	
MONO 3°	-270-M157	2				270		28	58		42	53		305	2.3	22.2	6.3	216
MONO 3°	-SLRB10- 75-M 22	1	10	22	6	75	22	26	—	24.3	32	—	30	110	1.1	3.8	0.6	217
MONO CURVE	- 95-M 42					95	42		26.4				130	1.2	6.3	0.8	220	
MONO 3°	-105-M 22					105	22	56	24.3				140	1.3	4		218	
MONO CURVE	-120-M 67					120	67	26	29	42			155		9.4	1.1	223	
MONO 3°	-125-M 42					125	42	56	26.4	32			160		6.5	1.2	221	
MONO CURVE	-135-M 22	2				135	22	30	56	24.3		46		170	1.7	4.3	0.9	219
MONO 3°	-150-M 67	1				150	67	56	—	29	42	—		185	1.5	9.6	1.3	224
MONO CURVE	-155-M 42	2				155	42	30	56	26.4	32	46		190	1.7	6.8		222
MONO 3°	-180-M 67					180	67	28	58	29	42	53		215	2.1	9.8	1.4	225
HYPER VERSION	-SLFB10- 75-M 22	1	10	22	6	75	22	26	—	24.3	32	—	30	110	1.1	3.8	0.6	226
Z	- 95-M 42					95	42		26.4				130	1.2	6.3	0.8	229	
Z	-105-M 22					105	22	56	24.3				140	1.3	4		227	
Z	-120-M 67					120	67	26	29	42			155		9.4	1.1	232	
Z	-125-M 42					125	42	56	26.4	32			160		6.5	1.2	230	
Z	-135-M 22	2				135	22	30	56	24.3		46		170	1.7	4.3	0.9	228
Z	-150-M 67	1				150	67	56	—	29	42	—		185	1.5	9.6	1.3	233
Z	-155-M 42	2				155	42	28	58	26.4	36	50		190	1.9	6.8	1.1	231
Z	-180-M 67					180	67		29					215	2	9.8	1.6	234
STRAIGHT arbor	-SLSA10- 90 CV	3	10	13	1.5	90	63	—	—	53	—	—	30	125	1.2	3.3	1.8	235
STRAIGHT arbor	-120 CV					120	93						155	1.5	4.3	1.3	236	
STRAIGHT arbor	-150 CV					150	123						185	1.6	4.9	2.2	237	
STRAIGHT arbor	-180 CV					180	153						215	1.7	5.6	3.4	238	
STRAIGHT arbor	-210 CV					210	183						245		6	6	239	
STRAIGHT arbor	-240 CV					240	213						275	2	7.9	5.8	240	
OTHERS	-SLRA10- 90 CV	3	10	19	4.5	90	63	—	—	53	—	—	30	125	1.3	3.8	0.7	241
OTHERS	-120 CV					120	93						155	1.4	4.6	0.9	242	
OTHERS	-150 CV					150	123						185	1.6	5.4	1.4	243	
OTHERS	-180 CV					180	153						215	1.8	6.3	2	244	
OTHERS	-210 CV					210	183						245		7.2	3.1	245	
PERIPHERALS	-SLFA10- 90 CV	3	10	19	4.5	90	63	—	—	53	—	—	30	125	1.3	3.8	0.7	246
PERIPHERALS	-120 CV					120	93						155	1.4	4.6	0.9	247	
PERIPHERALS	-150 CV					150	123						185	1.6	5.4	1.4	248	
PERIPHERALS	-180 CV					180	153						215	1.8	6.3	2	249	
PERIPHERALS	-210 CV					210	183						245		7.2	3.1	250	

CODE	Fig.	φD	φC	t	L	M	L ₁	L ₂	φC ₁	φC ₂	φC ₃	H	h	N Kg	S ↓	Scale model			
BT40-SLSA12- 95-M 42	1	12	15	1.5	95	42	26	—	19.4	32	—	30	130	1.1	7.1	1.8			
					120	67			22				155		10.7	3.3			
					125	42	56		19.4				160	1.2	7.3	2.3			
					150	67			22	36			185	1.4	10.9	3.6			
					97	26			25.2	32				1.2	15.3	4.9			
	2				155	42	30	56	19.4		46		190	1.6	7.5	2.3			
					180	67			22				215	1.7	11.2	3.9			
					97	56	—		25.2					1.4	15.5	5.8			
					210		30	56			46		245	1.7	15.8				
-SLSB12- 95-M 42	1	12	19	3.5	95	42	26	—	23.4	32	—	30	130	1.1	8	1.1			
					120	67			26				155	1.2	12.2	1.8			
					125	42	56		23.4				160	1.3	8.2	1.5			
					150	67			26	32			185		12.4	2.5			
					97	26			29.2	42					17.9	2.4			
	2				155	42	30	56	23.4	32	46		190	1.7	8.4	1.6			
					180	67	28	58	26	36	50		215	1.9	12.6	2.2			
					97	56		—	29.2	50				1.7	18.4	2.6			
					127	26			32.3	42				1.5	22.9	3.3			
					210	97	86		29.2	50			245	2.1	19	2.9			
-M 97	1	12	19	3.5	127	56			32.3					1.9	23.5	3.5			
					157	26			35.5	42				1.7	27.9	4.1			
					240	127	86		32.3	50			275	2.2	24	3.8			
					157	56			35.5					2	28.5	4.4			
					270		86						305	2.4	29.1	4.8			
	2																		
-SLRB12- 75-M 22	1	12	26	7	75	22	26	—	28.3	42	—	30	110	1.2	6.9	0.4			
					95	42			30.4				130		8.7	0.6			
					105	22	56		28.3				140	1.4	7.5	0.5			
					120	67	26		33	50			155		12.9	0.8			
	2				125	42	56		30.4				160	1.6	9.3	0.6			
					135	22	86		28.3				170	1.8	8.1				
					150	67	56		33	42			185	1.6	13.5	1.1			
					155	42	28	58	30.4		53		190	2	9.9	0.8			
-SLFB12- 75-M 22	1	12	26	7	75	22	26	—	28.3	42	—	30	110	1.2	6.9	0.4			
					95	42			30.4				130		8.7	0.6			
					105	22	56		28.3				140	1.4	7.5	0.5			
					120	67	26		33				155		12.9	0.8			
					125	42	56		30.4				160	1.5	9.3	0.7			
	2				135	22	28	58	28.3		53		170	1.9	8.1	0.6			
					150	67	56	—	33				185	1.6	13.5	1.1			
					155	42	86		30.4	50			190	2	9.9	0.8			
					180	67			33				215	2.1	14.1	1.1			
-SLSA12- 90 CV	3	12	15	1.5	90	63	—	—	53	—	—	30	125	1.3	3.7	1.5			
					120	93							155	1.5	4.6	1.2			
					150	123							185		4.9	2.4			
					180	153							215	1.7	5.7	3.3			
					210	183							245	1.9	6.6	4.6			
					240	213							275	2	8	5.5			
-SLRA12- 90 CV	3	12	22	5	90	63	—	—	53	—	—	30	125	1.3	3.9	0.6			
					120	93							155	1.6	5.1	0.7			
					150	123							185	1.7	6	1.1			
					180	153							215		6.9	1.9			
					210	183							245	1.8	7.7	2.8			
-SLFA12- 90 CV	3	12	22	5	90	63	—	—	53	—	—	30	125	1.3	3.9	0.6			
					120	93							155	1.6	5.1	0.7			
					150	123							185	1.7	6	1.1			
					180	153							215		6.9	1.9			
					210	183							245	1.8	7.7	2.8			

	CODE	Fig.	φD	φC	t	L	M	L1	L2	φC1	φC2	φC3	H	h	Kg	N	S	Scale model
MONO 3°	BT40-SLSB16- 95-M 42	1	16	24	4	95	42	26	—	28.4	42	—	32	105	1.2	12.4	0.7	309
Shrink-fit Heater	-120-M 67					120	67			31				130	1.3	19.3	1.1	312
	-125-M 42					125	42	56		28.4				135	1.4	13	0.9	310
	-150-M 67					150	67			31				160	1.5	19.8	1.4	313
	-M 97						97	26		34.2	42				1.4	27.6	1.7	315
	-155-M 42	2				155	42	28	58	28.4			53	165	1.9	13.5	1	311
	-180-M 67					180	67			31				190	2	20.4	1.5	314
	-M 97	1					97	56	—	34.2	50				1.8	28.1	1.9	316
	-M127						127	26		37.3	53				1.7	35.8	2.1	318
	-210-M 97					210	97	86		34.2	50			220	2.1	28.7		317
	-M127						127	56		37.3					2	36.4	2.5	319
	-M157						157	26		40.5	53				1.9	44.1	2.7	321
	-240-M127					240	127	86		37.3				250	2.5	37	2.6	320
	-M157						157	56		40.5	50				2.2	44.7	3.1	322
	-270-M157					270		86						280	2.5	45.3	3.5	323
MONO Series	-SLRB16- 75-M 22	1	16	32	8	75	22	26	—	34.3	42	—	32	85	1.2	6.9	0.3	324
	- 95-M 42					95	42			36.4				105	1.3	12.5	0.5	327
	-105-M 22					105	22	56		34.3				115	1.4	7.5		325
	-120-M 67					120	67	26		39				130	1.5	19.4	0.7	330
	-125-M 42					125	42	56		36.4				135	1.6	13		328
	-135-M 22	2				135	22	28	58	34.3			53	145	2	8.1	0.5	326
	-150-M 67	1				150	67	56	—	39				160	1.7	20	0.9	331
	-155-M 42	2				155	42	28	58	36.4			53	165	2.1	13.6	0.7	329
	-180-M 67					180	67			39				190	2.3	20.5	1	332
2PIECE type	-SLFB16- 75-M 22	1	16	32	8	75	22	26	—	34.3	42	—	32	85	1.2	6.9	0.3	333
	 - 95-M 42					95	42			36.4				105	1.3	12.5	0.5	336
	-105-M 22					105	22	56		34.3				115	1.4	7.5		334
	-120-M 67					120	67	26		39				130	1.5	19.4	0.7	339
	-125-M 42					125	42	56		36.4				135	1.6	13		337
	-135-M 22					135	22	86		34.3	50			145	1.9	8.1	0.5	335
	-150-M 67					150	67	56		39	42			160	1.7	20	0.9	340
	-155-M 42					155	42	86		36.4	50			165	2	13.6	0.7	338
	-180-M 67					180	67			39				190	2.2	20.5	1	341
UNO	-SLFB16- 75-M 22	1	16	32	8	75	22	26	—	34.3	42	—	32	85	1.2	6.9	0.3	333
	 - 95-M 42					95	42			36.4				105	1.3	12.5	0.5	336
	-105-M 22					105	22	56		34.3				115	1.4	7.5		334
	-120-M 67					120	67	26		39				130	1.5	19.4	0.7	339
	-125-M 42					125	42	56		36.4				135	1.6	13		337
	-135-M 22					135	22	86		34.3	50			145	1.9	8.1	0.5	335
	-150-M 67					150	67	56		39	42			160	1.7	20	0.9	340
	-155-M 42					155	42	86		36.4	50			165	2	13.6	0.7	338
	-180-M 67					180	67			39				190	2.2	20.5	1	341
HYPER VERSION	-SLSB16- 90 CV	3	16	21	2.5	90	63	—	—	53	—	—	32	100	1.3	4.2	0.6	342
	-120 CV					120	93							130	1.5	5.5	0.8	343
	-150 CV					150	123							160	1.6	6.2	1.5	344
	BT40					180	153							190	1.9	7.5	1.9	345
	-210 CV					210	183							220	2	8.2	3	346
	-240 CV					240	213							250	2.2	9.5	3.7	347
Z	BT40-SLSB20- 95-M 42	1	20	29	4.5	95	42	26	—	33.4	42	—	40	105	1.2	14.2	0.6	348
	-120-M 67					120	67			36				130	1.3	24.5	0.9	351
	-125-M 42					125	42	56		33.4				135	1.5	14.8	0.8	349
	-150-M 67					150	67			36				160	1.6	25	1.2	352
	-M 97						97	26		39.2	53			165	2	15.3	0.9	354
STRAIGHT arbor	-155-M 42	2				155	42	28	58	33.4	42	53		190		25.6	1.2	350
OTHERS	-180-M 67	1				180	67	86	—	36	50				1.9	37.4	1.4	353
	-M 97						97	56		39.2					1.8	50	1.6	355
	-M127						127	26		42.3	53			220	2.2	38	1.7	357
PERIPHERALS	-210-M 97					210	97	86		39.2	50				2.1	50.5	1.9	356
Technical data	-M127						127	56		42.3					2	62.3	2.1	358
	-M157						157	26		45.5					2.4	51.1	2.3	360
	-240-M127					240	127	86		42.3					62.9	2.4	359	
	-M157						157	56		45.5					2.7	63.5	2.9	361
	-270-M157					270		86										362

CODE	Fig.	ϕD	ϕC	t	L	M	L ₁	L ₂	ϕC_1	ϕC_2	ϕC_3	H	h	Kg	N	S	Scale model	Feature			
BT40-SLRB20- 95-M 42	1	20	38	9	95	42	26	—	42.4	53	—	40	105	1.5	14.3	0.4	363	Shrink-fit Heater			
					120	67	56		45	50			130	1.7	24.6	0.5	366				
					125	42			42.4				135	1.9	14.9		364				
				9	150	67	86	—	45	50	—	40	160	2	25.2	0.7	367				
					155	42			42.4	53			165	2.2	15.4	0.6	365				
					180	67			45	50			190	2.3	25.7	0.9	368				
-SLFB20- 95-M 42	1	20	38	9	95	42	26	—	42.4	53	—	40	105	1.5	14.3	0.4	369	MONO 3°			
					120	67	56		45	50			130	1.7	24.6	0.5	372	MONO CURVE			
					125	42			42.4				135	1.9	14.9		370				
				9	150	67	86	—	45	50	—	40	160	2	25.2	0.7	373				
					155	42			42.4	165			2.1	15.4		371					
					180	67			45	190			2.3	25.7	0.9	374					
-SLSB20- 90 CV	3	20	26	3	90	63	—	—	50.5	—	—	40	100	1.3	4.4	0.5	375	MONO Series			
					120	93			53				130	1.5	5.8	0.8	376				
					150	123							160	1.6	6.7	1.3	377				
					180	153							190	1.9	8	1.8	378				
					210	183							220	2.1	9.4	2.3	379				
					240	213							250	2.4	10.7	3	380				
BT40-SLRB25- 95-M 42	1	25	45	10	95	42	26	—	49.4	53	—	45	105	1.5	16.4	0.3	381	2PIECE type			
					125	56	86			135			1.9	17	0.4	382					
					155					165			2.3	17.5	0.6	383					
-SLFB25- 95-M 42	1	25	45	10	95	42	26	—	49.4	53	—	45	105	1.5	16.4	0.3	384	UNO			
					125	56	86			135			1.9	17	0.4	385					
					155					165			2.3	17.5	0.6	386					
BT40-SLRB32- 95-M 42	1	32	54	11	95	42	26	—	58.4	63	—	50	87	1.8	4.7	0.3	387	HYPER VERSION			

NEW


Φ70 Nozzle (HRB-03S)




HEAT ROBO Baby3000S

Φ 3


BT40-SLSA3-95-M42




BT40-SLSA3-125-M42




BT40-SLSA3-155-M42




BT40-SLSA3-120-M67




BT40-SLSA3-150-M67




BT40-SLSA3-180-M67




BT40-SLSA3-150-M97




BT40-SLSA3-180-M97




BT40-SLSA3-210-M97

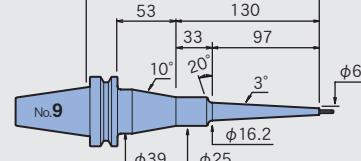


BT40-SLRA3-75-M22




BT40-SLRA3-105-M22




BT40-SLRA3-135-M22




BT40-SLRA3-95-M42




BT40-SLRA3-125-M42




BT40-SLRA3-155-M42




BT40-SLRA3-120-M67




BT40-SLRA3-150-M67




BT40-SLRA3-180-M67




BT40-SLRA3-150-M97



BT40-SLRA3-180-M97



BT40-SLRA3-210-M97

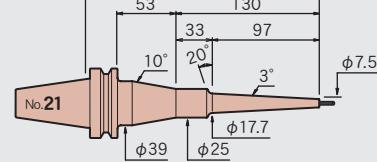

Feature

Shrink-fit Heater

MONO 3°
MONO CURVE

MONO Series

2PIECE type

UNO

HYPER VERSION

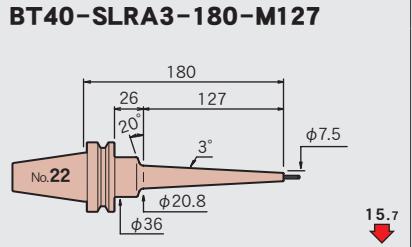
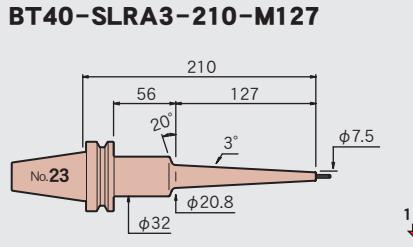
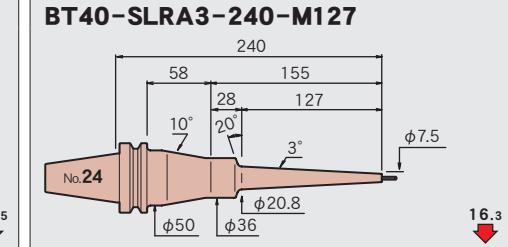
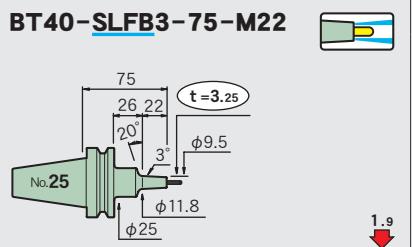
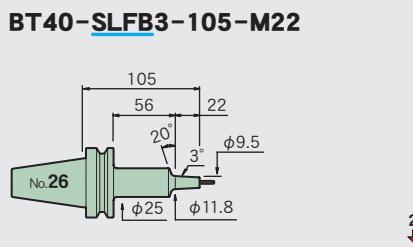
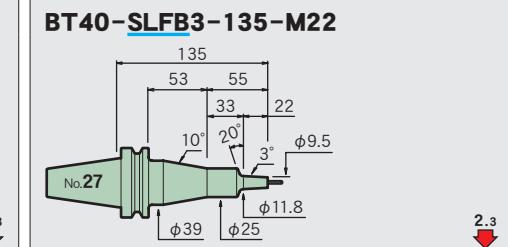
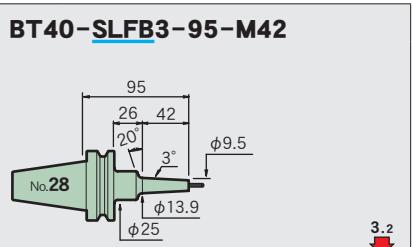
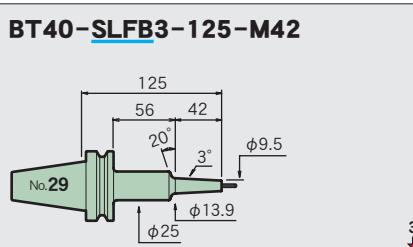
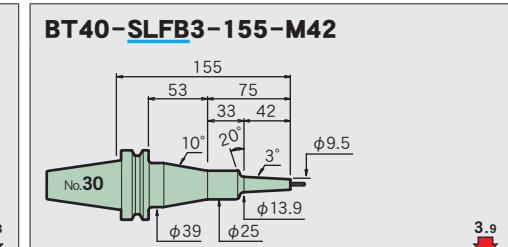
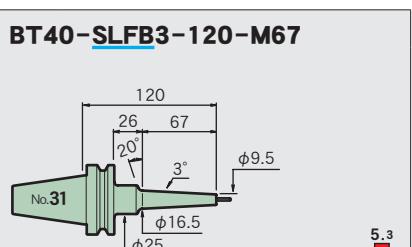
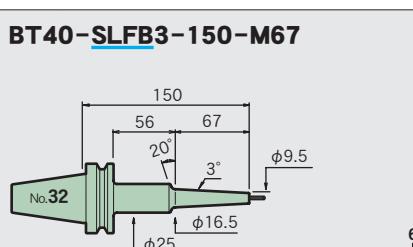
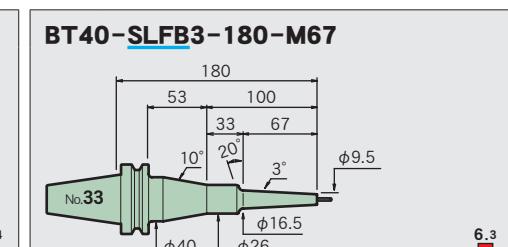
Z

STRAIGHT arbor

OTHERS

PERIPHERALS






















Technical data























BT40-SLRA3-180-M127	BT40-SLRA3-210-M127	BT40-SLRA3-240-M127
		
BT40-SLFB3-75-M22	BT40-SLFB3-105-M22	BT40-SLFB3-135-M22
		
BT40-SLFB3-95-M42	BT40-SLFB3-125-M42	BT40-SLFB3-155-M42
		
BT40-SLFB3-120-M67	BT40-SLFB3-150-M67	BT40-SLFB3-180-M67
		

Feature
 Shrink-fit Heater
 MONO 3°
 MONO CURVE
 MONO Series
 2PIECE type
 UNO
 HYPER VERSION
 Z
 STRAIGHT arbor
 OTHERS
 PERIPHERALS
 Technical data
 31

φ 4

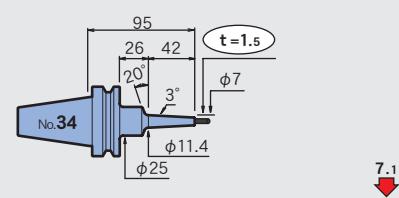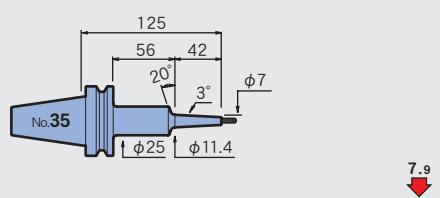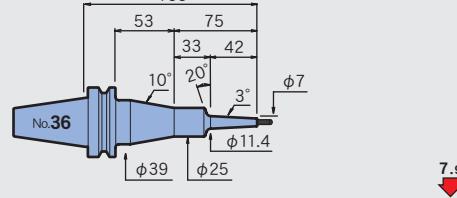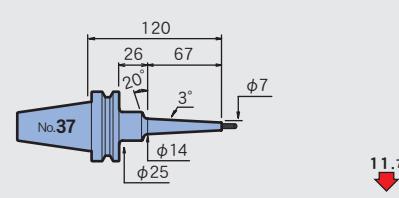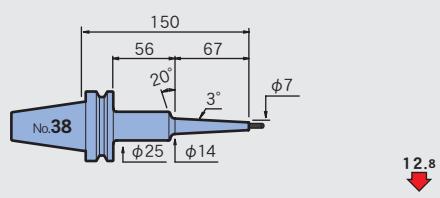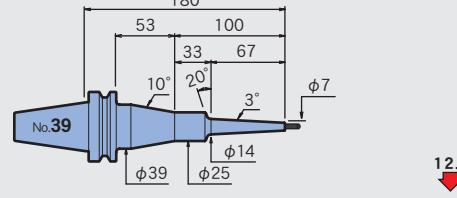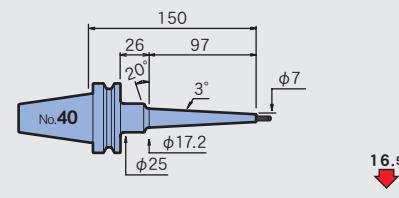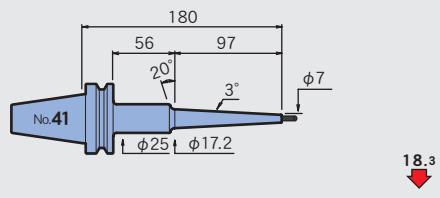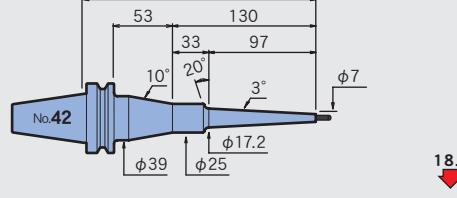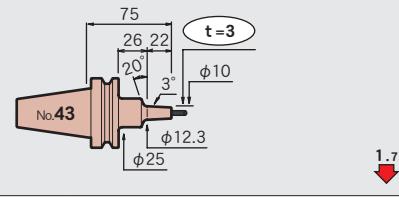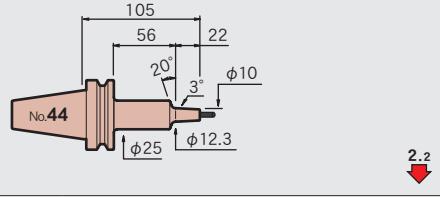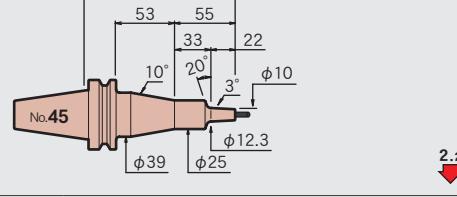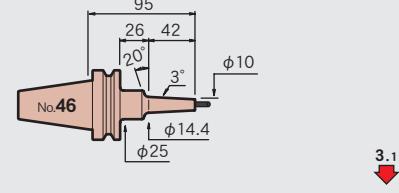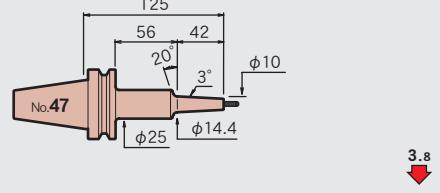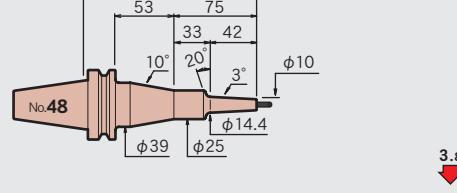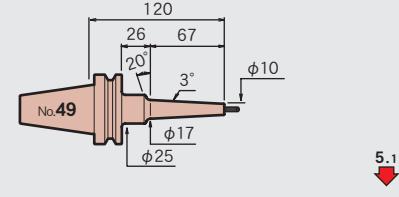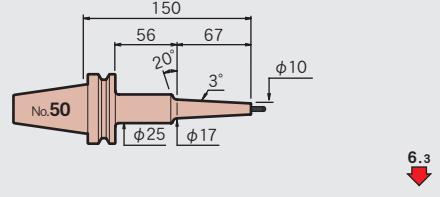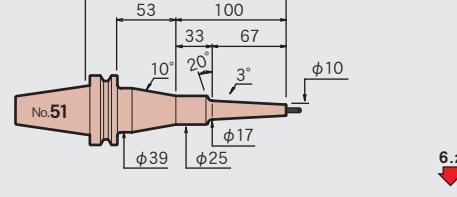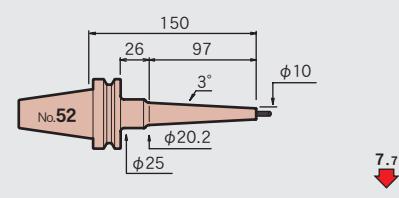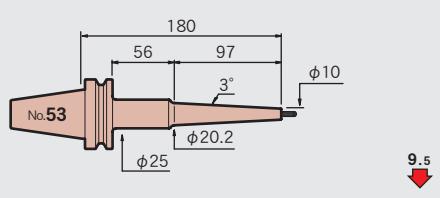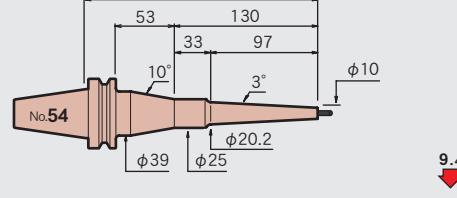Feature
Shrink-fit Heater
MONO 3°
MONO CURVE
MONO Series
2PIECE type
UNO
HYPER VERSION
Z
STRAIGHT arbor
OTHERS
PERIPHERALS
Technical data

BT40-SLSA4-95-M42**BT40-SLSA4-125-M42****BT40-SLSA4-155-M42****BT40-SLSA4-120-M67****BT40-SLSA4-150-M67****BT40-SLSA4-180-M67****BT40-SLSA4-150-M97****BT40-SLSA4-180-M97****BT40-SLSA4-210-M97****BT40-SLRA4-75-M22****BT40-SLRA4-105-M22****BT40-SLRA4-135-M22****BT40-SLRA4-95-M42****BT40-SLRA4-125-M42****BT40-SLRA4-155-M42****BT40-SLRA4-120-M67****BT40-SLRA4-150-M67****BT40-SLRA4-180-M67****BT40-SLRA4-150-M97****BT40-SLRA4-180-M97****BT40-SLRA4-210-M97**

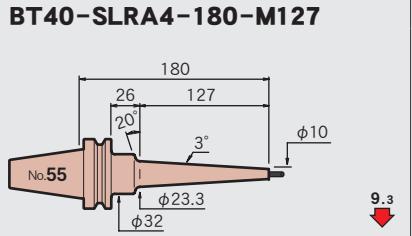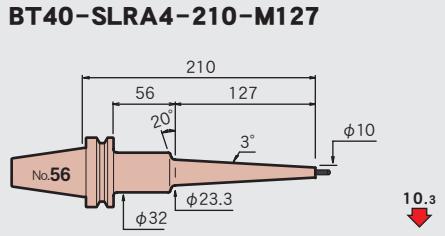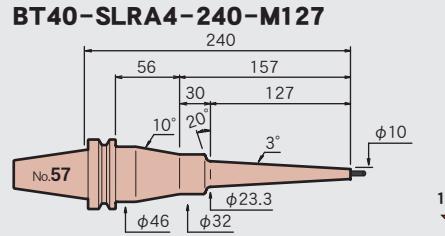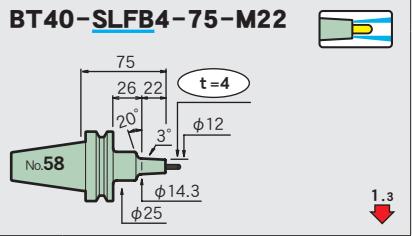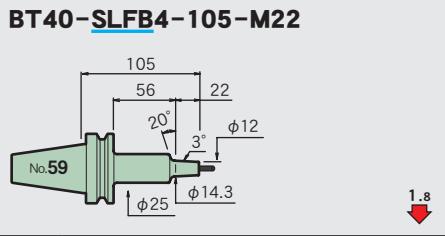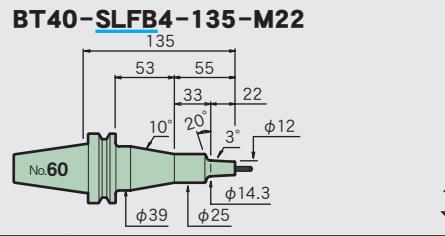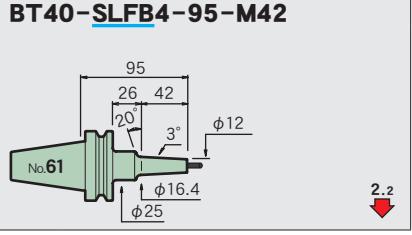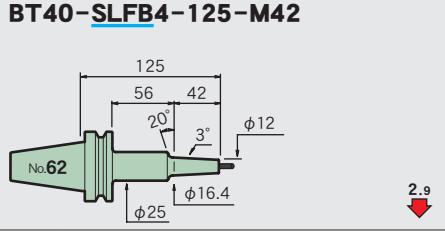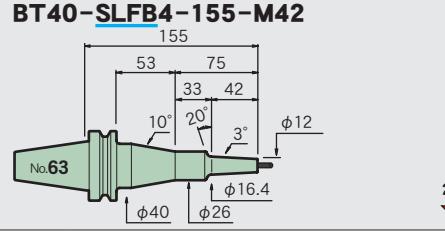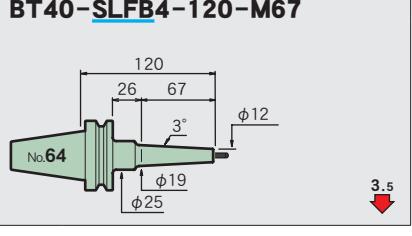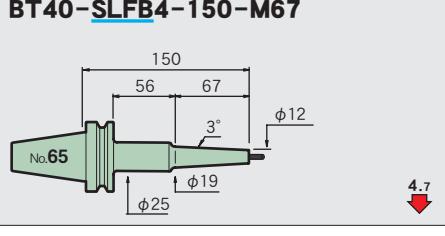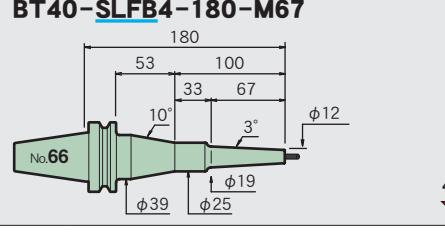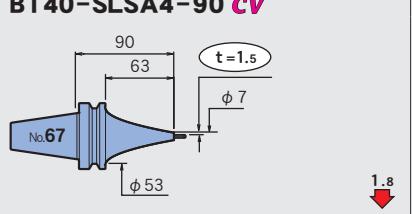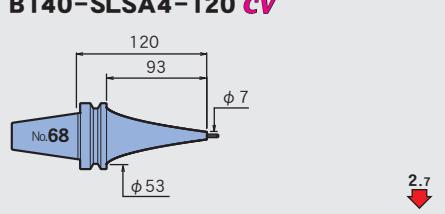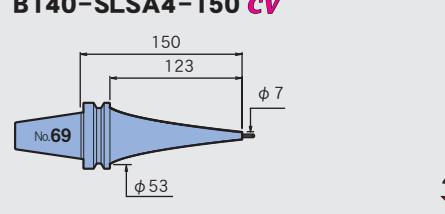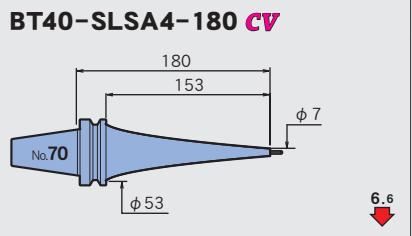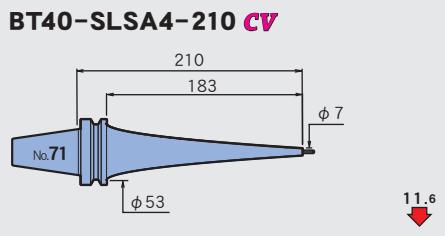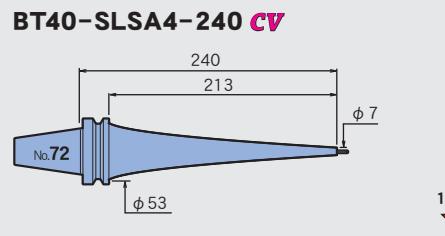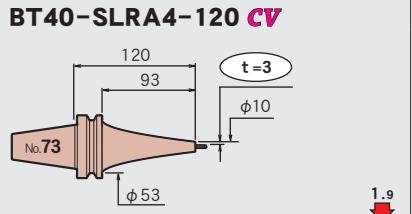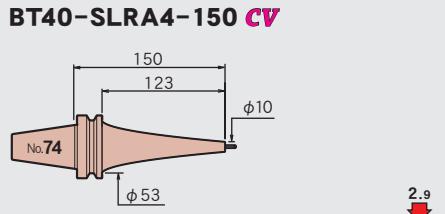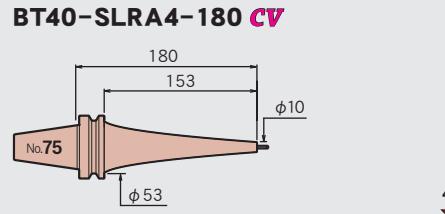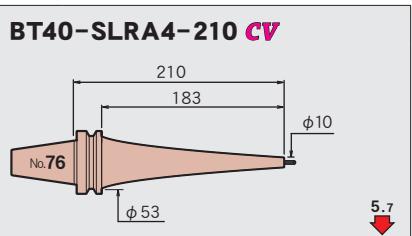BT40-SLRA4-180-M127	BT40-SLRA4-210-M127	BT40-SLRA4-240-M127
 No.55 180 26 127 20° 3° φ10 φ23.3 φ32 9.3 ↓	 No.56 210 56 127 20° 3° φ10 φ23.3 φ32 10.3 ↓	 No.57 240 56 157 127 30 20° 3° φ10 φ46 φ32 10.4 ↓
BT40-SLFB4-75-M22	BT40-SLFB4-105-M22	BT40-SLFB4-135-M22
 No.58 75 26 22 20° 3° t=4 φ12 φ14.3 φ25 1.3 ↓	 No.59 105 56 22 20° 3° φ12 φ25 φ14.3 1.8 ↓	 No.60 135 53 55 22 33 20° 3° φ12 φ39 φ25 φ14.3 1.8 ↓
BT40-SLFB4-95-M42	BT40-SLFB4-125-M42	BT40-SLFB4-155-M42
 No.61 95 26 42 20° 3° φ12 φ16.4 φ25 2.2 ↓	 No.62 125 56 42 20° 3° φ12 φ25 φ16.4 2.9 ↓	 No.63 155 53 75 33 42 20° 3° φ12 φ40 φ26 φ16.4 2.9 ↓
BT40-SLFB4-120-M67	BT40-SLFB4-150-M67	BT40-SLFB4-180-M67
 No.64 120 26 67 20° 3° φ12 φ19 φ25 3.5 ↓	 No.65 150 56 67 20° 3° φ12 φ25 φ19 4.7 ↓	 No.66 180 53 100 33 67 20° 3° φ12 φ39 φ25 φ19 4.7 ↓
BT40-SLSA4-90 CV	BT40-SLSA4-120 CV	BT40-SLSA4-150 CV
 No.67 90 63 t=1.5 φ7 φ53 1.8 ↓	 No.68 120 93 φ7 φ53 2.7 ↓	 No.69 150 123 φ7 φ53 4.0 ↓
BT40-SLSA4-180 CV	BT40-SLSA4-210 CV	BT40-SLSA4-240 CV
 No.70 180 153 φ7 φ53 6.6 ↓	 No.71 210 183 φ7 φ53 11.6 ↓	 No.72 240 213 φ7 φ53 14.0 ↓
BT40-SLRA4-120 CV	BT40-SLRA4-150 CV	BT40-SLRA4-180 CV
 No.73 120 93 t=3 φ10 φ53 1.9 ↓	 No.74 150 123 φ10 φ53 2.9 ↓	 No.75 180 153 φ10 φ53 4.2 ↓
BT40-SLRA4-210 CV		
 No.76 210 183 φ10 φ53 5.7 ↓		

φ6

Feature

Shrink-fit Heater

MONO 3°
MONO CURVE

MONO Series

2PIECE type

UNO

HYPER VERSION

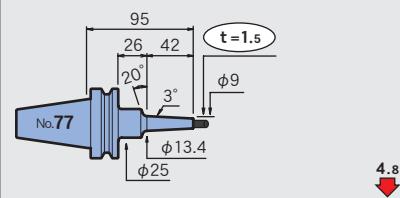
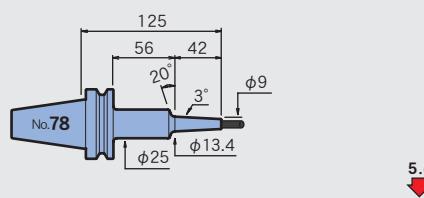
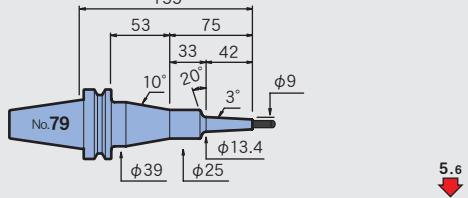
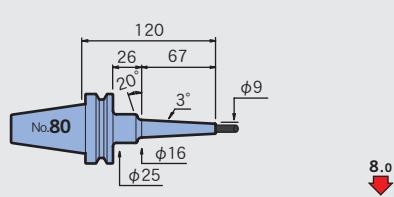
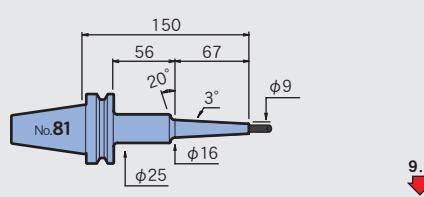
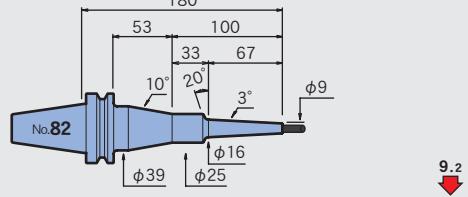
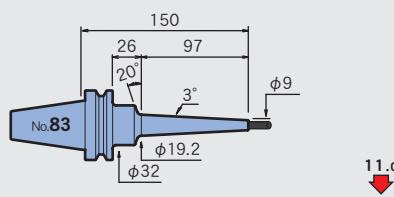
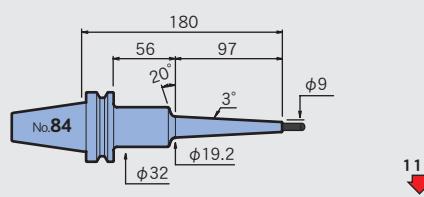
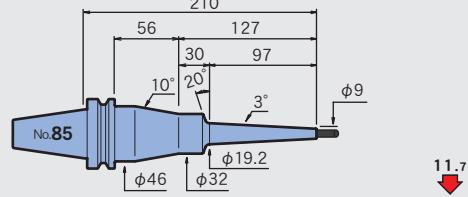
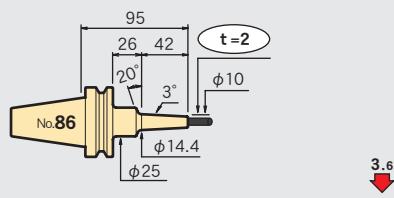
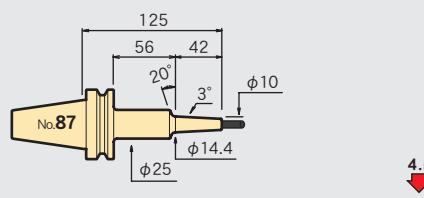
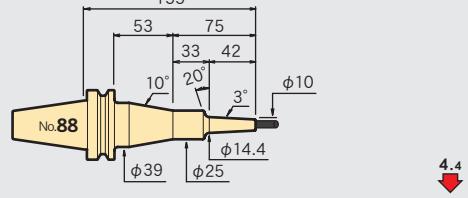
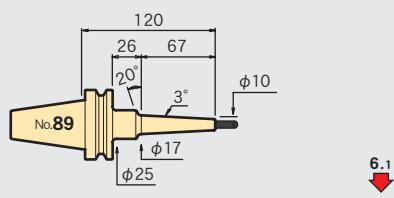
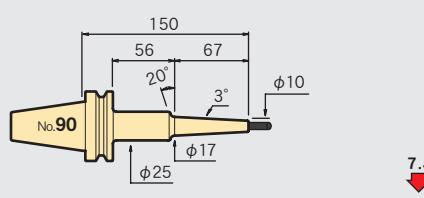
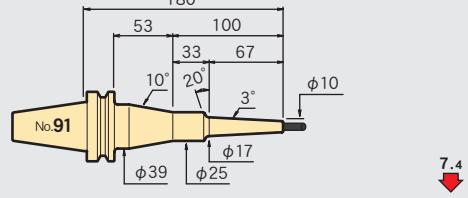
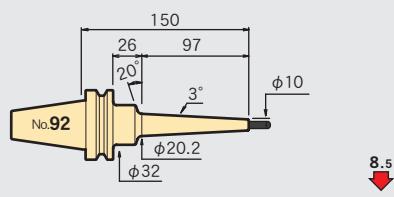
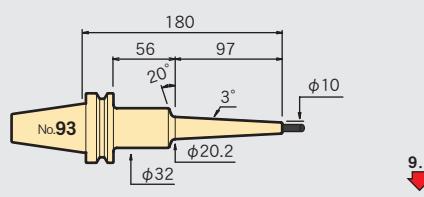
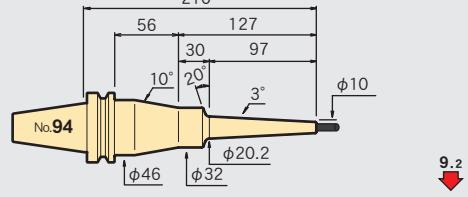
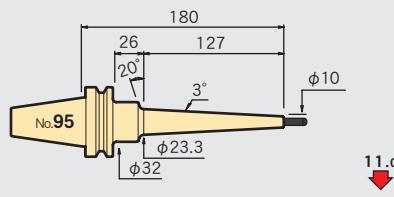
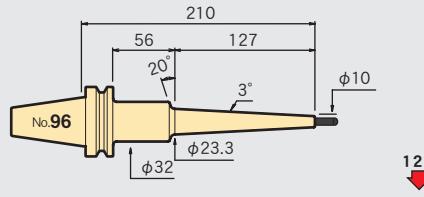
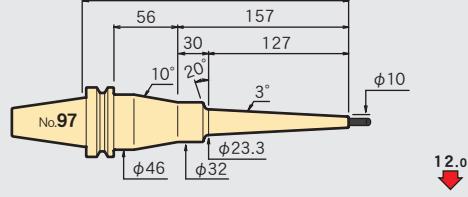
Z






















STRAIGHT arbor

OTHERS

PERIPHERALS

















Technical data






















BT40-SLSA6-95-M42**BT40-SLSA6-125-M42****BT40-SLSA6-155-M42****BT40-SLSA6-120-M67****BT40-SLSA6-150-M67****BT40-SLSA6-180-M67****BT40-SLSA6-150-M97****BT40-SLSA6-180-M97****BT40-SLSA6-210-M97****BT40-SLSB6-95-M42****BT40-SLSB6-125-M42****BT40-SLSB6-155-M42****BT40-SLSB6-120-M67****BT40-SLSB6-150-M67****BT40-SLSB6-180-M67****BT40-SLSB6-150-M97****BT40-SLSB6-180-M97****BT40-SLSB6-210-M97****BT40-SLSB6-180-M127****BT40-SLSB6-210-M127****BT40-SLSB6-240-M127**

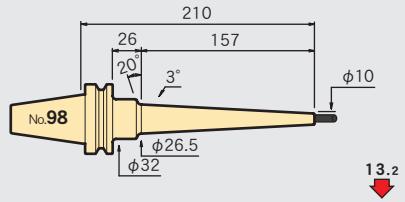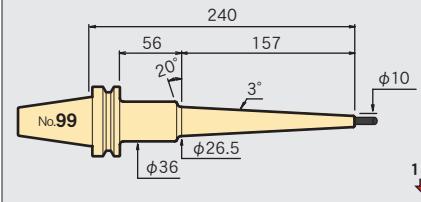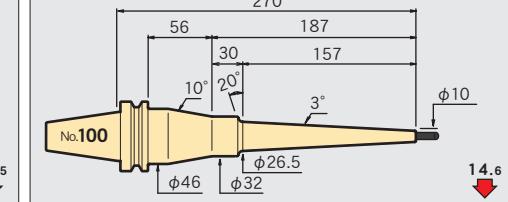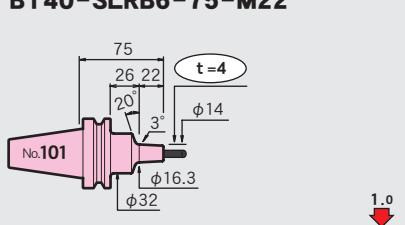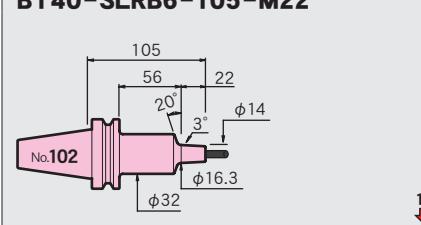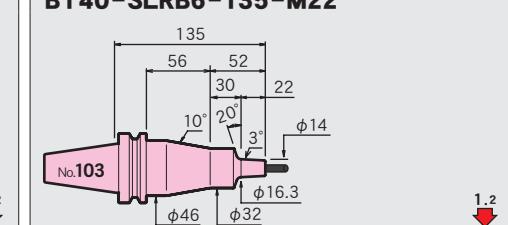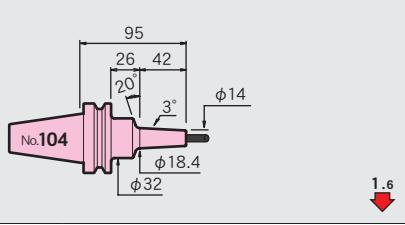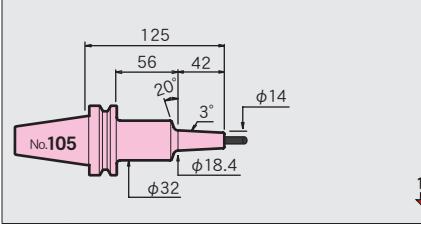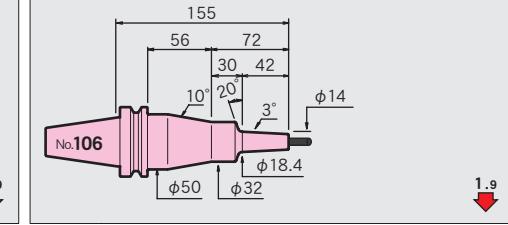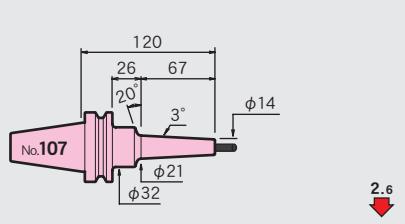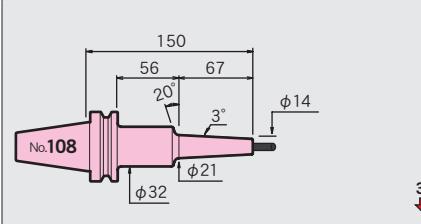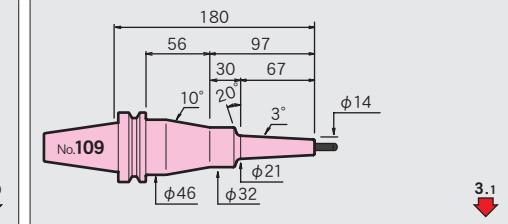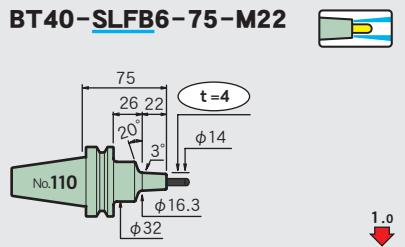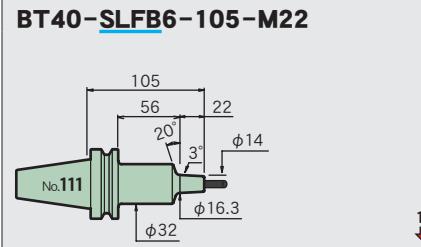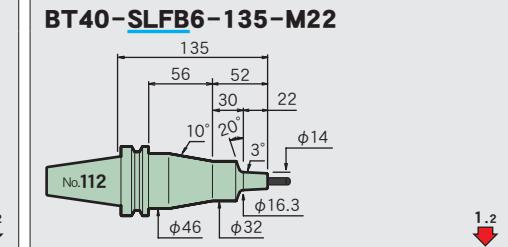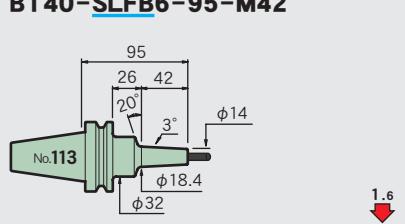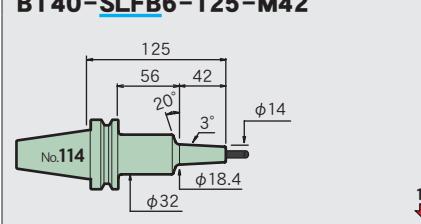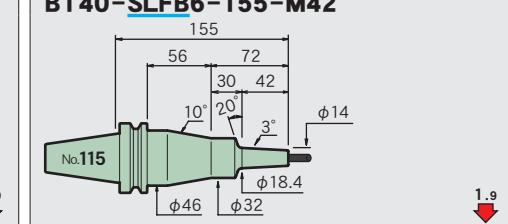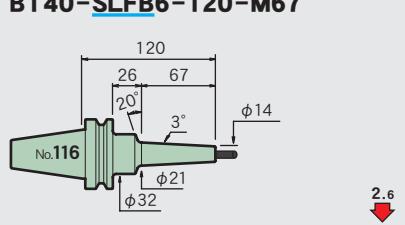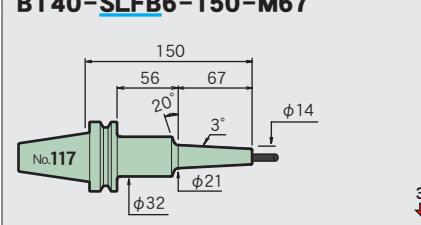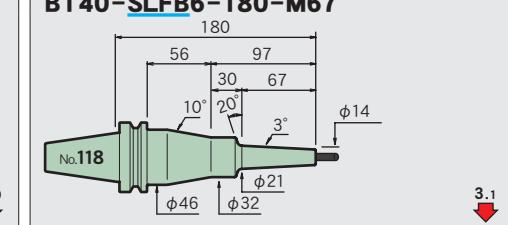BT40-SLSB6-210-M157	BT40-SLSB6-240-M157	BT40-SLSB6-270-M157
		
BT40-SLRB6-75-M22	BT40-SLRB6-105-M22	BT40-SLRB6-135-M22
		
BT40-SLRB6-95-M42	BT40-SLRB6-125-M42	BT40-SLRB6-155-M42
		
BT40-SLRB6-120-M67	BT40-SLRB6-150-M67	BT40-SLRB6-180-M67
		
BT40-SLFB6-75-M22	BT40-SLFB6-105-M22	BT40-SLFB6-135-M22
		
BT40-SLFB6-95-M42	BT40-SLFB6-125-M42	BT40-SLFB6-155-M42
		
BT40-SLFB6-120-M67	BT40-SLFB6-150-M67	BT40-SLFB6-180-M67
		

Feature
 Shrink-fit Heater
 MONO 3°
 MONO CURVE
 MONO Series
 2PIECE type
 UNO
 HYPER VERSION
 Z
 STRAIGHT arbor
 OTHERS
 PERIPHERALS
 Technical data
 35

Feature	
Shrink-fit Heater	
MONO 3° MONO CURVE	
MONO Series	
2PIECE type	
UNO	
HYPER VERSION	
Z	
STRAIGHT arbor	
OTHERS	
PERIPHERALS	
Technical data	

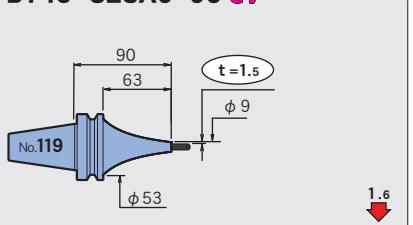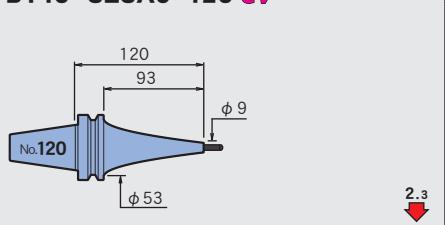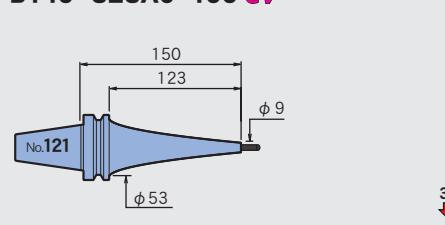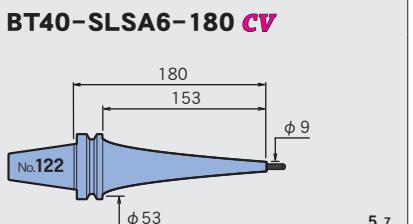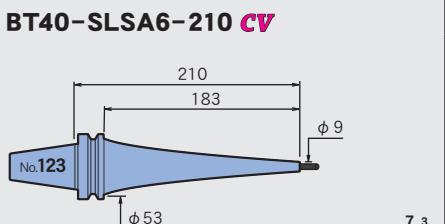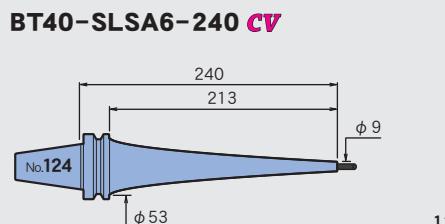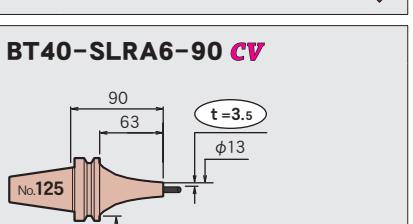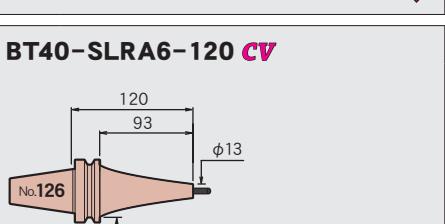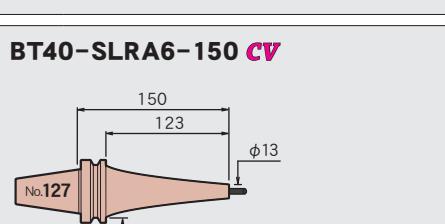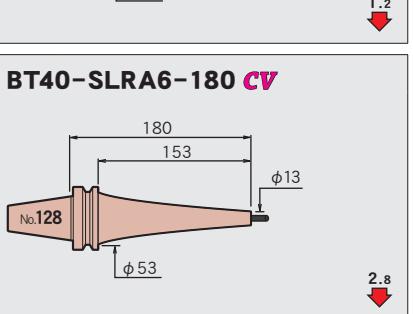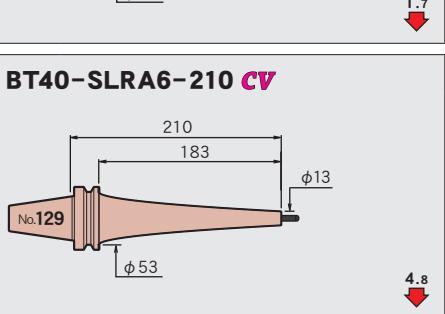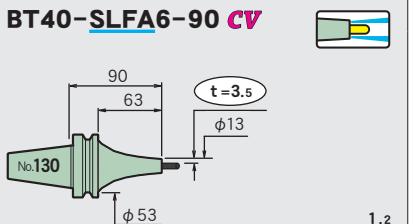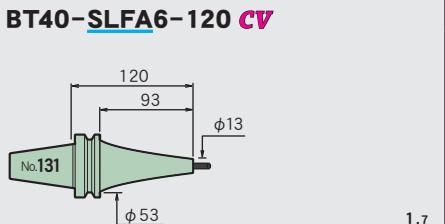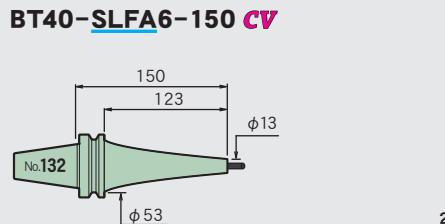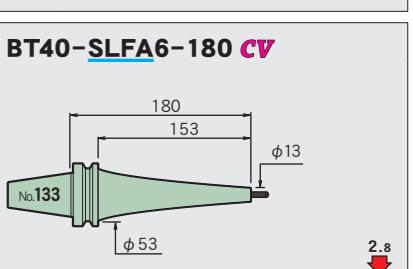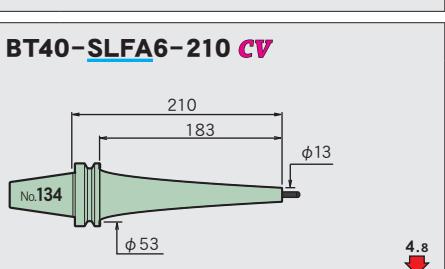BT40-SLSA6-90 CV	BT40-SLSA6-120 CV	BT40-SLSA6-150 CV
		
BT40-SLSA6-180 CV	BT40-SLSA6-210 CV	BT40-SLSA6-240 CV
		
BT40-SLRA6-90 CV	BT40-SLRA6-120 CV	BT40-SLRA6-150 CV
		
BT40-SLRA6-180 CV	BT40-SLRA6-210 CV	
		
BT40-SLFA6-90 CV	BT40-SLFA6-120 CV	BT40-SLFA6-150 CV
		
BT40-SLFA6-180 CV	BT40-SLFA6-210 CV	
		

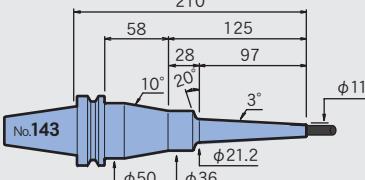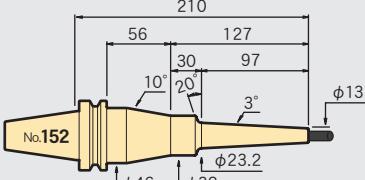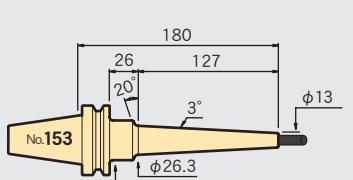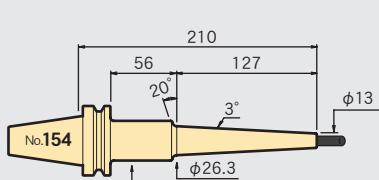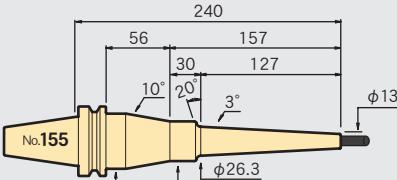Φ8**BT40-SLSA8-95-M42****BT40-SLSA8-125-M42****BT40-SLSA8-155-M42****BT40-SLSA8-120-M67****BT40-SLSA8-150-M67****BT40-SLSA8-180-M67****BT40-SLSA8-150-M97****BT40-SLSA8-180-M97****BT40-SLSA8-210-M97****BT40-SLSB8-95-M42****BT40-SLSB8-125-M42****BT40-SLSB8-155-M42****BT40-SLSB8-120-M67****BT40-SLSB8-150-M67****BT40-SLSB8-180-M67****BT40-SLSB8-150-M97****BT40-SLSB8-180-M97****BT40-SLSB8-210-M97****BT40-SLSB8-180-M127****BT40-SLSB8-210-M127****BT40-SLSB8-240-M127**Feature
Shrink-fit Heater
MONO 3°
MONO CURVEMONO Series
2PIECE typeUNO
HYPER VERSION


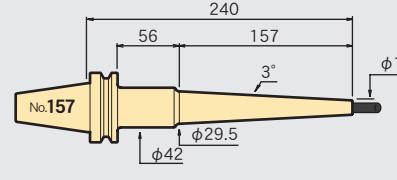
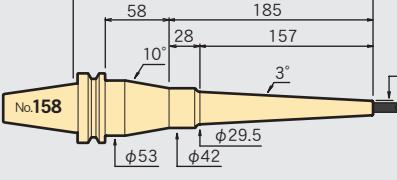


















Z

















STRAIGHT
arbor

OTHERS

PERIPHERALS

Technical

BT40-SLSB8-210-M157	BT40-SLSB8-240-M157	BT40-SLSB8-270-M157
 No.156	 No.157	 No.158
210 26 157 3° φ13 φ29.5 φ36 8.5	240 56 157 3° φ13 φ29.5 φ42 8.6	270 58 185 10° 28 157 3° φ13 φ53 φ42 8.7
BT40-SLRB8-75-M22	BT40-SLRB8-105-M22	BT40-SLRB8-135-M22
 No.159	 No.160	 No.161
75 26 22 20° t = 5 φ18 φ20.3 φ32 0.7	105 56 22 20° 3° φ18 φ20.3 φ32 0.9	135 56 52 30 22 10° 20° 3° φ18 φ46 φ32 1.0
BT40-SLRB8-95-M42	BT40-SLRB8-125-M42	BT40-SLRB8-155-M42
 No.162	 No.163	 No.164
95 26 42 20° 3° φ18 φ22.4 φ32 1.1	125 56 42 20° 3° φ18 φ22.4 φ32 1.4	155 56 72 30 42 10° 20° 3° φ18 φ46 φ32 1.5
BT40-SLRB8-120-M67	BT40-SLRB8-150-M67	BT40-SLRB8-180-M67
 No.165	 No.166	 No.167
120 26 67 20° 3° φ18 φ25 φ36 1.7	150 56 67 20° 3° φ18 φ25 φ32 2.2	180 56 97 30 67 10° 20° 3° φ18 φ46 φ32 2.2
BT40-SLFB8-75-M22	BT40-SLFB8-105-M22	BT40-SLFB8-135-M22
 No.168	 No.169	 No.170
75 26 22 20° t = 5 φ18 φ20.3 φ32 0.7	105 56 22 20° 3° φ18 φ20.3 φ32 0.9	135 56 52 30 22 10° 20° 3° φ18 φ46 φ32 1.0
BT40-SLFB8-95-M42	BT40-SLFB8-125-M42	BT40-SLFB8-155-M42
 No.171	 No.172	 No.173
95 26 42 20° 3° φ18 φ22.4 φ32 1.1	125 56 42 20° 3° φ18 φ22.4 φ32 1.4	155 56 72 30 42 10° 20° 3° φ18 φ46 φ32 1.5
BT40-SLFB8-120-M67	BT40-SLFB8-150-M67	BT40-SLFB8-180-M67
 No.174	 No.175	 No.176
120 26 67 20° 3° φ18 φ25 φ32 1.7	150 56 67 20° 3° φ18 φ25 φ32 2.2	180 58 95 28 67 10° 20° 3° φ18 φ50 φ36 2.0

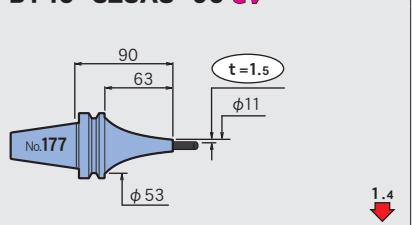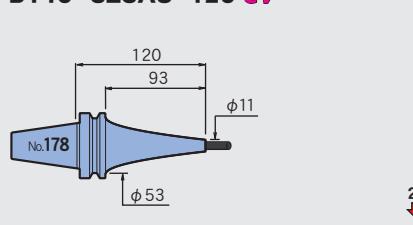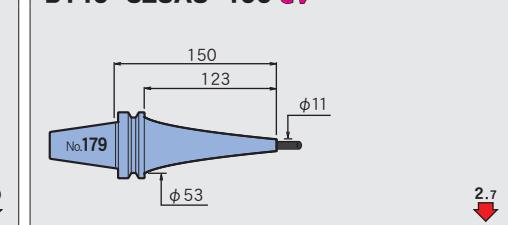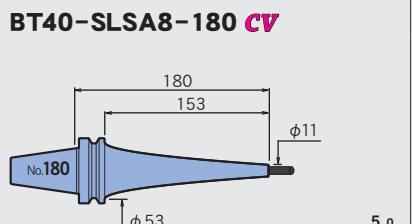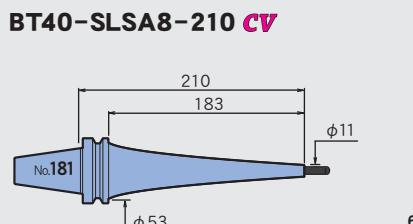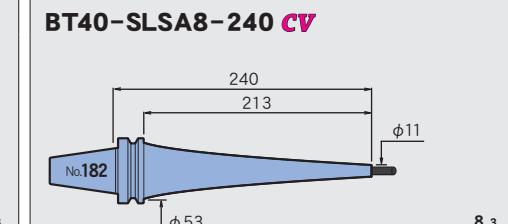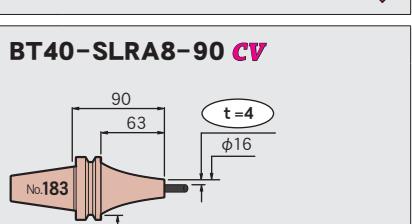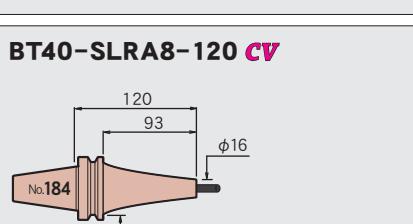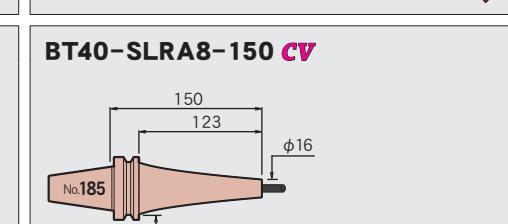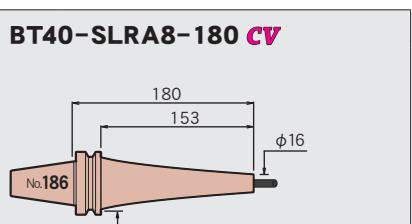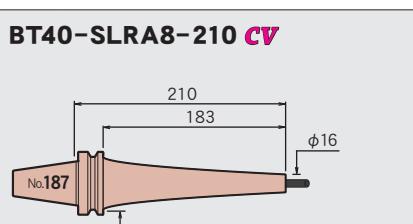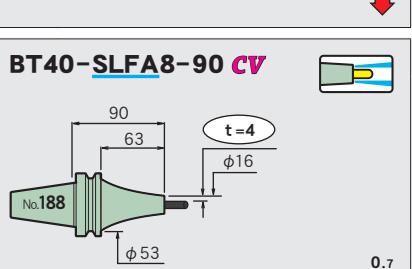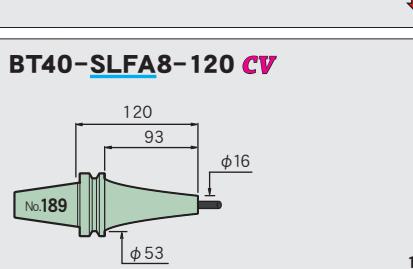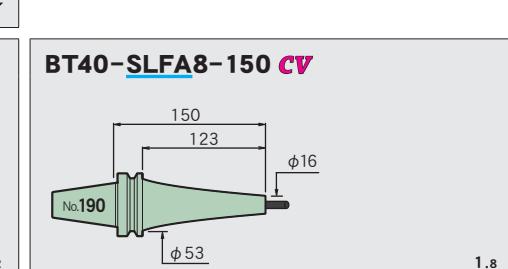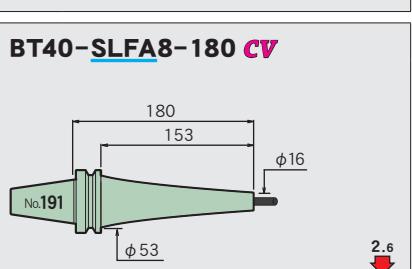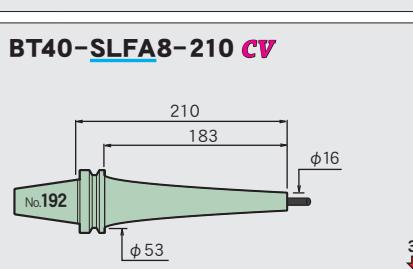BT40-SLSA8-90 CV	BT40-SLSA8-120 CV	BT40-SLSA8-150 CV
 No.177 90 63 $t = 1.5$ $\phi 11$ $\phi 53$ 1.4	 No.178 120 93 $\phi 11$ $\phi 53$ 2.0	 No.179 150 123 $\phi 11$ $\phi 53$ 2.7
BT40-SLSA8-180 CV	BT40-SLSA8-210 CV	BT40-SLSA8-240 CV
 No.180 180 153 $\phi 11$ $\phi 53$ 5.0	 No.181 210 183 $\phi 11$ $\phi 53$ 6.6	 No.182 240 213 $\phi 11$ $\phi 53$ 8.3
BT40-SLRA8-90 CV	BT40-SLRA8-120 CV	BT40-SLRA8-150 CV
 No.183 90 63 $t = 4$ $\phi 16$ $\phi 53$ 0.7	 No.184 120 93 $\phi 16$ $\phi 53$ 1.2	 No.185 150 123 $\phi 16$ $\phi 53$ 1.8
BT40-SLRA8-180 CV	BT40-SLRA8-210 CV	
 No.186 180 153 $\phi 16$ $\phi 53$ 2.6	 No.187 210 183 $\phi 16$ $\phi 53$ 3.5	
BT40-SLFA8-90 CV	BT40-SLFA8-120 CV	BT40-SLFA8-150 CV
 No.188 90 63 $t = 4$ $\phi 16$ $\phi 53$ 0.7	 No.189 120 93 $\phi 16$ $\phi 53$ 1.2	 No.190 150 123 $\phi 16$ $\phi 53$ 1.8
BT40-SLFA8-180 CV	BT40-SLFA8-210 CV	
 No.191 180 153 $\phi 16$ $\phi 53$ 2.6	 No.192 210 183 $\phi 16$ $\phi 53$ 3.5	

Feature
Shrink-fit HeaterMONO 3°
MONO CURVE

MONO Series






















2PIECE type






















UNO

HYPER VERSION

















Z

STRAIGHT arbor
OTHERSTechnical PERIPHERALS
data






















BT40-SLSA10-95-M42	BT40-SLSA10-125-M42	BT40-SLSA10-155-M42
 No.193 95 26 42 20° 3° $t = 1.5$ $\phi 17.4$ $\phi 25$ 2.6	 No.194 125 56 42 20° 3° $\phi 13$ $\phi 17.4$ $\phi 25$ 3.6	 No.195 155 53 72 30 42 10° 20° 3° $\phi 13$ $\phi 39$ $\phi 25$ 3.6
BT40-SLSA10-120-M67	BT40-SLSA10-150-M67	BT40-SLSA10-180-M67
 No.196 120 26 67 20° 3° $\phi 13$ $\phi 20$ $\phi 32$ 4.0	 No.197 150 56 67 20° 3° $\phi 13$ $\phi 20$ $\phi 32$ 4.6	 No.198 180 58 95 28 67 10° 20° 3° $\phi 13$ $\phi 20$ $\phi 36$ $\phi 50$ 4.4
BT40-SLSA10-150-M97	BT40-SLSA10-180-M97	BT40-SLSA10-210-M97
 No.199 150 26 97 20° 3° $\phi 13$ $\phi 23.2$ $\phi 32$ 6.0	 No.200 180 56 97 20° 3° $\phi 13$ $\phi 23.2$ $\phi 32$ 6.9	 No.201 210 56 127 30 97 10° 20° 3° $\phi 13$ $\phi 23.2$ $\phi 32$ $\phi 46$ 6.9
BT40-SLSB10-95-M42	BT40-SLSB10-125-M42	BT40-SLSB10-155-M42
 No.202 95 26 42 20° 3° $t = 3$ $\phi 16$ $\phi 20.4$ $\phi 32$ 1.4	 No.203 125 56 42 20° 3° $\phi 16$ $\phi 20.4$ $\phi 32$ 1.8	 No.204 155 56 72 30 42 10° 20° 3° $\phi 16$ $\phi 20.4$ $\phi 32$ $\phi 46$ 1.9
BT40-SLSB10-120-M67	BT40-SLSB10-150-M67	BT40-SLSB10-180-M67
 No.205 120 26 67 20° 3° $\phi 16$ $\phi 23$ $\phi 32$ 2.4	 No.206 150 56 67 20° 3° $\phi 16$ $\phi 23$ $\phi 32$ 3.0	 No.207 180 58 97 30 67 10° 20° 3° $\phi 16$ $\phi 23$ $\phi 32$ $\phi 46$ 3.0
BT40-SLSB10-150-M97	BT40-SLSB10-180-M97	BT40-SLSB10-210-M97
 No.208 150 26 97 20° 3° $\phi 16$ $\phi 26.2$ $\phi 32$ 3.6	 No.209 180 56 97 20° 3° $\phi 16$ $\phi 26.2$ $\phi 32$ 4.5	 No.210 210 56 127 30 97 10° 20° 3° $\phi 16$ $\phi 26.2$ $\phi 32$ $\phi 46$ 4.5
BT40-SLSB10-180-M127	BT40-SLSB10-210-M127	BT40-SLSB10-240-M127
 No.211 180 26 127 20° 3° $\phi 16$ $\phi 29.3$ $\phi 42$ 4.5	 No.212 210 56 127 20° 3° $\phi 16$ $\phi 29.3$ $\phi 50$ 4.7	 No.213 240 86 127 20° 3° $\phi 16$ $\phi 29.3$ $\phi 50$ 5.0

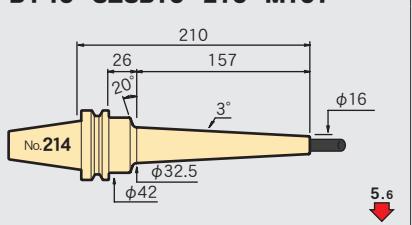
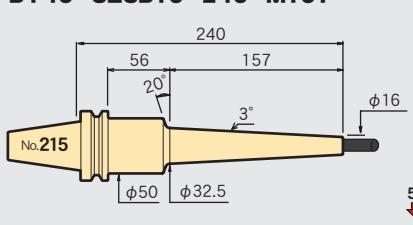
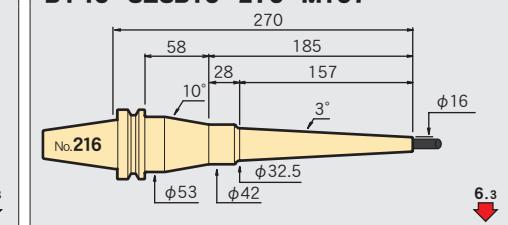
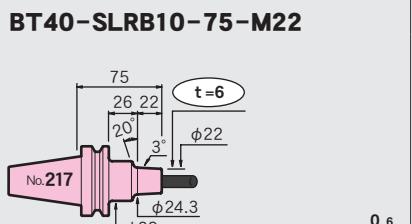
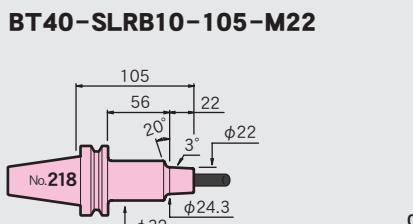
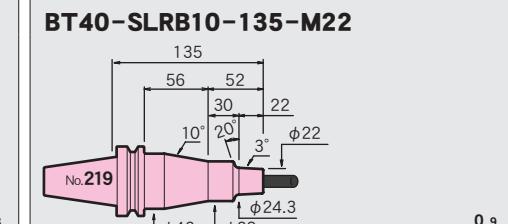
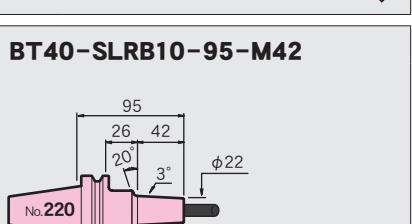
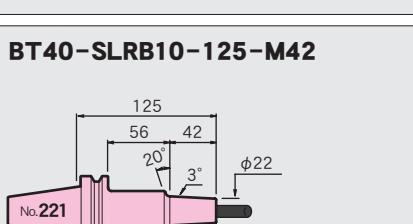
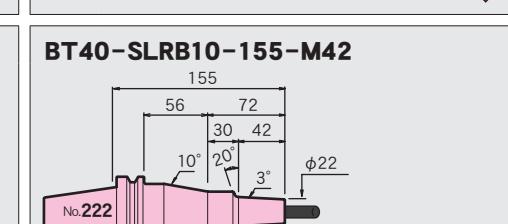
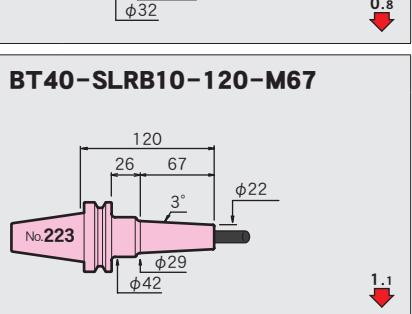
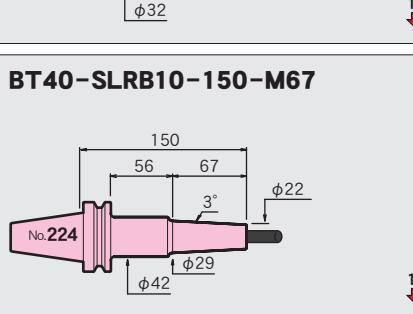
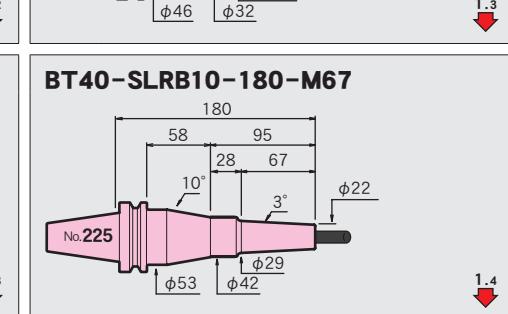
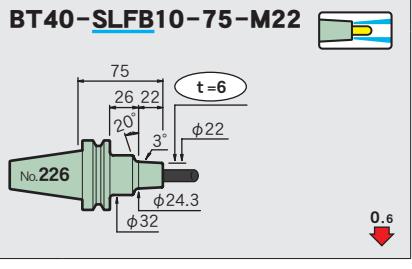
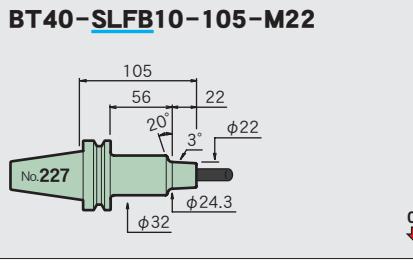
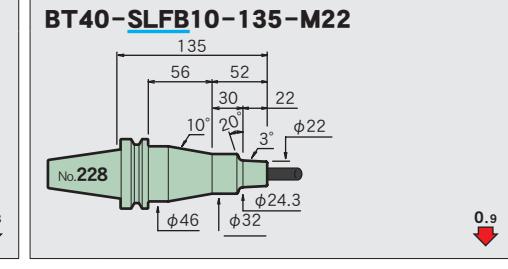
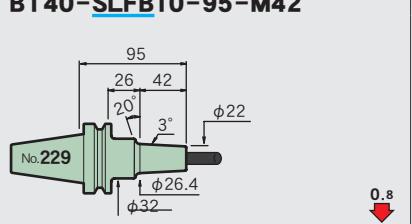
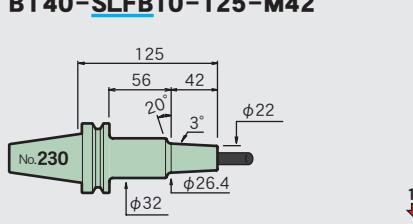
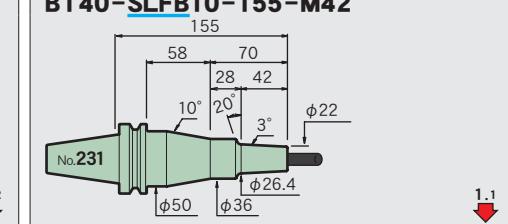
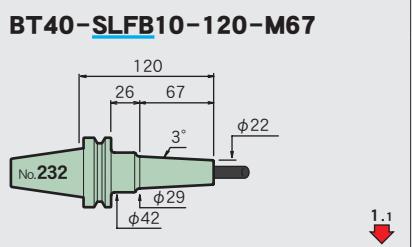
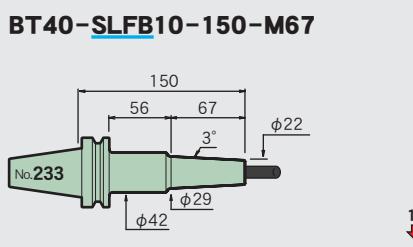
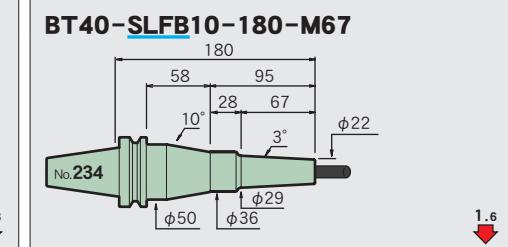
BT40-SLSB10-210-M157	BT40-SLSB10-240-M157	BT40-SLSB10-270-M157
 No.214 210 26 20 157 3° φ16 φ32.5 φ42 5.6 MONO 3° MONO CURVE	 No.215 240 56 20 157 3° φ16 φ50 φ32.5 5.8 MONO 3° MONO CURVE	 No.216 270 58 28 185 157 3° φ16 φ53 φ42 φ32.5 6.3 MONO 3° MONO CURVE
BT40-SLRB10-75-M22	BT40-SLRB10-105-M22	BT40-SLRB10-135-M22
 No.217 75 26 22 20 3° t=6 φ22 φ24.3 φ32 0.6 MONO Series	 No.218 105 56 20 22 3° φ22 φ24.3 φ32 0.8 2PIECE type	 No.219 135 56 52 30 20 22 3° φ22 φ46 φ32 t φ24.3 0.9 UNO
BT40-SLRB10-95-M42	BT40-SLRB10-125-M42	BT40-SLRB10-155-M42
 No.220 95 26 42 20 3° φ22 φ26.4 φ32 0.8 HYPER VERSION	 No.221 125 56 42 20 3° φ22 φ26.4 φ32 1.2 Z	 No.222 155 56 72 30 42 20 3° φ22 φ46 φ32 φ26.4 1.3 STRAIGHT arbor
BT40-SLRB10-120-M67	BT40-SLRB10-150-M67	BT40-SLRB10-180-M67
 No.223 120 26 67 3° φ22 φ29 φ42 1.1 OTHERS	 No.224 150 56 67 3° φ22 φ29 φ42 1.3 PERIPHERALS	 No.225 180 58 95 28 67 3° φ22 φ53 φ42 φ29 1.4 Technical data
BT40-SLFB10-75-M22	BT40-SLFB10-105-M22	BT40-SLFB10-135-M22
 No.226 75 26 22 20 3° t=6 φ22 φ24.3 φ32 0.6 41	 No.227 105 56 20 22 3° φ22 φ24.3 φ32 0.8 41	 No.228 135 56 52 30 20 22 3° φ22 φ46 φ32 t φ24.3 0.9 41
BT40-SLFB10-95-M42	BT40-SLFB10-125-M42	BT40-SLFB10-155-M42
 No.229 95 26 42 20 3° φ22 φ26.4 φ32 0.8 41	 No.230 125 56 42 20 3° φ22 φ26.4 φ32 1.2 41	 No.231 155 58 70 28 42 20 3° φ22 φ50 φ36 φ26.4 1.1 41
BT40-SLFB10-120-M67	BT40-SLFB10-150-M67	BT40-SLFB10-180-M67
 No.232 120 26 67 3° φ22 φ29 φ42 1.1 41	 No.233 150 56 67 3° φ22 φ29 φ42 1.3 41	 No.234 180 58 95 28 67 3° φ22 φ50 φ36 φ29 1.6 41

















Feature	
Shrink-fit Heater	
MONO 3° MONO CURVE	
MONO Series	
2PIECE type	
UNO	
HYPER VERSION	
Z	
STRAIGHT arbor	
OTHERS	
PERIPHERALS	
Technical data	

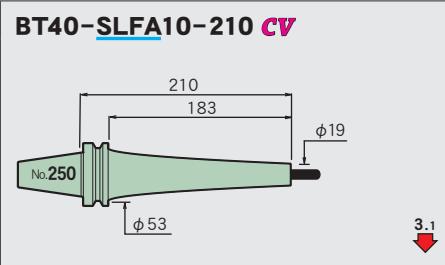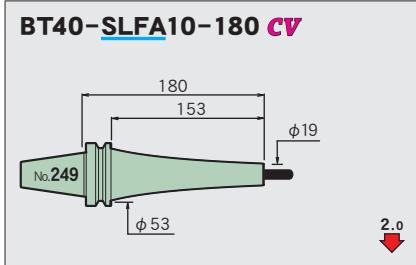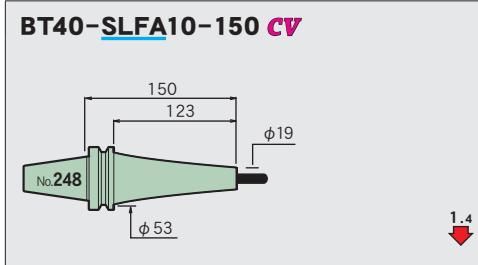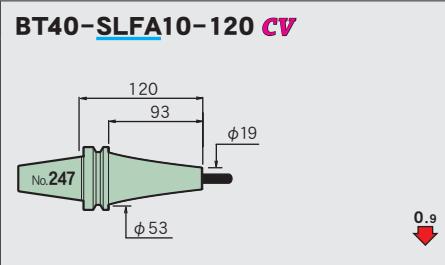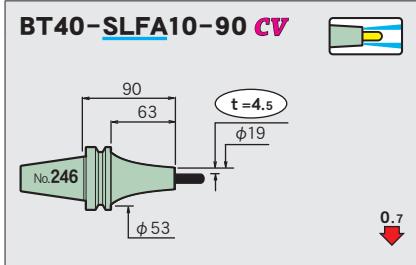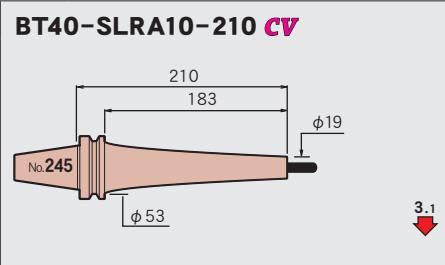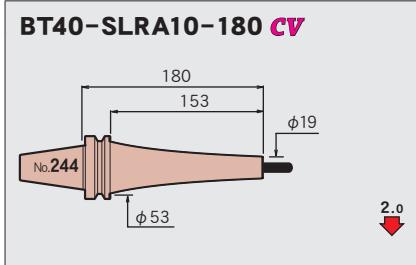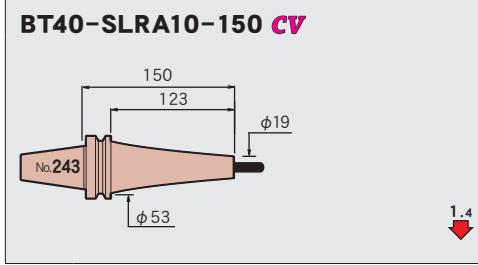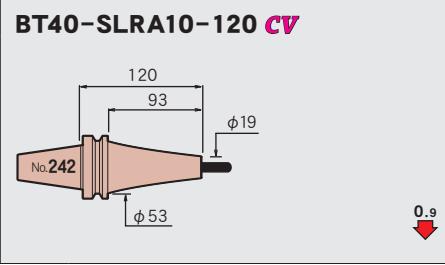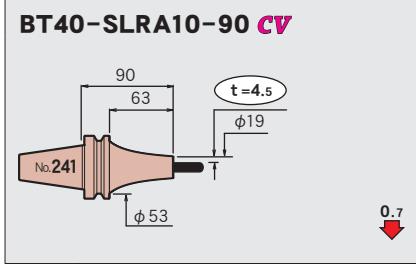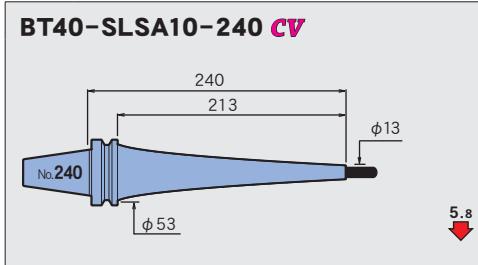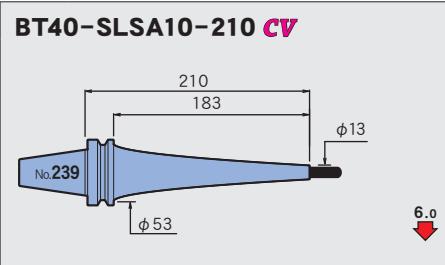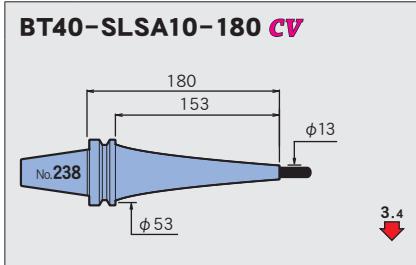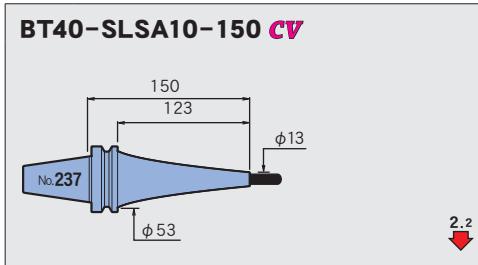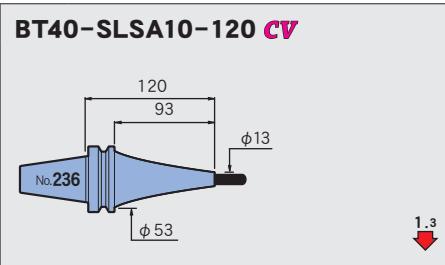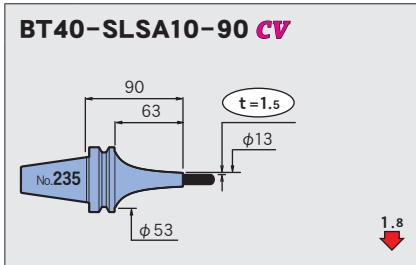






















Φ 12



















BT40-SLSA12-95-M42  No.251 1.8	BT40-SLSA12-125-M42  No.252 2.3	BT40-SLSA12-155-M42  No.253 2.3
BT40-SLSA12-120-M67  No.254 3.3	BT40-SLSA12-150-M67  No.255 3.6	BT40-SLSA12-180-M67  No.256 3.9
BT40-SLSA12-150-M97  No.257 4.9	BT40-SLSA12-180-M97  No.258 5.8	BT40-SLSA12-210-M97  No.259 5.8
BT40-SLSB12-95-M42  No.260 1.1	BT40-SLSB12-125-M42  No.261 1.5	BT40-SLSB12-155-M42  No.262 1.6
BT40-SLSB12-120-M67  No.263 1.8	BT40-SLSB12-150-M67  No.264 2.5	BT40-SLSB12-180-M67  No.265 2.2
BT40-SLSB12-150-M97  No.266 2.4	BT40-SLSB12-180-M97  No.267 2.6	BT40-SLSB12-210-M97  No.268 2.9
BT40-SLSB12-180-M127  No.269 3.3	BT40-SLSB12-210-M127  No.270 3.5	BT40-SLSB12-240-M127  No.271 3.8

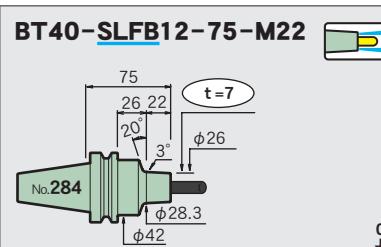BT40-SLSB12-210-M157	BT40-SLSB12-240-M157	BT40-SLSB12-270-M157
 No.272 210 157 26 20° 3° φ19 φ35.5 φ42 4.1	 No.273 240 157 56 20° 3° φ19 φ50 φ35.5 4.4	 No.274 270 157 86 20° 3° φ19 φ50 φ35.5 4.8
BT40-SLRB12-75-M22	BT40-SLRB12-105-M22	BT40-SLRB12-135-M22
 No.275 75 26 22 20° 3° φ26 t=7 φ28.3 φ42 0.4	 No.276 105 56 22 20° 3° φ26 φ28.3 φ42 0.5	 No.277 135 86 22 20° 3° φ26 φ28.3 φ50 0.6
BT40-SLRB12-95-M42	BT40-SLRB12-125-M42	BT40-SLRB12-155-M42
 No.278 95 26 42 20° 3° φ26 φ30.4 φ42 0.6	 No.279 125 56 42 20° 3° φ26 φ30.4 φ50 0.6	 No.280 155 58 70 28 42 10° 20° 3° φ26 φ30.4 φ53 φ42 0.8
BT40-SLRB12-120-M67	BT40-SLRB12-150-M67	BT40-SLRB12-180-M67
 No.281 120 26 67 20° 3° φ26 φ33 φ50 0.8	 No.282 150 56 67 20° 3° φ26 φ33 φ42 1.1	 No.283 180 58 95 28 67 10° 20° 3° φ26 φ33 φ53 φ42 1.1
BT40-SLFB12-75-M22	BT40-SLFB12-105-M22	BT40-SLFB12-135-M22
 No.284 75 26 22 20° 3° φ26 φ28.3 φ42 0.4	 No.285 105 56 22 20° 3° φ26 φ28.3 φ42 0.5	 No.286 135 58 50 28 22 10° 20° 3° φ26 φ28.3 φ53 φ42 0.6
BT40-SLFB12-95-M42	BT40-SLFB12-125-M42	BT40-SLFB12-155-M42
 No.287 95 26 42 20° 3° φ26 φ30.4 φ42 0.6	 No.288 125 56 42 20° 3° φ26 φ30.4 φ50 0.7	 No.289 155 86 42 20° 3° φ26 φ30.4 φ50 0.8
BT40-SLFB12-120-M67	BT40-SLFB12-150-M67	BT40-SLFB12-180-M67
 No.290 120 26 67 20° 3° φ26 φ33 φ42 0.8	 No.291 150 56 67 20° 3° φ26 φ33 φ42 1.1	 No.292 180 86 67 20° 3° φ26 φ33 φ50 1.1






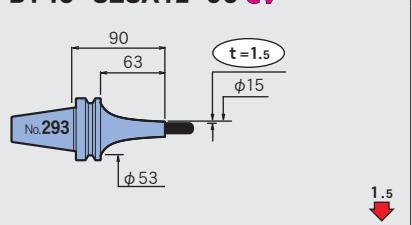
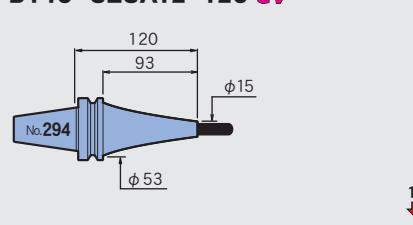
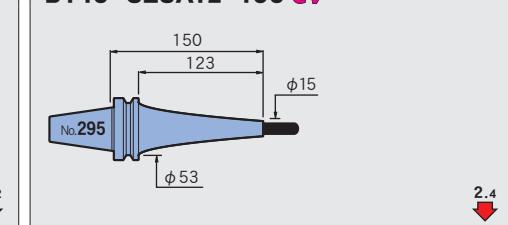
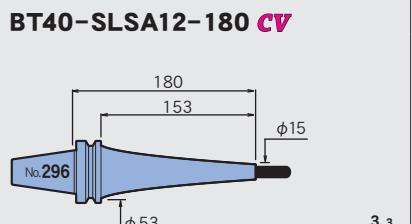
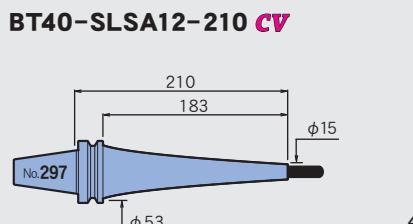
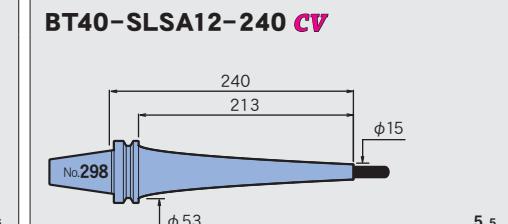
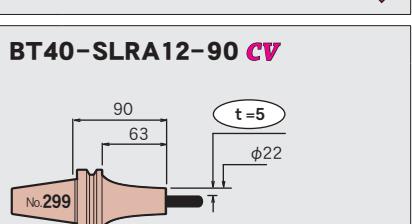
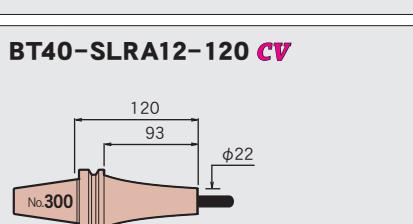
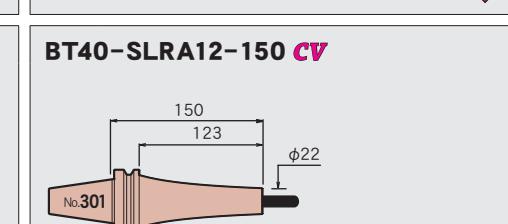
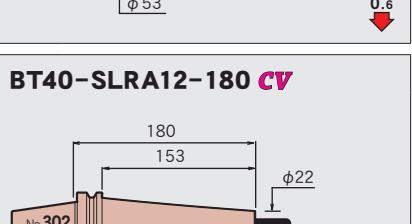
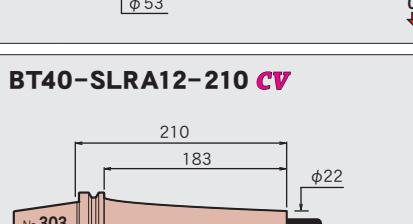
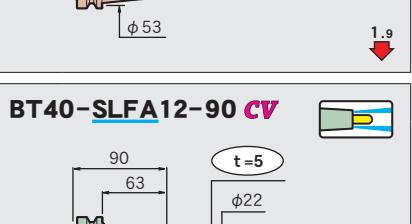
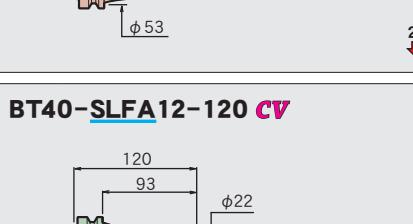
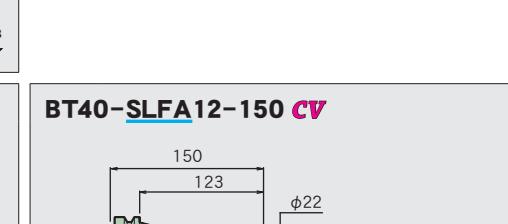
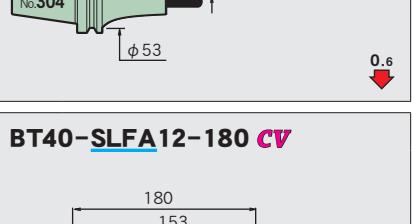
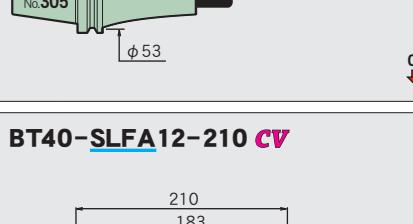
BT40-SLSA12-90 CV	BT40-SLSA12-120 CV	BT40-SLSA12-150 CV
 No.293 90 63 $t = 1.5$ $\phi 15$ $\phi 53$ 1.5 	 No.294 120 93 $\phi 15$ $\phi 53$ 1.2 	 No.295 150 123 $\phi 15$ $\phi 53$ 2.4 
BT40-SLSA12-180 CV	BT40-SLSA12-210 CV	BT40-SLSA12-240 CV
 No.296 180 153 $\phi 15$ $\phi 53$ 3.3 	 No.297 210 183 $\phi 15$ $\phi 53$ 4.6 	 No.298 240 213 $\phi 15$ $\phi 53$ 5.5 
BT40-SLRA12-90 CV	BT40-SLRA12-120 CV	BT40-SLRA12-150 CV
 No.299 90 63 $t = 5$ $\phi 22$ $\phi 53$ 0.6 	 No.300 120 93 $\phi 22$ $\phi 53$ 0.7 	 No.301 150 123 $\phi 22$ $\phi 53$ 1.1 
BT40-SLRA12-180 CV	BT40-SLRA12-210 CV	
 No.302 180 153 $\phi 22$ $\phi 53$ 1.9 	 No.303 210 183 $\phi 22$ $\phi 53$ 2.8 	
BT40-SLFA12-90 CV	BT40-SLFA12-120 CV	BT40-SLFA12-150 CV
 No.304 90 63 $t = 5$ $\phi 22$ $\phi 53$ 0.6 	 No.305 120 93 $\phi 22$ $\phi 53$ 0.7 	 No.306 150 123 $\phi 22$ $\phi 53$ 1.1 
BT40-SLFA12-180 CV	BT40-SLFA12-210 CV	
 No.307 180 153 $\phi 22$ $\phi 53$ 1.9 	 No.308 210 183 $\phi 22$ $\phi 53$ 2.8 	

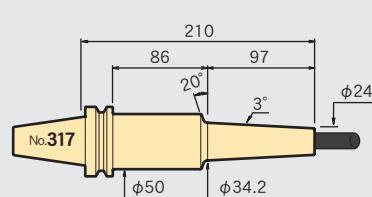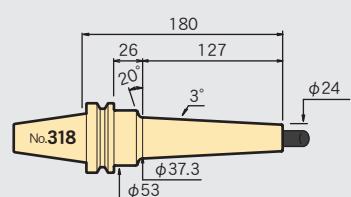
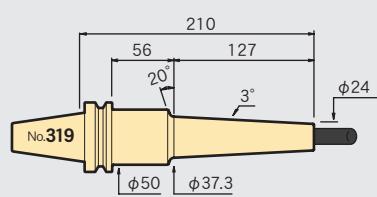
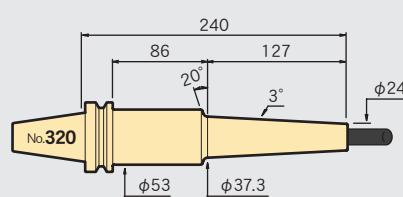
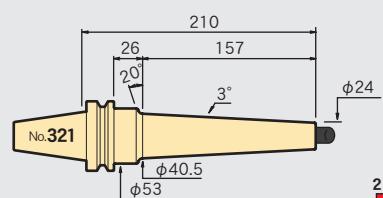
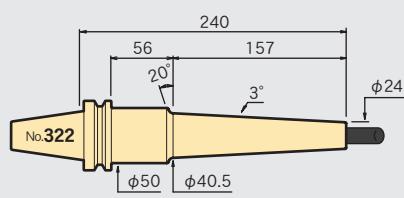
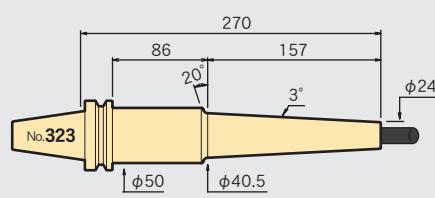






Feature
 Shrink-fit Heater
 MONO 3°
 MONO Series
 2PIECE type
 UNO
 HYPER VERSION
 Z
 STRAIGHT arbor
 OTHERS
 PERIPHERALS
 Technical data
 45

BT40-SLSB16-95-M42**BT40-SLSB16-125-M42****BT40-SLSB16-155-M42****BT40-SLSB16-120-M67****BT40-SLSB16-150-M67****BT40-SLSB16-180-M67****BT40-SLSB16-150-M97****BT40-SLSB16-180-M97****BT40-SLSB16-210-M97****BT40-SLSB16-180-M127****BT40-SLSB16-210-M127****BT40-SLSB16-240-M127****BT40-SLSB16-210-M157****BT40-SLSB16-240-M157****BT40-SLSB16-270-M157****BT40-SLRB16-75-M22****BT40-SLRB16-105-M22****BT40-SLRB16-135-M22****BT40-SLRB16-95-M42****BT40-SLRB16-125-M42****BT40-SLRB16-155-M42**

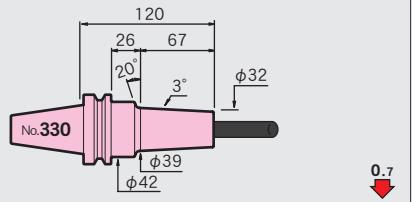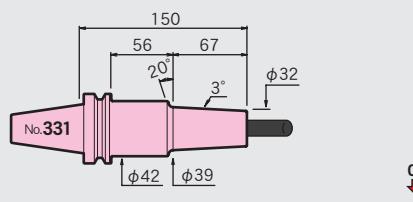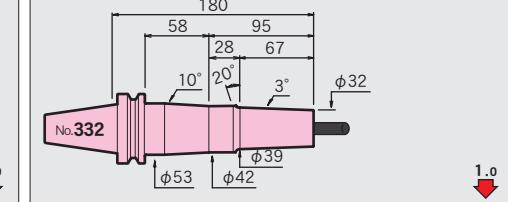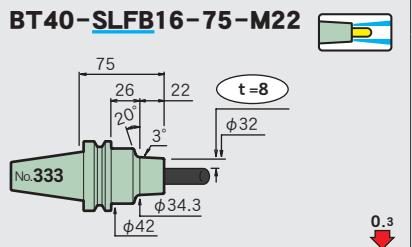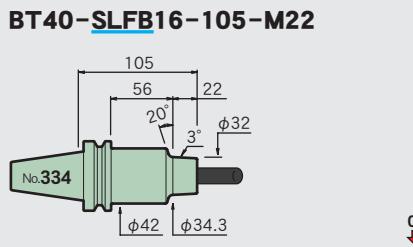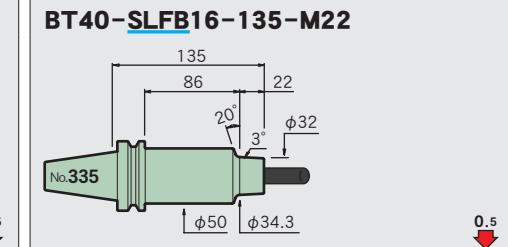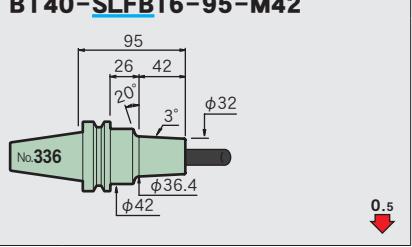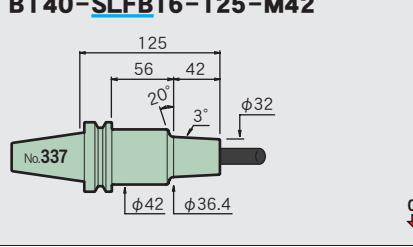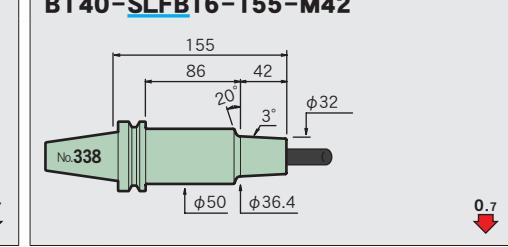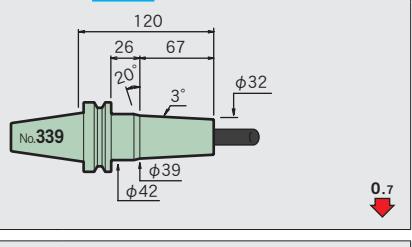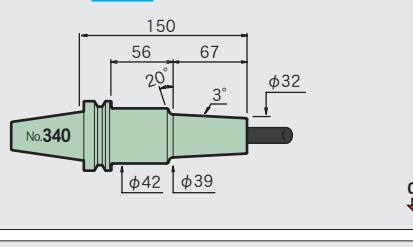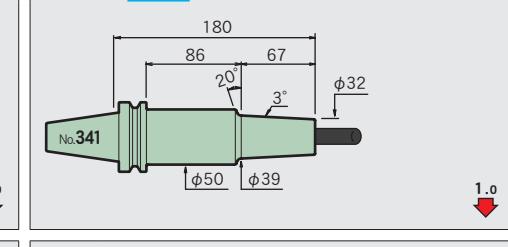
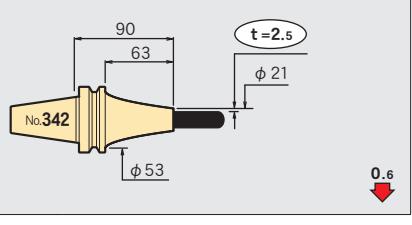
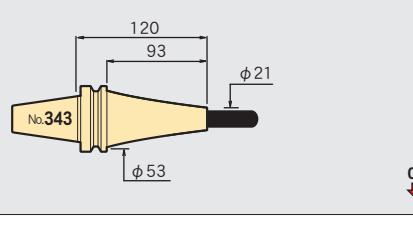
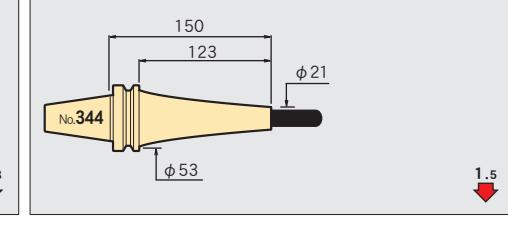
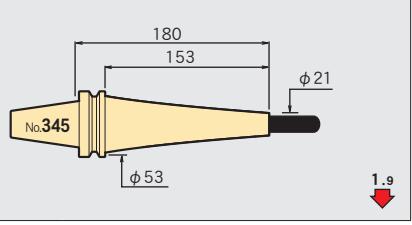
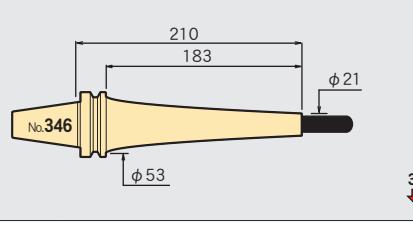
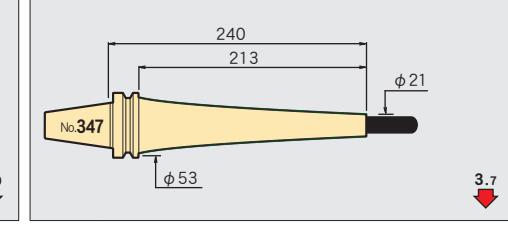
BT40-SLRB16-120-M67	BT40-SLRB16-150-M67	BT40-SLRB16-180-M67
		
0.7 ↓	0.9 ↓	1.0 ↓
BT40-SLFB16-75-M22	BT40-SLFB16-105-M22	BT40-SLFB16-135-M22
		
0.3 ↓	0.5 ↓	0.5 ↓
BT40-SLFB16-95-M42	BT40-SLFB16-125-M42	BT40-SLFB16-155-M42
		
0.5 ↓	0.7 ↓	0.7 ↓
BT40-SLFB16-120-M67	BT40-SLFB16-150-M67	BT40-SLFB16-180-M67
		
0.7 ↓	0.9 ↓	1.0 ↓
BT40-SLSB16-90 CV	BT40-SLSB16-120 CV	BT40-SLSB16-150 CV
		
0.6 ↓	0.8 ↓	1.5 ↓
BT40-SLSB16-180 CV	BT40-SLSB16-210 CV	BT40-SLSB16-240 CV
		
1.9 ↓	3.0 ↓	3.7 ↓

Feature
 Shrink-fit Heater
 MONO 3°
 MONO CURVE
 MONO Series
 2PIECE type
 UNO
 HYPER VERSION
 Z
 STRAIGHT arbor
 OTHERS
 PERIPHERALS
 Technical data

BT40-SLSB20-95-M42	BT40-SLSB20-125-M42	BT40-SLSB20-155-M42
 No.348	 No.349	 No.350
95 26 42 20° 3° t = 4.5 φ29 φ33.4 φ42 0.6	125 56 42 20° 3° φ29 φ50 φ33.4 0.8	155 58 70 28 42 10° 3° φ29 φ53 φ42 0.9
BT40-SLSB20-120-M67	BT40-SLSB20-150-M67	BT40-SLSB20-180-M67
 No.351	 No.352	 No.353
120 26 67 20° 3° φ29 φ36 φ42 0.9	150 56 67 20° 3° φ29 φ42 φ36 1.2	180 86 67 20° 3° φ29 φ50 φ36 1.2
BT40-SLSB20-150-M97	BT40-SLSB20-180-M97	BT40-SLSB20-210-M97
 No.354	 No.355	 No.356
150 26 97 20° 3° φ29 φ39.2 φ53 1.2	180 56 97 20° 3° φ29 φ50 φ39.2 1.4	210 86 97 20° 3° φ29 φ50 φ39.2 1.7
BT40-SLSB20-180-M127	BT40-SLSB20-210-M127	BT40-SLSB20-240-M127
 No.357	 No.358	 No.359
180 26 127 20° 3° φ29 φ42.3 φ53 1.6	210 56 127 20° 3° φ29 φ50 φ42.3 1.9	240 86 127 20° 3° φ29 φ50 φ42.3 2.3
BT40-SLSB20-210-M157	BT40-SLSB20-240-M157	BT40-SLSB20-270-M157
 No.360	 No.361	 No.362
210 26 157 20° 3° φ29 φ45.5 φ50 2.1	240 56 157 20° 3° φ29 φ50 φ45.5 2.4	270 86 157 20° 3° φ29 φ50 φ45.5 2.9
BT40-SLRB20-95-M42	BT40-SLRB20-125-M42	BT40-SLRB20-155-M42
 No.363	 No.364	 No.365
95 26 42 20° 3° t = 9 φ38 φ42.4 φ53 0.4	125 56 42 20° 3° φ38 φ53 φ42.4 0.5	155 86 42 20° 3° φ38 φ53 φ42.4 0.6
BT40-SLRB20-120-M67	BT40-SLRB20-150-M67	BT40-SLRB20-180-M67
 No.366	 No.367	 No.368
120 26 67 20° 3° φ38 φ45 φ53 0.5	150 56 67 20° 3° φ38 φ50 φ45 0.7	180 86 67 20° 3° φ38 φ50 φ45 0.9

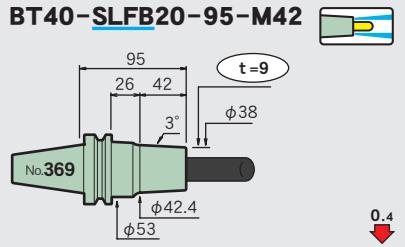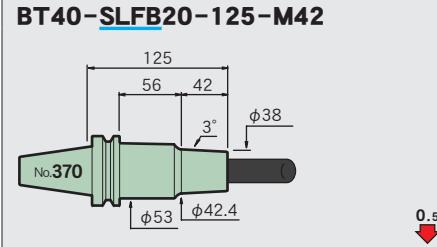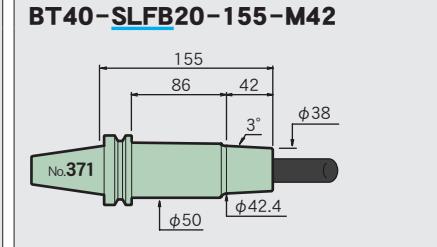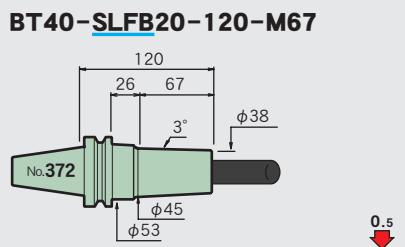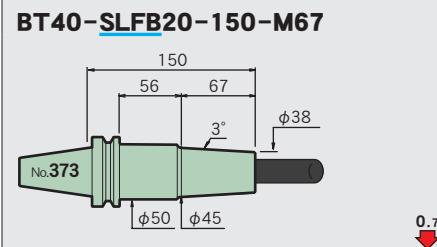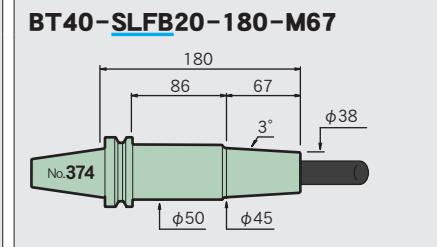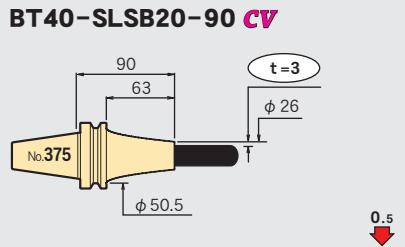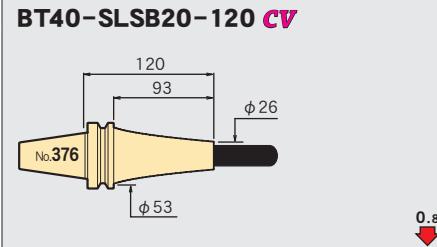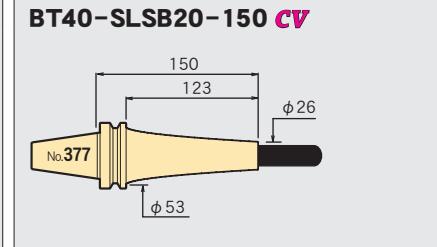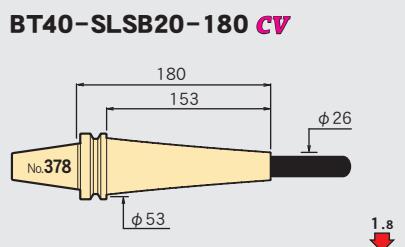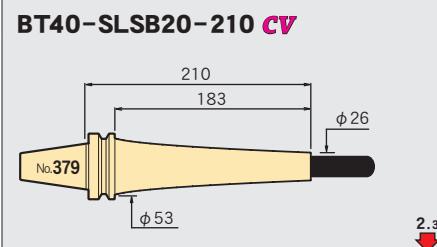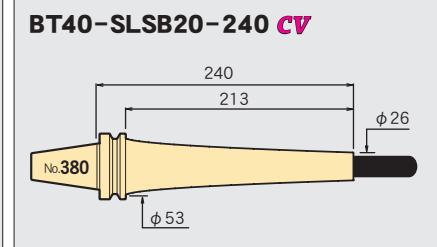BT40-SLFB20-95-M42	BT40-SLFB20-125-M42	BT40-SLFB20-155-M42
		
0.4	0.5	0.7
BT40-SLFB20-120-M67	BT40-SLFB20-150-M67	BT40-SLFB20-180-M67
		
0.5	0.7	0.9
BT40-SLSB20-90 CV	BT40-SLSB20-120 CV	BT40-SLSB20-150 CV
		
0.5	0.8	1.3
BT40-SLSB20-180 CV	BT40-SLSB20-210 CV	BT40-SLSB20-240 CV
		
1.8	2.3	3.0

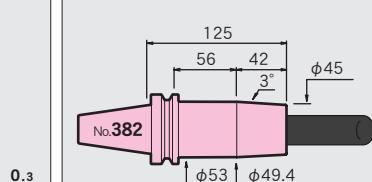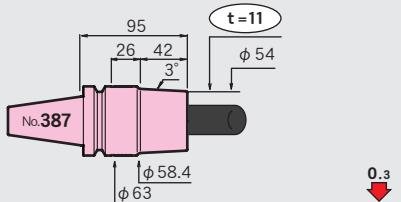Feature
 Shrink-fit Heater
 MONO 3°
 MONO CURVE
 MONO Series
 2PIECE type
 UNO
 HYPER VERSION
 Z
 STRAIGHT
 OTHERS
 PERIPHERALS
 Technical data
 49

φ 25**BT40-SLRB25-95-M42****BT40-SLRB25-125-M42****BT40-SLRB25-155-M42****BT40-SLFB25-95-M42****BT40-SLFB25-125-M42****BT40-SLFB25-155-M42****φ 32****BT40-SLRB32-95-M42****φ70 Nozzle (HRB-03S)**

Required for shrinking the SLRB32.

CODE
HRB-NZL70



HEAT ROBO Baby3000S

BT50

BT50-SLSB16-225-M157

MONO 3°



Fig.1





Fig. 2

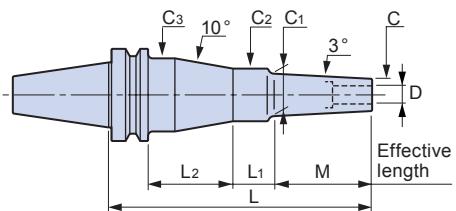


Compatibility table
for HRD-01S

- [○] Available [✗] Not available
- [▲] Usable by raising the heating unit. → P.257

MONO CURVE



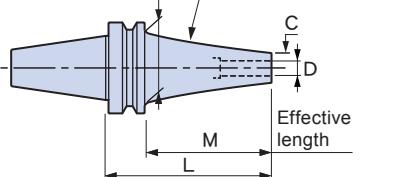Fig.3



CV: Curve

Thickness


CODE	Fig.	φD	φC	t	L	M	L1	L2	φC1	φC2	φC3	H	h	Kg	N	S	Scale model
BT50-SLSA3-110-M 42	1	3	6	1.5	110	42	30	—	10.4	25	—	9	165	3.6	4.4	9.1	○
					135	67			13				190		5.1	14.7	
					140	42	60		10.4				195	3.7	4.4	9.8	
					165	67			13				220		5.2	15.9	
					97	30			16.2	26			225	4.1	4.6	9.9	
					170	42	33	57	10.4		40		250		5.4	15.8	
					195	67			13				280	3.8	6.1	22.3	
					97	60	—		16.2								
-225-M 97	2			2.25	33	57					40						○
					225												
					90	22	30	—	9.8	25	—	9	145	3.6	4.6	2.8	
					110	42			11.9	26			165	3.7	4.9	5.4	
					120	22	60		9.8	25			175		4.7	3.2	
					135	67	30		14.5	26			190		5.4	9	
					140	42	60		11.9				195	3.8	5	6	
					150	22	33	57	9.8	25	39		205	4	4.9	3.2	
-SLRA3- 90-M 22	1	3	7.5	2.25	165	67	60	—	14.5				220	3.8	5.5	10	○
					97	30			17.7	26			225	4.1	5.1	6	
					170	42	33	57	11.9		40		250		5.7	9.8	
					195	67			14.5				280	3.8	6.2	14.5	
					97	60	—		17.7						7.7	15.7	
					127	30			20.8	32							
					225	97	33	57	17.7	25	39						
					127	60	—		20.8	36	—						
-M127	1				30	60	—										○
					255				32	46							
-225-M 97	2				30	60	—										○
					127												
-M127	1				30	60	—										○
					255												
-255-M127	2				30	60	—										○
					127												

■ Option

- Retention knob → P.244

■ Caution

- Retention knob → Use a retention knob with hole, or remove the retention knob and heat it.
- Setting cutters → Be sure to insert the tool beyond the safety mark.



Feature

Shrink-fit Heater

MONO 3°

MONO CURVE

2PIECE type

UNO

HYPER VERSION

Z

STRAIGHT

arbor

OTHERS

PERIPHERALS

OTHERS

Technical

data

	CODE	Fig.	φD	φC	t	L	M	L ₁	L ₂	φC ₁	φC ₂	φC ₃	H	h	Kg	N	S	Feature
MONO 3°	BT50-SLFB3- 90-M 22	1	3	9.5	3.25	90	22	30	—	11.8	26	—	9	145	3.6	4.4	1.9	25
MONO Series	-110-M 42					110	42			13.9				165	3.7	4.7	3.3	28
MONO CURVE	-120-M 22					120	22	60		11.8	25			175		4.5	2.4	26
MONO 3°	-135-M 67					135	67	30		16.5	26			190		5.4	5.4	31
MONO Series	-140-M 42					140	42	60		13.9	25			195		4.8	4	29
MONO CURVE	-150-M 22	2				150	22	33	57	11.8		39		205	4	4.6	2.3	27
MONO 3°	-165-M 67	1				165	67	60	—	16.5	26	—		220	3.8	5.5	6.4	32
MONO Series	-170-M 42	2				170	42	33	57	13.9	25	39		225	4	4.9	3.9	30
MONO CURVE	-195-M 67					195	67			16.5				250	4.1	5.7	6.4	33
MONO 3°	BT50-SLSA4-110-M 42	1	4	7	1.5	110	42	30	—	11.4	25	—	12	165	3.6	5.1	7.2	34
MONO Series	-135-M 67					135	67			14				190		5.2	11.8	37
MONO CURVE	-140-M 42					140	42	60		11.4				195	3.7		8	35
MONO 3°	-165-M 67					165	67			14				220			13	38
MONO Series	-M 97						97	30		17.2						6.1	16.7	40
MONO CURVE	-170-M 42	2				170	42	33	57	11.4		39		225	4	5.4	7.9	36
MONO 3°	-195-M 67					195	67			14				250			12.8	39
MONO Series	-M 97	1					97	60	—	17.2		—			3.8	6.2	18.5	41
MONO CURVE	-225-M 97	2				225		33	57			39		280	4.1	6.3	18.2	42
MONO 3°	-SLRA4- 90-M 22	1	4	10	3	90	22	30	—	12.3	25	—	12	145	3.6	4.7	1.7	43
MONO Series	-110-M 42					110	42			14.4				165		5.1	3.1	46
MONO CURVE	-120-M 22					120	22	60		12.3				175	3.7	4.8	2.2	44
MONO 3°	-135-M 67					135	67	30		17	26			190		5.9	5.2	49
MONO Series	-140-M 42					140	42	60		14.4	25			195		5.2	3.9	47
MONO CURVE	BT50 -150-M 22	2				150	22	33	57	12.3		39		205	4	5	2.2	45
MONO 3°	-165-M 67	1				165	67	60	—	17		—		220	3.8	5.9	6.4	50
MONO Series	-M 97						97	30		20.2					3.7	6.8	7.9	52
MONO CURVE	-170-M 42	2				170	42	33	57	14.4	26	40		225	4.1	5.4	3.7	48
MONO 3°	-195-M 67					195	67			17	25	39		250		6.1	6.2	51
MONO Series	-M 97	1					97	60	—	20.2		—			3.8	6.9	9.7	53
MONO CURVE	-M127						127	30		23.3	32					9.2	9.4	55
MONO 3°	-225-M 97	2				225	97	30	60	20.2	25	39		280	4.1	7.1		54
MONO Series	-M127	1					127	60	—	23.3	32	—			4	9.2	10.4	56
MONO CURVE	-255-M127	2				255		30	60			46		310	4.4	9.5	10.3	57
MONO 3°	-SLFB4- 90-M 22	1	4	12	4	90	22	30	—	14.3	26	—	12	145	3.7	4.6	1.4	58
MONO Series	-110-M 42					110	42			16.4				165		5	2.2	61
MONO CURVE	-120-M 22					120	22	60		14.3	25			175		4.6	1.9	59
MONO 3°	-135-M 67					135	67	30		19	26			190		5.8	3.6	64
MONO Series	-140-M 42					140	42	60		16.4				195	3.8	5.1	2.9	62
MONO CURVE	-150-M 22	2				150	22	33	57	14.3	25	39		205	4	4.8	1.8	60
MONO 3°	-165-M 67	1				165	67	60	—	19		—		220	3.8	5.9	4.8	65
MONO Series	-170-M 42	2				170	42	33	57	16.4	26	40		225	4.1	5.3	2.8	63
MONO CURVE	-195-M 67					195	67			19				250	4.2	6.1	4.5	66
MONO 3°	-SLSA4-165 CV	3	4	7	1.5	165	127	—	—	85		—	12	220	5.2	15.4	1.8	67
MONO Series	-195 CV					195	157							250	5.3	15.9	2.6	68
MONO CURVE	-225 CV					225	187							280	5.5	16.4	3.8	69
MONO 3°	-255 CV					255	217							310	5.6	16.9	5.7	70
MONO Series	-285 CV					285	247							340	6.4	19.5	5.9	71
MONO CURVE	-315 CV					315	277							370	8.3	26	7.7	72
MONO 3°	BT50-SLSA6-110-M 42	1	6	9	1.5	110	42	30	—	13.4	25	—	18	165	3.6	5.4	4.8	73
MONO Series	-135-M 67					135	67			16				190	3.7	6.4	8.1	76
MONO CURVE	-140-M 42					140	42	60		13.4				195		5.4	5.7	74
MONO 3°	-165-M 67					165	67			16				220	3.8	6.5	9.4	77
MONO Series	-M 97						97	30		19.2	32				3.7	8.3	11	79
MONO CURVE	-170-M 42	2				170	42	33	57	13.4	26	40		225	4.1	5.6	5.5	75
MONO 3°	-195-M 67					195	67			16	25	39		250	4	6.6	9.2	78
MONO Series	-M 97	1					97	60	—	19.2	32	—			3.9	8.2	11.7	80
MONO CURVE	-225-M 97	2				225		30	60			46		280	4.3	8.5		81

CODE	Fig.	φD	φC	t	L	M	L ₁	L ₂	φC ₁	φC ₂	φC ₃	H	h	Kg	N	S	Scale model
BT50-SLSB6-110-M 42	1	6	10	2	110	42	30	—	14.4	25	—	18	165	3.6	6	3.7	○
-135-M 67					135	67			17				190	3.7	7.4	6.2	
-140-M 42					140	42	60		14.4				195		6.1	4.6	
-165-M 67					165	67			17				220	3.8	7.4	7.6	
-M 97						97	30		20.2	32					9.6	8.5	
-170-M 42	2				170	42	33	57	14.4	25	39		225	4	6.2	4.4	
-195-M 67					195	67			17				250	4.1	7.6	7.3	
-M 97	1					97	60	—	20.2	32	—			3.9	9.6	9.2	
-M127						127	30		23.3					3.8	11.3	11.1	
-225-M 97	2				225	97		60	20.2		46		280	4.3	9.9	9.2	
-M127	1					127	60	—	23.3		—			4	11.2	12.1	
-M157						157	30		26.5					3.9	13	13.3	
-255-M127	2				255	127		60	23.3	32	46		310	4.4	11.5	12	▲
-M157	1					157	60	—	26.5		—			4.1	12.9	14.7	
-285-M157	2				285		30	60			46		340	4.5	13.2	14.5	
-SLRB6- 90-M 22	1	6	14	4	90	22	30	—	16.3	32	—	18	145	3.7	5.5	1	○
-110-M 42					110	42			18.4				165		6.6	1.6	
-120-M 22					120	22	60		16.3				175	3.8	5.5	1.2	
-135-M 67					135	67	30		21				190		8	2.6	
-140-M 42					140	42	60		18.4				195	3.9	6.6	1.9	
-150-M 22	2				150	22	30	60	16.3		46		205	4.2	5.8	1.2	
-165-M 67	1				165	67	60	—	21		—		220	3.9	8	3.1	
-170-M 42	2				170	42	30	60	18.4		46		225	4.3	6.9	1.9	
-195-M 67					195	67			21				250		8.3	3	
-SLFB6- 90-M 22	1	6	14	4	90	22	30	—	16.3	32	—	18	145	3.7	5.5	1	○
-110-M 42					110	42			18.4				165		6.6	1.6	
-120-M 22					120	22	60		16.3				175	3.8	5.5	1.2	
-135-M 67					135	67	30		21				190		8	2.6	
-140-M 42					140	42	60		18.4				195	3.9	6.6	1.9	
-150-M 22	2				150	22	30	60	16.3		46		205	4.2	5.8	1.2	
-165-M 67	1				165	67	60	—	21		—		220	3.9	8	3.1	
-170-M 42	2				170	42	30	60	18.4		46		225	4.3	6.9	1.9	
-195-M 67					195	67			21				250		8.3	3	
-SLSA6-165 CV	3	6	9	1.5	165	127	—	—	85	—	—	18	220	5.1	15.1	1.5	○
-195 CV					195	157							250	5.2	15.5	2.4	
-225 CV					225	187							280	5.7	16.8	2.9	
-255 CV					255	217							310	5.9	18.4	4	
-285 CV					285	247							340	6.2	19.5	5.2	
-315 CV					315	277							370	8.4	26.8	6.9	
BT50-SLSA8-110-M 42	1	8	11	1.5	110	42	30	—	15.4	25	—	24	165	3.6	6.9	3.5	○
-135-M 67					135	67			18	32			190	3.7	8.7	5.4	
-140-M 42					140	42	60		15.4	25			195		6.9	4.4	
-165-M 67					165	67			18	32			220	3.9	8.6	5.9	
-M 97						97	30		21.2					3.8	10.8	7.9	
-170-M 42	2				170	42	33	57	15.4	25	39		225	4	7.2	4.3	
-195-M 67					195	67	28	62	18	36	50			4.5	8.9	5.7	
-M 97	1					97	60	—	21.2	32	—			3.9	10.7	8.7	
-225-M 97	2				225		28	62		36	50			4.5	11	8.3	

	CODE	Fig.	φD	φC	t	L	M	L ₁	L ₂	φC ₁	φC ₂	φC ₃	H	h	Kg	N	S	Feature	Scale model
MONO 3°	BT50-SLSB8-110-M 42	1	8	13	2.5	110	42	30	—	17.4	32	—	24	165	3.7	7.7	2.1	○	130
MONO Series	-135-M 67					135	67		20					190		9.8	3.5		133
MONO CURVE	-140-M 42					140	42	60		17.4				195	3.8	7.6	2.4		131
MONO 3°	-165-M 67					165	67		20					220	3.9	9.8	4		134
MONO Series	-M 97						97	30		23.2					3.8	12.4	5.3		136
MONO CURVE	-170-M 42	2				170	42		60	17.4		46		225	4.3	7.9	2.4		132
MONO 3°	-195-M 67					195	67		20					250		10.1	4		135
MONO Series	BT50 -M 97	1					97	60	—	23.2					4	12.3	6.1		137
MONO CURVE	-M127						127	30		26.3					3.9	14.9	7.1		139
MONO 3°	-225-M 97	2				225	97		60	23.2		46		280	4.4	12.6	6		138
MONO Series	-M127	1					127	60	—	26.3					4	14.9	8.2		140
MONO CURVE	-M157						157	30		29.5	42					17.5	8		142
MONO 3°	-255-M127	2				255	127		60	26.3	32	46		310	4.5	15.2	8.1	▲	141
MONO Series	-M157	1					157	60	—	29.5	42	—			4.3	17.5	8.5		143
MONO CURVE	-285-M157	2				285		28	62			56		340	4.9	17.8			144
MONO 3°	-SLRB8- 90-M 22	1	8	18	5	90	22	30	—	20.3	32	—	24	145	3.7	6	0.7	×	145
MONO Series	-110-M 42					110	42			22.4				165		7.7	1.1	○	148
MONO CURVE	-120-M 22					120	22	60		20.3				175	3.8	5.9	0.9	×	146
MONO 3°	-135-M 67					135	67	30		25				190		9.8	1.7	○	151
MONO Series	-140-M 42					140	42	60		22.4				195	3.9	7.7	1.4		149
MONO CURVE	-150-M 22	2				150	22	30	60	20.3		46		205	4.3	6.2	0.9	×	147
MONO 3°	-165-M 67	1				165	67	60	—	25				220	4	9.8	2.2	○	152
MONO Series	-170-M 42	2				170	42	28	62	22.4	36	50		225	4.5	8	1.3	•	150
MONO CURVE	-195-M 67					195	67	30	60	25	32	46		250	4.4	10.1	2.2		153
MONO 3°	-SLFB8- 90-M 22	1	8	18	5	90	22	30	—	20.3	32	—	24	145	3.7	6	0.7	×	154
MONO Series	-110-M 42					110	42			22.4				165		7.7	1.1	○	157
MONO CURVE	-120-M 22					120	22	60		20.3				175	3.8	5.9	0.9	×	155
MONO 3°	-135-M 67					135	67	30		25				190		9.8	1.7	○	160
MONO Series	-140-M 42					140	42	60		22.4				195	3.9	7.7	1.4		158
MONO CURVE	-150-M 22	2				150	22	30	60	20.3		46		205	4.3	6.2	0.9	×	156
MONO 3°	-165-M 67	1				165	67	60	—	25				220	4	9.8	2.2	○	161
MONO Series	-170-M 42	2				170	42	30	60	22.4		46		225	4.3	8	1.4		159
MONO CURVE	-195-M 67					195	67			25				250	4.4	10.1	2.2		162
MONO 3°	-SLSA8-165 CV	3	8	11	1.5	165	127	—	—	85	—	—	24	220	4.9	14.7	1.4	○	163
MONO Series	-195 CV					195	157							250	5.3	16.1	1.9		164
MONO CURVE	-225 CV					225	187							280	5.8	17.7	2.3		165
MONO 3°	-255 CV					255	217							310		17.9	3.7	▲	166
MONO Series	-285 CV					285	247							340	6	19.1	4.9		167
MONO CURVE	-315 CV					315	277							370	8.4	28	5		168
MONO 3°	-SLRA8-195 CV	3	8	16	4	195	157	—	—	85	—	—	24	250	5.4	17.3	1.1	○	169
MONO Series	-225 CV					225	187							280	5.6	18.3	1.5		170
MONO CURVE	-255 CV					255	217							310	5.8	19.1	2.2	▲	171
MONO 3°	-285 CV					285	247							340	5.9	19.9	3		172
MONO Series	-SLFA8-195 CV	3	8	16	4	195	157	—	—	85	—	—	24	250	5.4	17.3	1.1	○	173
MONO CURVE	-225 CV					225	187							280	5.6	18.3	1.5		174
MONO 3°	-255 CV					255	217							310	5.8	19.1	2.2	▲	175
MONO Series	-285 CV					285	247							340	5.9	19.9	3		176

CODE	Fig.	φD	φC	t	L	M	L ₁	L ₂	φC ₁	φC ₂	φC ₃	H	h	Kg	N	S	Scale model	
BT50-SLSA10-110-M 42	1	10	13	1.5	110	42	30	—	17.4	25	—	30	165	3.6	7.9	2.6	○	177
-135-M 67					135	67			20	32			190	3.7	10.4	4		180
-140-M 42					140	42	60		17.4	25			195		7.8	3.7		178
-165-M 67					165	67			20	32			220	3.9	10.4	4.6		181
-M 97					97	30			23.2					3.8	13.6	6		183
-170-M 42					170	42	33	57	17.4	25	39		225	4	8.1	3.5		179
-195-M 67					195	67	28	62	20	36	50		250	4.5	10.7	4.3		182
-M 97					97	60	—	23.2	32	—			3.9	13.5	6.9		184	
-225-M 97					225		30	60			46		280	4.4	13.8	6.8	▲	185
BT50																		
-SLSB10-110-M 42	1	10	16	3	110	42	30	—	20.4	32	—	30	165	3.7	8.6	1.4	○	186
-135-M 67					135	67			23				190	3.8	11.7	2.4		189
-140-M 42					140	42	60		20.4				195	3.9	8.6	1.8		187
-165-M 67					165	67			23				220		11.7	3		190
-M 97					97	30			26.2					15.4	3.7			192
-170-M 42					170	42	28	62	20.4	36	50		225	4.5	8.9	1.7		188
-195-M 67					195	67	30	60	23	32	46		250	4.3	12	3		191
-M 97					97	60	—	26.2			—			4	15.3	4.5		193
-M127					127	30			29.3	42				20				195
-225-M 97					225	97		60	26.2	32	46		280	4.4	15.6	4.4	▲	194
-M127	1				127	60	—	29.3	42	—				4.2	20.6	4.9		196
-M157					157	30			32.5					4.1	23.7	5.6		198
-255-M127	2				255	127	28	62	29.3		56		310	4.8	21.1	4.9		197
-M157					157	60	—	32.5			—			4.4	24.3	6.1		199
-285-M157					285		28	62			56		340	5	24.8			200
-SLRB10- 90-M 22	1	10	22	6	90	22	30	—	24.3	32	—	30	145	3.7	6.2	0.6	×	201
-110-M 42					110	42			26.4				165	3.8	8.7	0.8	○	204
-120-M 22					120	22	60		24.3				175	3.9	6.2		×	202
-135-M 67					135	67	30		29	42			190		11.8	1.1	○	207
-140-M 42					140	42	60		26.4	32			195		8.6	1.2		205
-150-M 22					150	22	30	60	24.3		46		205	4.3	6.5	0.8	×	203
-165-M 67					165	67	60	—	29	42	—		220	4.1	11.7	1.3	○	208
-170-M 42					170	42	28	62	26.4	36	50		225	4.5	8.9	1		206
-195-M 67					195	67		62	29	42	56		250	4.7	12	1.3		209
-SLFB10- 90-M 22	1	10	22	6	90	22	30	—	24.3	32	—	30	145	3.7	6.2	0.6	×	210
-110-M 42					110	42			26.4				165	3.8	8.7	0.8	○	213
-120-M 22					120	22	60		24.3				175	3.9	6.2		×	211
-135-M 67					135	67	30		29	42			190		11.8	1.1	○	216
-140-M 42					140	42	60		26.4	36			195	4	8.6	1		214
-150-M 22					150	22	30	60	24.3	32	46		205	4.3	6.5	0.8	×	212
-165-M 67					165	67	60	—	29	42	—		220	4.1	11.7	1.3	○	217
-170-M 42					170	42	30	60	26.4	32	46		225	4.3	8.9	1.2		215
-195-M 67					195	67	28	62	29	42	56		250	4.7	12	1.3		218
-SLSA10-165 CV	3	10	13	1.5	165	127	—	—	85	—	—	30	220	4.9	14.9	1.2		219
-195 CV					195	157							250	5.5	16.9	1.5		220
-225 CV					225	187							280	5.4	16.8	2.4		221
-255 CV					255	217							310	6.1	19.8	2.6		222
-285 CV					285	247							340	6.3	21.2	3.7		223
-315 CV					315	277							370	8.4	28.6	4.6		224

	CODE	Fig.	φD	φC	t	L	M	L ₁	L ₂	φC ₁	φC ₂	φC ₃	H	h	Kg	N	S	Feature	Scale model
MONO 3° MONO CURVE	BT50-SLRA10-165 CV	3	10	19	4.5	165	127	—	—	85	—	—	30	220	5.1	15.9	0.7	X	225
	-195 CV					195	157						250	5.2	16.6	1.1		O	226
	-225 CV					225	187						280	5.9	19.7	1.2	▲	227	
	-255 CV					255	217						310	6.1	20.3	1.7		228	
	-285 CV					285	247						340	6.2	21.1	2.4		229	
	-SLFA10-165 CV	3	10	19	4.5	165	127	—	—	85	—	—	30	220	5.1	15.9	0.7	X	230
	-195 CV					195	157						250	5.2	16.6	1.1		O	231
	-225 CV					225	187						280	5.9	19.7	1.2	▲	232	
	-255 CV					255	217						310	6.1	20.3	1.7		233	
	-285 CV					285	247						340	6.2	21.1	2.4		234	
MONO Series	BT50-SLSA12-110-M 42	1	12	15	1.5	110	42	30	—	19.4	32	—	30	165	3.7	9.5	1.9	O	235
	-135-M 67					135	67			22			190		13.1	3.3		238	
	-140-M 42					140	42	60		19.4			195	3.8	9.4	2.3		236	
	-165-M 67					165	67			22			220	3.9	13	3.9		239	
	-M 97					97	30	30		25.2				3.8	17.7	4.9		241	
	-170-M 42					170	42		60	19.4		46		225	4.3	9.7	2.3		237
	-195-M 67					195	67			22			250		13.3	3.9		240	
	-M 97					97	60	—	25.2			—		4	17.7	5.9		242	
	-225-M 97					225	30	60				46		280	4.4	18	5.8	▲	243
	-SLSB12-110-M 42					110	42	30	—	23.4	32	—	30	165	3.7	10.4	1.1	O	244
2PIECE type	-135-M 67					135	67			26			190	3.8	14.6	1.9		247	
	-140-M 42					140	42	60		23.4			195	3.9	10.3	1.6		245	
	-165-M 67					165	67			26			220		14.5	2.5		248	
	-M 97					97	30			29.2	42				20.5	2.4		250	
	-170-M 42					170	42	28	62	23.4	36	50		225	4.5	10.6	1.3		246
	-195-M 67					195	67	30	60	26	32	46		250	4.4	14.8	2.4		249
	BT50 -M 97					97	60	—	29.2	42		—		4.2	21.1	2.7		251	
	-M127					127	30			32.3				4.1	25.5	3.3		253	
	-225-M 97					225	97	28	62	29.2		56		280	4.8	21.6	2.8	▲	252
	-M127					127	60	—	32.3			—		4.3	26.1	3.7		254	
UNO	-M157					157	30			35.5					30.6	4.1		256	
	-255-M127					255	127	28	62	32.3		56		310	4.9	26.7	3.7		255
	-M157					157	60	—	35.5			—		4.5	31.1	4.7		257	
	-285-M157					285	28	62				56		340	5.1	31.7			258
	-SLRB12- 90-M 22	1	12	26	7	90	22	30	—	28.3	42	—	30	145	3.7	9.5	0.4	X	259
	-110-M 42					110	42			30.4			165	3.8	11.4	0.6		262	
	-120-M 22					120	22	60		28.3			175	4	10.1	0.5		260	
	-135-M 67					135	67	30		33			190		15.5	0.8		265	
	-140-M 42					140	42	60		30.4			195	4.1	11.9	0.7		263	
	-150-M 22					150	22	28	62	28.3		56		205	4.6	10.7	0.5		261
	-165-M 67					165	67	60	—	33			220	4.2	16.1	1		266	
STRAIGHT arbor	-170-M 42					170	42	28	62	30.4		56		225	4.7	12.5	0.7		264
	-195-M 67					195	67			33			250	4.8	16.7	1.1		267	
	-SLFB12- 90-M 22	1	12	26	7	90	22	30	—	28.3	42	—	30	145	3.7	9.5	0.4	X	268
	-110-M 42					110	42			30.4			165	3.8	11.4	0.6		271	
	-120-M 22					120	22	60		28.3			175	4	10.1	0.5		269	
	-135-M 67					135	67	30		33			190		15.5	0.8		274	
	-140-M 42					140	42	60		30.4			195	4.1	11.9	0.7		272	
	-150-M 22					150	22	28	62	28.3		56		205	4.6	10.7	0.5		270
	-165-M 67					165	67	60	—	33			220	4.2	16.1	1		275	
OTHERS	-170-M 42					170	42	28	62	30.4		56		225	4.7	12.5	0.7		273
	-195-M 67					195	67			33			250	4.8	16.7	1.1		276	
PERIPHERALS	-SLFB12- 90-M 22					90	22	30	—	28.3	42	—	30	145	3.7	9.5	0.4	X	
	-110-M 42					110	42			30.4			165	3.8	11.4	0.6			
	-120-M 22					120	22	60		28.3			175	4	10.1	0.5			
	-135-M 67					135	67	30		33			190		15.5	0.8			
	-140-M 42					140	42	60		30.4			195	4.1	11.9	0.7			
	-150-M 22					150	22	28	62	28.3		56		205	4.6	10.7	0.5		
	-165-M 67					165	67	60	—	33			220	4.2	16.1	1			
Technical data	-170-M 42					170	42	28	62	30.4		56		225	4.7	12.5	0.7		
	-195-M 67					195	67			33			250	4.8	16.7	1.1			

CODE	Fig.	φD	φC	t	L	M	L ₁	L ₂	φC ₁	φC ₂	φC ₃	H	h	Kg	N	S	Scale model
BT50-SLSA12-165 CV	3	12	15	1.5	165	127	—	—	84	—	—	30	220	4.8	14.6	1.2	○
-195 CV					195	157			85				250	5.6	17.6		277
-225 CV					225	187							280	5.8	18.5	1.8	278
-255 CV					255	217							310	6	19.3	2.6	279
-285 CV					285	247							340	6.2	21.2	3.5	280
-315 CV					315	277							370	8.5	29.2	3.6	281
-SLRA12-165 CV	3	12	22	5	165	127	—	—	85	—	—	30	220	5.1	16.1	0.7	○
-195 CV					195	157							250	5.6	18	0.8	283
BT50					225	187							280		18.6	1.3	284
-225 CV					255	217							310	5.8	20.7	1.6	285
-285 CV					285	247							340	6.1	22.4	2.1	286
-SLFA12-165 CV	3	12	22	5	165	127	—	—	85	—	—	30	220	5.1	16.1	0.7	○
—					195	157							250	5.6	18	0.8	288
-195 CV					225	187							280		18.6	1.3	289
-225 CV					255	217							310	5.8	20.7	1.6	290
-285 CV					285	247							340	6.1	22.4	2.1	291
BT50-SLSB16-110-M 42	1	16	24	4	110	42	30	—	28.4	42	—	32	165	3.8	15	0.7	292
-135-M 67					135	67			31				190	3.9	21.9	1.1	293
-140-M 42					140	42		60	28.4				195	4	15.6	0.9	294
-165-M 67					165	67			31				220	4.1	22.5	1.4	297
-M 97					97	30			34.2				4	30.2	1.7		299
-170-M 42					170	42	28	62	28.4	56	—	32	225	4.6	16.2	0.9	295
-195-M 67					195	67			31				250	4.7	23	1.4	298
-M 97					97	60			34.2				4.3	30.7	2		300
-M127					127	30			37.3				4.2	38.5	2.1		302
-225-M 97					225	97	28	62	34.2				280	4.9	31.3		301
-M127					127	60			37.3				4.6	39	2.3		303
-M157					157	30			40.5				4.4	46.8	2.6		305
-255-M127					255	127	28	62	37.3	67	—	32	310	5.5	39.6	2.3	304
-M157					157	60			40.5				4.8	47.3	2.8		306
-285-M157					285	28			62				340	5.7	47.9	2.9	307
-SLRB16- 90-M 22	1	16	32	8	90	22	30	—	34.3	42	—	32	145	3.8	9.6	0.3	308
-110-M 42					110	42			36.4				165	3.9	15.1	0.5	311
-120-M 22					120	22			34.3				175	4	10.1		309
-135-M 67					135	67			39				190	4.1	22	0.6	314
-140-M 42					140	42	60	—	36.4				195	4.2	15.7		312
-150-M 22					150	22			34.3	56	—	32	205	4.6	10.7	0.5	310
-165-M 67					165	67			39				220	4.3	22.6	0.9	315
-170-M 42					170	42			36.4				225	4.8	16.2	0.7	313
-195-M 67					195	67			39				250	4.9	23.2	0.9	316
-SLFB16- 90-M 22	1	16	32	8	90	22	30	—	34.3	42	—	32	145	3.8	9.6	0.3	317
—					110	42			36.4				165	3.9	15.1	0.5	320
-120-M 22					120	22			34.3				175	4	10.1		318
-135-M 67					135	67			39				190	4.1	22	0.6	323
-140-M 42					140	42	60	—	36.4				195	4.2	15.7		321
-150-M 22					150	22			34.3	56	—	32	205	4.6	10.7	0.5	319
-165-M 67					165	67			39				220	4.3	22.6	0.9	324
-170-M 42					170	42			36.4				225	4.8	16.2	0.7	322
-195-M 67					195	67			39				250	4.9	23.2	0.9	325
-SLSB16-165 CV	3	16	21	2.5	165	127	—	—	85	—	—	32	220	5.4	17.8	0.6	326
-195 CV					195	157							250		17.7	1.1	327
-225 CV					225	187							280	6.3	21.1	1.2	328
-255 CV					255	217							310	6.1	20.9	2	329
-285 CV					285	247							340	7	24.3		330
-315 CV					315	277							370	8.6	30.9	2.6	331

	CODE	Fig.	ϕD	ϕC	t	L	M	L1	L2	ϕC_1	ϕC_2	ϕC_3	H	h	Kg	N	S	Feature	Scale model
	BT50-SLSB20-110-M 42	1	20	29	4.5	110	42	30	—	33.4	42	—	40	165	3.8	16.8	0.5		332
	-135-M 67					135	67			36				190	3.9	27.1	0.9		335
	-140-M 42					140	42	60		33.4				195	4.1	17.4	0.8		333
	-165-M 67					165	67			36				220	4.2	27.7	1.2		336
	-M 97					97	30			39.2	53			4.1	39.4	1.1			338
	-170-M 42	2				170	42	28	62	33.4	42	56		225	4.7	18	0.8		334
	-195-M 67					195	67			36				250	4.8	28.2	1.2		337
	-M 97	1				97	60	—		39.2	53	—		4.5	40	1.3			339
	-M127					127	30			42.3				4.3	52.6	1.5			341
	-225-M 97	2				225	97	28	62	39.2		67		280	5.4	40.6	1.3		340
	-M127	1				127	60	—		42.3		—		4.7	53.2	1.8			342
	-M157					157	30			45.5				4.6	65	1.7			344
	-255-M127	2				255	127	28	62	42.3		67		310	5.6	53.7			343
	-M157	1				157	60	—		45.5		—		5	65.5	2.2			345
	-285-M157	2				285		28	62			67		340	5.9	66.1			346
	-SLRB20-110-M 42	1	20	38	9	110	42	30	—	42.4	53	—	40	165	4	16.9	0.3		347
	-135-M 67					135	67			45				190	4.2	27.2	0.4		350
	-140-M 42					140	42	60		42.4				195	4.4	17.5			348
	-165-M 67					165	67			45				220	4.6	27.8	0.6		351
	-170-M 42	2				170	42	28	62	42.4		67		225	5.3	18.1	0.4		349
	-195-M 67					195	67			45				250	5.5	28.4	0.6		352
	-SLFB20-110-M 42	1	20	38	9	110	42	30	—	42.4	53	—	40	165	4	16.9	0.3		353
	-135-M 67					135	67			45				190	4.2	27.2	0.4		356
	-140-M 42					140	42	60		42.4				195	4.4	17.5			354
	-165-M 67					165	67			45				220	4.6	27.8	0.6		357
	-170-M 42	2				170	42	28	62	42.4		67		225	5.3	18.1	0.4		355
	-195-M 67					195	67			45				250	5.5	28.4	0.6		358
	-SLSB20-165 CV	3	20	26	3	165	127	—	—	85	—	—	40	220	5.4	17.4	0.6		359
	-195 CV					195	157							250	6.1	20.8	0.7		360
	-225 CV					225	187							280	5.8	20.5	1.2		361
	-255 CV					255	217							310	6.7	23.9	1.3		362
	-285 CV					285	247							340	7	25.4	1.7		363
	-315 CV					315	277							370	8.9	32.4	2.3		364
	BT50-SLRB25-110-M 42	1	25	45	10	110	42	30	—	49.4	53	—	45	165	4.1	19	0.3		365
	-140-M 42					140		60						195	4.5	19.6	0.4		366
	-170-M 42	2				170		28	62			67		5.3	20.2				367
	-SLFB25-110-M 42	1	25	45	10	110	42	30	—	49.4	53	—	45	165	4.1	19	0.3		368
	-140-M 42					140		60						195	4.5	19.6	0.4		369
	-170-M 42	2				170		28	62			67		5.4	20.2				370
	BT50-SLRB32-110-M 42	1	32	54	11	110	42	30	—	58.4	63	—	50	160	4.0	11.2	0.2		371
	-140-M 42					140		60						171	4.6	13.4	0.3		372
	-170-M 42	2				170		28	62			77		5.8	19.6				373

Φ70 Nozzle (HRB-03S)

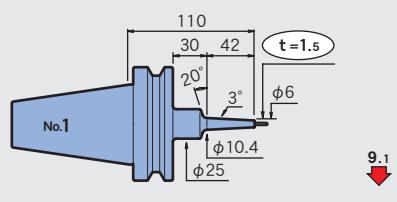
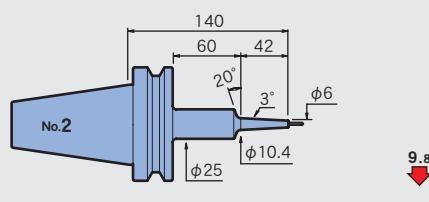
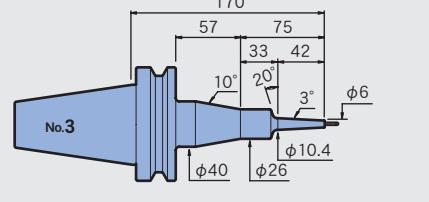
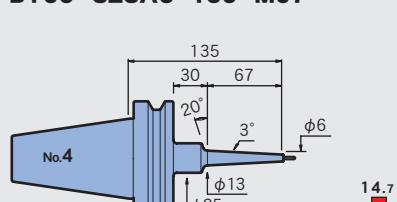
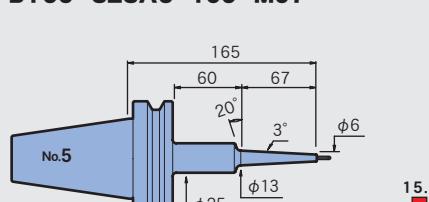
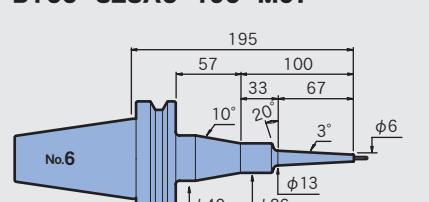
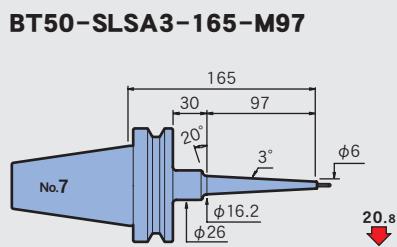
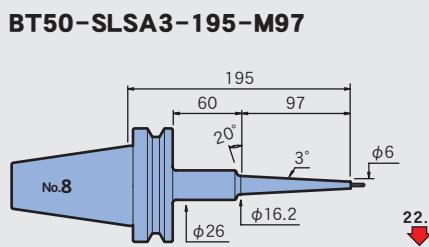
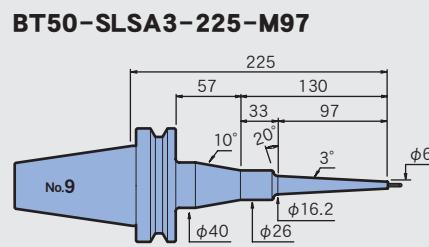
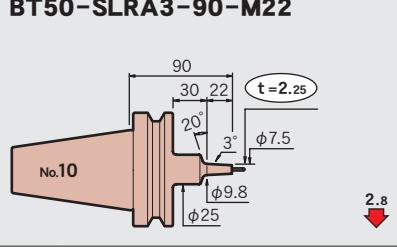
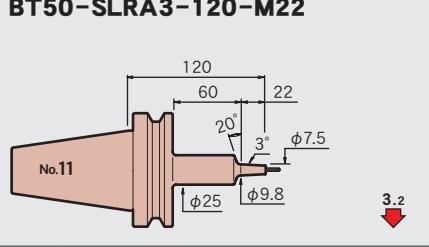
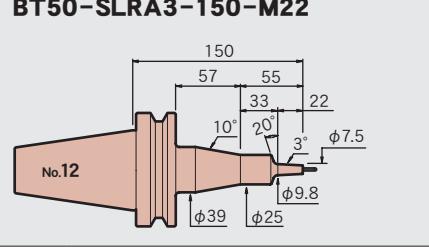
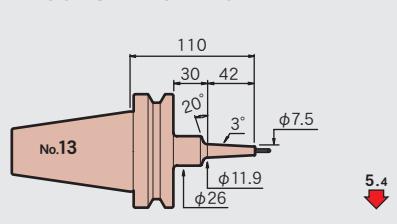
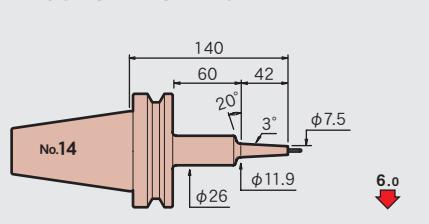
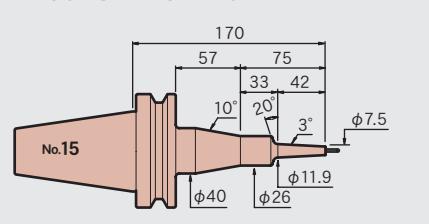
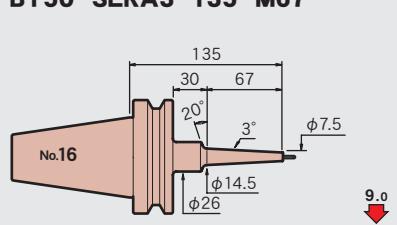
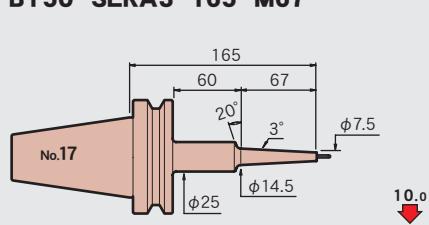
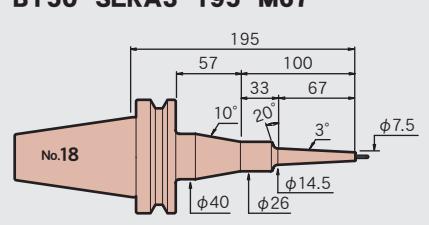
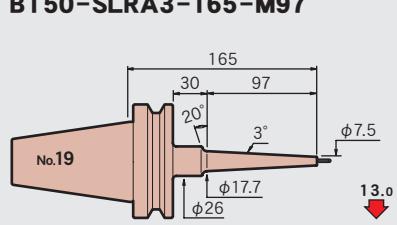
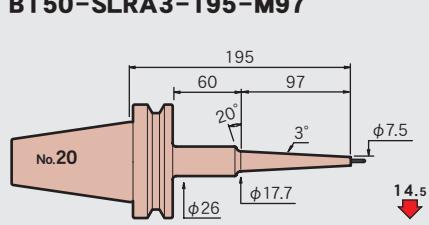
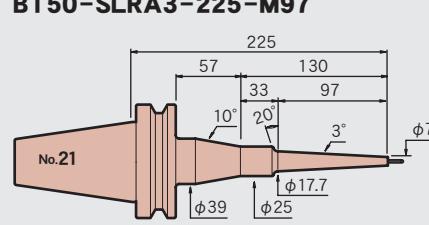
Required for shrinking the SRLB32.













CODE
HRB-NZL70
























HEAT ROBO Baby3000S



















φ3






















BT50-SLSA3-110-M42  No.1 110 30 42 20° 3° t = 1.5 φ10.4 φ25 φ6 9.1 MONO 3° MONO CURVE	BT50-SLSA3-140-M42  No.2 140 60 42 20° 3° φ6 φ25 φ10.4 9.8 MONO 3° MONO CURVE	BT50-SLSA3-170-M42  No.3 170 57 75 33 42 10° 20° 3° φ40 φ26 φ10.4 φ6 9.9 MONO 3° MONO CURVE
BT50-SLSA3-135-M67  No.4 135 30 67 20° 3° φ6 φ13 φ25 14.7 MONO Series	BT50-SLSA3-165-M67  No.5 165 60 67 20° 3° φ6 φ13 φ25 15.9 MONO Series	BT50-SLSA3-195-M67  No.6 195 57 100 33 67 10° 20° 3° φ40 φ26 φ13 φ6 15.8 MONO Series
BT50-SLSA3-165-M97  No.7 165 30 97 20° 3° φ6 φ16.2 φ26 20.8 MONO Series	BT50-SLSA3-195-M97  No.8 195 60 97 20° 3° φ6 φ16.2 φ26 22.3 MONO Series	BT50-SLSA3-225-M97  No.9 225 57 130 33 97 10° 20° 3° φ40 φ26 φ16.2 φ6 22.1 MONO Series
BT50-SLRA3-90-M22  No.10 90 30 22 20° 3° φ7.5 φ9.8 φ25 2.8 2PIECE type	BT50-SLRA3-120-M22  No.11 120 60 22 20° 3° φ7.5 φ9.8 φ25 3.2 UNO	BT50-SLRA3-150-M22  No.12 150 57 55 33 22 10° 20° 3° φ39 φ9.8 φ25 3.2 HYPER VERSION
BT50-SLRA3-110-M42  No.13 110 30 42 20° 3° φ7.5 φ11.9 φ26 5.4 Z	BT50-SLRA3-140-M42  No.14 140 60 42 20° 3° φ7.5 φ11.9 φ26 6.0 STRAIGHT arbor	BT50-SLRA3-170-M42  No.15 170 57 75 33 42 10° 20° 3° φ40 φ26 φ11.9 φ7.5 6.0 OTHERS
BT50-SLRA3-135-M67  No.16 135 30 67 20° 3° φ7.5 φ14.5 φ26 9.0 PERIPHERALS	BT50-SLRA3-165-M67  No.17 165 60 67 20° 3° φ7.5 φ14.5 φ26 10.0 OTHERS	BT50-SLRA3-195-M67  No.18 195 57 100 33 67 10° 20° 3° φ40 φ26 φ14.5 φ7.5 9.8 Technical
BT50-SLRA3-165-M97  No.19 165 30 97 20° 3° φ7.5 φ17.7 φ26 13.0 59	BT50-SLRA3-195-M97  No.20 195 60 97 20° 3° φ7.5 φ17.7 φ26 14.5 59	BT50-SLRA3-225-M97  No.21 225 57 130 33 97 10° 20° 3° φ39 φ25 φ17.7 φ7.5 14.4 59

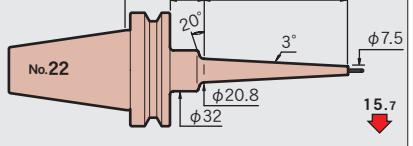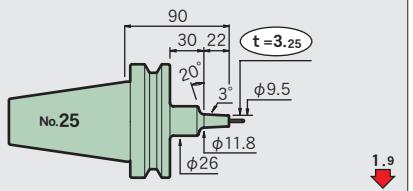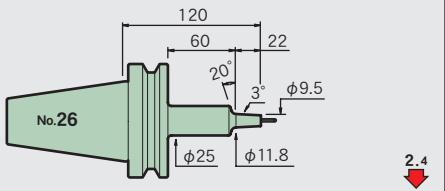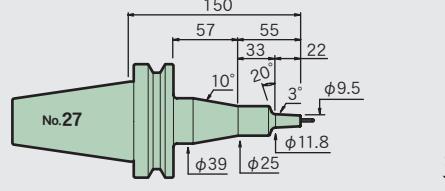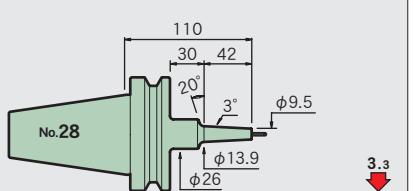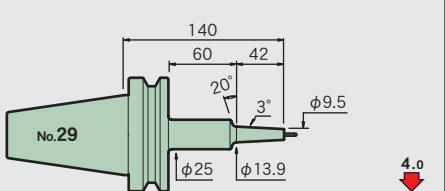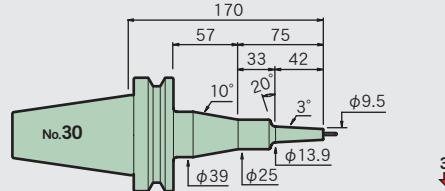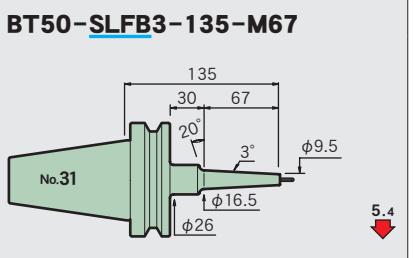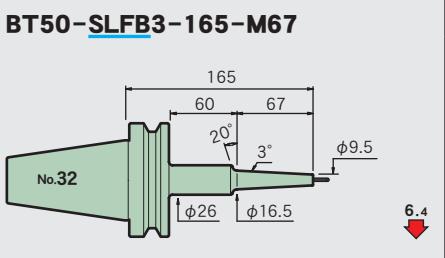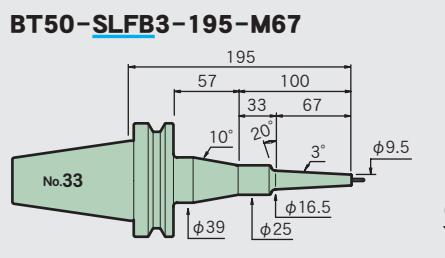BT50-SLRA3-195-M127	BT50-SLRA3-225-M127	BT50-SLRA3-255-M127
 No.22	 No.23	 No.24
195 30 127 20° 3° φ20.8 φ32 φ7.5 15.7 ↓	225 60 127 20° 3° φ36 φ20.8 φ7.5 16.3 ↓	255 60 157 127 30 20° 3° φ46 φ32 φ20.8 φ7.5 16.5 ↓
BT50-SLFB3-90-M22	BT50-SLFB3-120-M22	BT50-SLFB3-150-M22
 No.25	 No.26	 No.27
90 30 22 20° 3° φ26 φ11.8 t=3.25 φ9.5 1.9 ↓	120 60 22 20° 3° φ25 φ11.8 φ9.5 2.4 ↓	150 57 55 22 33 20° 3° φ39 φ25 φ11.8 φ9.5 2.3 ↓
BT50-SLFB3-110-M42	BT50-SLFB3-140-M42	BT50-SLFB3-170-M42
 No.28	 No.29	 No.30
110 30 42 20° 3° φ26 φ13.9 φ9.5 3.3 ↓	140 60 42 20° 3° φ25 φ13.9 φ9.5 4.0 ↓	170 57 75 42 33 20° 3° φ39 φ25 φ13.9 φ9.5 3.9 ↓
BT50-SLFB3-135-M67	BT50-SLFB3-165-M67	BT50-SLFB3-195-M67
 No.31	 No.32	 No.33
135 30 67 20° 3° φ26 φ16.5 φ9.5 5.4 ↓	165 60 67 20° 3° φ26 φ16.5 φ9.5 6.4 ↓	195 57 100 67 33 20° 3° φ39 φ25 φ16.5 φ9.5 6.4 ↓

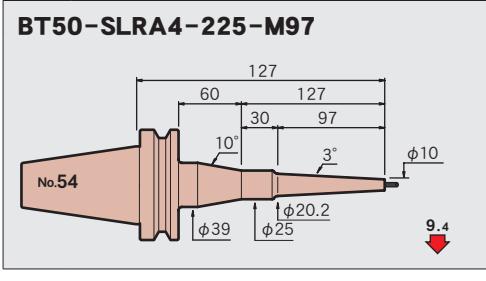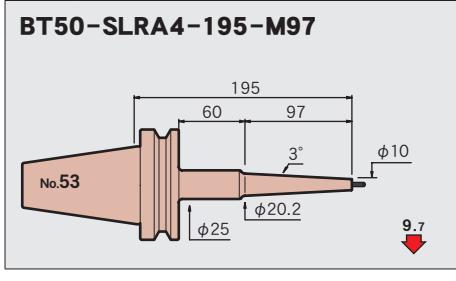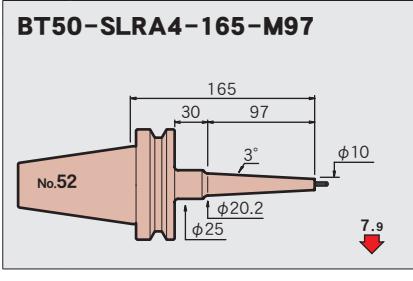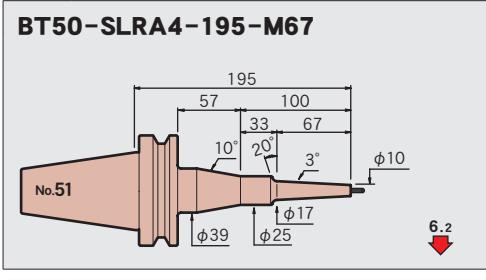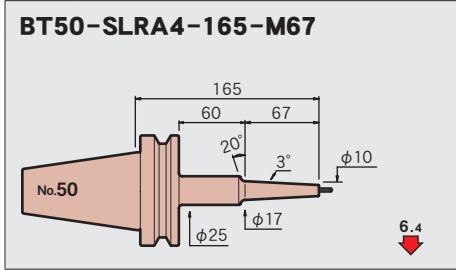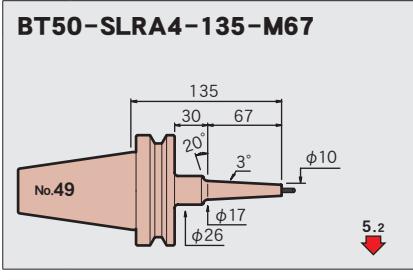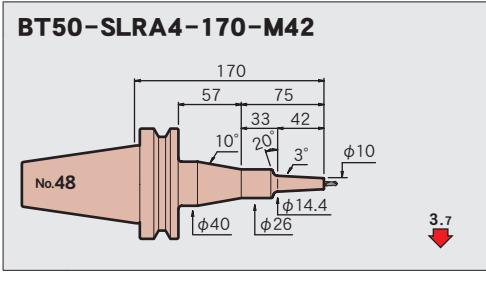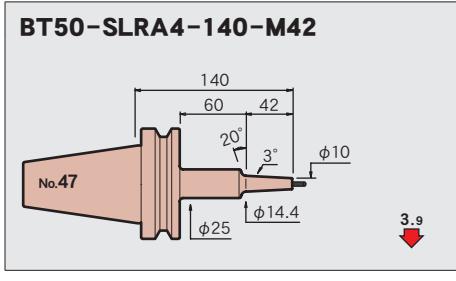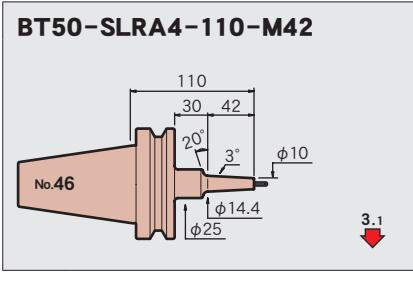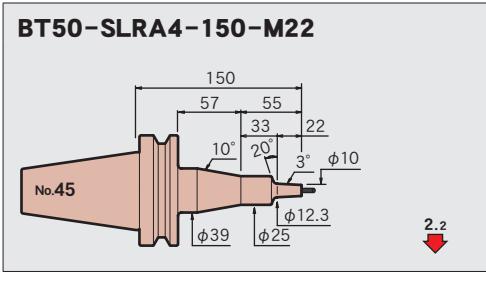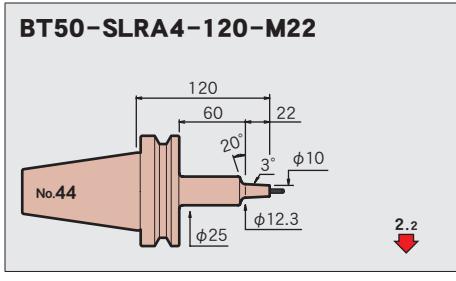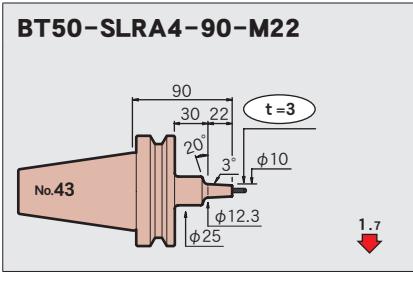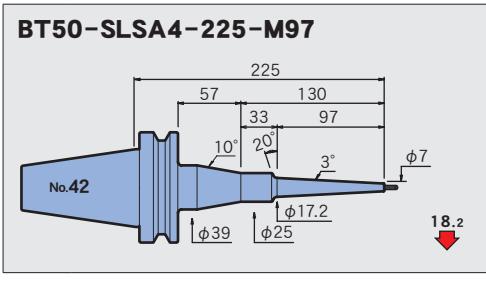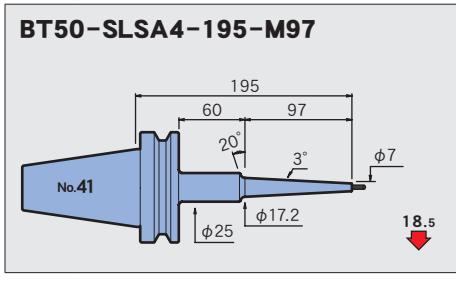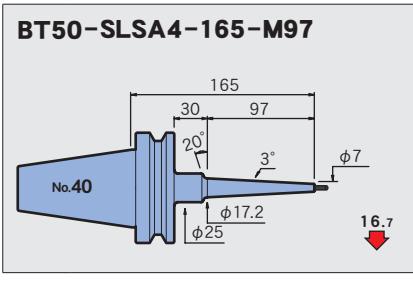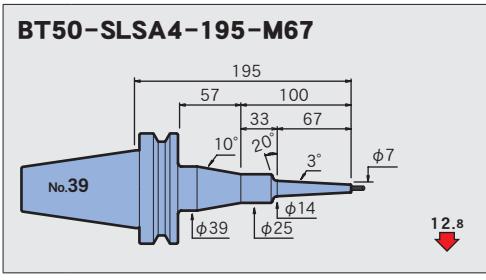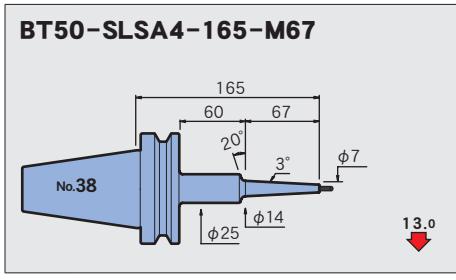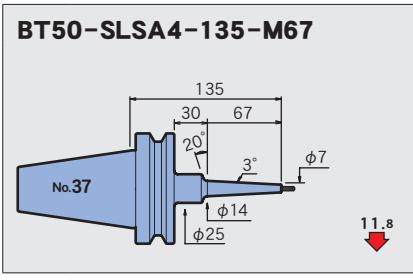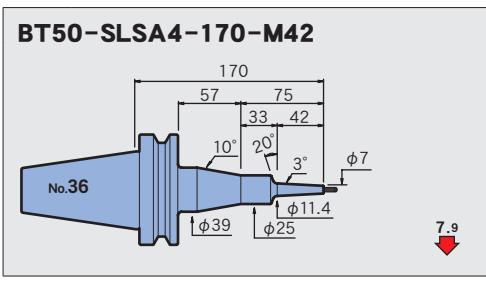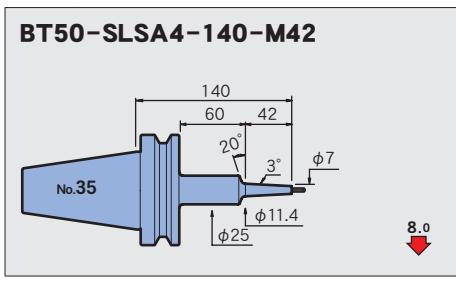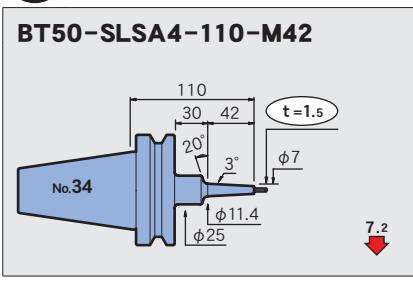Φ 4

Feature	
Shrink-fit Heater	
MONO 3° MONO CURVE	
MONO Series	
2PIECE type	
UNO	
HYPER VERSION	
Z	
STRAIGHT arbor	
OTHERS	
PERIPHERALS	
Technical data	

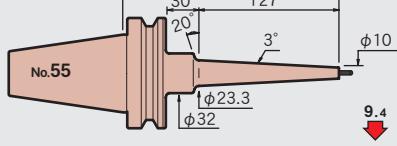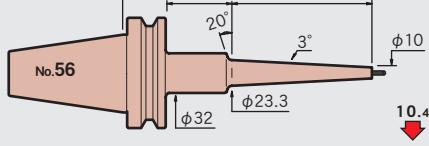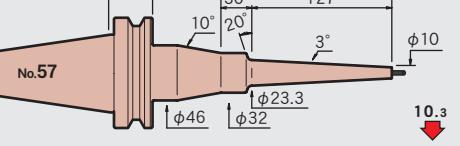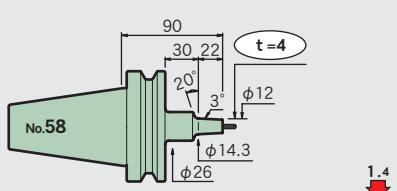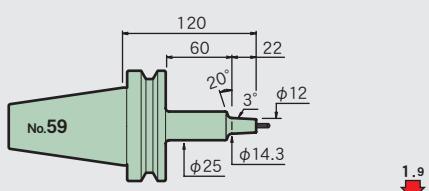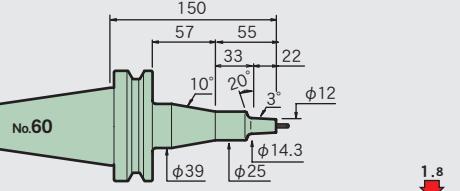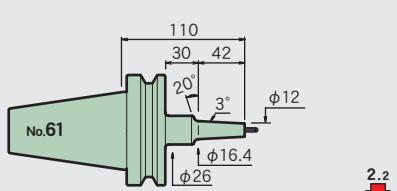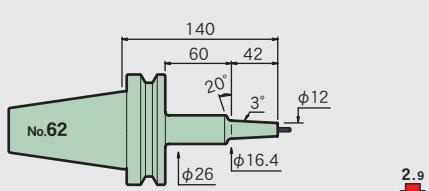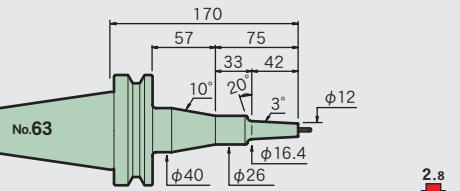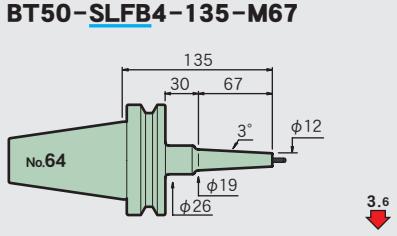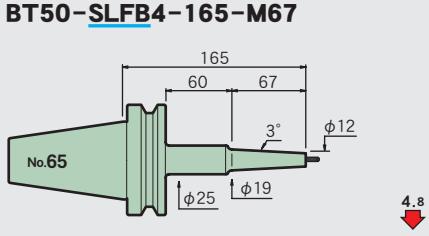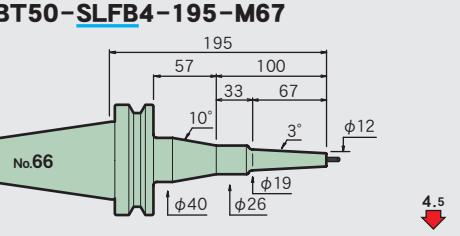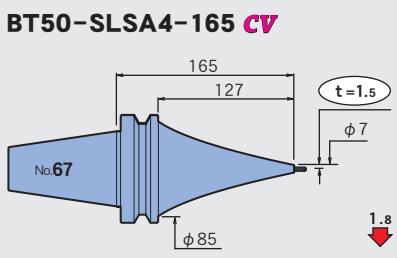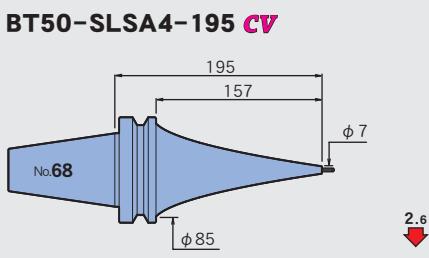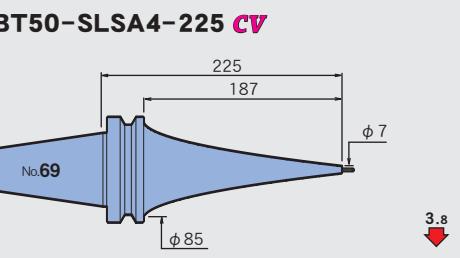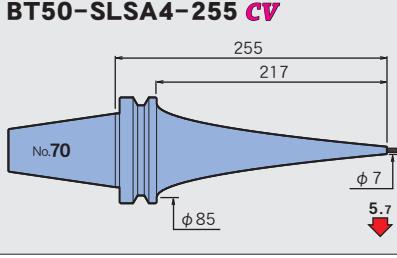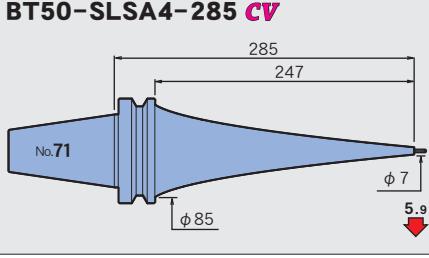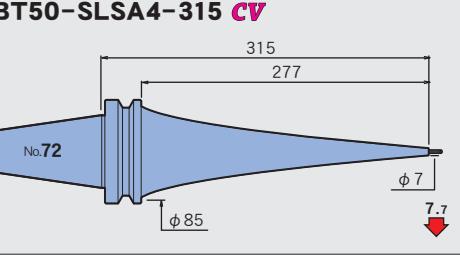BT50-SLRA4-195-M127  No.55 195 30 127 20 3° φ10 φ23.3 φ32 9.4 ↓	BT50-SLRA4-225-M127  No.56 225 60 127 20 3° φ10 φ32 φ23.3 10.4 ↓	BT50-SLRA4-255-M127  No.57 255 60 155 127 30 10° 20° 3° φ10 φ46 φ32 φ23.3 10.3 ↓
BT50-SLFB4-90-M22  No.58 90 30 22 20 3° φ12 φ14.3 φ26 t=4 1.4 ↓	BT50-SLFB4-120-M22  No.59 120 60 22 20 3° φ12 φ25 φ14.3 1.9 ↓	BT50-SLFB4-150-M22  No.60 150 57 55 22 33 10° 20° 3° φ12 φ39 φ25 φ14.3 1.8 ↓
BT50-SLFB4-110-M42  No.61 110 30 42 20 3° φ12 φ26 t=16.4 2.2 ↓	BT50-SLFB4-140-M42  No.62 140 60 42 20 3° φ12 φ26 t=16.4 2.9 ↓	BT50-SLFB4-170-M42  No.63 170 57 75 33 42 20 10° 3° φ12 φ40 φ26 φ16.4 2.8 ↓
BT50-SLFB4-135-M67  No.64 135 30 67 20 3° φ12 φ26 t=19 3.6 ↓	BT50-SLFB4-165-M67  No.65 165 60 67 20 3° φ12 φ25 φ19 4.8 ↓	BT50-SLFB4-195-M67  No.66 195 57 100 33 67 20 10° 3° φ12 φ40 φ26 φ19 4.5 ↓
BT50-SLSA4-165 CV  No.67 165 127 165 127 t=1.5 φ7 φ85 1.8 ↓	BT50-SLSA4-195 CV  No.68 195 157 φ7 φ85 2.6 ↓	BT50-SLSA4-225 CV  No.69 225 187 φ7 φ85 3.8 ↓
BT50-SLSA4-255 CV  No.70 255 217 φ7 φ85 5.7 ↓	BT50-SLSA4-285 CV  No.71 285 247 φ7 φ85 5.9 ↓	BT50-SLSA4-315 CV  No.72 315 277 φ7 φ85 7.7 ↓

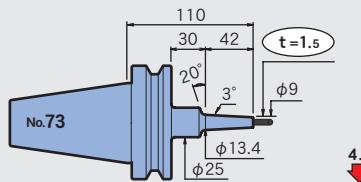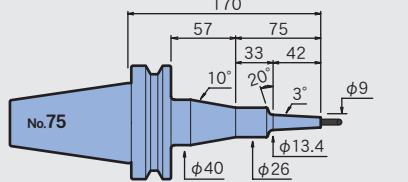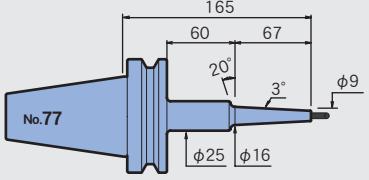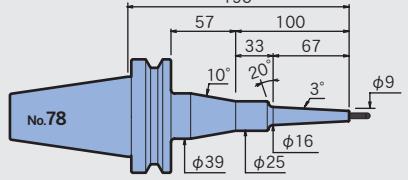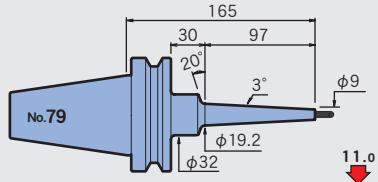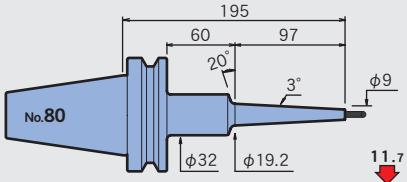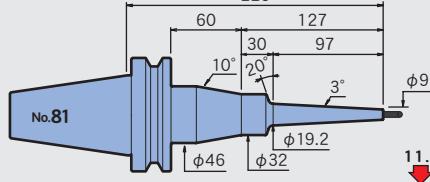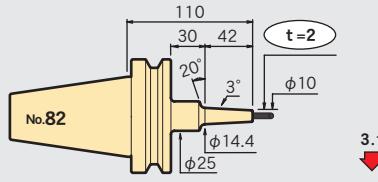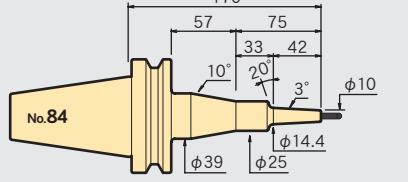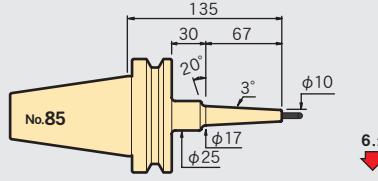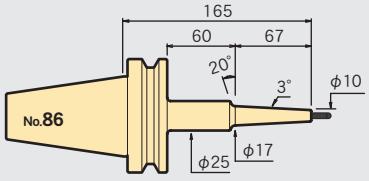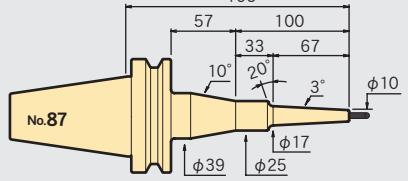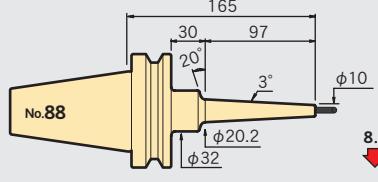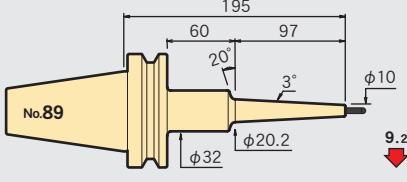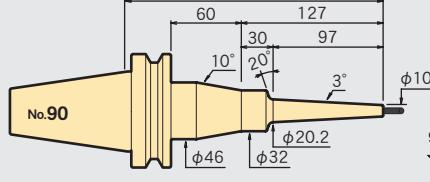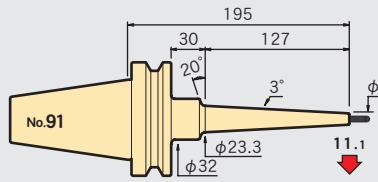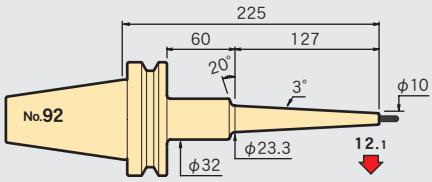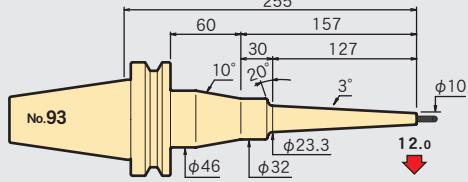φ6**BT50-SLSA6-110-M42****BT50-SLSA6-140-M42****BT50-SLSA6-170-M42****BT50-SLSA6-135-M67****BT50-SLSA6-165-M67****BT50-SLSA6-195-M67****BT50-SLSA6-165-M97****BT50-SLSA6-195-M97****BT50-SLSA6-225-M97****BT50-SLSB6-110-M42****BT50-SLSB6-140-M42****BT50-SLSB6-170-M42****BT50-SLSB6-135-M67****BT50-SLSB6-165-M67****BT50-SLSB6-195-M67****BT50-SLSB6-165-M97****BT50-SLSB6-195-M97****BT50-SLSB6-225-M97****BT50-SLSB6-195-M127****BT50-SLSB6-225-M127****BT50-SLSB6-255-M127**

Feature

Shrink-fit Heater
MONO 3°
MONO CURVE

MONO Series

2PIECE type

UNO

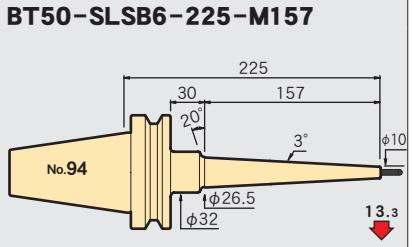
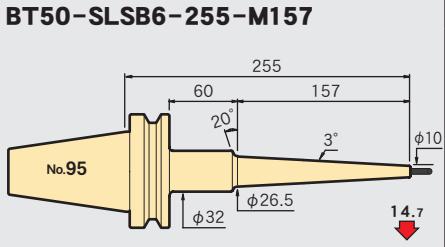
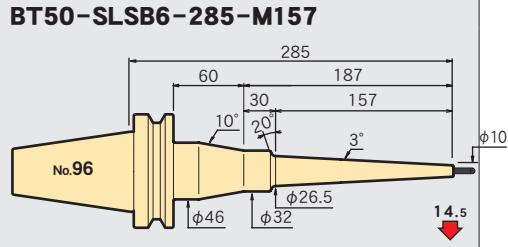
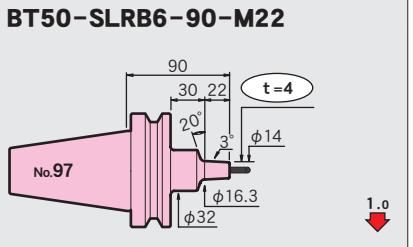
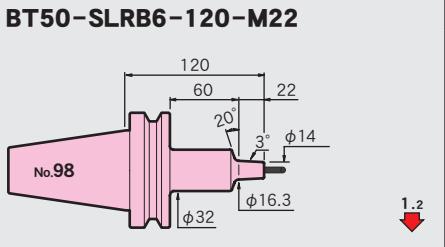
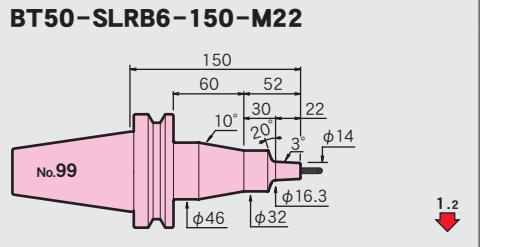
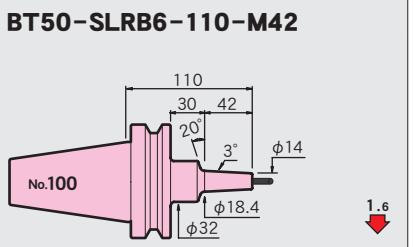
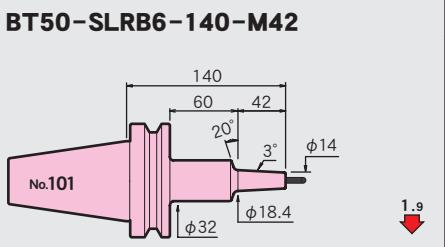
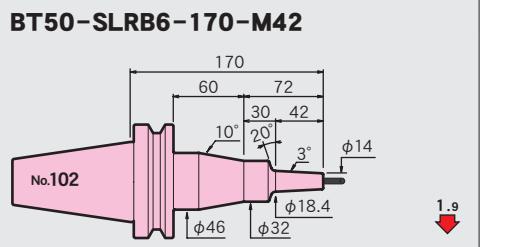
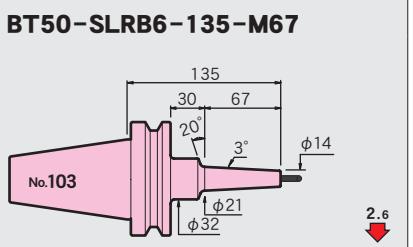
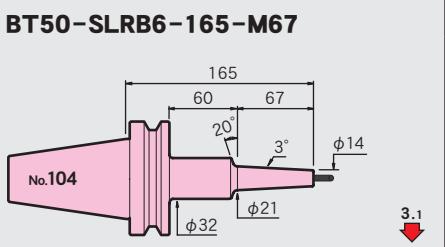
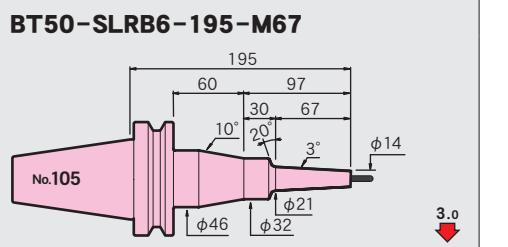
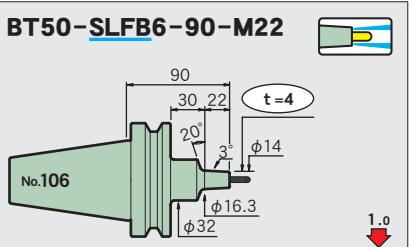
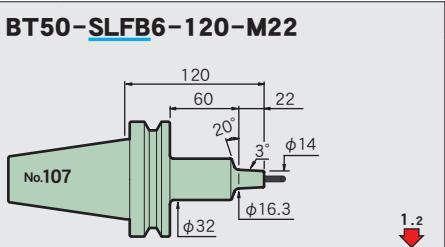
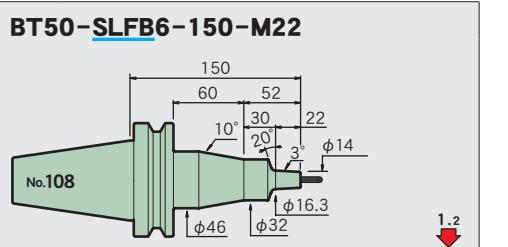
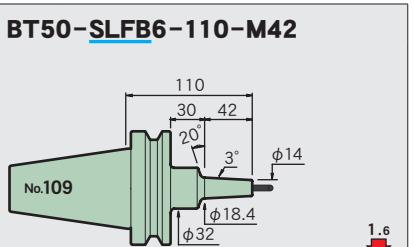
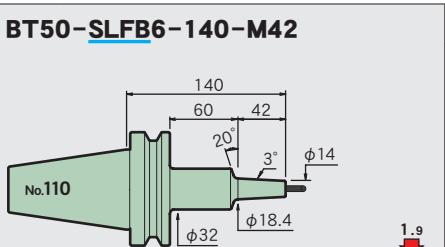
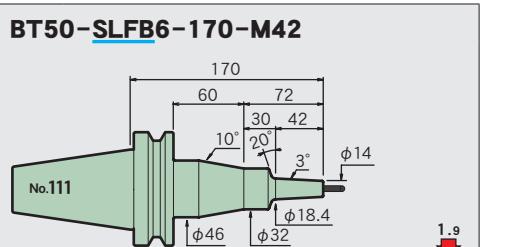
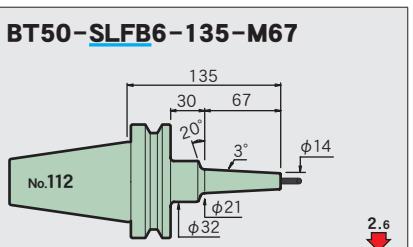
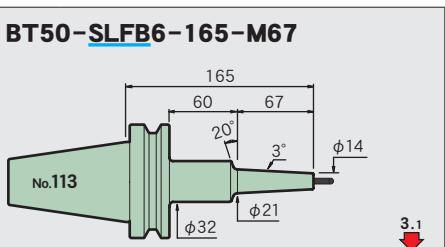
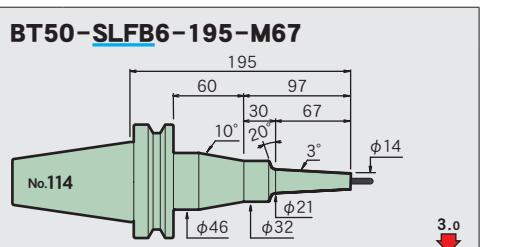
HYPER VERSION


Z

STRAIGHT arbor






















OTHERS





















PERIPHERALS
Technical

BT50-SLSB6-225-M157	BT50-SLSB6-255-M157	BT50-SLSB6-285-M157
 No.94 225 30 157 20° 3° φ10 φ32 1φ26.5 13.3  No.95 255 60 157 20° 3° φ10 φ32 1φ26.5 14.7  No.96 285 60 187 157 30 20° 3° φ10 φ46 φ32 1φ26.5 14.5		
BT50-SLRB6-90-M22	BT50-SLRB6-120-M22	BT50-SLRB6-150-M22
 No.97 90 30 22 20° 3° φ14 φ32 t=4 φ16.3 1.0  No.98 120 60 22 20° 3° φ14 φ32 φ16.3 1.2  No.99 150 60 52 22 30 20° 3° φ14 φ46 φ32 φ16.3 1.2		
BT50-SLRB6-110-M42	BT50-SLRB6-140-M42	BT50-SLRB6-170-M42
 No.100 110 30 42 20° 3° φ14 φ32 φ18.4 1.6  No.101 140 60 42 20° 3° φ14 φ32 φ18.4 1.9  No.102 170 60 72 30 42 20° 3° φ14 φ46 φ32 φ18.4 1.9		
BT50-SLRB6-135-M67	BT50-SLRB6-165-M67	BT50-SLRB6-195-M67
 No.103 135 30 67 20° 3° φ14 φ32 φ21 2.6  No.104 165 60 67 20° 3° φ14 φ32 φ21 3.1  No.105 195 60 97 30 67 20° 3° φ14 φ46 φ32 φ21 3.0		
BT50-SLFB6-90-M22	BT50-SLFB6-120-M22	BT50-SLFB6-150-M22
 No.106 90 30 22 20° 3° φ14 φ32 t=4 φ16.3 1.0  No.107 120 60 22 20° 3° φ14 φ32 φ16.3 1.2  No.108 150 60 72 30 42 20° 3° φ14 φ46 φ32 φ16.3 1.2		
BT50-SLFB6-110-M42	BT50-SLFB6-140-M42	BT50-SLFB6-170-M42
 No.109 110 30 42 20° 3° φ14 φ32 φ18.4 1.6  No.110 140 60 42 20° 3° φ14 φ32 φ18.4 1.9  No.111 170 60 72 30 42 20° 3° φ14 φ46 φ32 φ18.4 1.9		
BT50-SLFB6-135-M67	BT50-SLFB6-165-M67	BT50-SLFB6-195-M67
 No.112 135 30 67 20° 3° φ14 φ32 φ21 2.6  No.113 165 60 67 20° 3° φ14 φ32 φ21 3.1  No.114 195 60 97 30 67 20° 3° φ14 φ46 φ32 φ21 3.0		

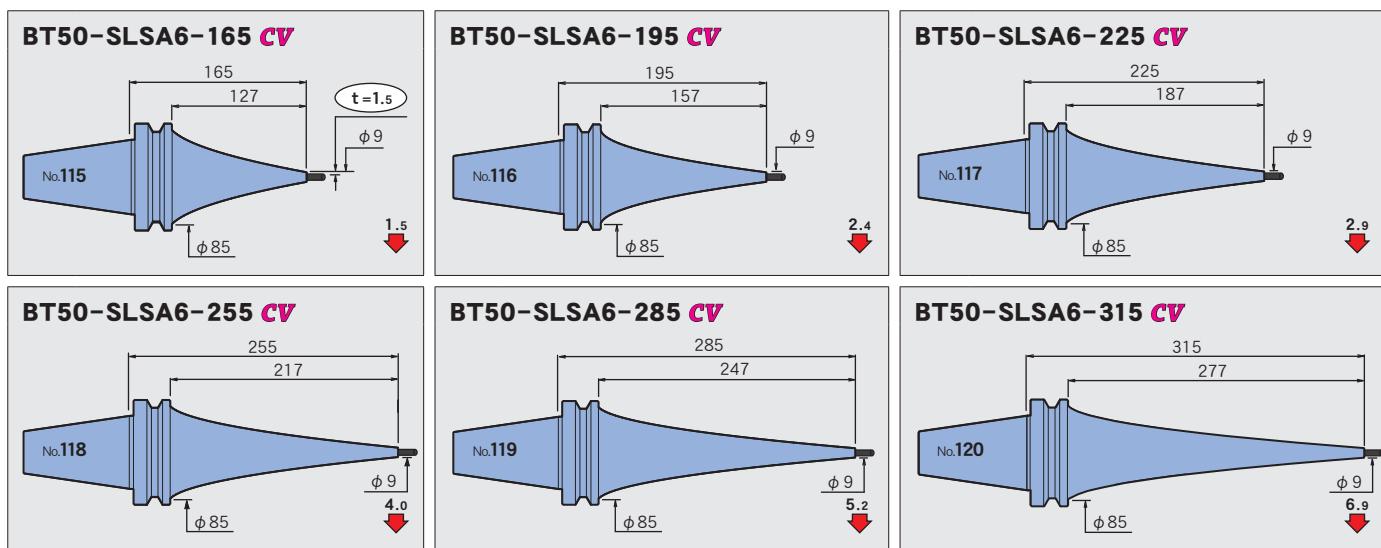

Technical data	PERIPHERALS	OTHERS	STRAIGHT arbor	Z	HYPER VERSION	UNO	2PIECE type
Feature	Shrink-fit Heater						
MONO Series	MONO 3°	MONO CURVE					
MONO Series							

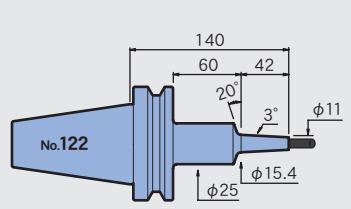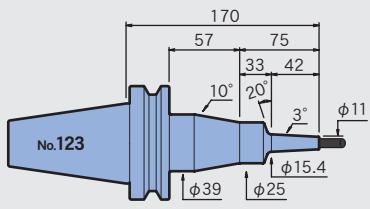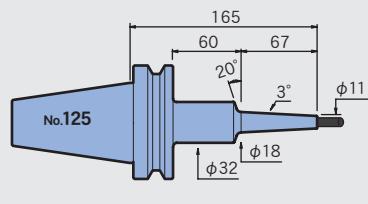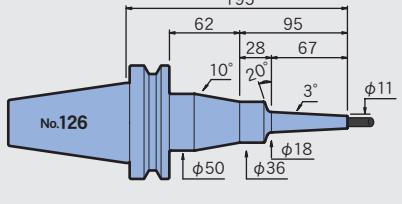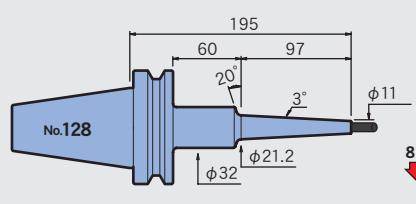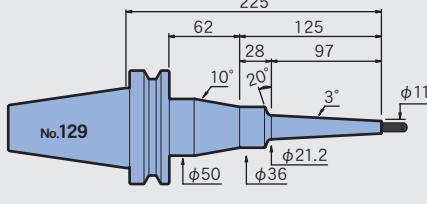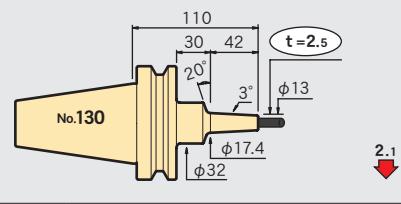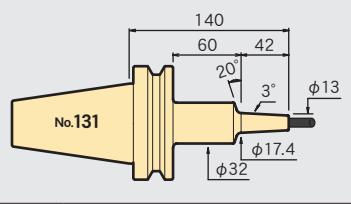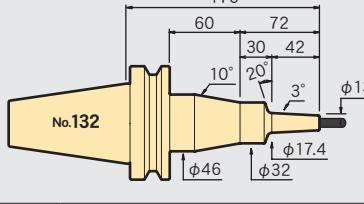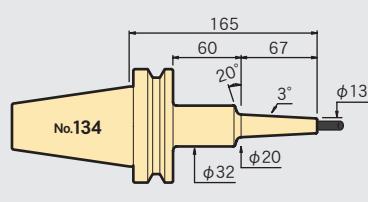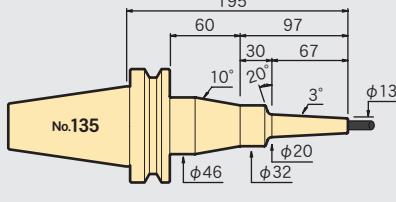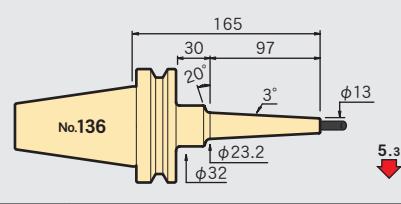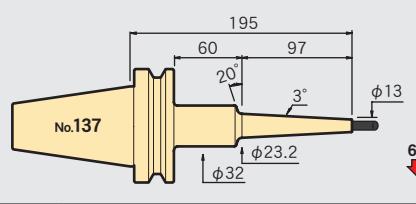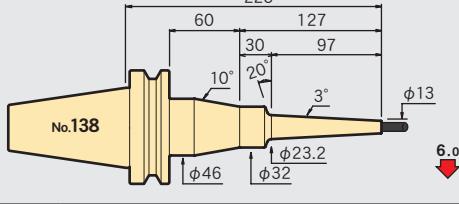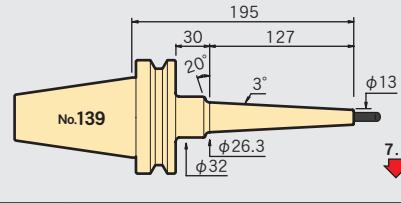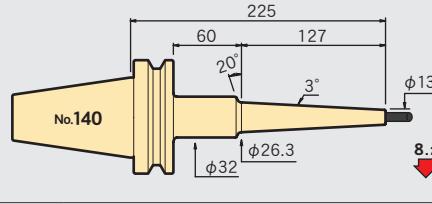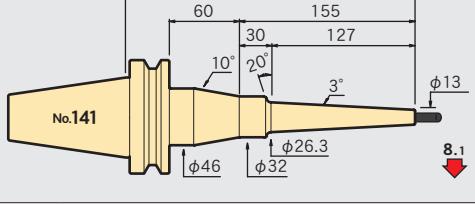φ8**BT50-SLSA8-110-M42****BT50-SLSA8-140-M42****BT50-SLSA8-170-M42****BT50-SLSA8-135-M67****BT50-SLSA8-165-M67****BT50-SLSA8-195-M67****BT50-SLSA8-165-M97****BT50-SLSA8-195-M97****BT50-SLSA8-225-M97****BT50-SLSB8-110-M42****BT50-SLSB8-140-M42****BT50-SLSB8-170-M42****BT50-SLSB8-135-M67****BT50-SLSB8-165-M67****BT50-SLSB8-195-M67****BT50-SLSB8-165-M97****BT50-SLSB8-195-M97****BT50-SLSB8-225-M97****BT50-SLSB8-195-M127****BT50-SLSB8-225-M127****BT50-SLSB8-255-M127**

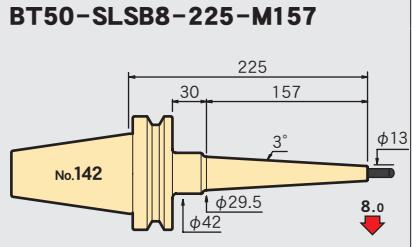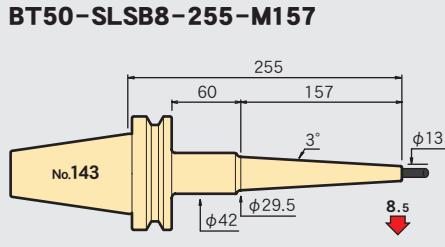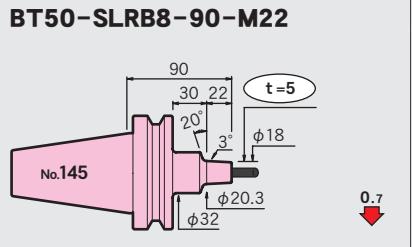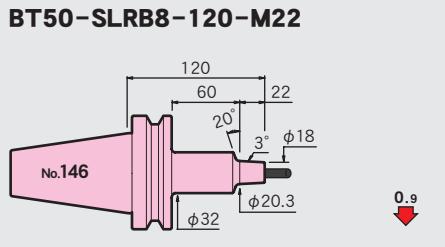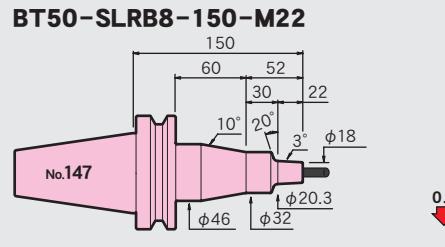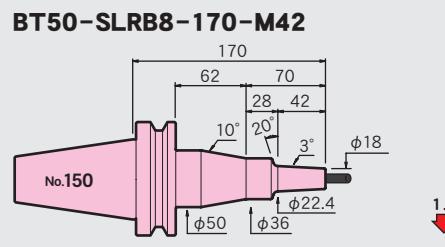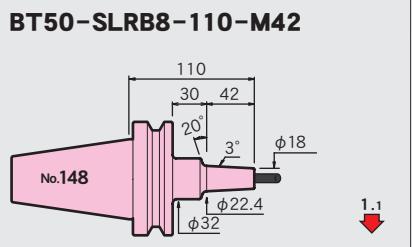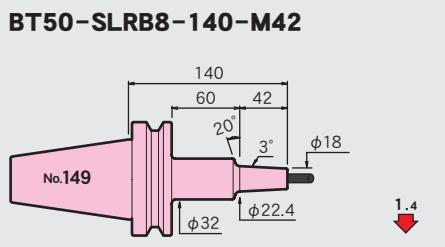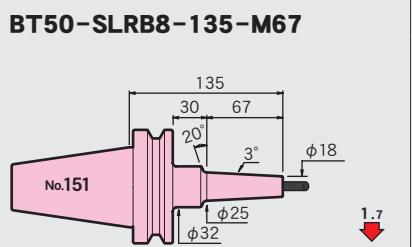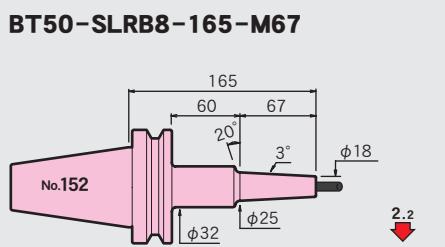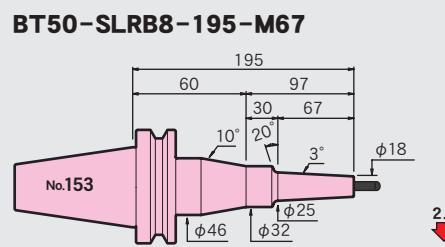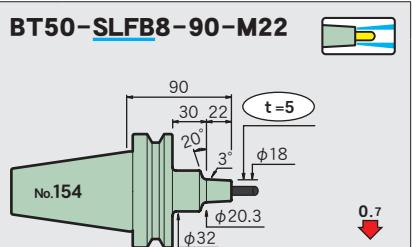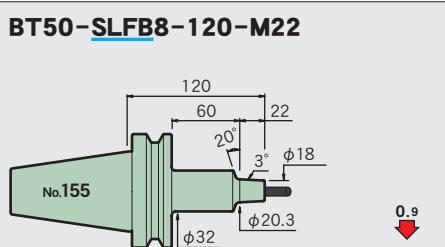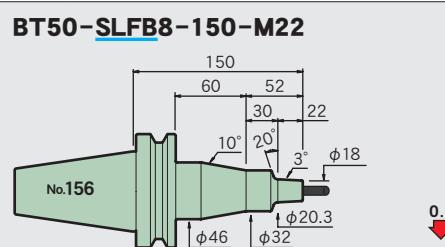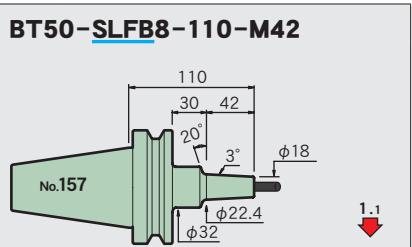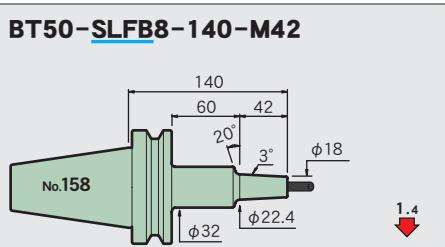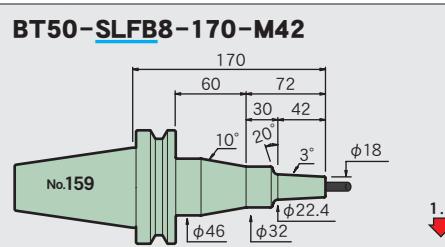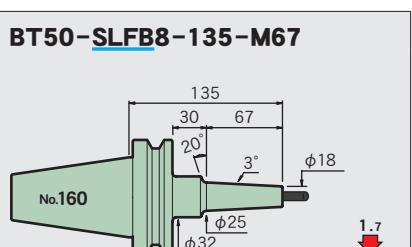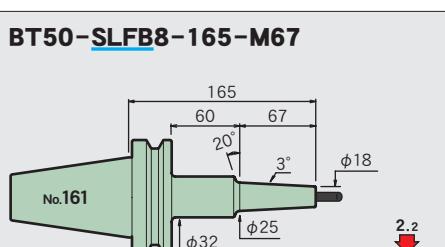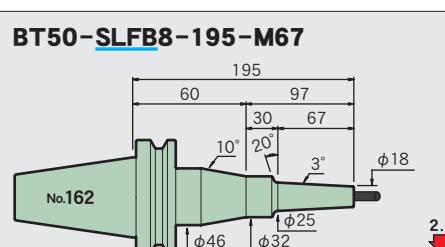			Feature
BT50-SLSB8-225-M157		BT50-SLSB8-255-M157	
No.142	225 30 157 3° φ13 φ29.5 φ42 8.0 ↓	No.143	255 60 157 3° φ13 φ42 φ29.5 8.5 ↓
BT50-SLRB8-90-M22		BT50-SLRB8-120-M22	
No.145	90 30 22 20° 3° φ18 t=5 φ20.3 φ32 0.7 ↓	No.146	120 60 22 20° 3° φ18 φ32 φ20.3 0.9 ↓
BT50-SLRB8-150-M22		BT50-SLRB8-170-M42	
No.147	150 60 52 30 22 20° 3° φ18 φ46 φ32 φ20.3 0.9 ↓	No.150	170 62 70 28 42 20° 3° φ18 φ50 φ36 φ22.4 1.3 ↓
BT50-SLRB8-110-M42		BT50-SLRB8-140-M42	
No.148	110 30 42 20° 3° φ18 φ22.4 φ32 1.1 ↓	No.149	140 60 42 20° 3° φ18 φ32 φ22.4 1.4 ↓
BT50-SLRB8-135-M67		BT50-SLRB8-165-M67	
No.151	135 30 67 20° 3° φ18 φ25 φ32 1.7 ↓	No.152	165 60 67 20° 3° φ18 φ32 φ25 2.2 ↓
BT50-SLRB8-195-M67		BT50-SLFB8-90-M22	
No.153	195 60 97 30 67 20° 3° φ18 φ46 φ32 φ25 2.2 ↓	No.154	90 30 22 20° 3° φ18 t=5 φ20.3 φ32 0.7 ↓
BT50-SLFB8-120-M22		BT50-SLFB8-150-M22	
No.155	120 60 22 20° 3° φ18 φ32 φ20.3 0.9 ↓	No.156	150 60 52 30 22 20° 3° φ18 φ46 φ32 φ20.3 0.9 ↓
BT50-SLFB8-110-M42		BT50-SLFB8-140-M42	
No.157	110 30 42 20° 3° φ18 φ22.4 φ32 1.1 ↓	No.158	140 60 42 20° 3° φ18 φ32 φ22.4 1.4 ↓
BT50-SLFB8-170-M42		BT50-SLFB8-135-M67	
No.159	170 60 72 30 42 20° 3° φ18 φ46 φ32 φ22.4 1.4 ↓	No.160	135 30 67 20° 3° φ18 φ25 φ32 1.7 ↓
BT50-SLFB8-165-M67		BT50-SLFB8-195-M67	
No.161	165 60 67 20° 3° φ18 φ32 φ25 2.2 ↓	No.162	195 60 97 30 67 20° 3° φ18 φ46 φ32 φ25 2.2 ↓

Shrink-fit Heater

MONO 3°
MONO CURVE

MONO Series

2PIECE type

UNO

HYPER VERSION

Z














STRAIGHT arbor

OTHERS






















PERIPHERALS

Technical data

Feature	
Shrink-fit Heater	
MONO 3° MONO CURVE	
MONO Series	
2PIECE type	
UNO	
HYPER VERSION	
Z	
STRAIGHT arbor	
OTHERS	
PERIPHERALS	
Technical data	









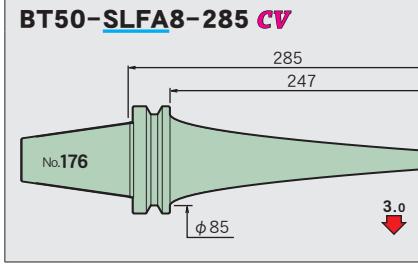
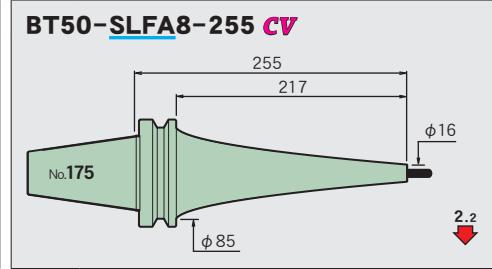
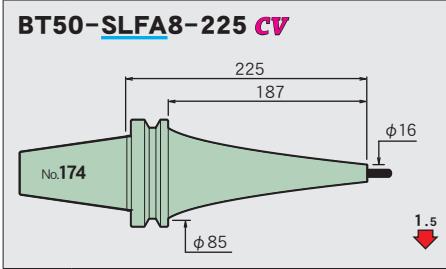
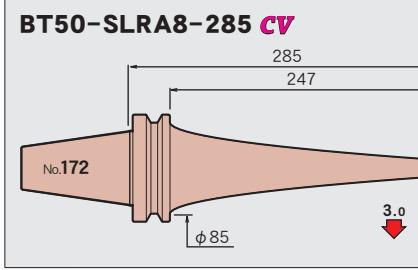
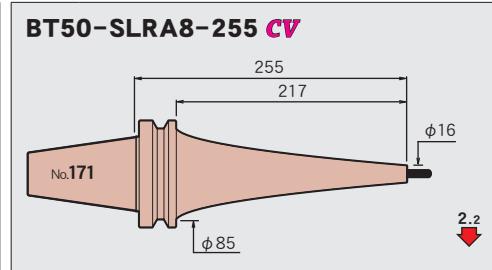
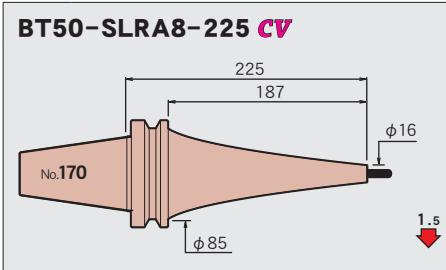
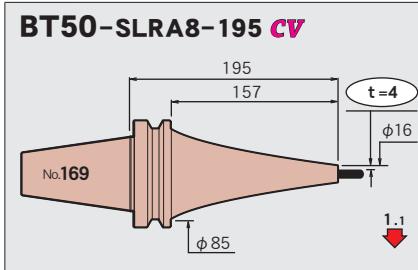
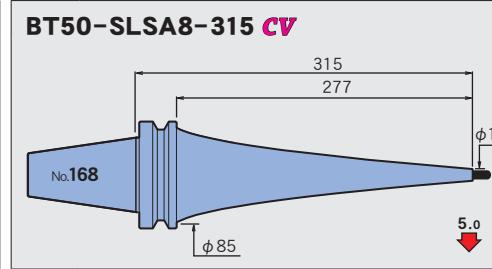
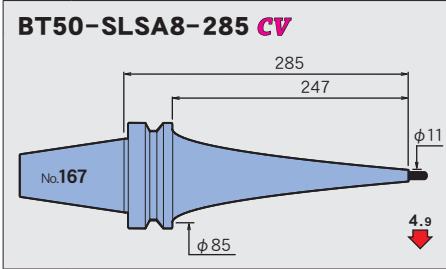
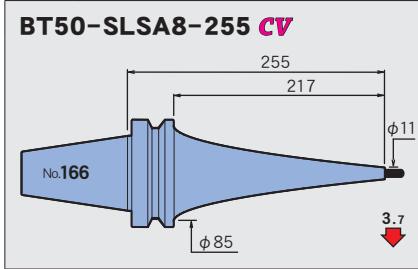
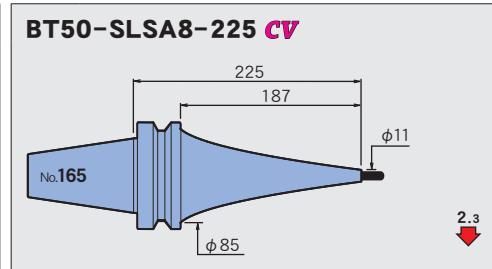
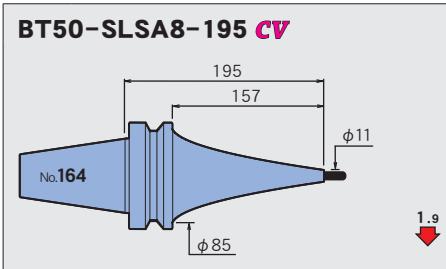
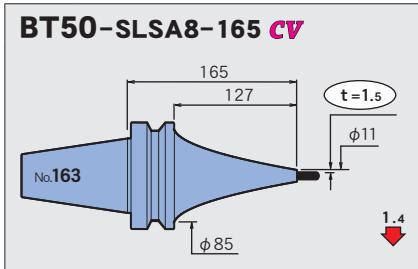





















Φ 10

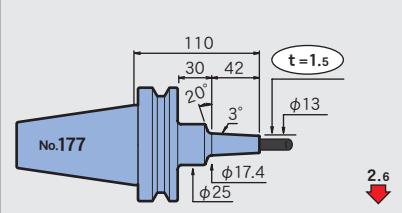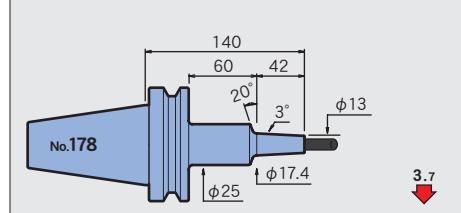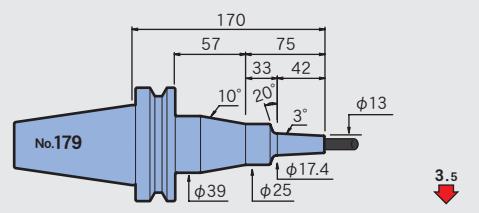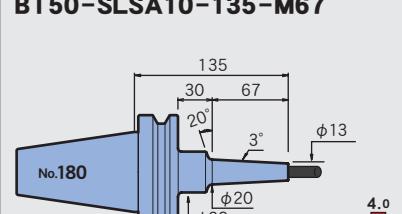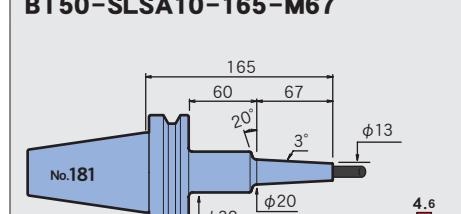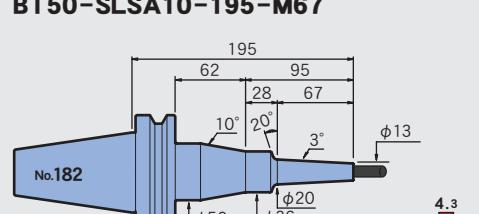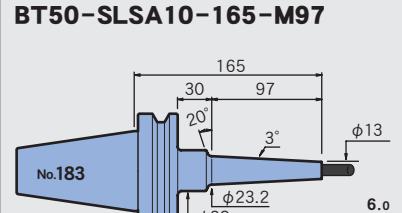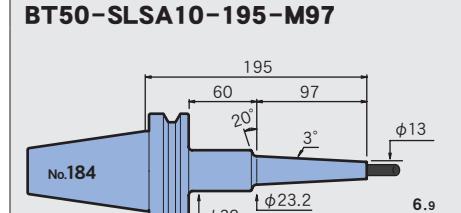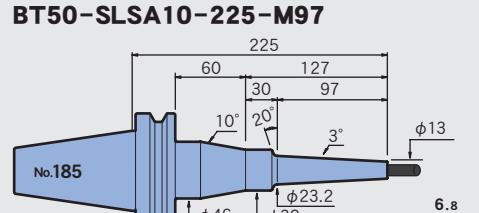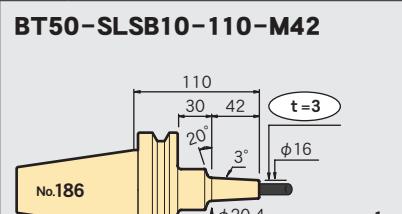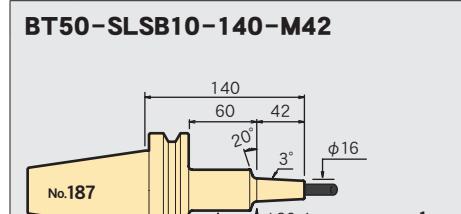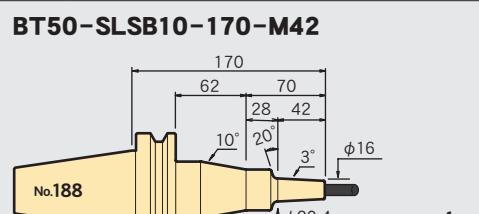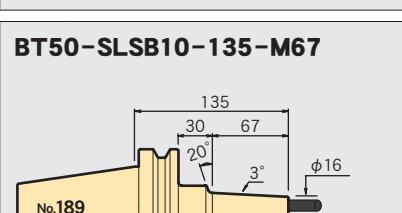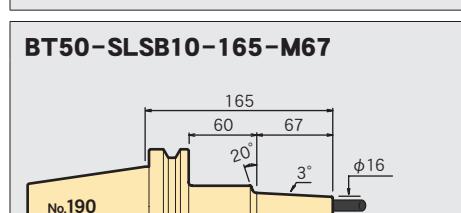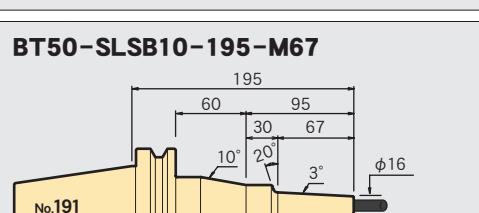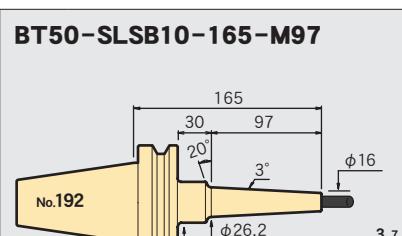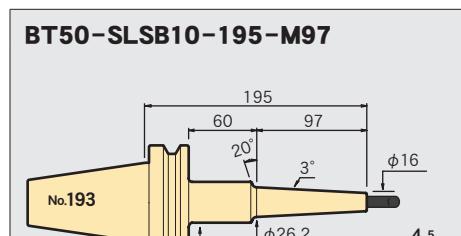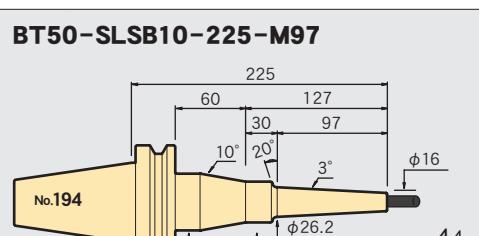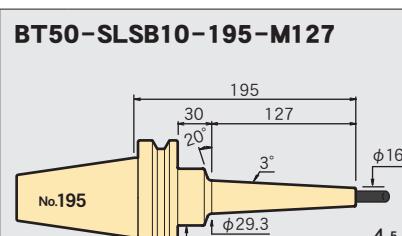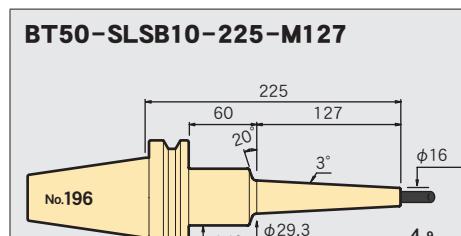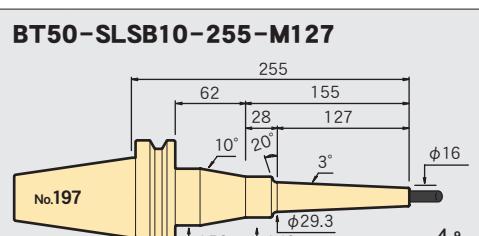BT50-SLSA10-110-M42 No.177	BT50-SLSA10-140-M42 No.178	BT50-SLSA10-170-M42 No.179
		
BT50-SLSA10-135-M67 No.180	BT50-SLSA10-165-M67 No.181	BT50-SLSA10-195-M67 No.182
		
BT50-SLSA10-165-M97 No.183	BT50-SLSA10-195-M97 No.184	BT50-SLSA10-225-M97 No.185
		
BT50-SLSB10-110-M42 No.186	BT50-SLSB10-140-M42 No.187	BT50-SLSB10-170-M42 No.188
		
BT50-SLSB10-135-M67 No.189	BT50-SLSB10-165-M67 No.190	BT50-SLSB10-195-M67 No.191
		
BT50-SLSB10-165-M97 No.192	BT50-SLSB10-195-M97 No.193	BT50-SLSB10-225-M97 No.194
		
BT50-SLSB10-195-M127 No.195	BT50-SLSB10-225-M127 No.196	BT50-SLSB10-255-M127 No.197
		

BT50-SLSB10-225-M157	BT50-SLSB10-255-M157	BT50-SLSB10-285-M157
BT50-SLRB10-90-M22	BT50-SLRB10-120-M22	BT50-SLRB10-150-M22
BT50-SLRB10-110-M42	BT50-SLRB10-140-M42	BT50-SLRB10-170-M42
BT50-SLRB10-135-M67	BT50-SLRB10-165-M67	BT50-SLRB10-195-M67
BT50-SLFB10-90-M22	BT50-SLFB10-120-M22	BT50-SLFB10-150-M22
BT50-SLFB10-110-M42	BT50-SLFB10-140-M42	BT50-SLFB10-170-M42
BT50-SLFB10-135-M67	BT50-SLFB10-165-M67	BT50-SLFB10-195-M67

BT50-SLSA10-165 CV	No.219	165	127	$t=1.5$	$\phi 13$						
BT50-SLSA10-195 CV	No.220	195	157	$\phi 13$							
BT50-SLSA10-225 CV	No.221	225	187	$\phi 13$							
BT50-SLSA10-255 CV	No.222	255	217	$\phi 13$							
BT50-SLSA10-285 CV	No.223	285	247	$\phi 13$							
BT50-SLSA10-315 CV	No.224	315	277	$\phi 13$							
BT50-SLRA10-165 CV	No.225	165	127	$t=4.5$	$\phi 19$						
BT50-SLRA10-195 CV	No.226	195	157	$\phi 19$							
BT50-SLRA10-225 CV	No.227	225	187	$\phi 19$							
BT50-SLRA10-255 CV	No.228	255	217	$\phi 19$							
BT50-SLRA10-285 CV	No.229	285	247	$\phi 19$							
BT50-SLFA10-165 CV	No.230	165	127	$t=4.5$	$\phi 19$						
BT50-SLFA10-195 CV	No.231	195	157	$\phi 19$							
BT50-SLFA10-225 CV	No.232	225	187	$\phi 19$							
BT50-SLFA10-255 CV	No.233	255	217	$\phi 19$							
BT50-SLFA10-285 CV	No.234	285	247	$\phi 19$							

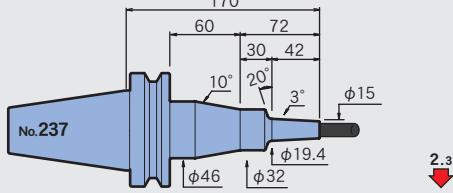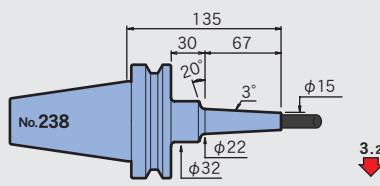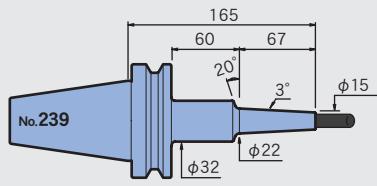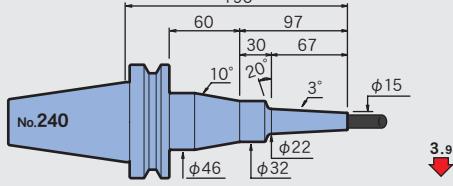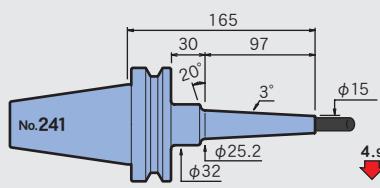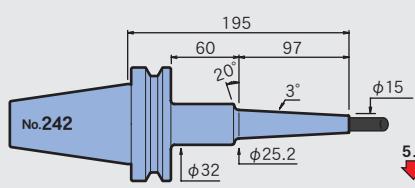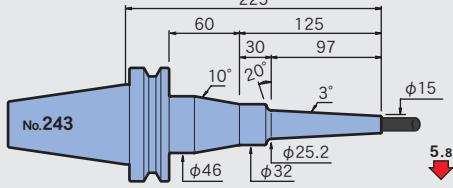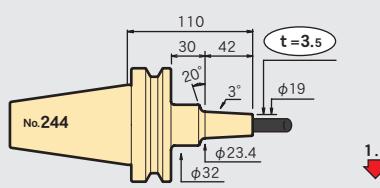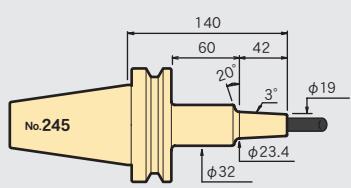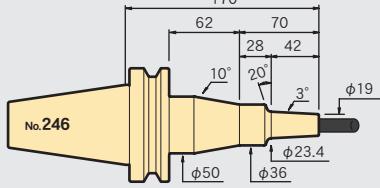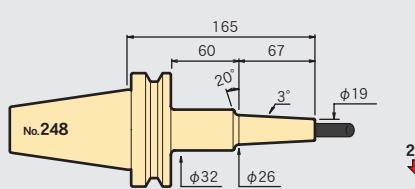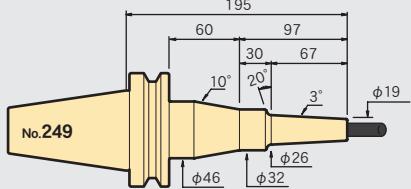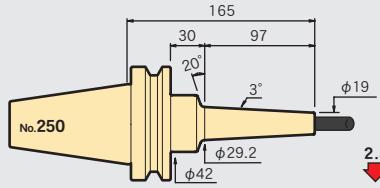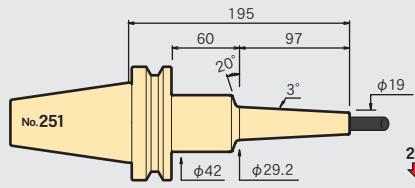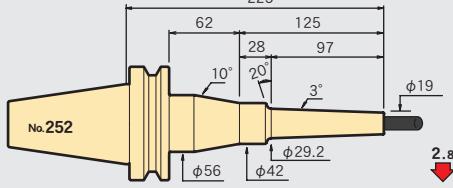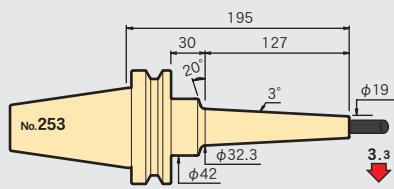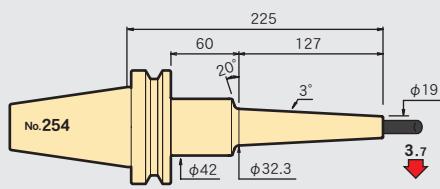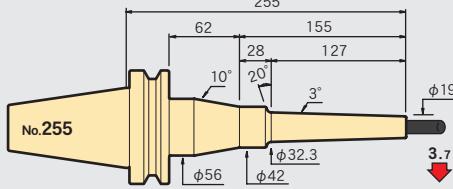φ 12**BT50-SLSA12-110-M42****BT50-SLSA12-140-M42****BT50-SLSA12-170-M42****BT50-SLSA12-135-M67****BT50-SLSA12-165-M67****BT50-SLSA12-195-M67****BT50-SLSA12-165-M97****BT50-SLSA12-195-M97****BT50-SLSA12-225-M97****BT50-SLSB12-110-M42****BT50-SLSB12-140-M42****BT50-SLSB12-170-M42****BT50-SLSB12-135-M67****BT50-SLSB12-165-M67****BT50-SLSB12-195-M67****BT50-SLSB12-165-M97****BT50-SLSB12-195-M97****BT50-SLSB12-225-M97****BT50-SLSB12-195-M127****BT50-SLSB12-225-M127****BT50-SLSB12-255-M127**

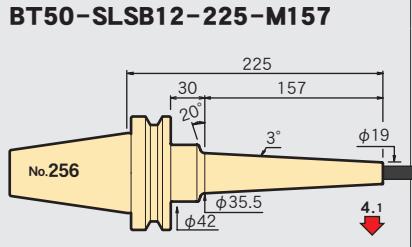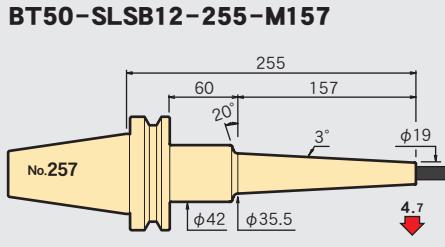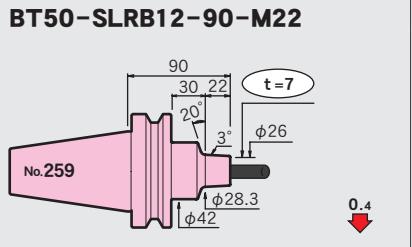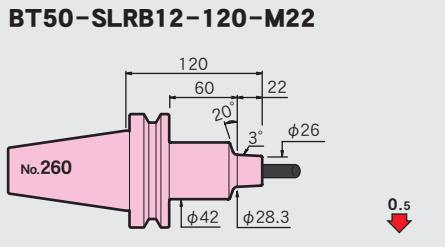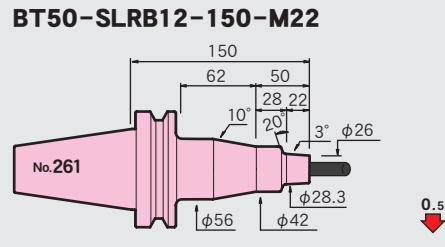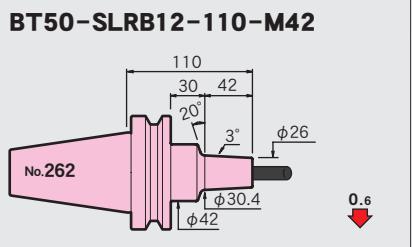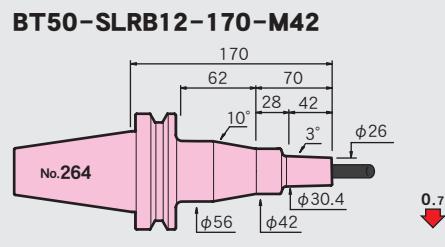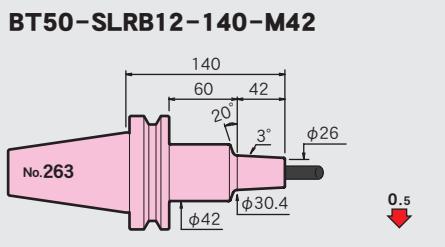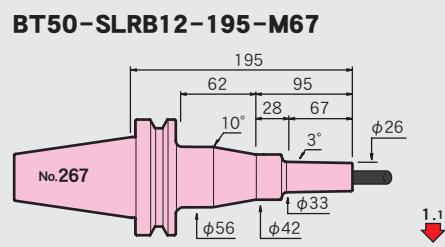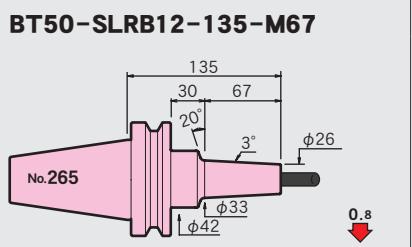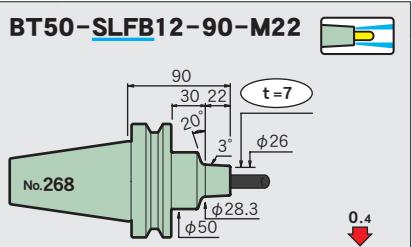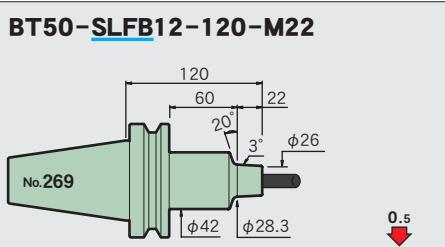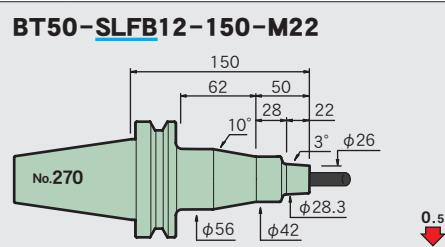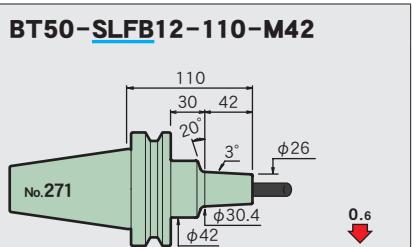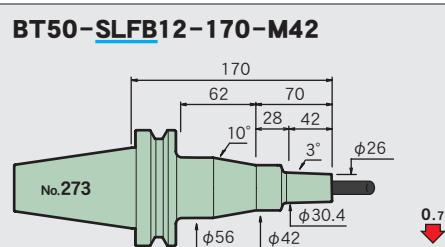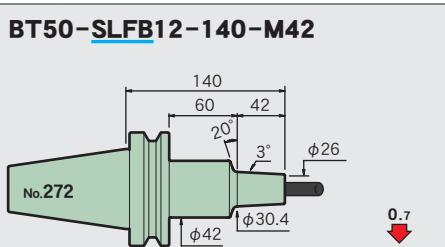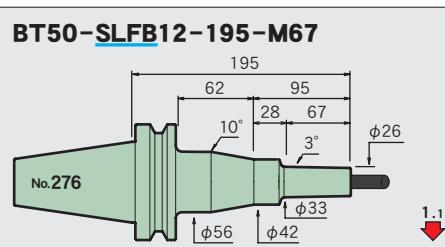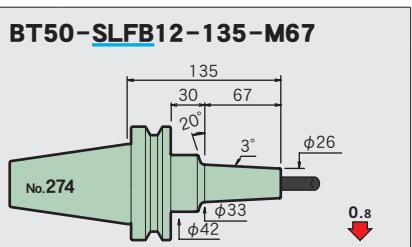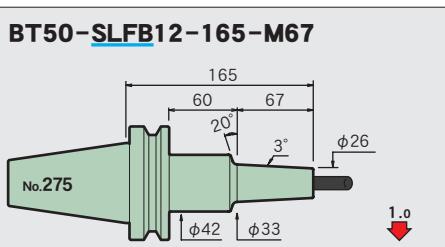			Feature
BT50-SLSB12-225-M157		BT50-SLSB12-255-M157	
No.256	225 30 157 20° 3° φ19 φ35.5 φ42 4.1	No.257	255 60 157 20° 3° φ19 φ42 φ35.5 4.7
BT50-SLRB12-90-M22		BT50-SLRB12-120-M22	
No.259	90 30 22 20° 3° φ26 t=7 φ42 φ28.3 0.4	No.260	120 60 22 20° 3° φ26 φ42 φ28.3 0.5
BT50-SLRB12-150-M22		BT50-SLRB12-110-M42	
No.261	150 62 50 28 22 10° 20° 3° φ26 φ56 φ42 φ28.3 0.5	No.262	110 30 42 20° 3° φ26 φ30.4 φ42 0.6
BT50-SLRB12-170-M42		BT50-SLRB12-140-M42	
No.264	170 62 70 28 42 10° 3° φ26 φ56 φ42 φ30.4 0.7	No.263	140 60 42 20° 3° φ26 φ42 φ30.4 0.5
BT50-SLRB12-195-M67		BT50-SLRB12-135-M67	
No.267	195 62 95 28 67 10° 3° φ26 φ56 φ42 φ33 1.1	No.265	135 30 67 20° 3° φ26 φ33 φ42 0.8
BT50-SLFB12-90-M22		BT50-SLFB12-120-M22	
No.268	90 30 22 20° 3° φ26 t=7 φ50 φ28.3 0.4	No.269	120 60 22 20° 3° φ26 φ42 φ28.3 0.5
BT50-SLFB12-150-M22		BT50-SLFB12-110-M42	
No.270	150 62 50 28 22 10° 3° φ26 φ56 φ42 φ28.3 0.5	No.271	110 30 42 20° 3° φ26 φ30.4 φ42 0.6
BT50-SLFB12-170-M42		BT50-SLFB12-140-M42	
No.273	170 62 70 28 42 10° 3° φ26 φ56 φ42 φ30.4 0.7	No.272	140 60 42 20° 3° φ26 φ42 φ30.4 0.7
BT50-SLFB12-195-M67		BT50-SLFB12-135-M67	
No.276	195 62 95 28 67 10° 3° φ26 φ56 φ42 φ33 1.1	No.274	135 30 67 20° 3° φ26 φ33 φ42 0.8
BT50-SLFB12-165-M67		BT50-SLFB12-165-M67	
No.275	165 60 67 20° 3° φ26 φ42 φ33 1.0	No.275	

Shrink-fit Heater

MONO 3°
MONO CURVE

MONO Series

2PIECE type

UNO

HYPER VERSION

















Z

STRAIGHT arbor






















OTHERS

PERIPHERALS
Technical data

Feature	
Shrink-fit Heater	
MONO 3° MONO CURVE	
MONO Series	
2PIECE type	
UNO	
HYPER VERSION	
Z	
STRAIGHT arbor	
OTHERS	
PERIPHERALS	
Technical data	

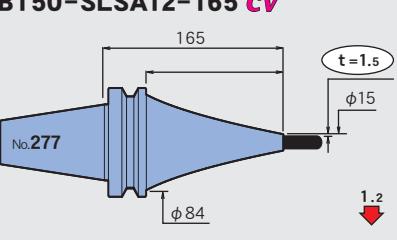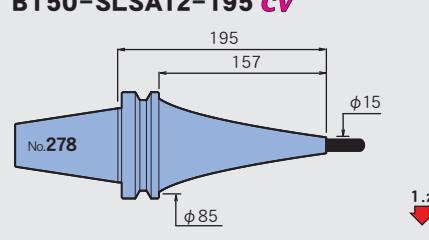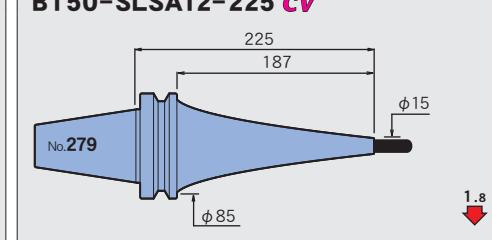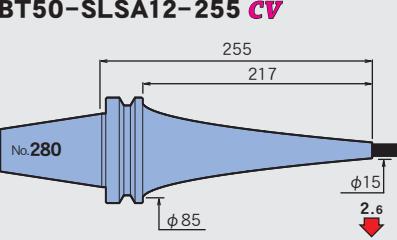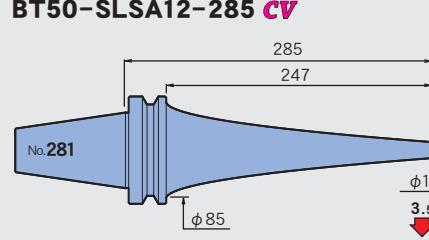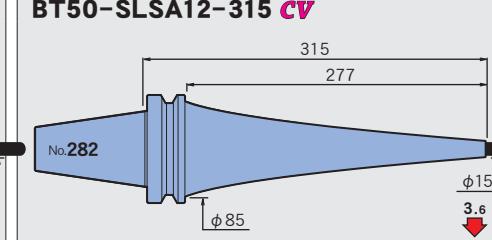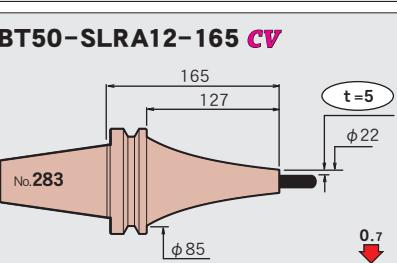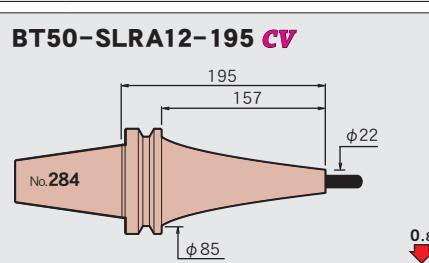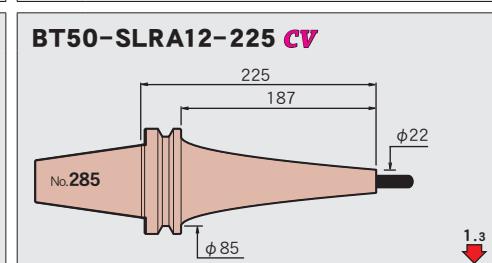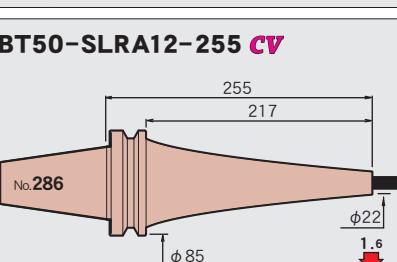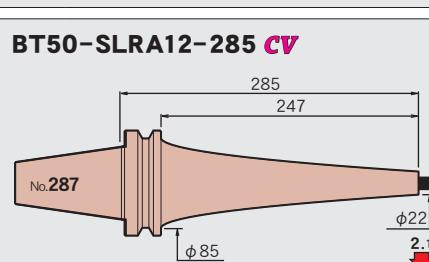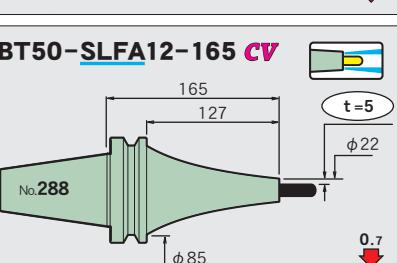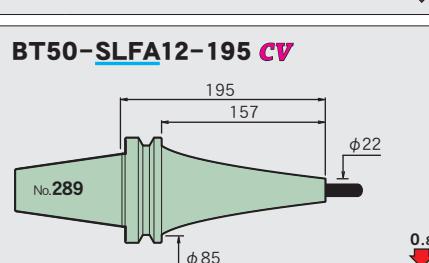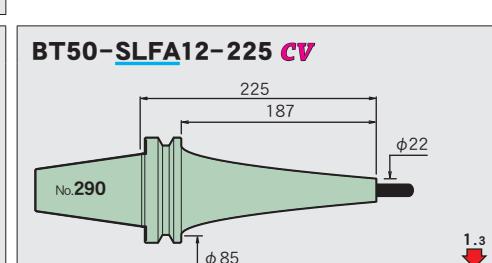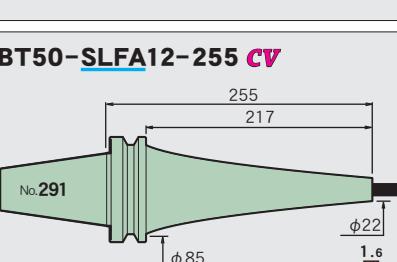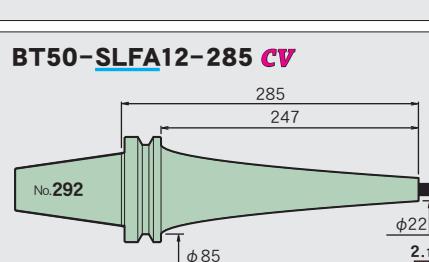BT50-SLSA12-165 CV  No.277 165 t = 1.5 φ15 φ84 1.2 ↓	BT50-SLSA12-195 CV  No.278 195 157 φ15 φ85 1.2 ↓	BT50-SLSA12-225 CV  No.279 225 187 φ15 φ85 1.8 ↓
BT50-SLSA12-255 CV  No.280 255 217 φ15 φ85 2.6 ↓	BT50-SLSA12-285 CV  No.281 285 247 φ15 φ85 3.5 ↓	BT50-SLSA12-315 CV  No.282 315 277 φ15 φ85 3.6 ↓
BT50-SLRA12-165 CV  No.283 165 127 t = 5 φ22 φ85 0.7 ↓	BT50-SLRA12-195 CV  No.284 195 157 φ22 φ85 0.8 ↓	BT50-SLRA12-225 CV  No.285 225 187 φ22 φ85 1.3 ↓
BT50-SLRA12-255 CV  No.286 255 217 φ22 φ85 1.6 ↓	BT50-SLRA12-285 CV  No.287 285 247 φ22 φ85 2.1 ↓	
BT50-SLFA12-165 CV  No.288 165 127 t = 5 φ22 φ85 0.7 ↓	BT50-SLFA12-195 CV  No.289 195 157 φ22 φ85 0.8 ↓	BT50-SLFA12-225 CV  No.290 225 187 φ22 φ85 1.3 ↓
BT50-SLFA12-255 CV  No.291 255 217 φ22 φ85 1.6 ↓	BT50-SLFA12-285 CV  No.292 285 247 φ22 φ85 2.1 ↓	

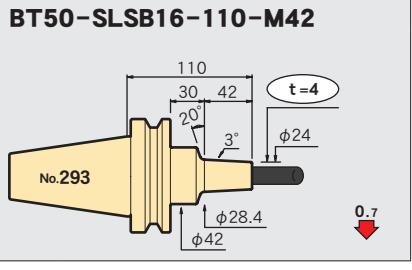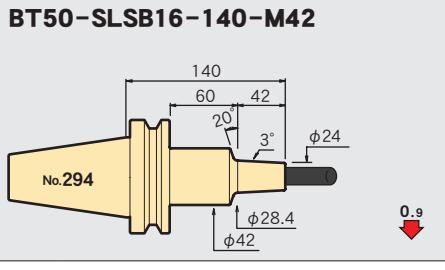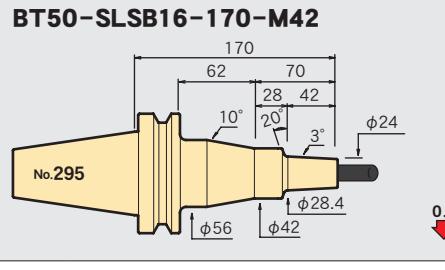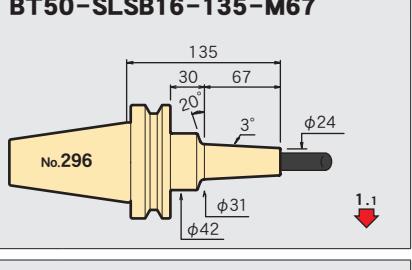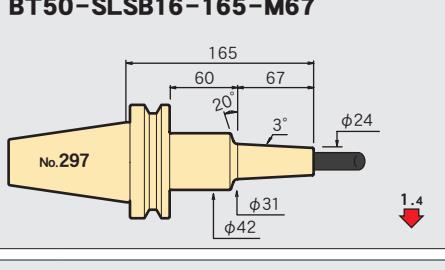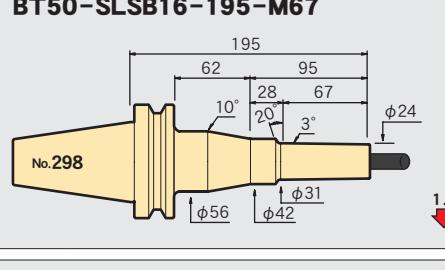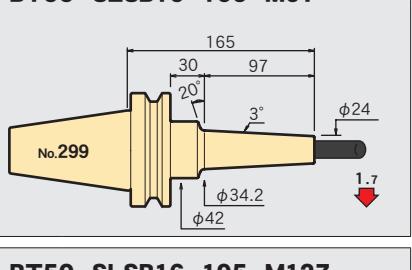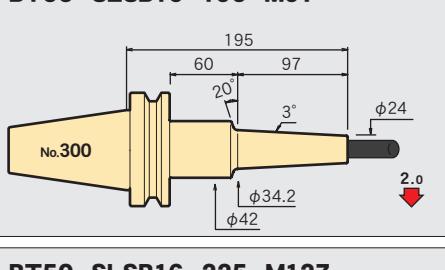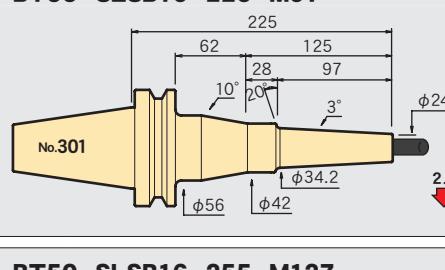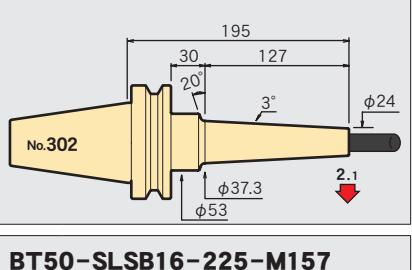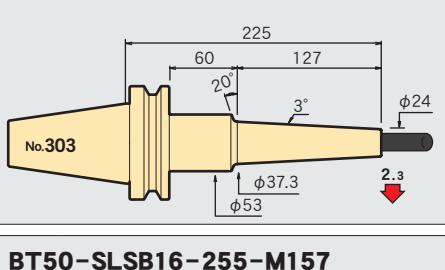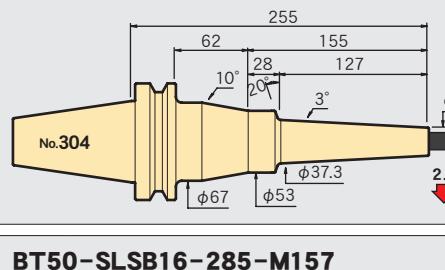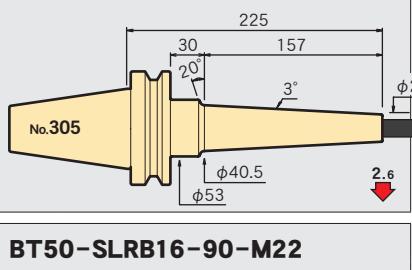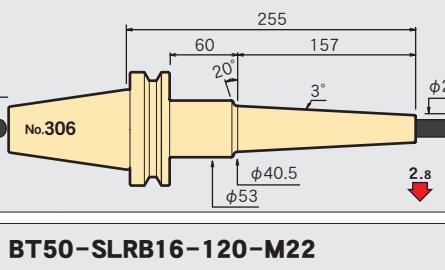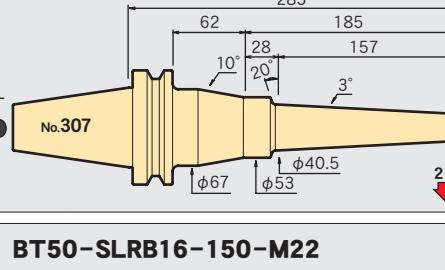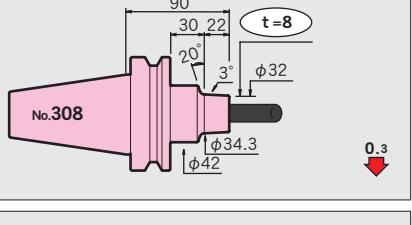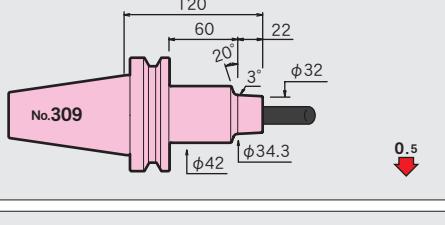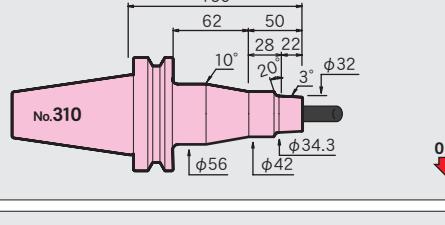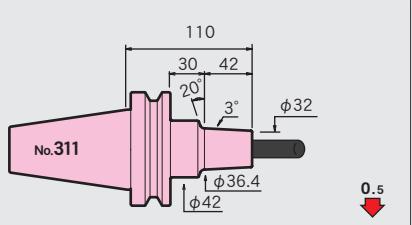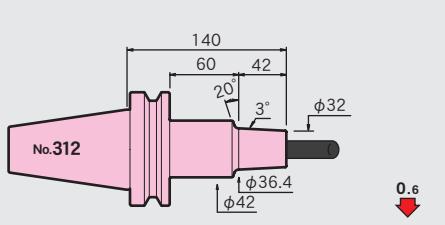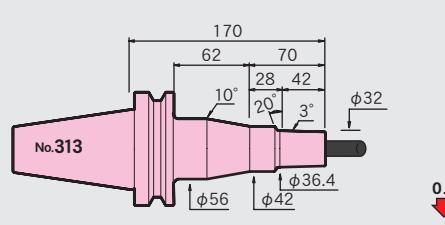Φ 16

BT50-SLSB16-110-M42	BT50-SLSB16-140-M42	BT50-SLSB16-170-M42
		
BT50-SLSB16-135-M67	BT50-SLSB16-165-M67	BT50-SLSB16-195-M67
		
BT50-SLSB16-165-M97	BT50-SLSB16-195-M97	BT50-SLSB16-225-M97
		
BT50-SLSB16-195-M127	BT50-SLSB16-225-M127	BT50-SLSB16-255-M127
		
BT50-SLSB16-225-M157	BT50-SLSB16-255-M157	BT50-SLSB16-285-M157
		
BT50-SLRB16-90-M22	BT50-SLRB16-120-M22	BT50-SLRB16-150-M22
		
BT50-SLRB16-110-M42	BT50-SLRB16-140-M42	BT50-SLRB16-170-M42
		

Feature

Shrink-fit Heater
MONO 3°
MONO CURVE

MONO Series

2PIECE type
UNO



















HYPER VERSION

Z
STRAIGHT arbor

OTHERS

PERIPHERALS
Technical










Feature	
Shrink-fit Heater	
MONO 3°	
MONO CURVE	
MONO Series	
2PIECE type	
UNO	
HYPER VERSION	
Z	
STRAIGHT arbor	
OTHERS	
PERIPHERALS	
Technical data	

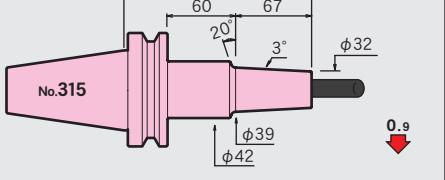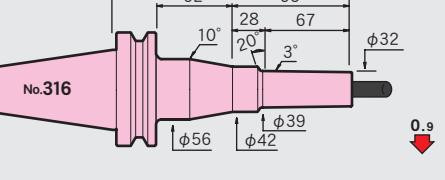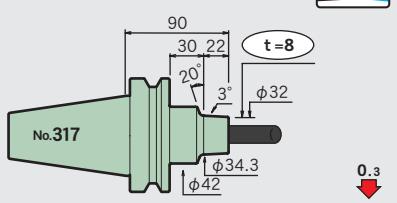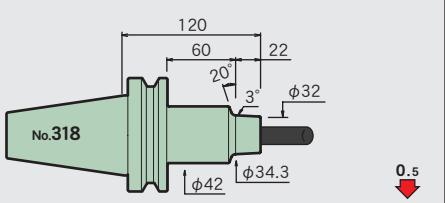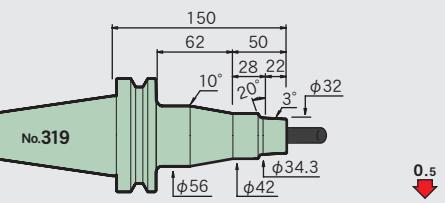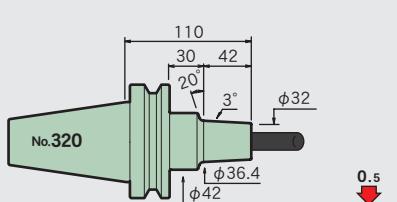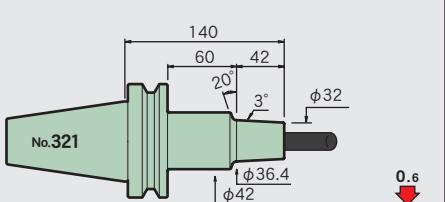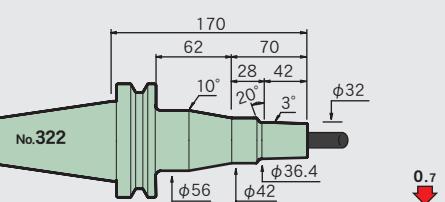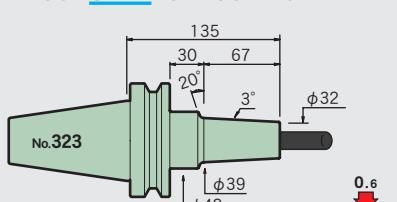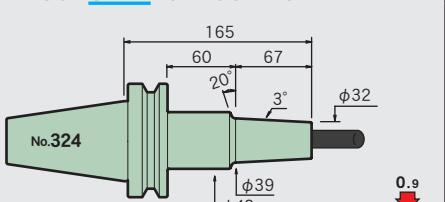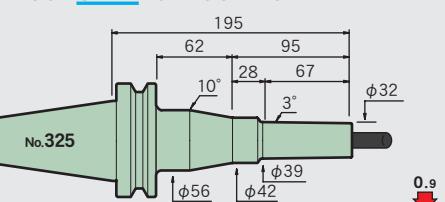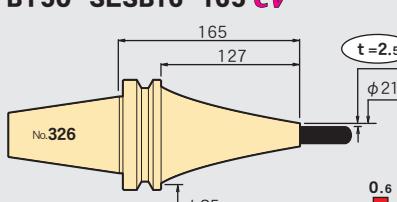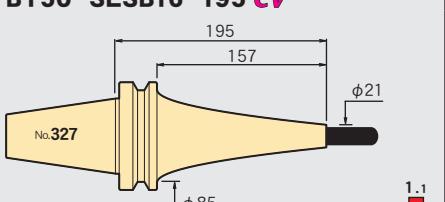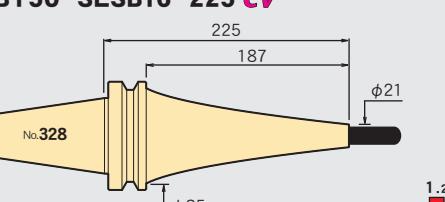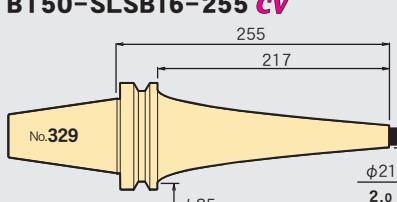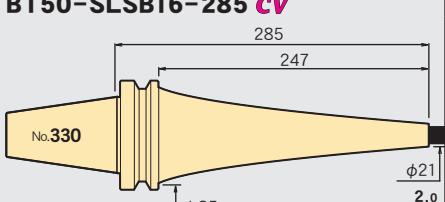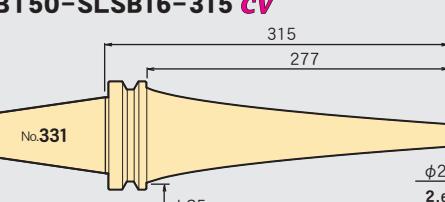BT50-SLRB16-135-M67 No.314	BT50-SLRB16-165-M67 No.315	BT50-SLRB16-195-M67 No.316
		
135 30 67 20° 3° φ32 φ39 φ42 0.6	165 60 67 20° 3° φ32 φ39 φ42 0.9	195 62 95 28 67 10° 20° 3° φ32 φ56 φ42 φ39 0.9
BT50-SLFB16-90-M22 No.317	BT50-SLFB16-120-M22 No.318	BT50-SLFB16-150-M22 No.319
		
90 30 22 20° 3° φ32 φ42 φ34.3 t=8 0.3	120 60 22 20° 3° φ32 φ42 φ34.3 0.5	150 62 50 28 22 10° 20° 3° φ32 φ56 φ42 φ34.3 0.5
BT50-SLFB16-110-M42 No.320	BT50-SLFB16-140-M42 No.321	BT50-SLFB16-170-M42 No.322
		
110 30 42 20° 3° φ32 φ42 φ36.4 0.5	140 60 42 20° 3° φ32 φ42 φ36.4 0.6	170 62 70 28 42 10° 20° 3° φ32 φ56 φ42 φ36.4 0.7
BT50-SLFB16-135-M67 No.323	BT50-SLFB16-165-M67 No.324	BT50-SLFB16-195-M67 No.325
		
135 30 67 20° 3° φ32 φ39 φ42 0.6	165 60 67 20° 3° φ32 φ39 φ42 0.9	195 62 95 28 67 10° 20° 3° φ32 φ56 φ42 φ39 0.9
BT50-SLSB16-165 CV No.326	BT50-SLSB16-195 CV No.327	BT50-SLSB16-225 CV No.328
		
165 127 t=2.5 φ21 φ85 0.6	195 157 φ21 φ85 1.1	225 187 φ21 φ85 1.2
BT50-SLSB16-255 CV No.329	BT50-SLSB16-285 CV No.330	BT50-SLSB16-315 CV No.331
		
255 217 φ21 φ85 2.0	285 247 φ21 φ85 2.0	315 277 φ21 φ85 2.6

Φ 20


BT50-SLSB20-110-M42 No.332	BT50-SLSB20-140-M42 No.333	BT50-SLSB20-170-M42 No.334
BT50-SLSB20-135-M67 No.335	BT50-SLSB20-165-M67 No.336	BT50-SLSB20-195-M67 No.337
BT50-SLSB20-165-M97 No.338	BT50-SLSB20-195-M97 No.339	BT50-SLSB20-225-M97 No.340
BT50-SLSB20-195-M127 No.341	BT50-SLSB20-225-M127 No.342	BT50-SLSB20-255-M127 No.343
BT50-SLSB20-225-M157 No.344	BT50-SLSB20-255-M157 No.345	BT50-SLSB20-285-M157 No.346
BT50-SLRB20-110-M42 No.347	BT50-SLRB20-140-M42 No.348	BT50-SLRB20-170-M42 No.349
BT50-SLRB20-135-M67 No.350	BT50-SLRB20-165-M67 No.351	BT50-SLRB20-195-M67 No.352

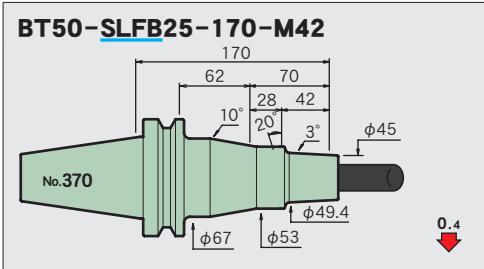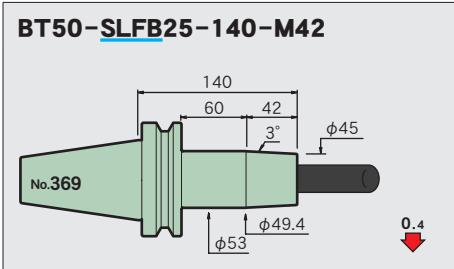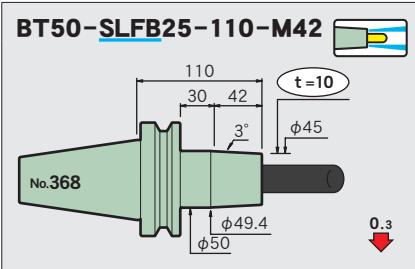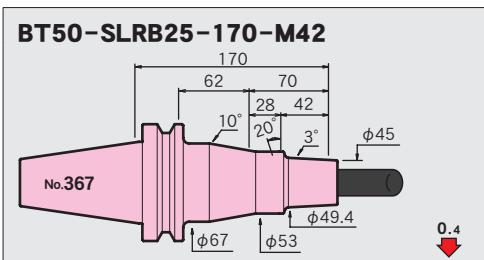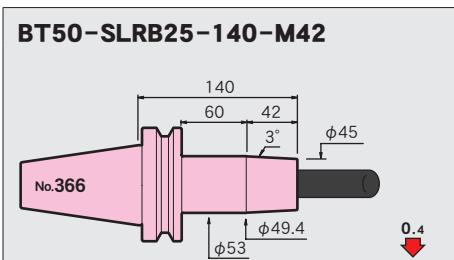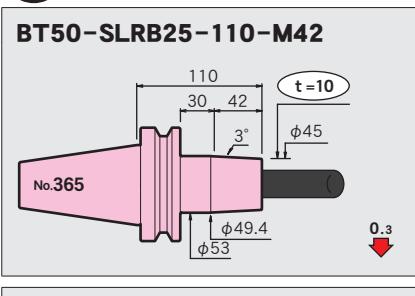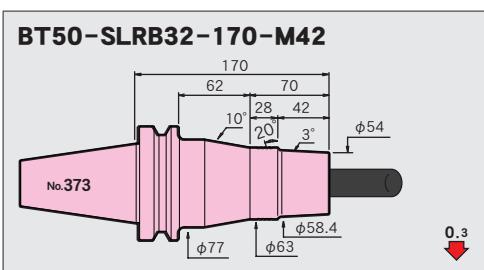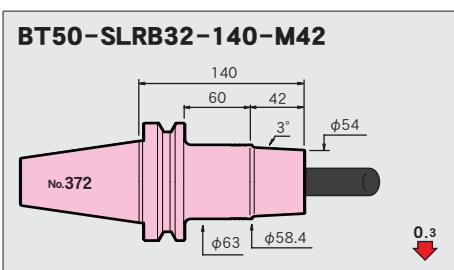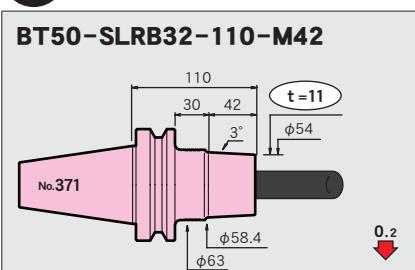Feature
 Shrink-fit Heater
 MONO 3°
 MONO CURVE
 MONO Series
 2PIECE type
 UNO
 HYPER VERSION
 Z
 STRAIGHT arbor
 OTHERS
 PERIPHERALS
 Technical

Φ 25**Φ 32**

Φ70 Nozzle (HRB-03S)


Required for shrinking the SLRB32.



HEAT ROBO Baby3000S

	Feature	
	Shrink-fit Heater	
MONO 3°	MONO CURVE	
MONO Series		
2PIECE type		
UNO		
HYPER VERSION		
Z		
STRAIGHT arbor		
OTHERS		
PERIPHERALS		
Technical data		

A40



Compatibility table for HRD-01S

[] Available [x] Not available

■Std.Access.

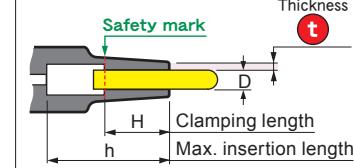
- Coolant duct (fixed type)→P.246

■Note

- Swing type coolant ducts are available upon request. For details, please contact us.

■Caution

- Setting cutters: Be sure to insert the tool beyond the safety mark.



CODE	φD	φC	t	L	M	L1	φC1	φC2	H	h	Kg	N	S	Scale model
A40-SLSA3- 60	3	6	1.5	60	22	18	8.3	20	9	44	0.2	1.3	4.8	○
				65		23		25			0.3	3	4.5	
				85	42		10.4			64		3.2	9.1	
				100		38				78		3.3	9.3	
-SLRA3- 65-M22	3	7.5	2.25	65	22	23	9.8	25	9	44	0.3	3	2.7	○
				85	42		11.9			64		3.2	5.3	
-SLFB3- 65-M22	3	9.5	3.25	65	22	23	11.8	25	9	44	0.3	3	1.2	○
				85	42		13.9			64		3.3	3.2	
A40-SLSA4- 60	4	7	1.5	60	22	18	9.3	20	12	44	0.2	1.4	3.8	○
				65		23		25			0.3	3.1	3.5	
				80	42	18	11.4	20		64	0.2	1.4	7.5	
				85		23		25			0.3	3.4	7.1	
				100		38				78		3.5	7.4	
-SLRA4- 65-M22	4	10	3	65	22	23	12.3	25	12	44	0.3	3.1	1.7	○
				85	42		14.4			64		3.5	3.1	
-SLFB4- 65-M22	4	12	4	65	22	23	14.3	25	12	44	0.3	3.2	1.3	○
				85	42		16.4			64		3.5	2.2	
A40-SLSA6- 65-M22	6	9	1.5	65	22	23	11.3	25	18	44	0.3	3.2	2.3	○
				80	42	18	13.4	20		54	0.2	1.5	5.1	
				85		23		25		64	0.3	3.9	4.8	
				100		38				78		4	5.1	
-SLRA6- 60	6	12	3	60	22	18	14.3	26	18	39	0.3	1.4	1.3	○
				65		23		25		44		3.2		
				85	42		16.4			64		3.9	2.4	
-SLFB6- 70-M22	6	14	4	70	22	28	16.3	32	18	48	0.4	4.1	1	○
				90	42		18.4			68		4.7	1.6	
A40-SLSA8- 65-M22	8	11	1.5	65	22	23	13.3	25	24	44	0.3	3.2	1.6	○
				85	42	23	15.4	25		64		4.3	3.4	
				100		38				78		4.4	3.8	
-SLRA8- 65-M22	8	14	3	65	22	23	16.3	25	24	44	0.3	3.2	1.1	○
				85	42		18.4			64		4.3	2	
-SLFB8- 70-M22	8	18	5	70	22	28	20.3	32	24	48	0.4	4.1	0.7	○
				90	42		22.4			68		5.2	1.1	



CODE	φD	φC	t	L	M	L1	φC1	φC2	H	h	Kg	N	S	
A40-SLSA10- 65-M22	10	13	1.5	65	22	23	15.3	25	30	44	0.3	3	1.2	O
- 85-M42				85	42		17.4			64		4.6	2.6	
- 90				90		28		26				1.9		
-100-M42				100		38		25		78		4.7	3	
-SLRA10- 65	10	16	3	65	22	23	18.3	26	25	44	0.3	1.6	0.9	O
- 65-M22								25	30			3	1	
- 90-M42				90	42	28	20.4	32			69	0.4	5.4	1.5
-SLFB10- 70-M22	10	22	6	70	22	28	24.3	32	30	48	0.4	3.9	0.6	X
- 90-M42				90	42		26.4				68	0.5	5.6	0.9
A40-SLSA12- 65-M22	12	15	1.5	65	22	23	17.3	25	30	44	0.3	3.3	1.1	O
- 90-M42				90	42	28	19.4	32			68	0.4	6.1	1.9
-SLRA12- 65-M22	12	20	4	65	22	23	22.3	25	30	44	0.3	3.3	0.8	O
-SLFB12- 70-M22	12	26	7	70	22	28	28.3	32	30	48	0.4	4.2	0.6	X
A40-SLRA16- 65-M22	16	26	5	65	22	23	28.3	33.5	32	43	0.4	2	0.5	
A40-SLRA20- 70-M50	20	32	6	70	50	-	33.5	-	38	48	0.4	2.4	0.6	



Feature

Shrink-fit Heater

MONO CURVE

MONO Series

2PIECE type

UNO




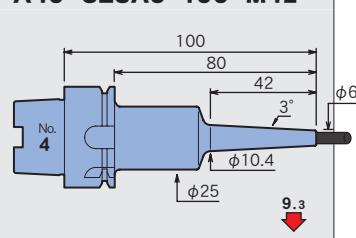

















HYPER VERSION

Z

STRAIGHT arbor



OTHERS

Technical data


φ 3**A40-SLSA3-60****A40-SLSA3-65-M22****A40-SLSA3-85-M42****A40-SLSA3-100-M42****A40-SLRA3-65-M22****A40-SLRA3-85-M42****A40-SLFB3-65-M22****A40-SLFB3-85-M42****φ 4****A40-SLSA4-60****A40-SLSA4-65-M22****A40-SLSA4-80****A40-SLSA4-85-M42****A40-SLSA4-100-M42****A40-SLRA4-65-M22****A40-SLRA4-85-M42****A40-SLFB4-65-M22****A40-SLFB4-85-M42****φ 6****A40-SLSA6-65-M22****A40-SLSA6-80****A40-SLSA6-85-M42****A40-SLSA6-100-M42**

Feature
Shrink-fit Heater
MONO 3°
MONO CURVE
MONO Series
2PIECE type
UNO
HYPER VERSION
Z
STRAIGHT arbor
OTHERS

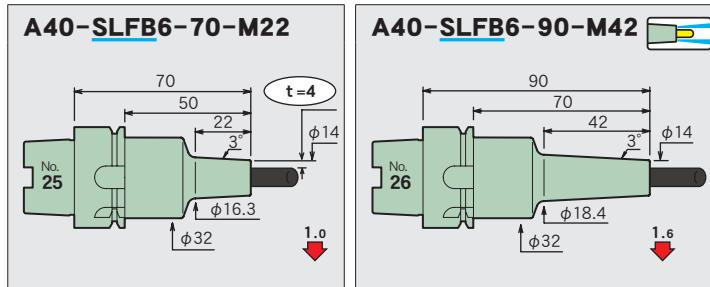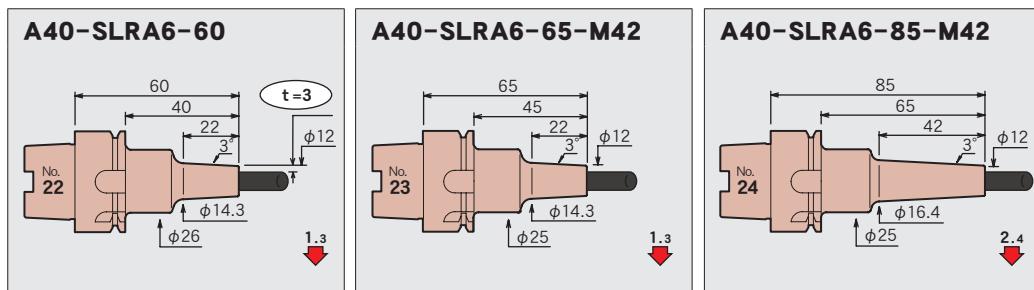
PERIPHERALS
Technical data




φ8

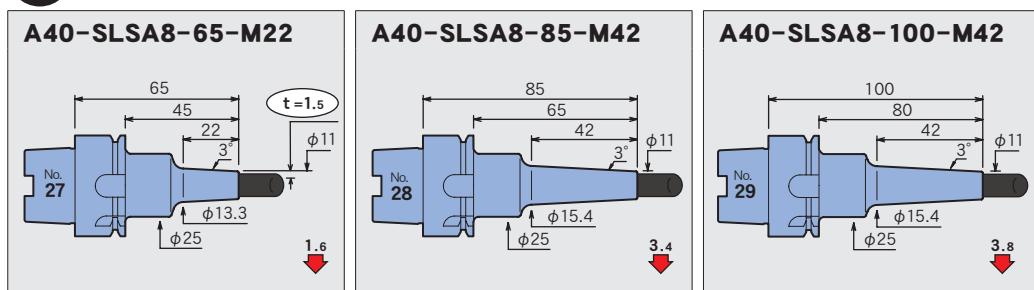


A40-SLRA8-65-M22




A40-SLRA8-85-M42




A40-SLFB8-70-M22




A40-SLFB8-90-M42




φ10

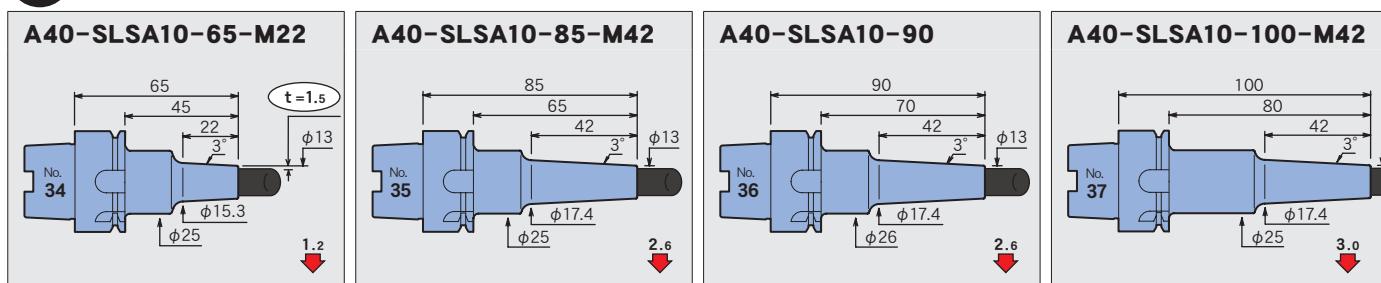


A40-SLRA10-65



A40-SLRA10-65-M22



A40-SLRA10-90-M42

Feature
Shrink-fit HeaterMONO 3°
MONO CURVE

MONO Series


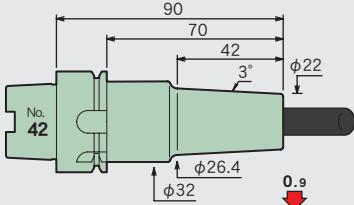






2PIECE type


UNO

HYPER VERSION

Z

STRAIGHT arbor
OTHERSPERIPHERALS
Technical

A40-SLFB10-70-M22**A40-SLFB10-90-M42****SLFB****φ 12****A40-SLSA12-65-M22****A40-SLSA12-90-M42****A40-SLRA12-65-M22****A40-SLFB12-70-M22****φ 16****A40-SLRA16-65-M22****φ 20****A40-SLRA20-70-M50**

A50Compatibility table
for HRD-01S

[O] Available [X] Not available

■ Std.Access.


- Coolant duct (fixed type) → P.246

■ Note

- Swing type coolant ducts are available upon request.
For details, please contact us.

■ Caution

- Setting cutters... Be sure to insert the tool beyond the safety mark.
- The undercut area of the A50M is different from the standards.
Please be careful to check for interference with the ATC arm.



CODE	φD	φC	t	L	M	L ₁	φC ₁	φC ₂	H	h	N Kg	S	
A50-SLSA 3- 95-M42	3	6	1.5	95	42	27	10.4	25	9	71	0.5	5.8	9.1
-125-M42										101	0.6	6.5	9.8
-SLRA 3- 75-M22	3	7.5	2.25	75	22	27	9.8	25	9	51	0.5	6.2	2.8
- 95-M42										71		6.6	5.3
-125-M42										101	0.6	7.3	6
A50-SLSA 4- 95-M42	4	7	1.5	95	42	27	11.4	25	12	71	0.5	7	7.2
-125-M42										101	0.6	7.7	7.9
-SLRA 4- 75-M22	4	10	3	75	22	27	12.3	25	12	51	0.5	6.3	1.7
- 95-M42										71		7	3.1
-125-M42										101	0.6	7.7	3.8
A50-SLSA 6- 95-M42	6	9	1.5	95	42	27	13.4	25	18	71	0.5	7.3	4.8
-125-M42										101	0.6	8	5.6
-SLRB 6- 75-M22	6	14	4	75	22	27	16.3	32	18	50	0.5	7.2	1
- 95-M42										70	0.6	8.9	1.6
-125-M42										100	0.7	10.2	1.9
A50-SLSA 8- 95-M42	8	11	1.5	95	42	27	15.4	25	24	71	0.5	9.3	3.4
-125-M42										101	0.6	11.8	4.4
-SLRB 8- 75-M22	8	18	5	75	22	27	20.3	32	24	50	0.6	7.9	0.7
- 95-M42										70		10.5	1.1
-125-M42										100	0.8	11.8	1.5
A50-SLSA10- 95-M42	10	13	1.5	95	42	27	17.4	25	30	71	0.5	10.7	2.6
-125-M42										101	0.6	12.1	3.7
-SLRB10- 75-M22	10	22	6	75	22	27	24.3	32	30	50	0.6	8.3	0.6
- 95-M42										70		11.9	0.9
-125-M42										100	0.8	13.3	1.3
A50-SLRB12- 75-M22	12	26	7	75	22	27	28.3	42	30	52	0.7	6.2	0.4
- 95-M42										72	0.8	6.3	0.6
-125-M42										98	1	22.9	0.8
A50-SLRB16- 75-M22	16	32	8	75	22	27	34.3	42	32	52	0.7	6.3	0.4
-105-M22										78	1	19	0.5
A50M-SLRB20- 75-M22^{**1}	20	38	9	75	22	27	40.3	49	40	51	0.8	6.4	0.3
-105-M22 ^{**1}										76	1.2	15.1	0.4

^{**1} When shrinking the SLRB20 with HEAT ROBO DENJI 5000(HRD-02S), the standard heating coil cannot be used.
Please use the heating coil No.4.

MAKINO J
MAKINO

J3



Scale model
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32

Feature

Shrink-fit Heater
















MONO Series


















2PIECE type

HYPER VERSION

Z
STRAIGHT arbor
OTHERS
PERIPHERALSTechnical data
90

85

φ 3**φ 4****φ 6**

ϕ 8**ϕ 10****ϕ 12****ϕ 16****ϕ 20**

A63

A63-SLRB12-95-M42

MONO 3°

Rigidity value
(μm/kgf) P.258
Imbalance value(g·mm) N P.261


Fig. 1





Fig. 2

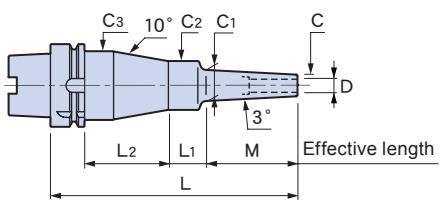


MONO CURVE

A63-SLFA6-150 cv

MONO CURVE

Rigidity value
(μm/kgf) P.258
Imbalance value(g·mm) N P.261

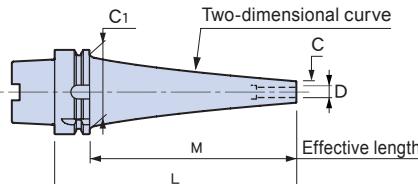
Fig. 3



CV: Curve

Thickness

Std. Access.

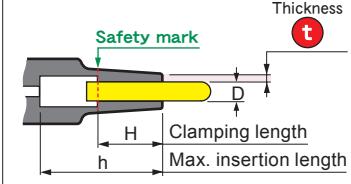
- Coolant duct (fixed type) → p.246

Note

- Swing type coolant ducts are available upon request. → p.246

Caution

- Setting cutters ... Be sure to insert the tool beyond the safety mark.



CODE	Fig.	φD	φC	t	L	M	L1	L2	φC1	φC2	φC3	H	h	Kg	N	S	Scale model	
A63-SLSA3- 95-M 42	1	3	6	1.5	95	42	27	—	10.4	25	—	9	70	0.7	8.1	9.1	1	
					120	67			13				95	0.8	9.2	14.7	4	
					125	42	57		10.4	26			100	0.9	8.2	9.6	2	
					150	67			13	25			125	0.8	9.3	15.8	5	
					97	27			16.2						10.5	20.5	7	
					155	42	33	54	10.4	26	40		130	1.2	8.4	9.9	3	
					180	67			13	25	39		155	1.1	9.6	15.7	6	
					97	57	—		16.2		—			0.9	10.6	22.2	8	
-210-M 97	2				210		33	54		25	39		185	1.2	10.8	22.1	9	
-SLRA3- 75-M 22	1	3	7.5	2.25	75	22	27	—	9.8	25	—	9	50	0.7	8.4	2.8	10	
					95	42			11.9				70		8.9	5.3	13	
					105	22	57		9.8				80	0.8	8.6	3.2	11	
					120	67	27		14.5				95		9.6	8.8	16	
					125	42	57		11.9				100		9	6	14	
					135	22	33	54	9.8		39		110	1.1	8.8	3.2	12	
-135-M 22	2				150	67	57	—	14.5		—		125	0.9	9.8	9.9	17	
					97	27			17.7					0.8	10.6	12.9	19	
					155	42	33	54	11.9	25	39		130	1.1	9.2	6	15	
					180	67			14.5	26	40		155	1.2	10	9.8	18	
					97	57	—		17.7	25	—			0.9	10.8	14.6	20	
					127	27			20.8	36					12.6	15.7	22	
-M 97	1				210	97	33	54	17.7	25	39		185	1.2	11	14.4	21	
-M127	2					127	57	—	20.8	32	—		184	1.1	12.8	16.6	23	
-210-M 97	2						97	33	54	17.7	25	39		214	1.5	13.2	16.5	24
-M127	1							30	57			46						
-240-M127	2																	

CODE	Fig.	φD	φC	t	L	M	L ₁	L ₂	φC ₁	φC ₂	φC ₃	H	h	Kg	N	S	Scale model
A63-SLFB3- 75-M 22	1	3	9.5	3.25	75	22	27	—	11.8	25	—	9	50	0.7	8.1	1.9	○
					95	42			13.9				70	0.8	8.5	3.2	
					105	22	57		11.8	26			80	0.9	8.2	2.3	
					120	67	27		16.5				95	0.8	9.7	5.3	
					125	42	57		13.9				100	0.9	8.7	3.8	
					135	22	33	54	11.8		40		110	1.2	8.5	2.3	
					150	67	57	—	16.5		—		125	0.9	9.8	6.3	
					155	42	33	54	13.9	25	39		130	1.1	8.9	3.9	
					180	67			16.5	26	40		155	1.2	10	6.3	
A63-SLSA4- 95-M 42	1	4	7	1.5	95	42	27	—	11.4	25	—	12	70	0.7	9.2	7.2	○
					120	67			14				95	0.8		11.7	
					125	42	57		11.4				100		9.4	7.9	
					150	67			14				125	0.9		12.8	
					97	27			17.2				0.8	10.6	16.6		
					155	42	33	54	11.4		39		130	1.1	9.6	7.9	
					180	67			14				155			12.8	
					97	57	—	17.2			—		0.9	10.8	18.4		
					210			33	54		39		185	1.2	11	18.2	
-SLRA4- 75-M 22	1	4	10	3	75	22	27	—	12.3	25	—	12	50	0.7	8.6	1.7	○
					95	42			14.4				70	0.8	9.2	3.1	
					105	22	57		12.3				80		8.7	2.2	
					120	67	27		17				95		10.3	5.1	
					125	42	57		14.4				100		9.3	3.8	
					135	22	33	54	12.3		39		110	1.1	8.9	2.2	
					150	67	57	—	17		—		125	0.9	10.4	6.3	
					97	27			20.2				124	0.8	11.7	7.7	
					155	42	33	54	14.4		39		130	1.1	9.6	3.8	
					180	67			17				155	1.2	10.7	6.2	
A63	1	4	10	3	97	57	—	20.2			—		154	0.9	11.8	9.5	○
					127	27			23.3	32			1	14.8	9.4		
					210	97	33	54	20.2	26	40		185	1.3	12.1	9.1	
					127	57	—	23.3	36	—			1.2	15.1	9.9		
					240			30	57		32	46		214	1.5	15.4	10.3
-SLFB4- 75-M 22	1	4	12	4	75	22	27	—	14.3	25	—	12	50	0.7	8.4	1.3	○
					95	42			16.4				70	0.8	9	2.2	
					105	22	57		14.3				80		8.5	1.8	
					120	67	27		19				95		10.3	3.6	
					125	42	57		16.4				100	0.9	9.1	2.9	
					135	22	33	54	14.3		39		110	1.1	8.7	1.8	
					150	67	57	—	19		—		125	0.9	10.4	4.7	
					155	42	33	54	16.4		39		130	1.1	9.4	2.9	
					180	67			19				155	1.2	10.6	4.6	
-SLSA4- 90 CV	3	4	7	1.5	90	64	—	—	53	—	—	12	65	1	9.3	1.8	○
					120	94							95	1.1	10.1	2.7	
					150	124							125	1.3	11	4	
					180	154							154	1.4	11.6	6.6	
					210	184							185		11.8	11.6	
					240	214							214	1.6	13.1	14	
					270	244							245	2	15.4	11.9	
					300	274							275	2.1	16.3	15.9	
-SLRA4-120 CV	3	4	10	3	120	94	—	—	53	—	—	12	95	1	8.6	1.9	○
					150	124							125	1.1	9.3	2.9	
					180	154							155	1.4	10.9	3.3	
					210	184							185		11.3	5.6	

CODE		Fig.	φD	φC	t	L	M	L ₁	L ₂	φC ₁	φC ₂	φC ₃	H	h	Kg lbs	N	S	Scale model
A63-SLSA3/16- 90 CV		3	3/16	.31	.06	3.54	2.52	—	—	2.87	—	—	.59	2.56	1.9	7.6	2	O
-120 CV						4.72	3.70							3.74	2.2	8.5	2.6	
-150 CV						5.91	4.88							4.92	2.5	9.4	4	
-180 CV						7.09	6.06							6.06	2.7	10.3	6.5	
-210 CV						8.27	7.24							7.24	3.1	11.8	8.4	
-240 CV						9.45	8.43							8.43	3.5	12.9	10.6	
-270 CV						10.63	9.61							9.61	4.0	14.2	13.2	
-300 CV						11.81	10.79							10.83	4.5	15.1	16.1	
-SLRA3/16-120 CV		3	3/16	.42	.12	4.72	3.70	—	—	2.87	—	—	.59	3.70	2.2	8.7	1.8	O
-150 CV						5.91	4.88							4.88	2.6	10	2.4	
-180 CV						7.09	6.06							6.10	2.8	10.2	4.3	
-210 CV						8.27	7.24							7.24	3.1	12	5.7	
A63-SLSA6- 95-M 42		1	6	9	1.5	95	42	27	—	13.4	25	—	18	70	0.7	9.5	4.8	O
-120-M 67						120	67			16				95	0.8	11.1	8	
-125-M 42						125	42	57		13.4				100		9.7	5.6	
-150-M 67						150	67			16				125	0.9	11.2	9.3	
-M 97						97	27			19.2	32			124		13.4	11	
-155-M 42						155	42	33	54	13.4	25	39		130	1.1	9.9	5.6	
-180-M 67						180	67			16				155		11.5	9.2	
-M 97						97	57	—		19.2	32	—		154	1	13.6	11.7	
-210-M 97		2				210		30	57			46		184	1.4	14		
-SLSB6- 95-M 42						95	42	27	—	14.4	25	—	18	70	0.7	10.5	3.7	O
-120-M 67						120	67			17				95	0.8	12.6	6.2	
-125-M 42						125	42	57		14.4				100		10.6	4.5	
-150-M 67						150	67			17				125	0.9	12.7	7.4	
-M 97						97	27			20.2	32			124		15.4	8.5	
-155-M 42		2				155	42	33	54	14.4	25	39		130	1.1	10.9	4.4	
-180-M 67						180	67			17				155		12.9	7.3	
A63		1				97	57	—		20.2	32	—		154	1	15.7	9.2	
-M 97						127	27			23.3				0.9	17.9	11		
-M127						127	57	—		23.3				184	1.4	16	9.2	
-210-M 97		2				210	97	30	57	20.2		46		1.1	18.2	12		
-M127						127	57	—		23.3				20.4	13.2			
-M157						157	27			26.5				214	1.5	18.5	12	
-240-M127		2				240	127	30	57	23.3		46		1.2	20.7	14.6		
-M157						157	57	—		26.5				244	1.6	21		
-270-M157		2				270		30	57			46						
-SLRB6- 75-M 22						75	22	27	—	16.3	32	—	18	49	0.8	9.3	1	O
- 95-M 42						95	42			18.4				69		10.9	1.6	
-105-M 22						105	22	57		16.3				79	0.9	9.5	1.2	
-120-M 67						120	67	27		21				94		13	2.6	
-125-M 42						125	42	57		18.4				99	1	11.2	1.9	
-135-M 22		2				135	22	30	57	16.3		46		109	1.3	9.9	1.2	
-150-M 67						150	67	57	—	21				124	1	13.2	3	
-155-M 42		1				155	42	30	57	18.4		46		129	1.4	11.5	1.9	
-180-M 67						180	67			21				154		13.6	3.1	
-SLFB6- 75-M 22		1				75	22	27	—	16.3	32	—	18	49	0.8	9.3	1	O
- 95-M 42						95	42			18.4				69		10.9	1.6	
-105-M 22						105	22	57		16.3				79	0.9	9.5	1.2	
-120-M 67						120	67	27		21				94		13	2.6	
-125-M 42						125	42	57		18.4				99	1	11.2	1.9	
-135-M 22		2				135	22	30	57	16.3		46		109	1.3	9.9	1.2	
-150-M 67						150	67	57	—	21				124	1	13.2	3	
-155-M 42		1				155	42	30	57	18.4		46		129	1.4	11.5	1.9	
-180-M 67						180	67			21				154		13.6	3.1	

CODE	Fig.	φD	φC	t	L	M	L ₁	L ₂	φC ₁	φC ₂	φC ₃	H	h	Kg lbs	N	S	Scale model
A63-SLSA 6- 90 CV	3	6	9	1.5	90	64	—	—	53	—	—	18	65	1	9.4	1.6	○
					120	94							95	1.1	10.1	2.3	
					150	124							125	1.3	11	3.6	
					180	154							154	1.4	11.7	5.7	
					210	184							184	1.6	13	7.3	
					240	214							214		13.3	12	
					270	244							245	2.1	16.3	8.5	
					300	274							275	2.3	17.2	11.7	
-SLRA 6- 90 CV	3	6	13	3.5	90	64	—	—	53	—	—	18	65	1	8.3	0.8	★
					120	94							95	1.1	9.3	1.2	
					150	124							125	1.3	10.1	1.9	○
					180	154							155	1.4	11.1	2.8	
					210	184							185		11.5	4.8	
-SLFA 6- 90 CV	3	6	13	3.5	90	64	—	—	53	—	—	18	65	1	8.3	0.8	★
					120	94							95	1.1	9.3	1.2	
					150	124							125	1.3	10.1	1.9	○
					180	154							155	1.4	11.1	2.8	
					210	184							185		11.5	4.8	
A63-SLSA1/4- 90 CV	3	1/4	.37	.06	3.54	2.52	—	—	2.87	—	—	.71	2.56	1.9	7.7	1.6	○
					4.72	3.70							3.74	2.2	8.5	2.4	
					5.91	4.88							4.92	2.5	9.4	3.7	
					7.09	6.06							6.10	2.8	10.4	5.5	
					8.27	7.24							7.24	3.1	12.1	7.5	
					9.45	8.43							8.43	3.5	13.2	9.6	
					10.63	9.61							9.65	4.1	14.2	11.3	
					11.81	10.79							10.79	4.7	16.9	11.8	
-SLRA1/4- 90 CV	3	1/4	.53	.14	3.54	2.52	—	—	2.87	—	—	.71	2.52	2.1	8.4	0.8	○
					4.72	3.70							3.74	2.5	9.2	1.2	
					5.91	4.88							4.92	2.8	10.2	1.9	
					7.09	6.06							6.06	3.1	11.6	2.9	
					8.27	7.24							7.24	3.2	12.2	4.9	
-SLFA1/4- 90 CV	3	1/4	.53	.14	3.54	2.52	—	—	2.87	—	—	.71	2.52	2.1	8.4	0.8	○
					4.72	3.70							3.74	2.5	9.2	1.2	
					5.91	4.88							4.92	2.8	10.2	1.9	
					7.09	6.06							6.06	3.1	11.6	2.9	
					8.27	7.24							7.24	3.2	12.2	4.9	
A63-SLSA8- 95-M 42	1	8	11	1.5	95	42	27	—	15.4	25	—	24	70	0.7	11.4	3.4	○
					120	67			18	32			94	0.8	14	5.4	
					125	42	57		15.4	25			100		11.6	4.3	
					150	67			18	32			124	1	14.2	5.9	
					97	27			21.2				0.9	17.1	7.9		
					155	42	33	54	15.4	25	39		130	1.1	12	4.3	
					180	67	30	57	18	32	46		154	1.4	14.6	5.9	
					97	57	—	21.2					1	1	17.4	8.7	
-SLSB8- 95-M 42	1	8	13	2.5	95	42	27	—	17.4	32	—	24	69	0.8	12.5	2.1	○
					120	67			20				94	0.9	15.7	3.5	
					125	42	57		17.4				99	1	12.7	2.4	
					150	67			20				124		15.9	4	
					97	27			23.2				0.9	19.5	5.2		
					155	42	30	57	17.4		46		129	1.4	13.1	2.4	
					180	67			20				154		16.3	4	
					97	57	—	23.2					1.1	19.8	6		
					127	27			26.3				1	23.4	7		
					210	97	30	57	23.2		46		184	1.5	20.2	6	
					127	57	—	26.3					1.2	23.7	8.1		
					157	27			29.5	42			185		27.3	8	
					240	127	30	57	26.3	32	46		214	1.6	24	8.1	
					157	57	—	29.5	42				1.5	27.5	8.6		
					270	28	59				53		242	2	27.9	8.7	
-M127	1																
-M157	1																
-240-M127	2																
-M157	1																
-270-M157	2																

	CODE	Fig.	φD	φC	t	L	M	L ₁	L ₂	φC ₁	φC ₂	φC ₃	H	h	Kg lbs	N	S	Scale model
MONO 3° MONO CURVE MONO Series	A63-SLRB8- 75-M 22	1	8	18	5	75	22	27	—	20.3	32	—	24	49	0.8	10	0.7	X
	- 95-M 42					95	42			22.4				69	0.9	12.5	1.1	O
	-105-M 22					105	22	57		20.3				79	1	10.2	0.9	X
	-120-M 67					120	67	27		25				94	0.9	15.7	1.7	O
	A63 -125-M 42					125	42	57		22.4				99	1	12.8	1.4	O
	-135-M 22					135	22	30	57	20.3		46		109	1.4	10.6	1	X
	-150-M 67					150	67	57	—	25		—		124	1.1	16	2.2	O
	-155-M 42					155	42	30	57	22.4		46		129	1.4	13.2	1.4	O
	-180-M 67					180	67			25				155	1.5	16.4	2.2	O
	-SLFB8- 75-M 22					75	22	27	—	20.3	32	—	24	49	0.8	10	0.7	X
2PIECE type	 - 95-M 42	1	8	18	5	95	42			22.4				69	0.9	12.5	1.1	O
	-105-M 22					105	22	57		20.3				79	1	10.2	0.9	X
	-120-M 67					120	67	27		25				94	0.9	15.7	1.7	O
	-125-M 42					125	42	57		22.4				99	1	12.8	1.4	O
	-135-M 22					135	22	30	57	20.3		46		109	1.4	10.6	1	X
	-150-M 67					150	67	57	—	25		—		124	1.1	16	2.2	O
	-155-M 42					155	42	30	57	22.4		46		129	1.4	13.2	1.4	O
	-180-M 67					180	67			25				154	1.5	16.4	2.2	O
UNO	-SLSA 8- 90 CV	3	8	11	1.5	90	64	—	—	53	—	—	24	65	1	9.4	1.4	O
	-120 CV					120	94							94	1.1	10.3	2	
	-150 CV					150	124							124	1.3	11.5	2.7	
	-180 CV					180	154							155	1.4	11.8	5	
	-210 CV					210	184							184	1.6	13.2	6.6	
	-240 CV					240	214							214	1.8	14.4	8.3	
	-270 CV					270	244							244	2.2	17.2	6.9	
	-300 CV					300	274							274	2.4	18.5	8.9	
HYPER VERSION	-SLRA 8- 90 CV	3	8	16	4	90	64	—	—	53	—	—	24	65	1	8.4	0.7	O
	-120 CV					120	94							95	1.2	9.6	1	
	-150 CV					150	124							125	1.4	10.8	1.4	
	-180 CV					180	154							155	1.5	12	2	
	-210 CV					210	184							185	1.6	12.5	3.5	
Z	-SLFA 8- 90 CV	3	8	16	4	90	64	—	—	53	—	—	24	65	1	8.4	0.7	O
	 -120 CV					120	94							95	1.2	9.6	1	
	-150 CV					150	124							125	1.4	10.8	1.4	
	-180 CV					180	154							155	1.5	12	2	
	-210 CV					210	184							185	1.6	12.5	3.5	
STRAIGHT arbor	A63-SLSA5/16- 90 CV	3	5/16	.43	.06	3.54	2.52	—	—	2.87	—	—	.94	2.56	1.9	7.7	1.5	O
	-120 CV					4.72	3.70							3.70	2.2	8.9	2	
	-150 CV					5.91	4.88							4.88	2.6	10.2	2.8	
	-180 CV					7.09	6.06							6.10	2.7	10.4	5.2	
	-210 CV					8.27	7.24							7.17	3.1	13.6	6	
	-240 CV					9.45	8.43							8.43	3.8	14.5	6.8	
	-270 CV					10.63	9.61							9.65	4.4	15.1	8.5	
	-300 CV					11.81	10.79							10.79	5.0	18.1	9	
OTHERS	-SLRA5/16- 90 CV	3	5/16	.63	.16	3.54	2.52	—	—	2.87	—	—	.94	2.52	2.1	8.4	0.7	O
	-120 CV					4.72	3.70							3.70	2.6	9.8	1	
	-150 CV					5.91	4.88							4.88	3.0	11.1	1.5	
	-180 CV					7.09	6.06							6.06	3.4	12.5	2.1	
	-210 CV					8.27	7.24							7.24	3.5	13.4	3.6	
PERIPHERALS	-SLFA5/16- 90 CV	3	5/16	.63	.16	3.54	2.52	—	—	2.87	—	—	.94	2.52	2.1	8.4	0.7	O
	 -120 CV					4.72	3.70							3.70	2.6	9.8	1	
	-150 CV					5.91	4.88							4.88	3.0	11.1	1.5	
	-180 CV					7.09	6.06							6.06	3.4	12.5	2.1	
	-210 CV					8.27	7.24							7.24	3.5	13.4	3.6	

CODE	Fig.	φD	φC	t	L	M	L ₁	L ₂	φC ₁	φC ₂	φC ₃	H	h	Kg	N	S	Scale model
A63-SLSA10- 95-M 42	1	10	13	1.5	95	42	27	—	17.4	25	—	30	70	0.8	12.8	2.6	○
					120	67			20	32			94		16.6	4	
					125	42	57		17.4	25			100		13	3.6	
					150	67			20	32			124	1	16.9	4.6	
					97	27			23.2					0.9	21.3	6	
					155	42	33	54	17.4	25	39		130	1.1	13.4	3.5	
					180	67	30	57	20	32	46		154	1.4	17.3	4.6	
					97	57	—	—	23.2	36	—		153	1.2	21.6	6.4	
					210		30	57		32	46			184	1.5	21.9	6.9
-SLSB10- 95-M 42	1	10	16	3	95	42	27	—	20.4	32	—	30	69	0.8	13.9	1.4	○
					120	67			23				94	0.9	18.5	2.4	
					125	42	57		20.4				99	1	14.2	1.8	
					150	67			23				124		18.8	3	
					97	27			26.2					24	3.6		
					155	42	28	59	20.4	36	50		128	1.6	14.6	1.7	
					180	67	30	57	23	32	46		154	1.4	19.2	3	
					97	57	—	—	26.2		—			1.1	24.3	4.5	
					127	27			29.3	42			155	1.2	30.2		
-210-M 97	2				210	97	28	59	26.2	36	50		180	1.7	24.7	4.1	○
					127	57	—	—	29.3	42	—		182	1.4	31	4.9	
					157	27			32.5				185	1.3	35.7	5.6	
					240	127	87		29.3				215	2.0	31.8	4.9	
					157	57			32.5					1.8	36.5	5.8	
					270		28	59			53		245	2.1	37.4	6.2	
					75	22	27	—	24.3	32	—	30	49	0.8	10.3	0.6	×
					95	42			26.4				68	0.9	14	0.8	
					105	22	57		24.3				79	1	10.6		
SLRB10- 75-M 22	1	10	22	6	120	67	27		29	42			94	1.1	18.6	1.1	○
					125	42	57		26.4	32	46		99		14.2	1.2	
					135	22	30	57	24.3				109	1.4	10.9	0.9	
					150	67	57	—	29	42	—		124	1.3	18.9	1.3	○
					155	42	30	57	26.4	32	46		129	1.5	14.6	1.2	
					180	67	28	59	29	42	53		154	1.8	19.2	1.3	
					75	22	27	—	24.3	32	—	30	49	0.8	10.3	0.6	
					95	42			26.4				69	0.9	14	0.8	
					105	22	57		24.3				79	1	10.6	0.8	
-SLFB10- 75-M 22	1	10	22	6	120	67	27		29	42			94	1.1	18.6	1.1	○
					125	42	57		26.4	32	46		99		14.2	1.2	
					135	22	30	57	24.3				109	1.4	10.9	0.9	
					150	67	57	—	29	42	—		124	1.3	18.9	1.3	○
					155	42	30	57	26.4	32	46		129	1.5	14.6	1.2	
					180	67	28	59	29	42	53		154	1.8	19.2	1.3	
					75	22	27	—	24.3	32	—	30	49	0.8	10.3	0.6	
					95	42			26.4				69	0.9	14	0.8	
					105	22	57		24.3				79	1	10.6	0.8	
A63	2				125	42	57		26.4	32	46		94	1.1	18.6	1.1	○
					135	22	30	57	24.3				109	1.4	10.9	0.9	
					150	67	57	—	29	42	—		124	1.3	18.9	1.3	
					155	42	30	57	26.4	32	46		129	1.5	14.6	1.2	
					180	67	28	59	29	42	53		154	1.8	19.2	1.3	
					75	22	27	—	24.3	32	—	30	49	0.8	10.3	0.6	
					95	42			26.4				69	0.9	14	0.8	
					105	22	57		24.3				79	1	10.6	0.8	
					120	67	27		26.4	32	46		94	1.1	18.6	1.1	
-135-M 22	2				125	42	57		26.4	32	46		99		14.2	1.2	○
					135	22	30	57	24.3				109	1.4	10.9	0.9	
					150	67	57	—	29	42	—		124	1.3	18.9	1.3	
					155	42	30	57	26.4	32	46		129	1.5	14.6	1.2	
					180	67	28	59	29	42	53		154	1.8	19.2	1.3	
					75	22	27	—	24.3	32	—	30	49	0.8	10.3	0.6	
					95	42			26.4				69	0.9	14	0.8	
					105	22	57		24.3				79	1	10.6	0.8	
					120	67	27		26.4	32	46		94	1.1	18.6	1.1	
-150-M 22	1				125	42	57		26.4	32	46		99		14.2	1.2	○
					135	22	30	57	24.3				109	1.4	10.9	0.9	
					150	67	57	—	29	42	—		124	1.3	18.9	1.3	
					155	42	30	57	26.4	32	46		129	1.5	14.6	1.2	
					180	67	28	59	29	42	53		154	1.8	19.2	1.3	
					75	22	27	—	24.3	32	—	30	49	0.8	10.3	0.6	
					95	42			26.4				69	0.9	14	0.8	
					105	22	57		24.3				79	1	10.6	0.8	
					120	67	27		26.4	32	46		94	1.1	18.6	1.1	
-180-M 67	1				125	42	57		26.4	32	46		99		14.2	1.2	○
					135	22	30	57	24.3				109	1.4	10.9	0.9	
					150	67	57	—	29	42	—		124	1.3	18.9	1.3	
					155	42	30	57	26.4	32	46						

	CODE	Fig.	φD	φC	t	L	M	L ₁	L ₂	φC ₁	φC ₂	φC ₃	H	h	Kg lbs	N	S	Feature	Scale model	
MONO 3° Shrink-fit Heater	A63-SLRA10- 90 CV	3	10	19	4.5	90	64	—	—	53	—	—	30	65	1	8.5	0.6	○	297	
	-120 CV					120	94							95	1.2	9.6	0.9		298	
	-150 CV					150	124							125	1.3	10.9	1.4		299	
	-180 CV					180	154							155	1.5	12.1	2		300	
	-210 CV					210	184							185	1.6	13.3	3.1		301	
	-SLFA10- 90 CV	3	10	19	4.5	90	64	—	—	53	—	—	30	65	1	8.5	0.6	○	302	
	-120 CV					120	94							95	1.2	9.6	0.9		303	
	-150 CV					150	124							125	1.3	10.9	1.4		304	
	-180 CV					180	154							155	1.5	12.1	2		305	
	-210 CV					210	184							185	1.6	13.3	3.1		306	
MONO Series	A63-SLSA3/8- 90 CV	3	3/8	.49	.06	3.54	2.52	—	—	2.87	—	—	1.18	2.56	1.9	7.7	1.3	○	307	
	-120 CV					4.72	3.70							3.74	2.2	8.7	2.2		308	
	-150 CV					5.91	4.88							4.88	2.6	10.4	2.6		309	
	-180 CV					7.09	6.06							6.06	3.0	11.8	3.6		310	
	-210 CV					8.27	7.24							7.24	3.4	13.4	4.9	▲	311	
	-240 CV					9.45	8.43							8.46	4.0	14.2	6		312	
	-270 CV					10.63	9.61							9.61	4.5	17.1	6.8		313	
	-300 CV					11.81	10.79							10.79	5.0	18.5	8.8		314	
	-SLRA3/8- 90 CV	3	3/8	.73	.185	3.54	2.52	—	—	2.87	—	—	1.18	2.52	2.1	8.4	0.7	○	315	
	-120 CV					4.72	3.70							3.70	2.6	9.7	1		316	
	-150 CV					5.91	4.88							4.88	3.0	11.2	1.4		317	
	-180 CV					7.09	6.06							6.06	3.4	12.7	2		318	
	-210 CV					8.27	7.24							7.28	3.8	13.2	2.9		319	
2PIECE type	-SLFA3/8- 90 CV	3	3/8	.73	.185	3.54	2.52	—	—	2.87	—	—	1.18	2.52	2.1	8.4	0.7	○	320	
	-120 CV					4.72	3.70							3.70	2.6	9.7	1		321	
	-150 CV					5.91	4.88							4.88	3.0	11.2	1.4		322	
	-180 CV					7.09	6.06							6.06	3.4	12.7	2		323	
	-210 CV					8.27	7.24							7.28	3.8	13.2	2.9		324	
	-SLFA3/8- 90 CV	3	3/8	.73	.185	3.54	2.52	—	—	2.87	—	—	1.18	2.52	2.1	8.4	0.7	○	325	
	-120 CV					4.72	3.70							3.70	2.6	9.7	1		326	
	-150 CV					5.91	4.88							4.88	3.0	11.2	1.4		327	
	-180 CV					7.09	6.06							6.06	3.4	12.7	2		328	
	-210 CV					8.27	7.24							7.28	3.8	13.2	2.9		329	
UNO	A63-SLSA12- 95-M 42	1	12	15	1.5	95	42	27	—	19.4	32	—	30	69	0.8	15.2	1.8	○	330	
	-120-M 67					120	67			22				94		20.6	3.3		331	
	-125-M 42					125	42	57		19.4				99	1	15.4	2.3		332	
	-150-M 67					150	67			22				124		20.8	3.9		333	
	-M 97					97	27			25.2				0.9		27.5	4.9		334	
	-155-M 42	2	12	15	1.5	155	42	30	57	19.4				129	1.4	15.8	2.3		335	
	-180-M 67					180	67			22				154		21.2	3.9		336	
	-M 97	1				97	57	—		25.2				184	1.1	27.8	5.8		337	
	-210-M 97	2				210	30	57						184	1.5	28.2		▲	338	
STRAIGHT arbor	-SLSB12- 95-M 42	1	12	19	3.5	95	42	27	—	23.4	32	—	30	69	0.8	16.5	1.1	○	339	
	-120-M 67					120	67			26				94	0.9	22.8	1.8		340	
	-125-M 42					125	42	57		23.4				99	1	16.8	1.5		341	
	A63 -150-M 67					150	67			26				124	1.1	23.1	2.5		342	
	-M 97					97	27			29.2	42			125		30.9	2.4		343	
	-155-M 42	2	12	19	3.5	155	42	30	57	23.4	32	46		129	1.4	17.2	1.6		344	
	-180-M 67					180	67			26				154	1.5	23.4	2.5		345	
	-M 97	1				97	57	—		29.2	42			152	1.4	31.7	2.8		346	
	-M127					127	27			32.3				155	1.3	38.5	3.3		347	
OTHERS	-210-M 97					210	97	87		29.2	50			180	1.9	32.6	2.8		348	
	-M127					127	57			32.3					1.7	39.3	3.5			
	-M157					157	27			35.5	42			185	1.4	46	4.1			
	-240-M127					240	127	87		32.3	50			215	2.1	40.1	3.8			
	-M157					157	57			35.5					1.9	46.8	4.3			
	-270-M157	2				270	28	59			42	53			242	2.2	47.7	4.8		

CODE	Fig.	φD	φC	t	L	M	L ₁	L ₂	φC ₁	φC ₂	φC ₃	H	h	Kg lbs	N	S	Scale model
A63-SLRB12- 75-M 22	1	12	26	7	75	22	27	—	28.3	42	—	30	50	0.9	14.5	0.4	X
- 95-M 42					95	42			30.4				70	1	17.2	0.6	
-105-M 22					105	22	57		28.3				77	1.2	15.3	0.5	
-120-M 67					120	67	27		33				95		23.5	0.8	
-125-M 42					125	42	57		30.4				97	1.3	18	0.7	
-135-M 22	2				135	22	28	59	28.3		53		107	1.7	16.2	0.6	
-150-M 67	1				150	67	57	—	33	42	—		122	1.4	24.3	1.1	
-155-M 42					155	42	87		30.4	50			125	1.8	18.9	0.8	
-180-M 67	2				180	67	28	59	33	42	53		152	1.9	25.2	1.1	
-SLFB12- 75-M 22	1	12	26	7	75	22	27	—	28.3	42	—	30	50	0.9	14.5	0.4	X
 - 95-M 42					95	42			30.4				70	1	17.2	0.6	
-105-M 22					105	22	57		28.3				77	1.2	15.3	0.5	
-120-M 67					120	67	27		33				95		23.5	0.8	
-125-M 42					125	42	57		30.4				97	1.3	18	0.7	
-135-M 22	2				135	22	28	59	28.3		53		107	1.7	16.2	0.6	
-150-M 67	1				150	67	57	—	33		—		122	1.4	24.3	1.1	
-155-M 42					155	42	86		30.4	50			125	1.8	18.9	0.8	
-180-M 67	2				180	67	28	59	33	42	53		152	1.9	25.2	1.1	
-SLSA12- 90 CV	3	12	15	1.5	90	64	—	—	53	—	—	30	64	1.1	9.9	0.9	O
-120 CV					120	94							94	1.3	11.3	1.2	
-150 CV					150	124							124	1.4	11.8	2.4	
-180 CV					180	154							154	1.6	13	3.3	
-210 CV					210	184							184	1.8	14.3	4.6	▲
-240 CV					240	214							212	2.1	16.2	5.5	
-270 CV					270	244							244	2.3	18.4	5.4	
-SLRA12- 90 CV	3	12	22	5	90	64	—	—	53	—	—	30	64	1	8.5	0.6	X
-120 CV					120	94							94	1.3	10.4	0.7	
 -150 CV					150	124							124	1.5	11.7	1.1	O
-180 CV					180	154							154		12.8	1.8	
-210 CV					210	184							184	1.6	14	2.8	
-SLFA12- 90 CV	3	12	22	5	90	64	—	—	53	—	—	30	64	1	8.5	0.6	X
 -120 CV					120	94							94	1.3	10.4	0.7	
-150 CV					150	124							124	1.5	11.7	1.1	O
-180 CV					180	154							154		12.8	1.8	
-210 CV					210	184							184	1.6	14	2.8	
A63-SLSA1/2- 90 CV	3	1/2	.62	.06	3.54	2.52	—	—	2.87	—	—	1.18	2.52	2.1	8.4	0.8	O
-120 CV					4.72	3.70							3.70	2.5	10	1.2	
-150 CV					5.91	4.88							4.88		10.9	2.4	
-180 CV					7.09	6.06							6.06	2.9	12.4	3.4	
-210 CV					8.27	7.24							7.17	3.5	16.3	3.6	▲
-240 CV					9.45	8.43							8.35	4.0	19.1	4.3	
-270 CV					10.63	9.61							9.53	4.7	20.9	5.1	
-SLRA1/2- 90 CV	3	1/2	.89	.20	3.54	2.52	—	—	2.87	—	—	1.18	2.44	2.2	9.3	0.5	X
-120 CV					4.72	3.70							3.70	2.8	10.6	0.7	
-150 CV					5.91	4.88							4.88	3.2	12.1	1.1	O
-180 CV					7.09	6.06							5.98		15.5	1.9	
-210 CV					8.27	7.24							7.24	4.4	15.7	2	
-SLFA1/2- 90 CV	3	1/2	.89	.20	3.54	2.52	—	—	2.87	—	—	1.18	2.44	2.2	9.3	0.5	X
 -120 CV					4.72	3.70							3.70	2.8	10.6	0.7	
-150 CV					5.91	4.88							4.88	3.2	12.1	1.1	O
-180 CV					7.09	6.06							5.98		15.5	1.9	
-210 CV					8.27	7.24							7.24	4.4	15.7	2	

CODE		Fig.	φD	φC	t	L	M	L ₁	L ₂	φC ₁	φC ₂	φC ₃	H	h	Kg lbs	N	S	Feature
A63-SLSB16- 95-M 42	1	16	24	4	95	42	27	—	28.4	42	—	32	70	1	22.7	0.7	401	
					120	67			31				95	1.1	33	1.1	404	
					125	42	57		28.4				97	1.2	23.5	0.9	402	
					150	67			31				122	1.3	33.8	1.4	405	
						97	27		34.2				125	1.2	45.5	1.7	407	
					155	42	87		28.4	50			130	1.7	24.4	0.9	403	
					180	67	28	59	31	42	53	—	152	1.8	34.7	1.5	406	
						97	57	—	34.2					1.4	46.3	2.1	408	
					127	27			37.3	53			155	1.5	57.9		410	
					210	97	87		34.2	50			185	2	47.1		409	
						127	57		37.3	53			181	1.9	58.7	2.3	411	
					157	27			40.5				185	1.7	70.3	2.7	413	
					240	127	87		37.3				211	2.3	59.5	2.6	412	
						157	57		40.5	50			215	2.1	71.1	3.1	414	
					270		87			53				241	2.5	72	3.2	415
-SLRB16- 75-M 22	1	16	32	8	75	22	27	—	34.3	42	—	32	50	1	14.5	0.3	416	
					95	42			36.4				70	1.1	22.8	0.5	419	
					105	22	57		34.3				77	1.2	15.3		417	
					120	67	27		39				95	1.3	33.2	0.7	422	
					125	42	57		36.4				97		23.6		420	
					135	22	28	59	34.3		53	—	107	1.7	16.2	0.5	418	
					150	67	57	—	39		—	—	122	1.5	34	0.9	423	
					155	42	28	59	36.4		53	—	127	1.9	24.5	0.7	421	
					180	67			39				152	2	34.9	1	424	
-SLFB16- 75-M 22	1	16	32	8	75	22	27	—	34.3	42	—	32	50	1	14.5	0.3	425	
					95	42			36.4				70	1.1	22.8	0.5	428	
					105	22	57		34.3				77	1.2	15.3		426	
					120	67	27		39				95	1.3	33.2	0.7	431	
					125	42	57		36.4				97		23.6		429	
					135	22	28	59	34.3		53	—	107	1.7	16.2	0.5	427	
					150	67	57	—	39	50	—	—	120		34	0.7	432	
					155	42	86		36.4				125	1.9	24.5		430	
-180-M 67	2				180	67	28	59	39	42	53	—	152	2	34.9	1	433	
																	434	
																	435	
																	436	
																	437	
																	438	
																	439	
-SLSB16- 90 CV	3	16	21	2.5	90	64	—	—	53	—	—	32	62	1.1	10.5	0.6	440	
					120	94							92	1.5	12.4	0.8	441	
					150	124							122	1.6	13.5	1.5	442	
					180	154							152	1.9	15.4	1.9	443	
					210	184							182	2.1	16.5	3	444	
					240	214							212	2.4	18.4	3.7	445	
					270	244							242	2.7	20.3	4.6	446	
A63-SLSB5/8- 90 CV	3	5/8	.82	.10	3.54	2.52	—	—	2.87	—	—	1.26	2.44	2.1	9.3	0.6	447	
					4.72	3.70							3.62	2.6	11.7	0.8		
					5.91	4.88							4.80	2.9	13.4	1.5		
					7.09	6.06							5.98	3.4	15.8	1.9		
					8.27	7.24							7.17	3.6	17.5	3		
					9.45	8.43							8.35	4.2	19.9	3.7		
					10.63	9.61							9.53	4.8	22.3	4.6		






















CODE	Fig.	ϕD	ϕC	t	L	M	L ₁	L ₂	ϕC_1	ϕC_2	ϕC_3	H	h	Kg lbs	N	S	Scale model	Feature
A63-SLSB20- 95-M 42	1	20	29	4.5	95	42	27	—	33.4	42	—	40	70	1	25.4	0.5	448	Shrink-fit Heater
-120-M 67					120	67			36				95	1.1	40.8	0.9	451	
-125-M 42					125	42	57		33.4				97	1.2	26.2	0.8	449	
-150-M 67					150	67			36				122	1.4	41.6	1.2	452	
-M 97						97	27		39.2	53			125		59.3	1.1	454	
-155-M 42					155	42	87		33.4	50			130	1.8	27.1	0.8	450	
-180-M 67	2				180	67	28	59	36	42	53		152	1.9	42.5	1.2	453	
-M 97	1					97	57	—	39.2	53	—		151	1.8	60.1	1.3	455	
-M127					127	27			42.3				155	1.6	79.1	1.5	457	
-210-M 97					210	97	87		39.2				181	2.2	61	1.6	456	
-M127						127	57		42.3				2		79.9	1.8	458	
-M157						157	27		45.5				185	1.9	97.6	1.9	460	
-240-M127					240	127	87		42.3	50			215	2.3	80.7	2.3	459	
-M157						157	57		45.5	53			211		98.4	2.2	461	
-270-M157					270		87		50				245	2.6	99.3	2.8	462	
-SLRB20- 95-M 42	1	20	38	9	95	42	27	—	42.4	53	—	40	70	1.3	25.6	0.3	463	
-120-M 67					120	67			45				95	1.5	41	0.5	466	
A63					125	42	57		42.4				96	1.7	26.4	0.4	464	
-125-M 42					150	67			45				121	1.9	41.8	0.6	467	
-150-M 67					155	42	87		42.4				126	2.1	27.2		465	
-155-M 42					180	67			45				151	2.3	42.7	0.8	468	
-SLFB20- 95-M 42	1	20	38	9	95	42	27	—	42.4	53	—	40	70	1.3	25.6	0.3	469	
 -120-M 67					120	67			45				95	1.5	41	0.5	472	
-125-M 42					125	42	57		42.4				96	1.7	26.4	0.4	470	
-150-M 67					150	67			45				120	1.9	41.8	0.7	473	
-155-M 42					155	42	87		42.4				125	2	27.2	0.6	471	
-180-M 67					180	67			45				150	2.2	42.7	0.9	474	
-SLSB20- 90 CV	3	20	26	3	90	64	—	—	51	—	—	40	62	1.2	10.7	0.5	475	
-120 CV					120	94			53				92	1.5	12.8	0.8	476	
-150 CV					150	124							122	1.7	14.1	1.3	477	
-180 CV					180	154							152	2	16.2	1.8	478	
-210 CV					210	184							182	2.4	18.2	2.3	479	
-240 CV					240	214							212	2.7	20.2	3	480	
-270 CV					270	244							242	3.1	22.8	3.4	481	
A63-SLSB3/4- 90 CV	3	3/4	.99	.12	3.54	2.52	—	—	2.87	—	—	1.50	2.44	2.1	9.5	0.6	482	
-120 CV					4.72	3.70							3.62	2.6	12.2	0.8	483	
-150 CV					5.91	4.88							4.80	2.9	14.5	1.4	484	
-180 CV					7.09	6.06							5.98	3.4	17.1	1.8	485	
-210 CV					8.27	7.24							7.17	3.9	19.8	2.4	486	
-240 CV					9.45	8.43							8.35	4.5	22.4	3.1	487	
-270 CV					10.63	9.61							9.53	5.0	25	3.9	488	
A63-SLRB25- 95-M 42	1	25	45	10	95	42	27	—	49.4	53	—	45	70	1.4	28.7	0.3	489	
-125-M 42					125		57						96	1.8	29.5	0.4	490	
-155-M 42					155		87						126	2.2	30.4	0.6	491	
-SLFB25- 95-M 42	1	25	45	10	95	42	27	—	49.4	53	—	45	70	1.4	28.7	0.3	492	
 -125-M 42					125		57						96	1.8	29.5	0.4	493	
-155-M 42					155		87						126	2.2	30.4	0.6	494	
A63-SLRB32-110-M 42	1	32	54	11	110	42	42	—	58.4	63	—	50	84	1.8	13.3	0.3	495	













Φ70 Nozzle (HRB-03S)



448	
451	
449	
452	
454	
450	
453	
455	
457	
456	
458	
460	
459	
461	
462	
463	
466	
464	
467	
465	
468	
469	
472	
470	
473	
471	
474	
475	
476	
477	
478	
479	
480	
481	
482	
483	
484	
485	
486	
487	
488	
489	
490	
491	
492	
493	
494	
495	

Shrink-fit Heater	MONO 3°	MONO CURVE	MONO Series	2PIECE type	UNO	HYPER VERSION	Z	STRAIGHT arbor	OTHERS	PERIPHERALS	Technical data
-------------------	---------	------------	-------------	-------------	-----	---------------	---	----------------	--------	-------------	----------------

φ 3**A63-SLSA3-95-M42****A63-SLSA3-125-M42****A63-SLSA3-155-M42****A63-SLSA3-120-M67****A63-SLSA3-150-M67****A63-SLSA3-180-M67****A63-SLSA3-150-M97****A63-SLSA3-180-M97****A63-SLSA3-210-M97****A63-SLRA3-75-M22****A63-SLRA3-105-M22****A63-SLRA3-135-M22****A63-SLRA3-95-M42****A63-SLRA3-125-M42****A63-SLRA3-155-M42****A63-SLRA3-120-M67****A63-SLRA3-150-M67****A63-SLRA3-180-M67****A63-SLRA3-150-M97****A63-SLRA3-180-M97****A63-SLRA3-210-M97**

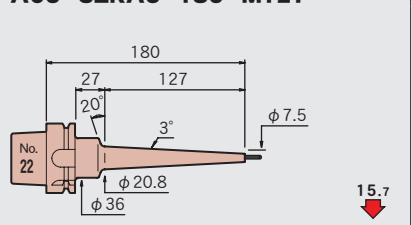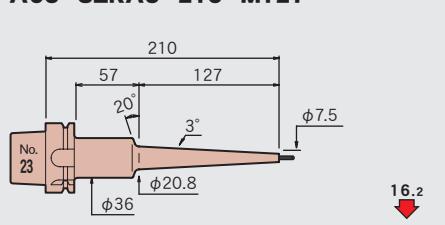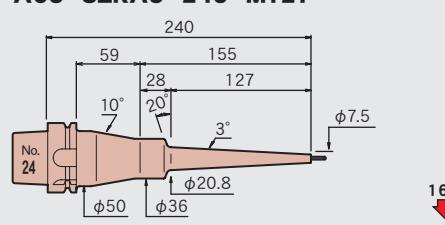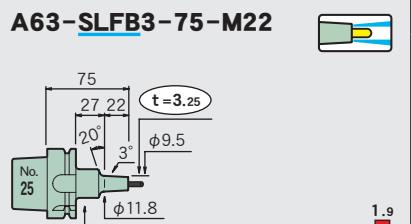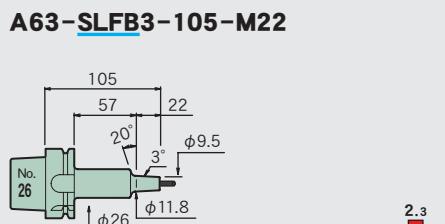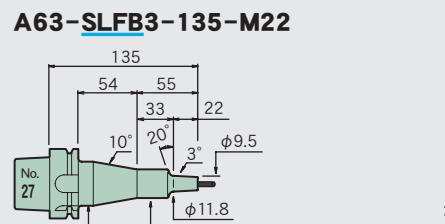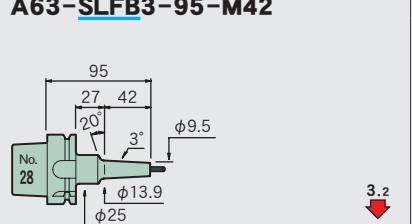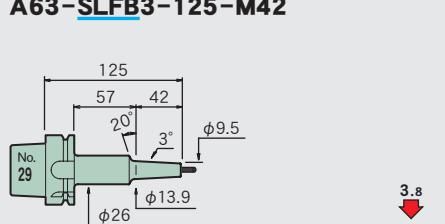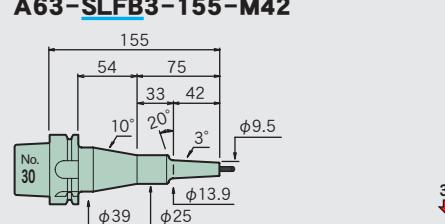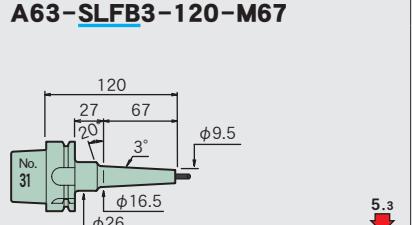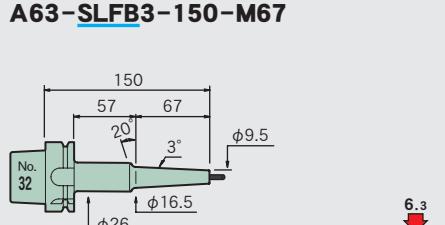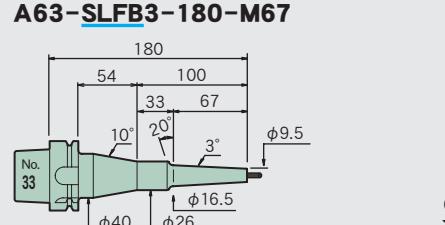A63-SLRA3-180-M127	A63-SLRA3-210-M127	A63-SLRA3-240-M127
		
15.7	16.2	16.3
A63-SLFB3-75-M22	A63-SLFB3-105-M22	A63-SLFB3-135-M22
		
1.9	2.3	2.3
A63-SLFB3-95-M42	A63-SLFB3-125-M42	A63-SLFB3-155-M42
		
3.2	3.8	3.9
A63-SLFB3-120-M67	A63-SLFB3-150-M67	A63-SLFB3-180-M67
		
5.3	6.3	6.3

Feature

Shrink-fit Heater

MONO 3°
MONO CURVE

MONO Series

2PIECE type

UNO

HYPER
VERSION

Z

STRAIGHT
arbor


OTHERS

PERIPHERALS


Technical
data

φ 4


A63-SLSA4-95-M42




A63-SLSA4-125-M42




A63-SLSA4-155-M42




A63-SLSA4-120-M67




A63-SLSA4-150-M67




A63-SLSA4-180-M67




A63-SLSA4-150-M97




A63-SLSA4-180-M97




A63-SLSA4-210-M97




A63-SLRA4-75-M22




A63-SLRA4-105-M22




A63-SLRA4-135-M22




A63-SLRA4-95-M42




A63-SLRA4-125-M42




A63-SLRA4-155-M42




A63-SLRA4-120-M67




A63-SLRA4-150-M67




A63-SLRA4-180-M67




A63-SLRA4-150-M97























A63-SLRA4-180-M97



A63-SLRA4-210-M97



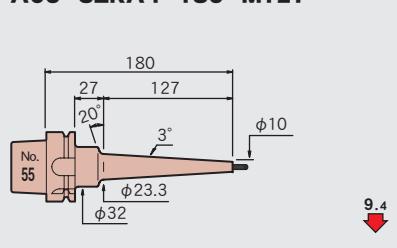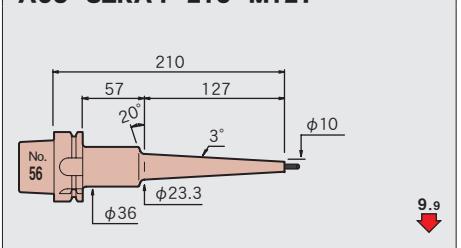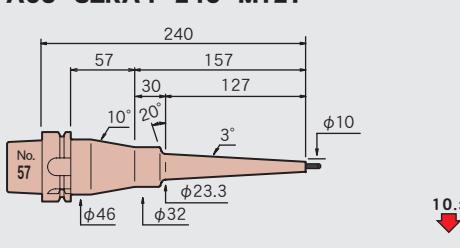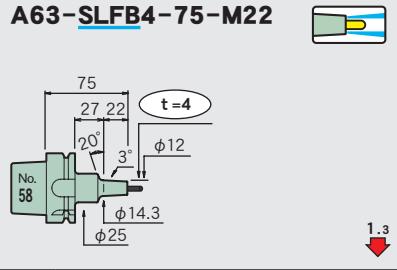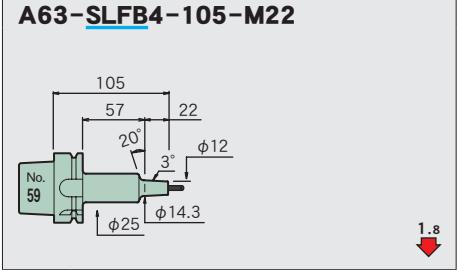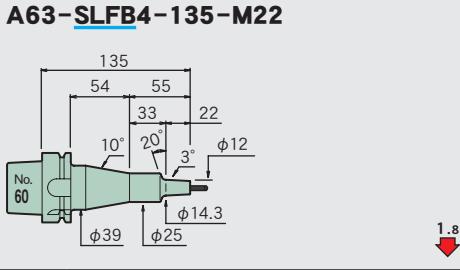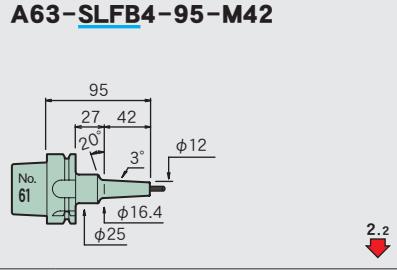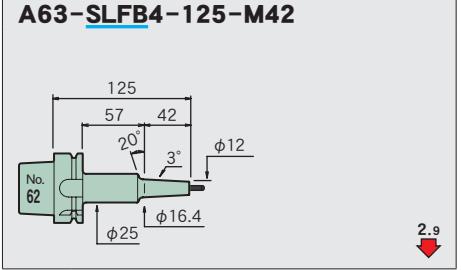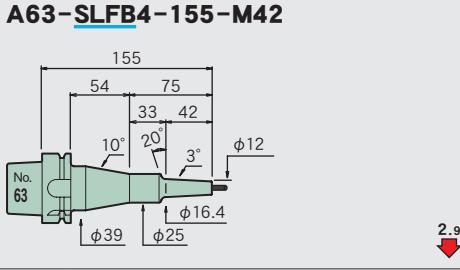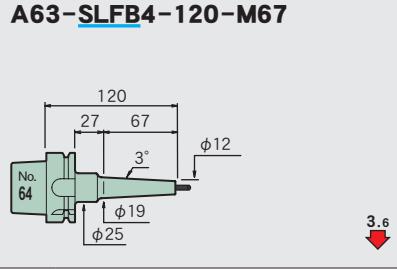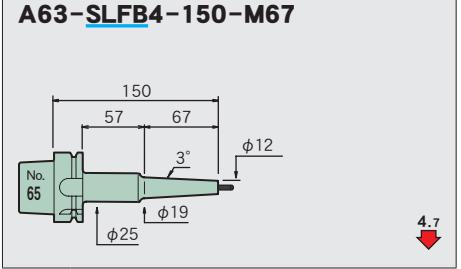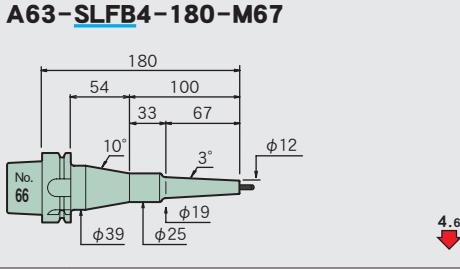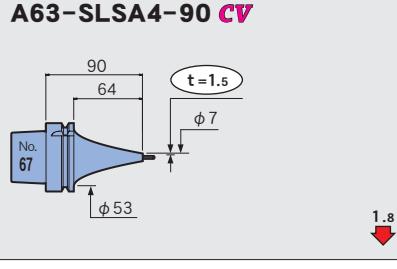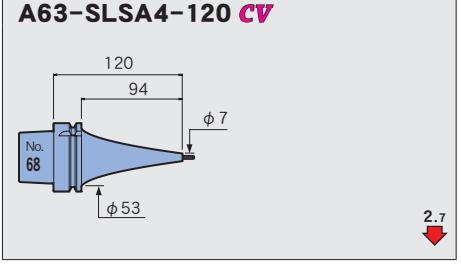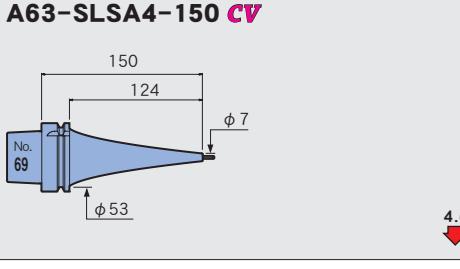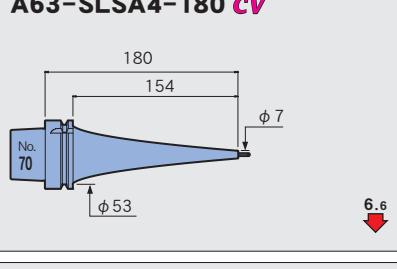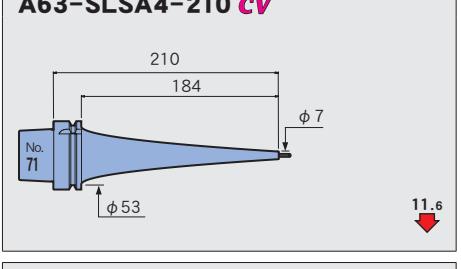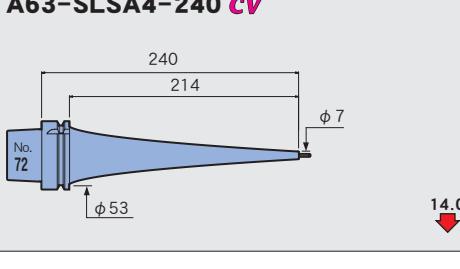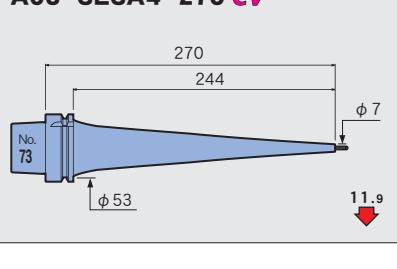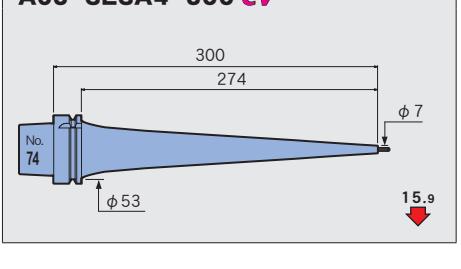A63-SLRA4-180-M127	A63-SLRA4-210-M127	A63-SLRA4-240-M127
		
A63-SLFB4-75-M22	A63-SLFB4-105-M22	A63-SLFB4-135-M22
		
A63-SLFB4-95-M42	A63-SLFB4-125-M42	A63-SLFB4-155-M42
		
A63-SLFB4-120-M67	A63-SLFB4-150-M67	A63-SLFB4-180-M67
		
A63-SLSA4-90 CV	A63-SLSA4-120 CV	A63-SLSA4-150 CV
		
A63-SLSA4-180 CV	A63-SLSA4-210 CV	A63-SLSA4-240 CV
		
A63-SLSA4-270 CV	A63-SLSA4-300 CV	
		

Feature

Shrink-fit Heater

MONO 3°
MONO CURVE

MONO Series

2PIECE type

UNO











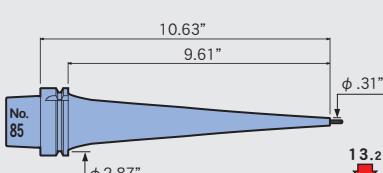
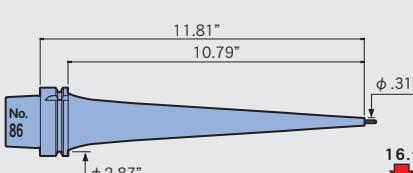



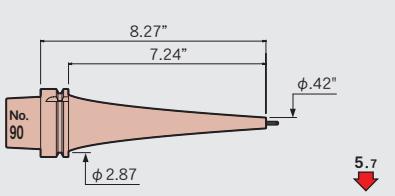
HYPER
VERSION






















Z

STRAIGHT
arbor

OTHERS

Technical
PERIPHERALS
data

A63-SLRA4-120 CV**A63-SLRA4-150 CV****A63-SLRA4-180 CV****A63-SLRA4-210 CV** **$\phi \frac{3}{16}$** **A63-SLSA3/16-90 CV****A63-SLSA3/16-120 CV****A63-SLSA3/16-150 CV****A63-SLSA3/16-180 CV****A63-SLSA3/16-210 CV****A63-SLSA3/16-240 CV****A63-SLSA3/16-270 CV****A63-SLSA3/16-300 CV****A63-SLRA3/16-120 CV****A63-SLRA3/16-150 CV****A63-SLRA3/16-180 CV****A63-SLRA3/16-210 CV**

Φ 6**A63-SLSA6-95-M42****A63-SLSA6-125-M42****A63-SLSA6-155-M42****A63-SLSA6-120-M67****A63-SLSA6-150-M67****A63-SLSA6-180-M67****A63-SLSA6-150-M97****A63-SLSA6-180-M97****A63-SLSA6-210-M97****A63-SLSB6-95-M42****A63-SLSB6-125-M42****A63-SLSB6-155-M42****A63-SLSB6-120-M67****A63-SLSB6-150-M67****A63-SLSB6-180-M67****A63-SLSB6-150-M97****A63-SLSB6-180-M97****A63-SLSB6-210-M97****A63-SLSB6-180-M127****A63-SLSB6-210-M127****A63-SLSB6-240-M127**

Feature

Shrink-fit Heater
MONO 3°
MONO CURVE

MONO Series

2PIECE type

UNO

HYPER VERSION

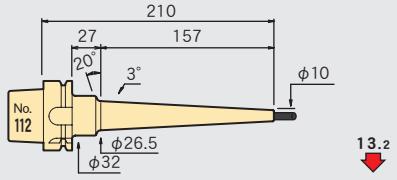
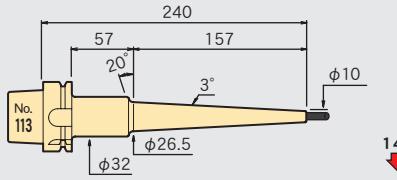
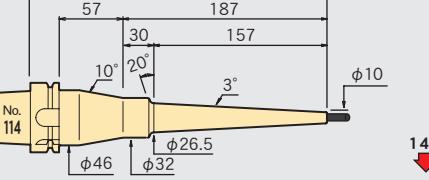
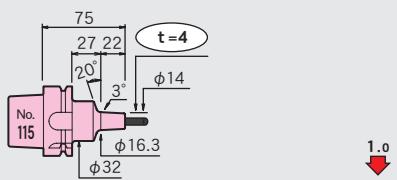
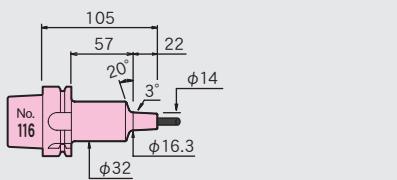
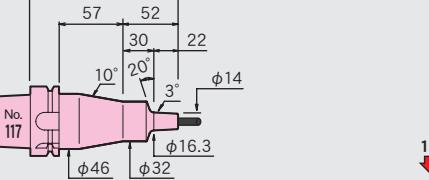
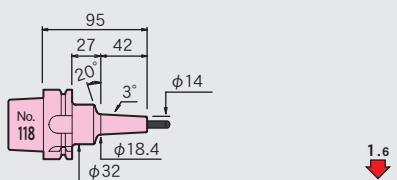
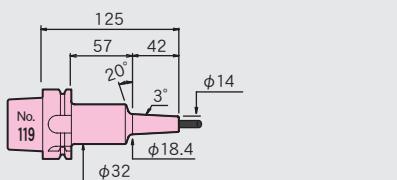
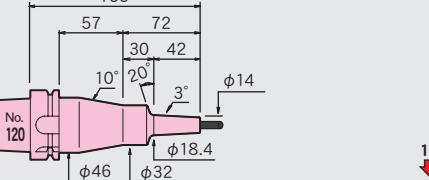
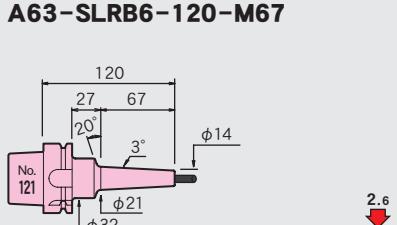
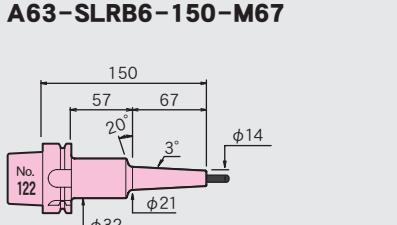
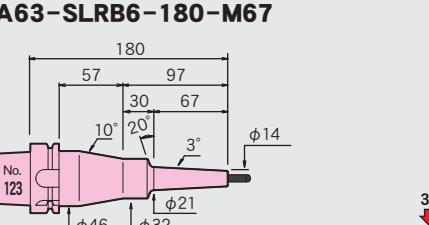
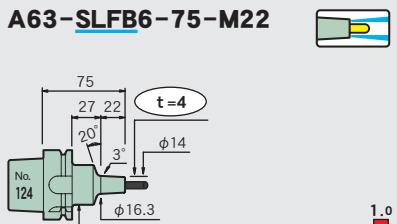
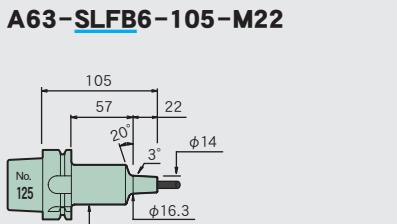
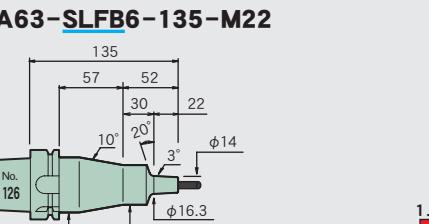
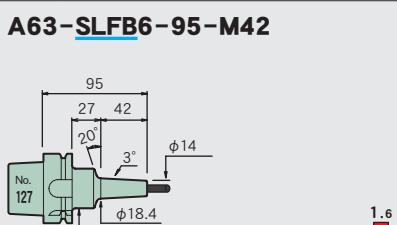
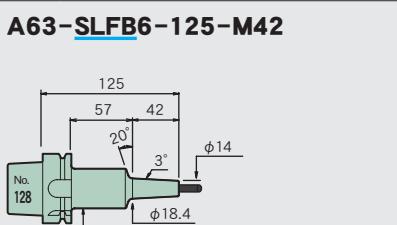
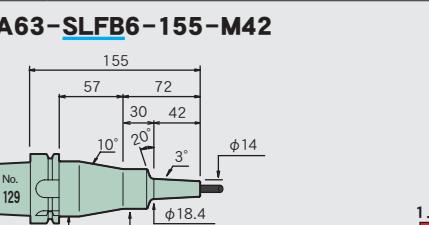
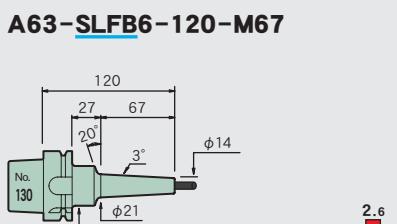
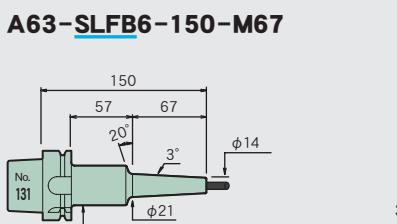
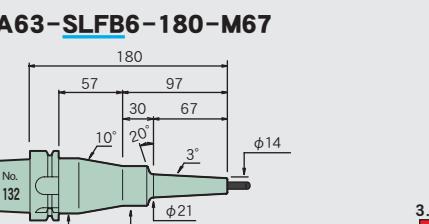
Z



















STRAIGHT arbor

OTHERS

PERIPHERALS

Technical data

A63-SLSB6-210-M157	A63-SLSB6-240-M157	A63-SLSB6-270-M157
		
13.2	14.6	14.6
A63-SLRB6-75-M22	A63-SLRB6-105-M22	A63-SLRB6-135-M22
		
1.0	1.2	1.2
A63-SLRB6-95-M42	A63-SLRB6-125-M42	A63-SLRB6-155-M42
		
1.6	1.9	1.9
A63-SLRB6-120-M67	A63-SLRB6-150-M67	A63-SLRB6-180-M67
		
2.6	3.0	3.1
A63-SLFB6-75-M22	A63-SLFB6-105-M22	A63-SLFB6-135-M22
		
1.0	1.2	1.2
A63-SLFB6-95-M42	A63-SLFB6-125-M42	A63-SLFB6-155-M42
		
1.6	1.9	1.9
A63-SLFB6-120-M67	A63-SLFB6-150-M67	A63-SLFB6-180-M67
		
2.6	3.0	3.1

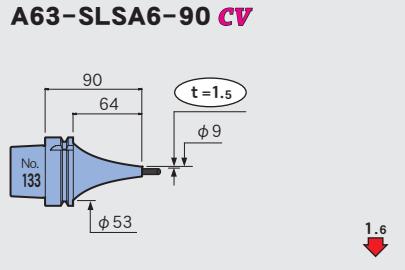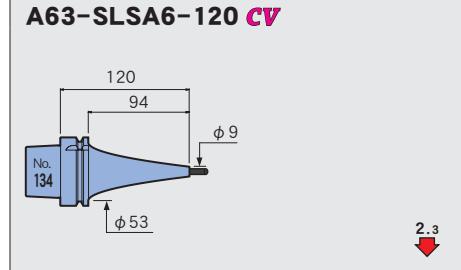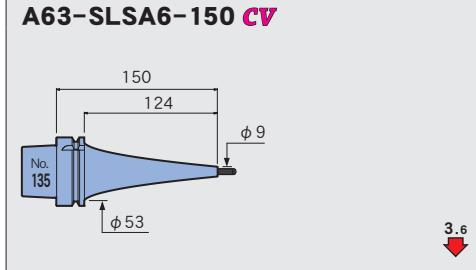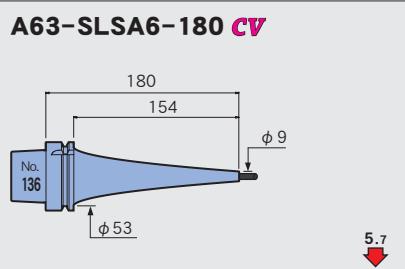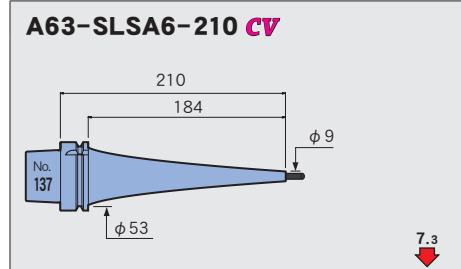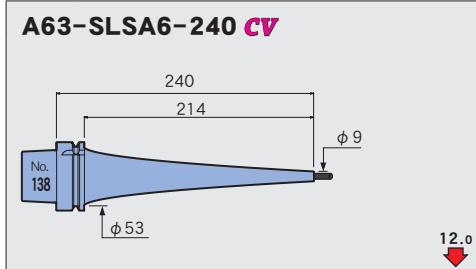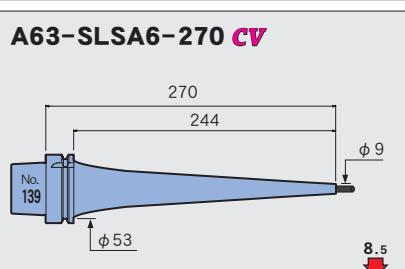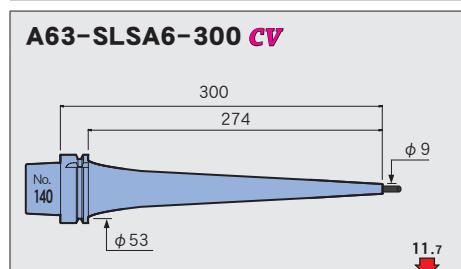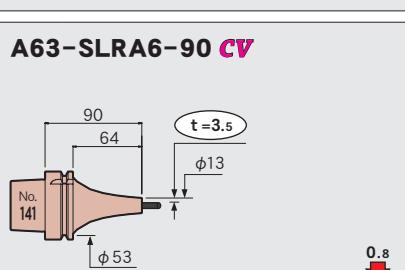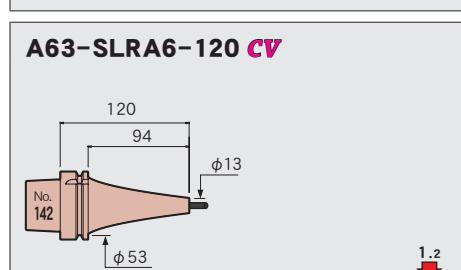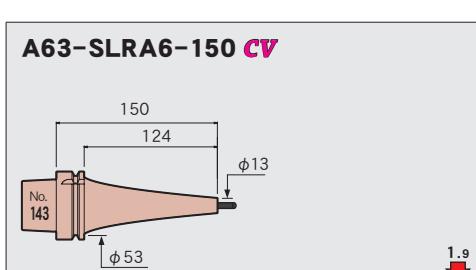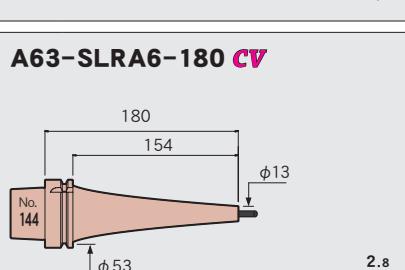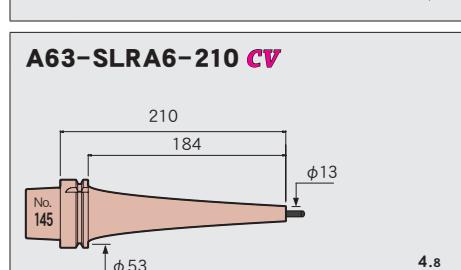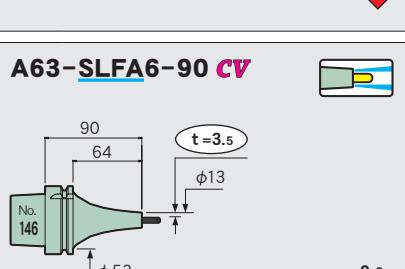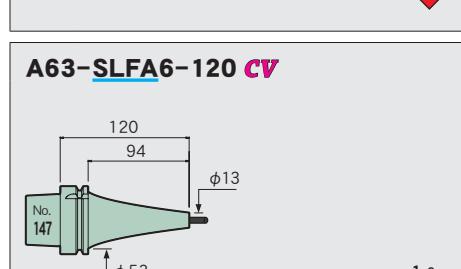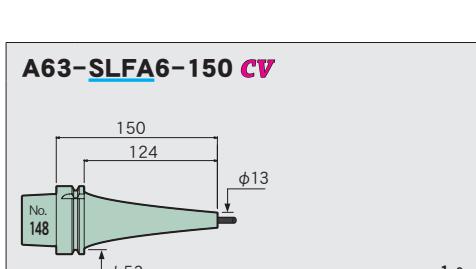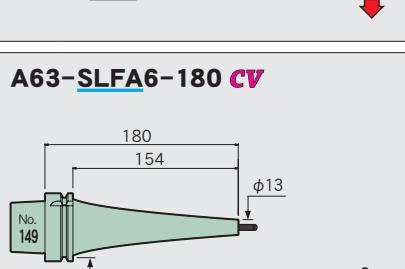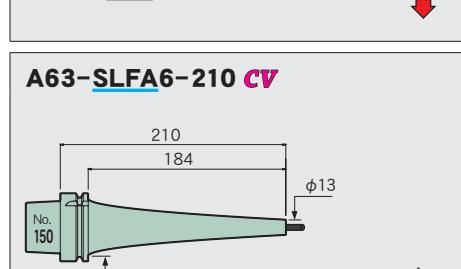A63-SLSA6-90 CV	A63-SLSA6-120 CV	A63-SLSA6-150 CV
		
A63-SLSA6-180 CV	A63-SLSA6-210 CV	A63-SLSA6-240 CV
		
A63-SLSA6-270 CV	A63-SLSA6-300 CV	
		
A63-SLRA6-90 CV	A63-SLRA6-120 CV	A63-SLRA6-150 CV
		
A63-SLRA6-180 CV	A63-SLRA6-210 CV	
		
A63-SLFA6-90 CV	A63-SLFA6-120 CV	A63-SLFA6-150 CV
		
A63-SLFA6-180 CV	A63-SLFA6-210 CV	
		

Feature

Shrink-fit Heater

MONO 3°
MONO CURVE

MONO Series

2PIECE type

UNO



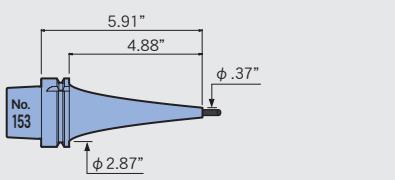


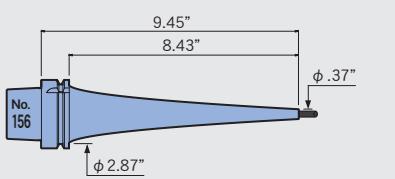
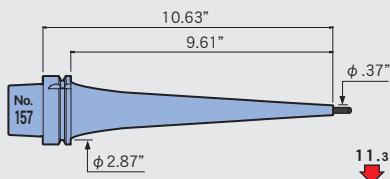
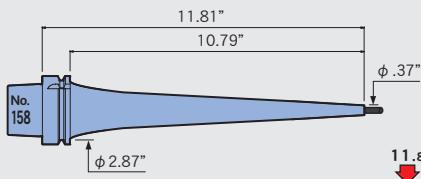
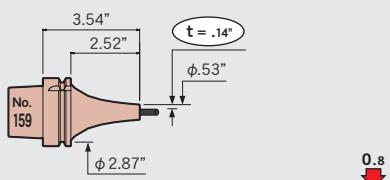

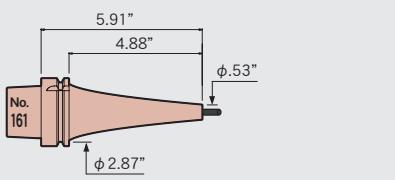


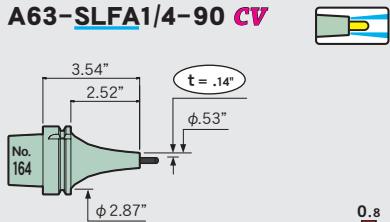

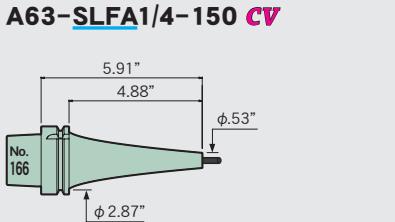


HYPER
VERSION






















Z

STRAIGHT
arbor

OTHERS



















PERIPHERALS
Technical data






















$\phi \frac{1}{4}$ **A63-SLSA1/4-90 CV****A63-SLSA1/4-120 CV****A63-SLSA1/4-150 CV****A63-SLSA1/4-180 CV****A63-SLSA1/4-210 CV****A63-SLSA1/4-240 CV****A63-SLSA1/4-270 CV****A63-SLSA1/4-300 CV****A63-SLRA1/4-90 CV****A63-SLRA1/4-120 CV****A63-SLRA1/4-150 CV****A63-SLRA1/4-180 CV****A63-SLRA1/4-210 CV****A63-SLFA1/4-90 CV****A63-SLFA1/4-120 CV****A63-SLFA1/4-150 CV****A63-SLFA1/4-180 CV****A63-SLFA1/4-210 CV**

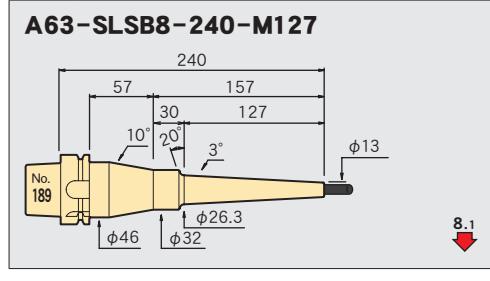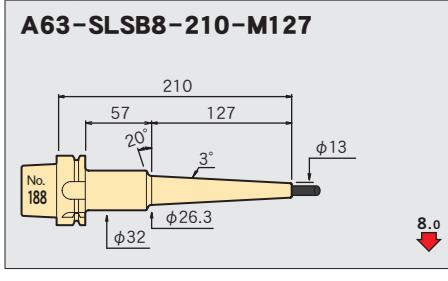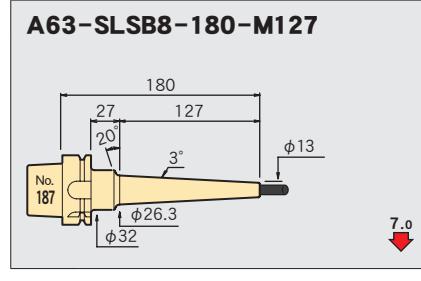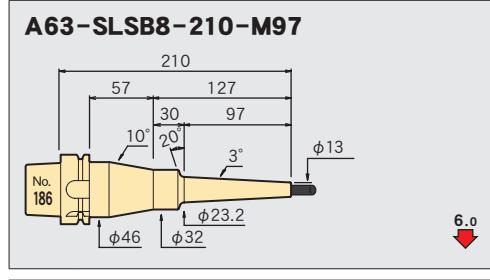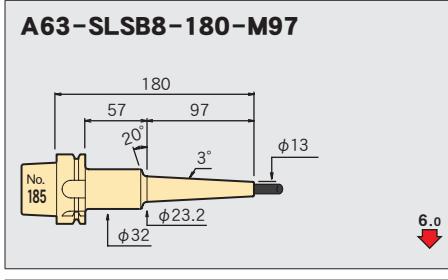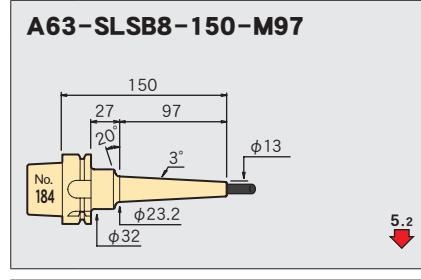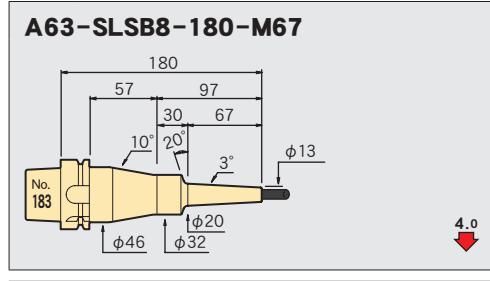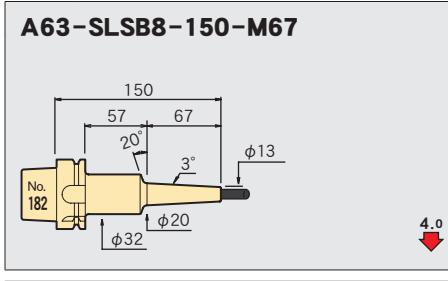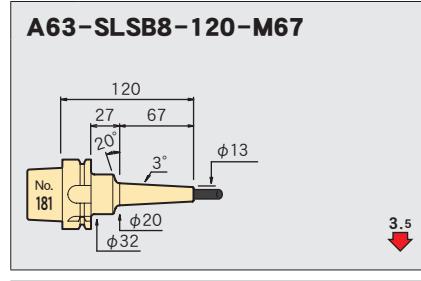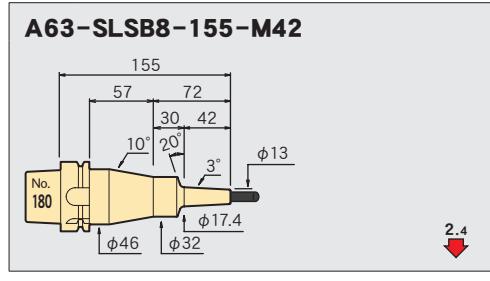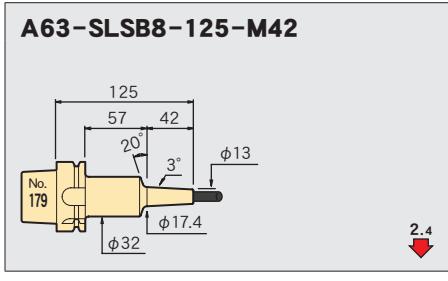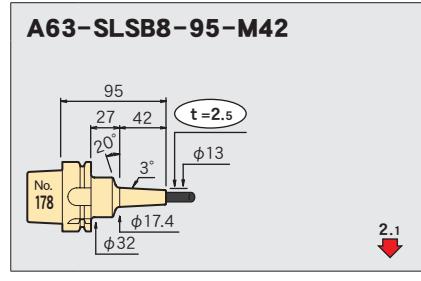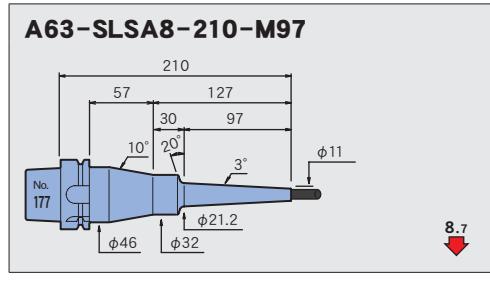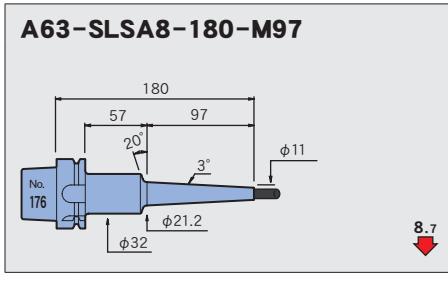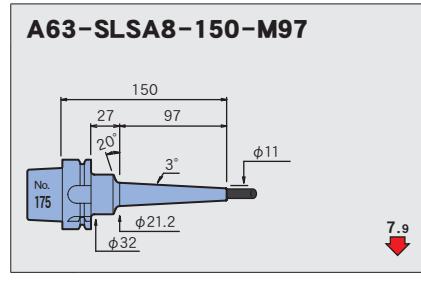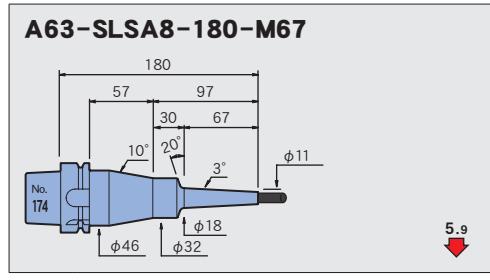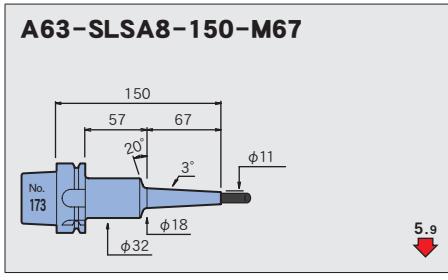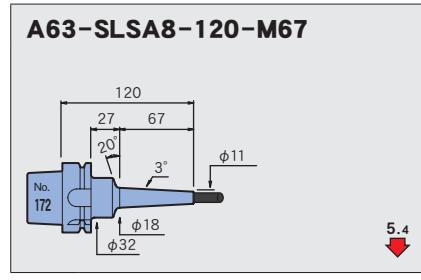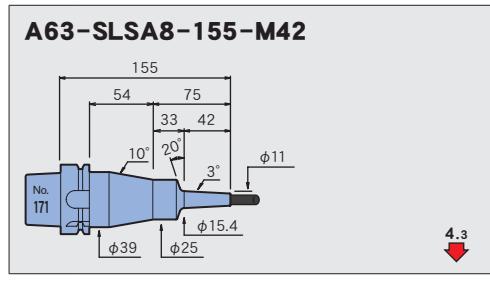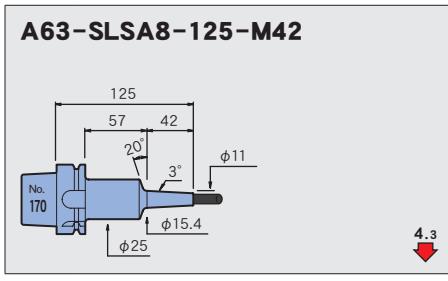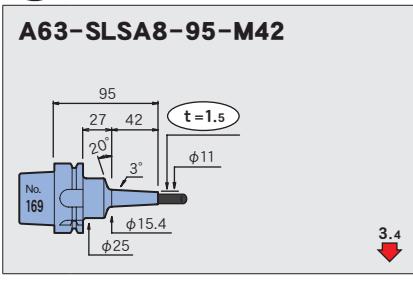Φ8



















A63-SLSB8-210-M157	A63-SLSB8-240-M157	A63-SLSB8-270-M157
A63-SLRB8-75-M22	A63-SLRB8-105-M22	A63-SLRB8-135-M22
A63-SLRB8-95-M42	A63-SLRB8-125-M42	A63-SLRB8-155-M42
A63-SLRB8-120-M67	A63-SLRB8-150-M67	A63-SLRB8-180-M67
A63-SLFB8-75-M22	A63-SLFB8-105-M22	A63-SLFB8-135-M22
A63-SLFB8-95-M42	A63-SLFB8-125-M42	A63-SLFB8-155-M42
A63-SLFB8-120-M67	A63-SLFB8-150-M67	A63-SLFB8-180-M67

		Feature	
A63-SLSA8-90 CV		A63-SLSA8-120 CV	
	A63-SLSA8-150 CV		A63-SLSA8-180 CV
	A63-SLSA8-210 CV		A63-SLSA8-240 CV
	A63-SLSA8-270 CV		A63-SLSA8-300 CV
	A63-SLRA8-90 CV		A63-SLRA8-120 CV
	A63-SLRA8-150 CV		A63-SLRA8-180 CV
	A63-SLRA8-210 CV		
	A63-SLFA8-90 CV		A63-SLFA8-120 CV
	A63-SLFA8-150 CV		A63-SLFA8-180 CV
	A63-SLFA8-210 CV		

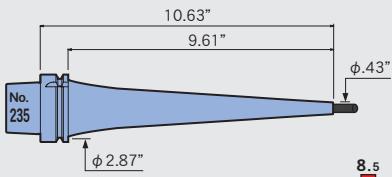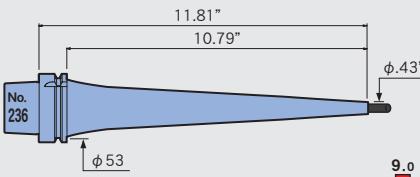$\phi \frac{5}{16}$ **A63-SLSA5/16-90 CV****A63-SLSA5/16-120 CV****A63-SLSA5/16-150 CV****A63-SLSA5/16-180 CV****A63-SLSA5/16-210 CV****A63-SLSA5/16-240 CV****A63-SLSA5/16-270 CV****A63-SLSA5/16-300 CV****A63-SLRA5/16-90 CV****A63-SLRA5/16-120 CV****A63-SLRA5/16-150 CV****A63-SLRA5/16-180 CV****A63-SLRA5/16-210 CV****A63-SLFA5/16-90 CV****A63-SLFA5/16-120 CV****A63-SLFA5/16-150 CV****A63-SLFA5/16-180 CV****A63-SLFA5/16-210 CV**

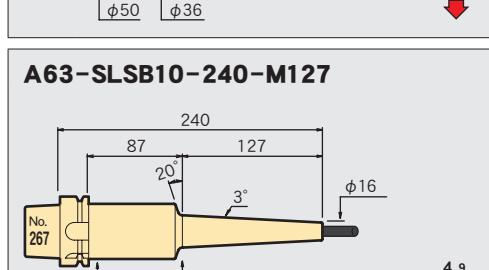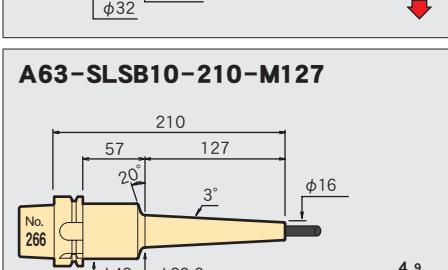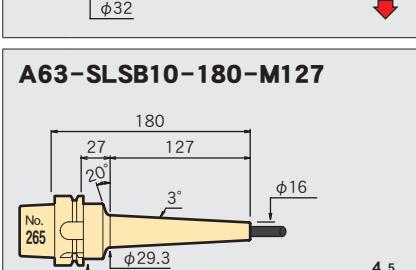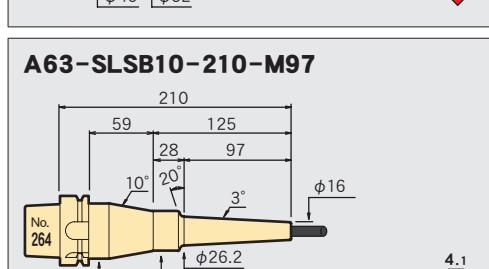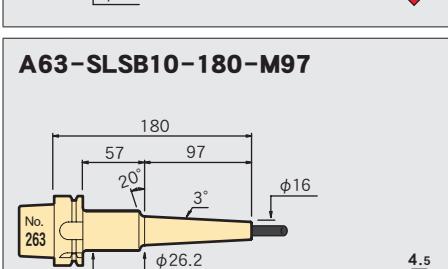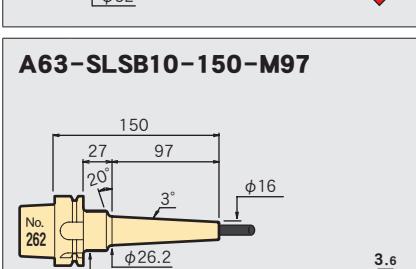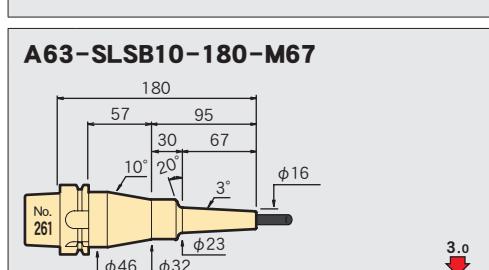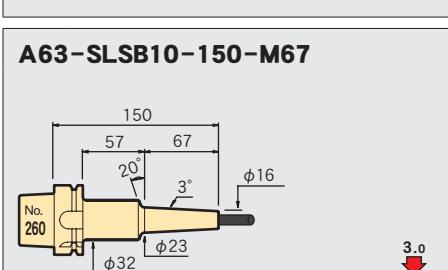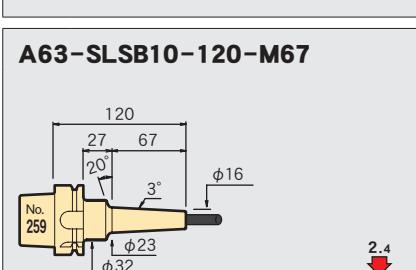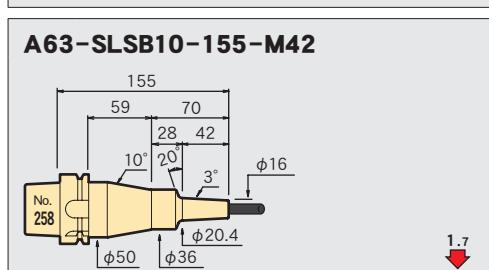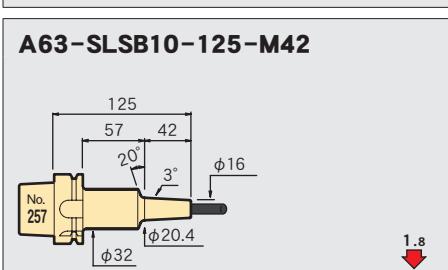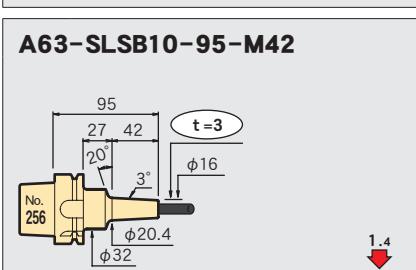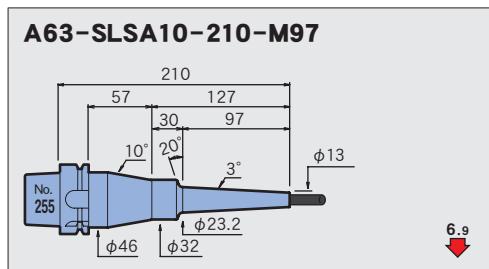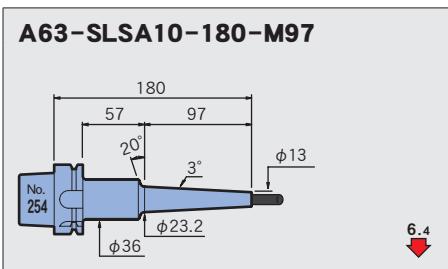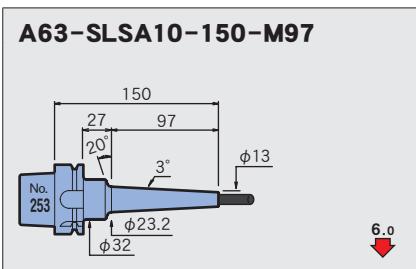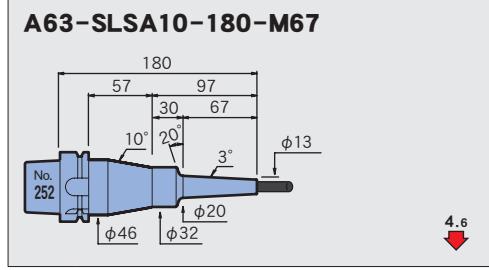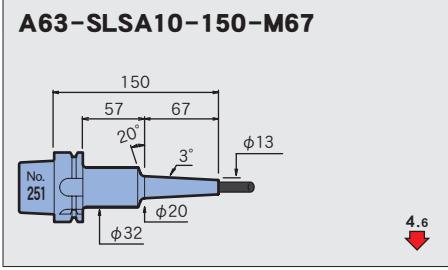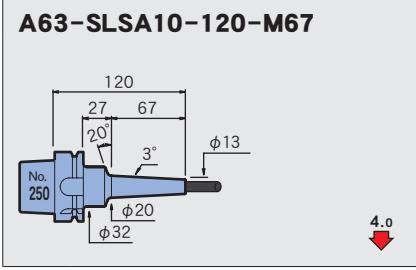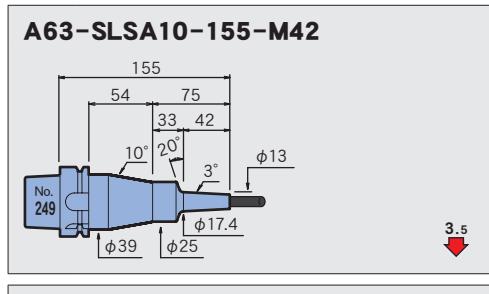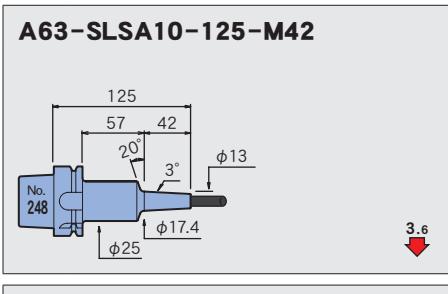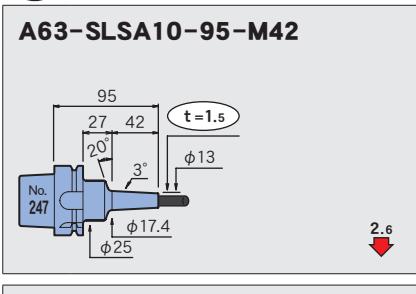Φ 10

A63-SLSB10-210-M157	A63-SLSB10-240-M157	A63-SLSB10-270-M157
5.6	5.8	6.2
A63-SLRB10-75-M22	A63-SLRB10-105-M22	A63-SLRB10-135-M22
0.6	0.8	0.9
A63-SLRB10-95-M42	A63-SLRB10-125-M42	A63-SLRB10-155-M42
0.8	1.2	1.2
A63-SLRB10-120-M67	A63-SLRB10-150-M67	A63-SLRB10-180-M67
1.1	1.3	1.3
A63-SLFB10-75-M22	A63-SLFB10-105-M22	A63-SLFB10-135-M22
0.6	0.8	0.9
A63-SLFB10-95-M42	A63-SLFB10-125-M42	A63-SLFB10-155-M42
0.8	1.2	1.2
A63-SLFB10-120-M67	A63-SLFB10-150-M67	A63-SLFB10-180-M67
1.1	1.3	1.3

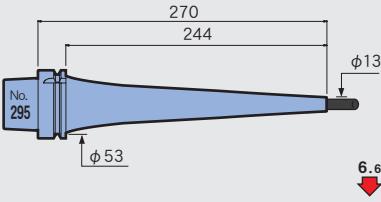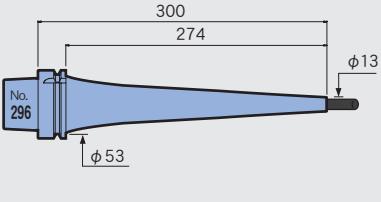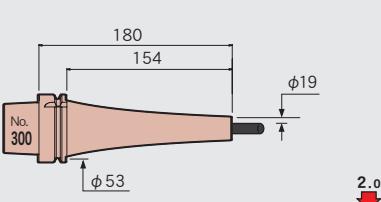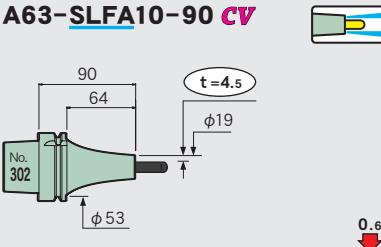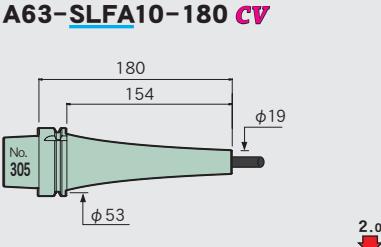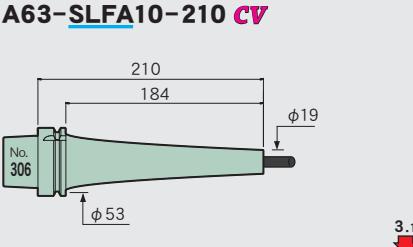A63-SLSA10-90 CV	A63-SLSA10-120 CV	A63-SLSA10-150 CV
 No. 289 90 64 $t = 1.5$ $\phi 13$ $\phi 53$ 1.3	 No. 290 120 94 $\phi 13$ $\phi 53$ 1.3	 No. 291 150 124 $\phi 13$ $\phi 53$ 2.2
A63-SLSA10-180 CV	A63-SLSA10-210 CV	A63-SLSA10-240 CV
 No. 292 180 154 $\phi 13$ $\phi 53$ 3.4	 No. 293 210 184 $\phi 13$ $\phi 53$ 6.0	 No. 294 240 214 $\phi 13$ $\phi 53$ 5.8
A63-SLSA10-270 CV	A63-SLSA10-300 CV	
 No. 295 270 244 $\phi 13$ $\phi 53$ 6.6	 No. 296 300 274 $\phi 13$ $\phi 53$ 8.6	
A63-SLRA10-90 CV	A63-SLRA10-120 CV	A63-SLRA10-150 CV
 No. 297 90 64 $t = 4.5$ $\phi 19$ $\phi 53$ 0.6	 No. 298 120 94 $\phi 19$ $\phi 53$ 0.9	 No. 299 150 124 $\phi 19$ $\phi 53$ 1.4
A63-SLRA10-180 CV	A63-SLRA10-210 CV	
 No. 300 180 154 $\phi 19$ $\phi 53$ 2.0	 No. 301 210 184 $\phi 19$ $\phi 53$ 3.1	
A63-SLFA10-90 CV	A63-SLFA10-120 CV	A63-SLFA10-150 CV
 No. 302 90 64 $t = 4.5$ $\phi 19$ $\phi 53$ 0.6	 No. 303 120 94 $\phi 19$ $\phi 53$ 0.9	 No. 304 150 124 $\phi 19$ $\phi 53$ 1.4
A63-SLFA10-180 CV	A63-SLFA10-210 CV	
 No. 305 180 154 $\phi 19$ $\phi 53$ 2.0	 No. 306 210 184 $\phi 19$ $\phi 53$ 3.1	

Feature

Shrink-fit Heater

MONO 3°
MONO CURVE

MONO Series

2PIECE type

UNO

HYPER
VERSION

Z

STRAIGHT
arbor

OTHERS

PERIPHERALS
Technical data

Φ 3/8

Feature

Shrink-fit Heater

MONO 3°
MONO CURVE

MONO Series

2PIECE type

UNO







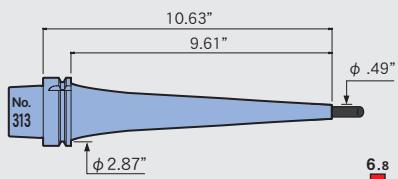
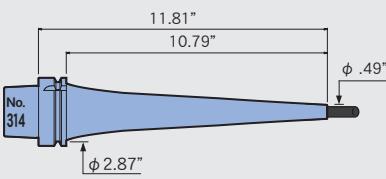
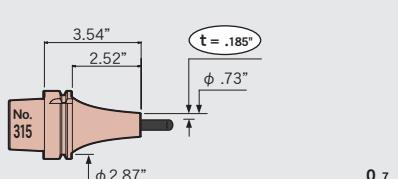


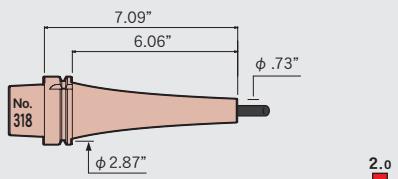

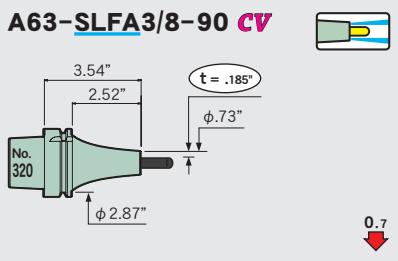


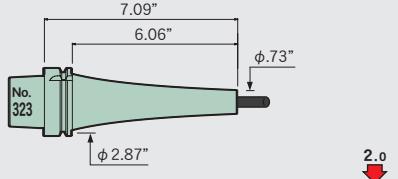

HYPER
VERSION

Z






















STRAIGHT
arbor

OTHERS

PERIPHERALS

Technical
data**A63-SLSA3/8-90 CV****A63-SLSA3/8-120 CV****A63-SLSA3/8-150 CV****A63-SLSA3/8-180 CV****A63-SLSA3/8-210 CV****A63-SLSA3/8-240 CV****A63-SLSA3/8-270 CV****A63-SLSA3/8-300 CV****A63-SLRA3/8-90 CV****A63-SLRA3/8-120 CV****A63-SLRA3/8-150 CV****A63-SLRA3/8-180 CV****A63-SLRA3/8-210 CV****A63-SLFA3/8-90 CV****A63-SLFA3/8-120 CV****A63-SLFA3/8-150 CV****A63-SLFA3/8-180 CV****A63-SLFA3/8-210 CV**

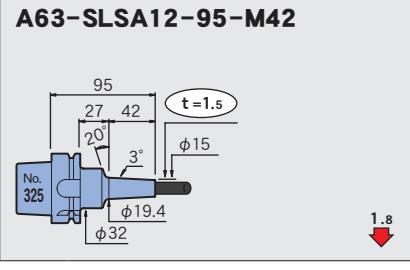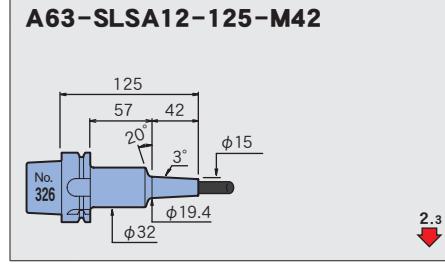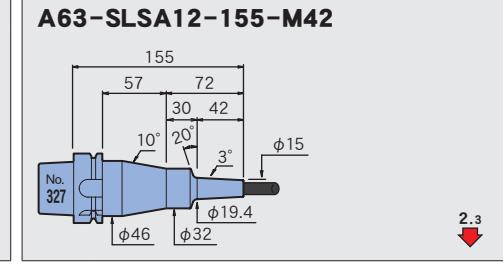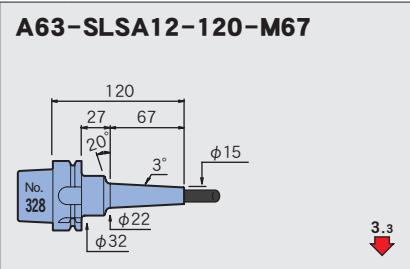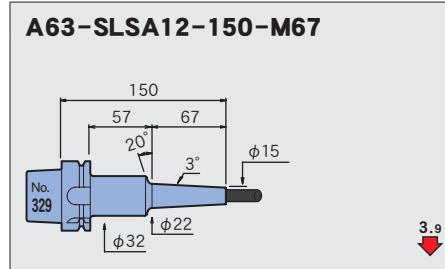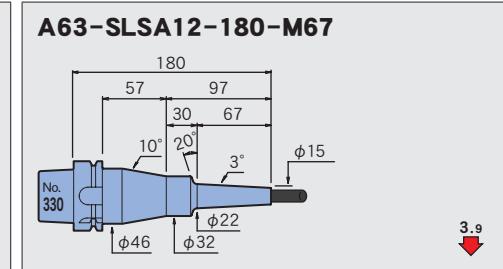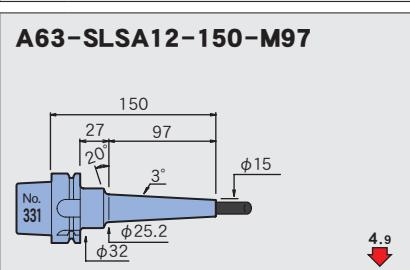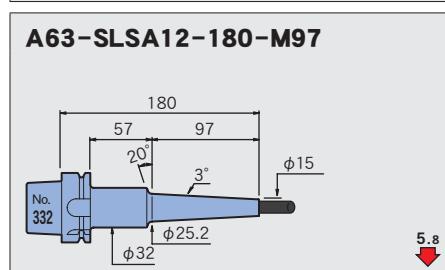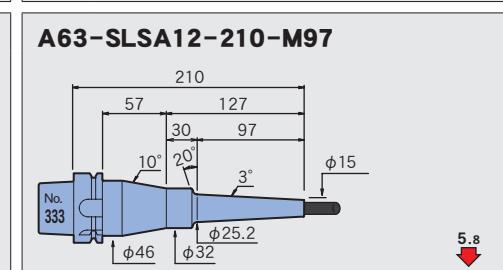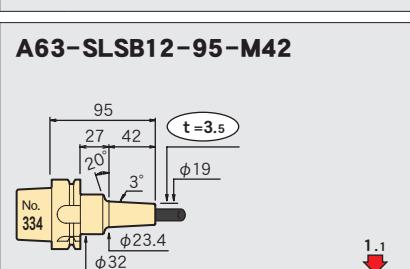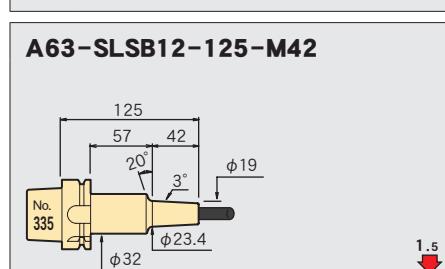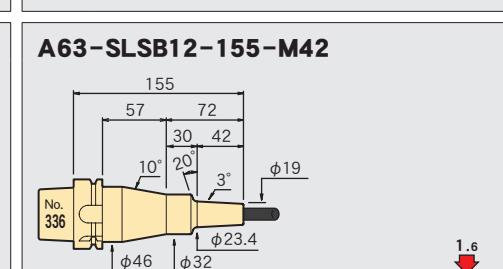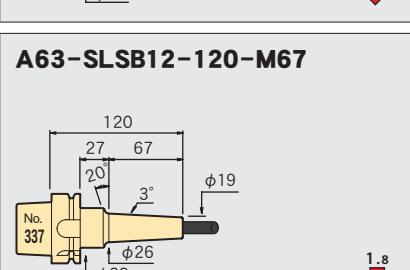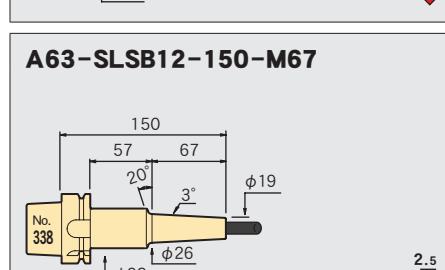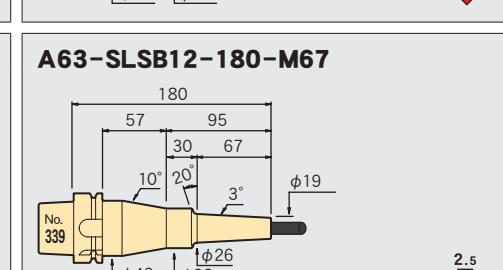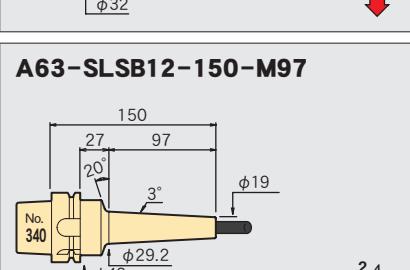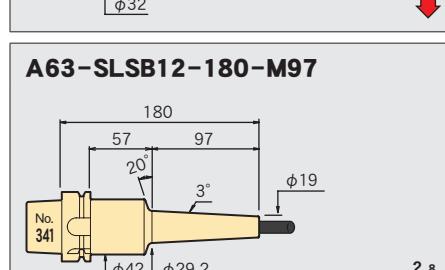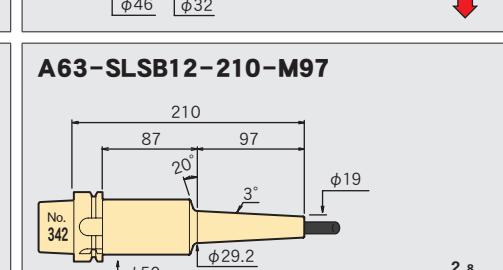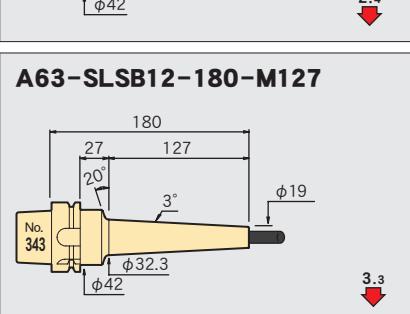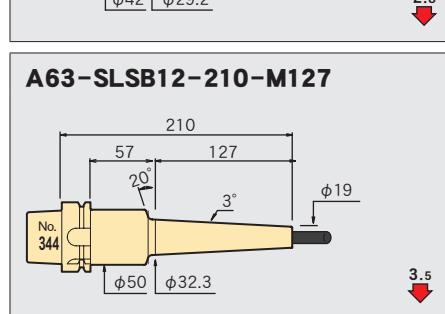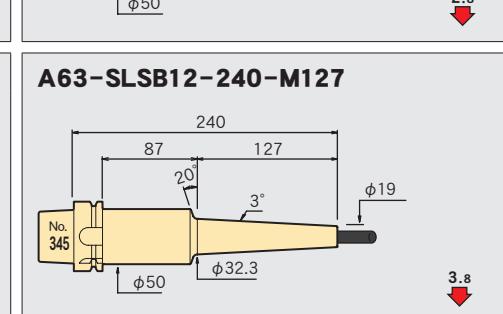Φ 12

A63-SLSA12-95-M42	A63-SLSA12-125-M42	A63-SLSA12-155-M42
		
A63-SLSA12-120-M67	A63-SLSA12-150-M67	A63-SLSA12-180-M67
		
A63-SLSA12-150-M97	A63-SLSA12-180-M97	A63-SLSA12-210-M97
		
A63-SLSB12-95-M42	A63-SLSB12-125-M42	A63-SLSB12-155-M42
		
A63-SLSB12-120-M67	A63-SLSB12-150-M67	A63-SLSB12-180-M67
		
A63-SLSB12-150-M97	A63-SLSB12-180-M97	A63-SLSB12-210-M97
		
A63-SLSB12-180-M127	A63-SLSB12-210-M127	A63-SLSB12-240-M127
		

Feature

Shrink-fit Heater

MONO^{3°}
MONO CURVE

MONO Series

2PIECE type

UNO

HYPER VERSION

Z


STRAIGHT arbor

OTHERS


PERIPHERALS

Technical data


A63-SLSB12-210-M157




A63-SLSB12-240-M157

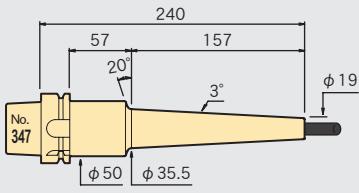


A63-SLSB12-270-M157

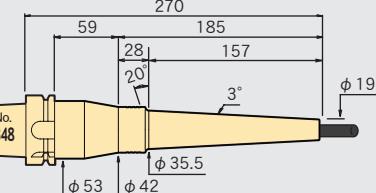


A63-SLRB12-75-M22




A63-SLRB12-105-M22




A63-SLRB12-135-M22




A63-SLRB12-95-M42




A63-SLRB12-125-M42




A63-SLRB12-155-M42




A63-SLRB12-120-M67




A63-SLRB12-150-M67




A63-SLRB12-180-M67




A63-SLFB12-75-M22




A63-SLFB12-105-M22




A63-SLFB12-135-M22




A63-SLFB12-95-M42




A63-SLFB12-125-M42




A63-SLFB12-155-M42




A63-SLFB12-120-M67




















A63-SLFB12-150-M67



A63-SLFB12-180-M67



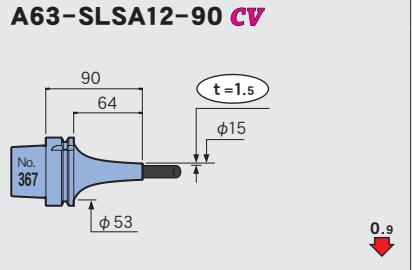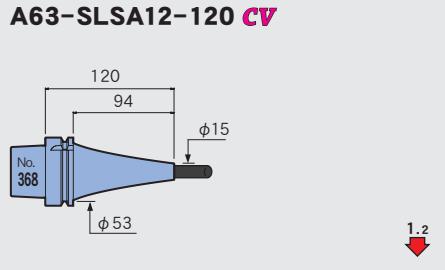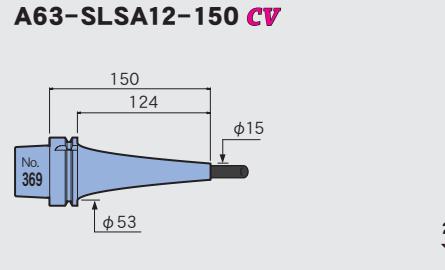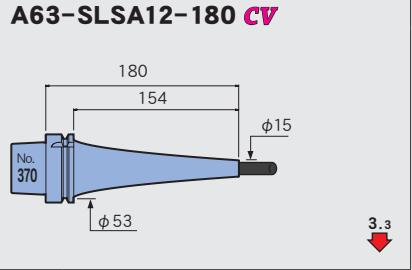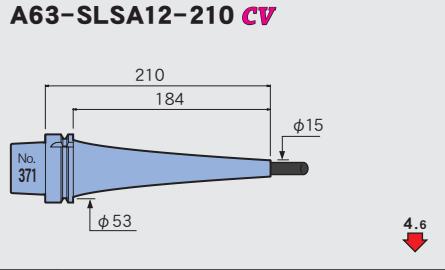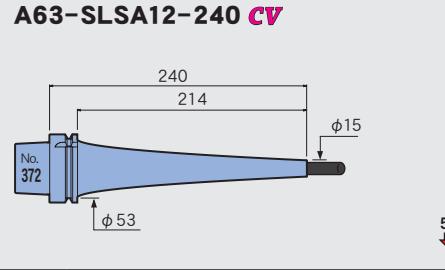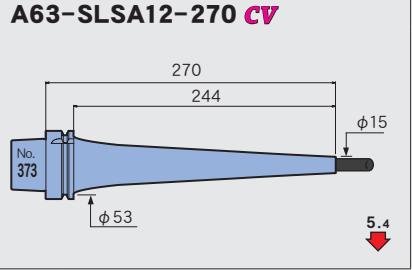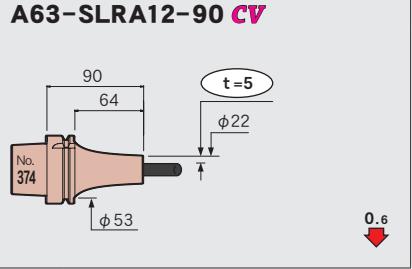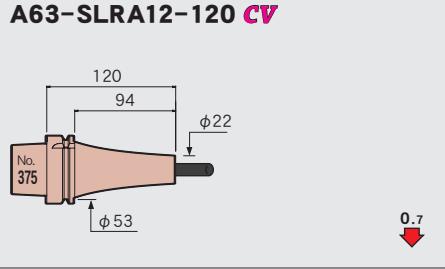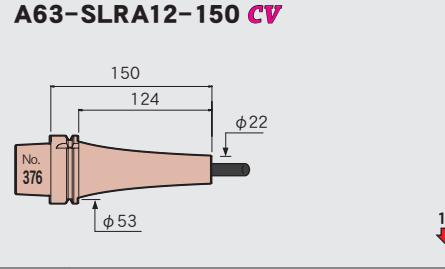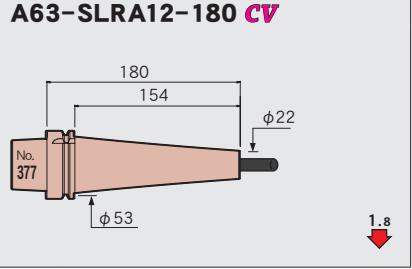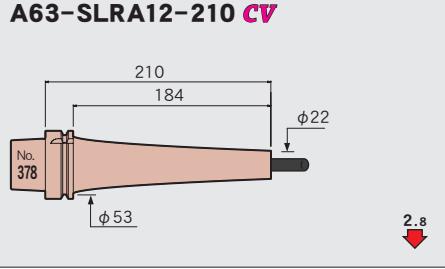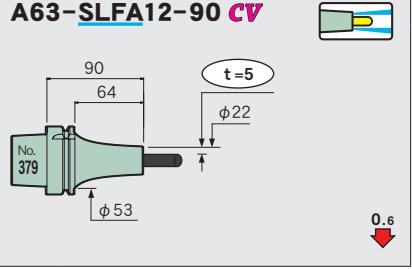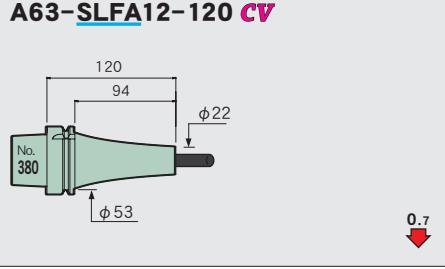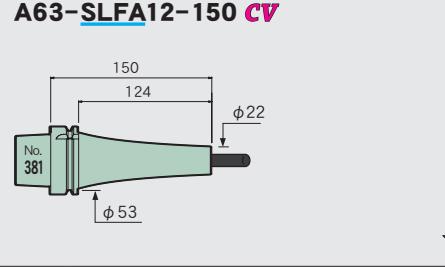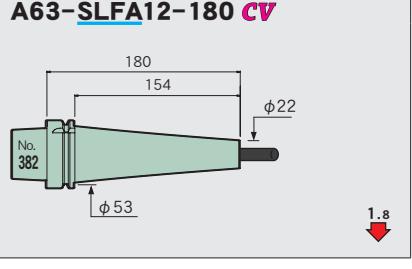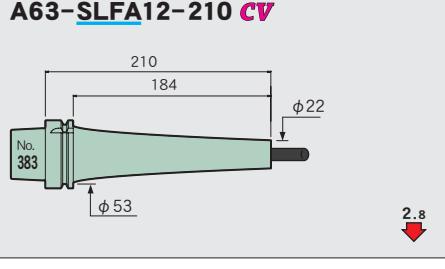A63-SLSA12-90 CV	A63-SLSA12-120 CV	A63-SLSA12-150 CV
		
A63-SLSA12-180 CV	A63-SLSA12-210 CV	A63-SLSA12-240 CV
		
A63-SLSA12-270 CV		
		
A63-SLRA12-90 CV	A63-SLRA12-120 CV	A63-SLRA12-150 CV
		
A63-SLRA12-180 CV	A63-SLRA12-210 CV	
		
A63-SLFA12-90 CV	A63-SLFA12-120 CV	A63-SLFA12-150 CV
		
A63-SLFA12-180 CV	A63-SLFA12-210 CV	
		

Feature

Shrink-fit Heater

MONO 3°
MONO CURVE

MONO Series

2PIECE type

UNO

HYPER
VERSION


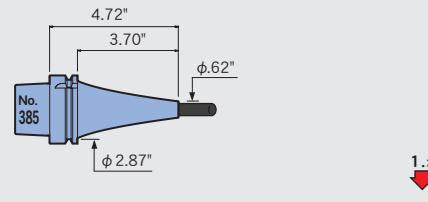
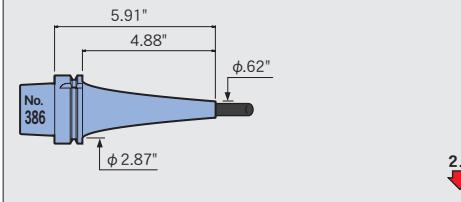

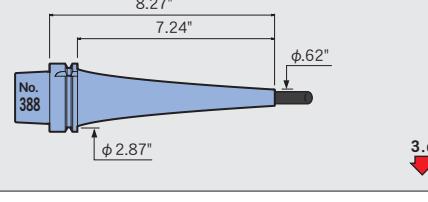
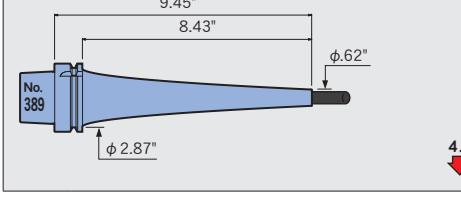


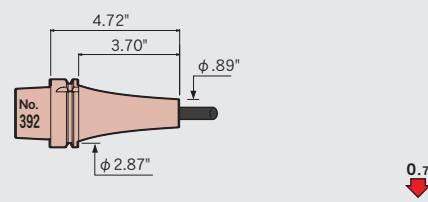
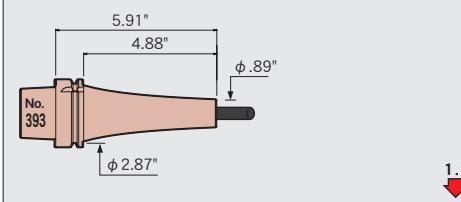

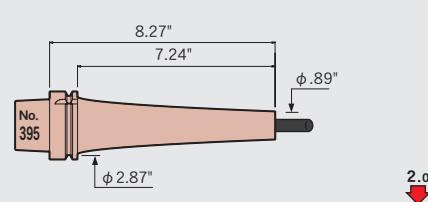

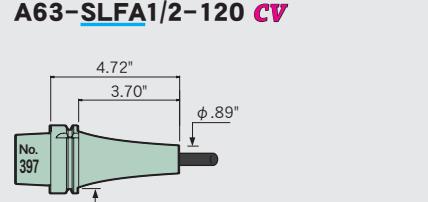
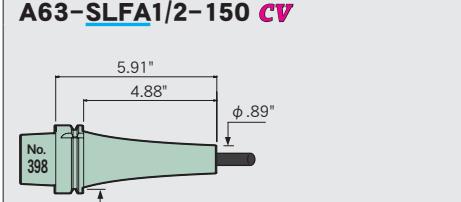

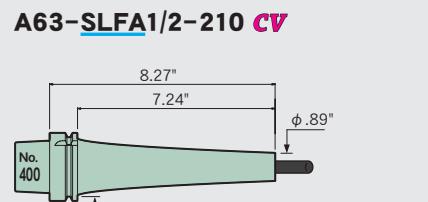
Z

STRAIGHT
arbor






















OTHERS

Technical
PERIPHERALS



















$\phi \frac{1}{2}$








A63-SLSA1/2-90 CV	A63-SLSA1/2-120 CV	A63-SLSA1/2-150 CV
 No. 384 3.54" 2.52" $t = .06"$ $\phi .62"$ $\phi 2.87"$ 0.8	 No. 385 4.72" 3.70" $\phi .62"$ $\phi 2.87"$ 1.2	 No. 386 5.91" 4.88" $\phi .62"$ $\phi 2.87"$ 2.4
A63-SLSA1/2-180 CV	A63-SLSA1/2-210 CV	A63-SLSA1/2-240 CV
 No. 387 7.09" 6.06" $\phi .62"$ $\phi 2.87"$ 3.4	 No. 388 8.27" 7.24" $\phi .62"$ $\phi 2.87"$ 3.6	 No. 389 9.45" 8.43" $\phi .62"$ $\phi 2.87"$ 4.3
A63-SLSA1/2-270 CV		
 No. 390 10.63" 9.61" $\phi .62"$ $\phi 2.87"$ 5.1		
A63-SLRA1/2-90 CV	A63-SLRA1/2-120 CV	A63-SLRA1/2-150 CV
 No. 391 3.54" 2.52" $t = .20"$ $\phi .89"$ $\phi 2.87"$ 0.5	 No. 392 4.72" 3.70" $\phi .89"$ $\phi 2.87"$ 0.7	 No. 393 5.91" 4.88" $\phi .89"$ $\phi 2.87"$ 1.1
A63-SLRA1/2-180 CV	A63-SLRA1/2-210 CV	
 No. 394 7.09" 6.06" $\phi .89"$ $\phi 2.87"$ 1.9	 No. 395 8.27" 7.24" $\phi .89"$ $\phi 2.87"$ 2.0	
A63-SLFA1/2-90 CV	A63-SLFA1/2-120 CV	A63-SLFA1/2-150 CV
 No. 396 3.54" 2.52" $t = .20"$ $\phi .89"$ $\phi 2.87"$ 0.5	 No. 397 4.72" 3.70" $\phi .89"$ $\phi 2.87"$ 0.7	 No. 398 5.91" 4.88" $\phi .89"$ $\phi 2.87"$ 1.1
A63-SLFA1/2-180 CV	A63-SLFA1/2-210 CV	
 No. 399 7.09" 6.06" $\phi .89"$ $\phi 2.87"$ 1.9	 No. 400 8.27" 7.24" $\phi .89"$ $\phi 2.87"$ 2.0	

Φ 16

A63-SLSB16-95-M42	A63-SLSB16-125-M42	A63-SLSB16-155-M42
 No. 401 0.7	 No. 402 0.9	 No. 403 0.9
A63-SLSB16-120-M67	A63-SLSB16-150-M67	A63-SLSB16-180-M67
 No. 404 1.1	 No. 405 1.4	 No. 406 1.5
A63-SLSB16-150-M97	A63-SLSB16-180-M97	A63-SLSB16-210-M97
 No. 407 1.7	 No. 408 2.1	 No. 409 2.1
A63-SLSB16-180-M127	A63-SLSB16-210-M127	A63-SLSB16-240-M127
 No. 410 2.1	 No. 411 2.3	 No. 412 2.6
A63-SLSB16-210-M157	A63-SLSB16-240-M157	A63-SLSB16-270-M157
 No. 413 2.7	 No. 414 3.1	 No. 415 3.2
A63-SLRB16-75-M22	A63-SLRB16-105-M22	A63-SLRB16-135-M22
 No. 416 0.3	 No. 417 0.5	 No. 418 0.5
A63-SLRB16-95-M42	A63-SLRB16-125-M42	A63-SLRB16-155-M42
 No. 419 0.5	 No. 420 0.7	 No. 421 0.7

Feature
 Shrink-fit Heater
 MONO 3°
 MONO CURVE
 MONO Series
 2PIECE type
 UNO
 HYPER VERSION
 Z
 STRAIGHT arbor
 OTHERS
 PERIPHERALS
 Technical

A63-SLRB16-120-M67**A63-SLRB16-150-M67****A63-SLRB16-180-M67****A63-SLFB16-75-M22****A63-SLFB16-105-M22****A63-SLFB16-135-M22****A63-SLFB16-95-M42****A63-SLFB16-125-M42****A63-SLFB16-155-M42****A63-SLFB16-120-M67****A63-SLFB16-150-M67****A63-SLFB16-180-M67****A63-SLSB16-90 CV****A63-SLSB16-120 CV****A63-SLSB16-150 CV****A63-SLSB16-180 CV****A63-SLSB16-210 CV****A63-SLSB16-240 CV****A63-SLSB16-270 CV**

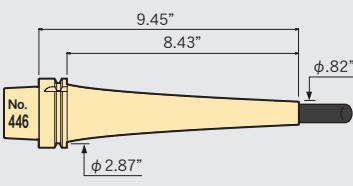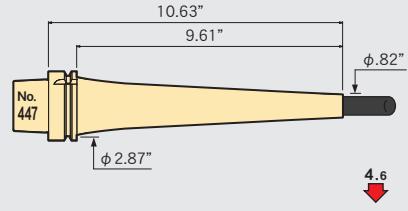$\phi \frac{5}{8}$ **A63-SLSB5/8-90 CV****A63-SLSB5/8-120 CV****A63-SLSB5/8-150 CV****A63-SLSB5/8-180 CV****A63-SLSB5/8-210 CV****A63-SLSB5/8-240 CV****A63-SLSB5/8-270 CV**Feature
Shrink-fit HeaterMONO 3°
MONO CURVE

MONO Series

2PIECE type

UNO

HYPER
VERSION

Z

STRAIGHT
arbor

OTHERS

PERIPHERALS

Technical data

φ 20

Feature

Shrink-fit Heater

MONO 3°
MONO CURVE

MONO Series

2PIECE type

UNO

HYPER VERSION












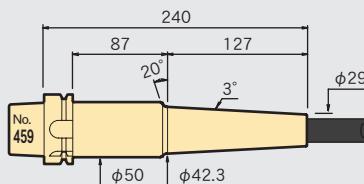

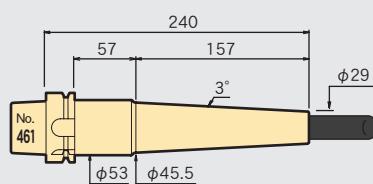
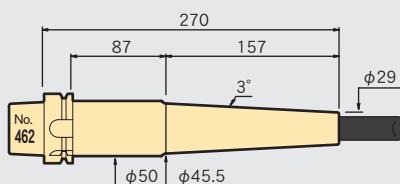






Z














STRAIGHT arbor

OTHERS
















PERIPHERALS

Technical data

A63-SLSB20-95-M42**A63-SLSB20-125-M42****A63-SLSB20-155-M42****A63-SLSB20-120-M67****A63-SLSB20-150-M67****A63-SLSB20-180-M67****A63-SLSB20-150-M97****A63-SLSB20-180-M97****A63-SLSB20-210-M97****A63-SLSB20-180-M127****A63-SLSB20-210-M127****A63-SLSB20-240-M127****A63-SLSB20-210-M157****A63-SLSB20-240-M157****A63-SLSB20-270-M157****A63-SLRB20-95-M42****A63-SLRB20-125-M42****A63-SLRB20-155-M42****A63-SLRB20-120-M67****A63-SLRB20-150-M67****A63-SLRB20-180-M67**

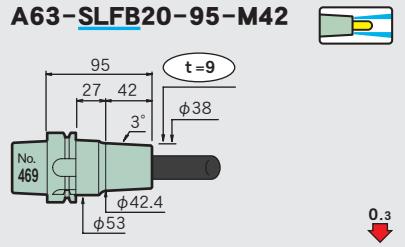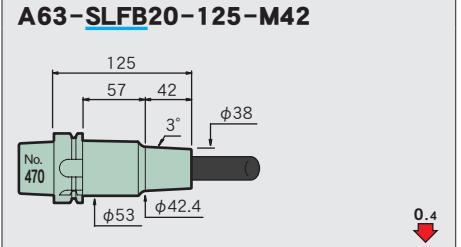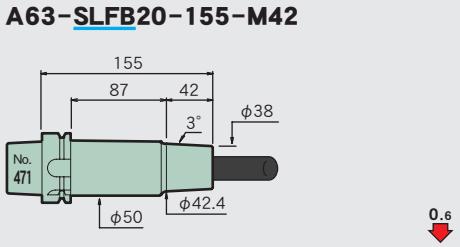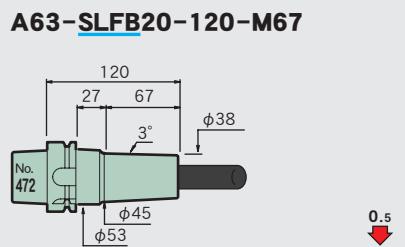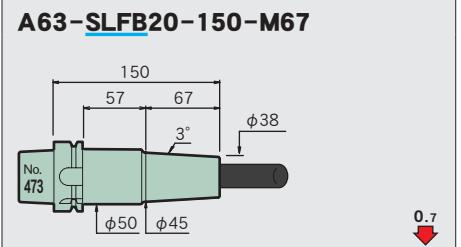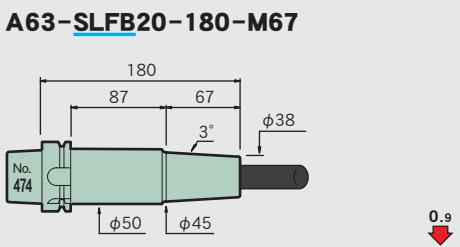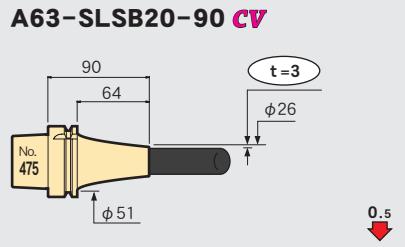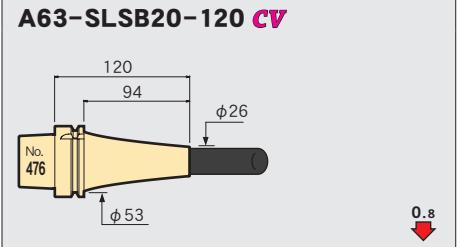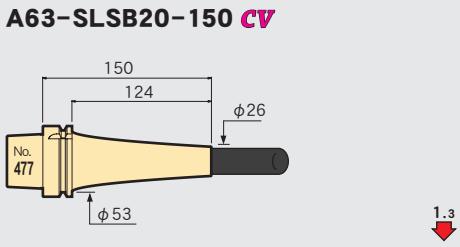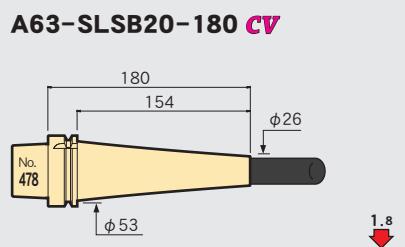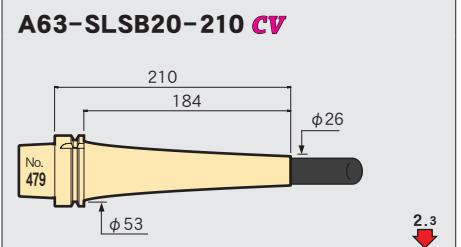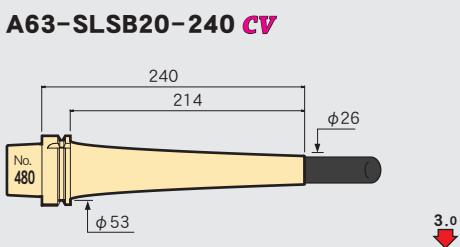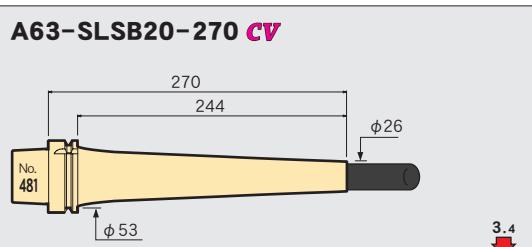A63-SLFB20-95-M42	A63-SLFB20-125-M42	A63-SLFB20-155-M42
		
A63-SLFB20-120-M67	A63-SLFB20-150-M67	A63-SLFB20-180-M67
		
A63-SLSB20-90 CV	A63-SLSB20-120 CV	A63-SLSB20-150 CV
		
A63-SLSB20-180 CV	A63-SLSB20-210 CV	A63-SLSB20-240 CV
		
A63-SLSB20-270 CV		
		

Feature	
Shrink-fit Heater	
MONO 3°	
MONO CURVE	
MONO Series	
2PIECE type	
UNO	
HYPER VERSION	
Z	
STRAIGHT arbor	
OTHERS	
PERIPHERALS	
Technical data	
123	

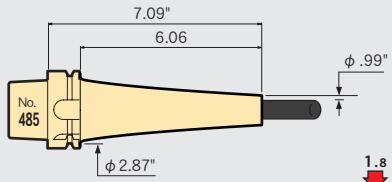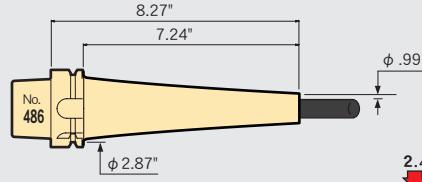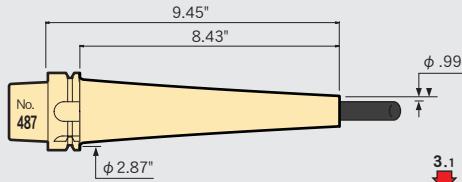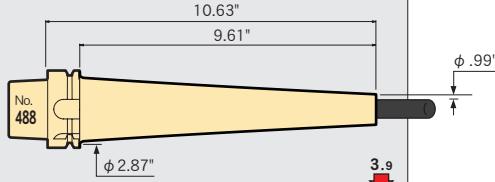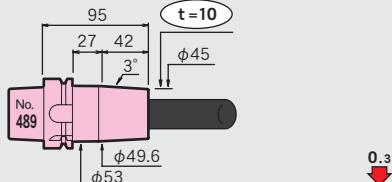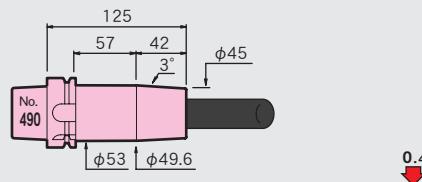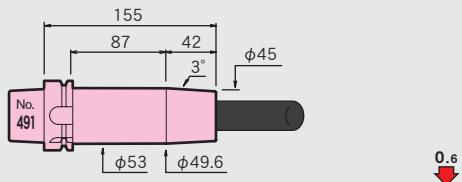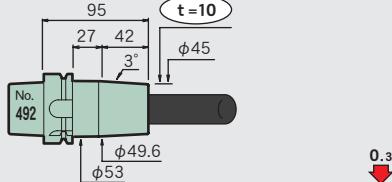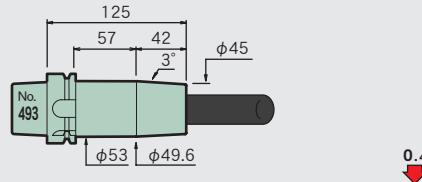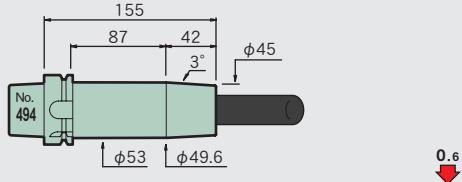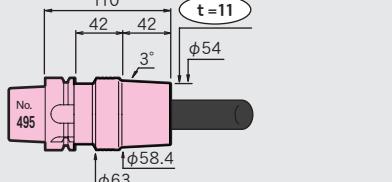φ3/4**A63-SLSB3/4-90 CV****A63-SLSB3/4-120 CV****A63-SLSB3/4-150 CV****A63-SLSB3/4-180 CV****A63-SLSB3/4-210 CV****A63-SLSB3/4-240 CV****A63-SLSB3/4-270 CV****φ 25****A63-SLRB25-95-M42****A63-SLRB25-125-M42****A63-SLRB25-155-M42****A63-SLFB25-95-M42****A63-SLFB25-125-M42****A63-SLFB25-155-M42****φ 32****A63-SLRB32-110-M42****φ70 Nozzle (HRB-03S)**

HEAT ROBO Baby3000S

A100

A100-SLRB16-285-M157

MONO 3°

Rigidity value
($\mu\text{m}/\text{kN}$)

• P.258

Imbalance value(g-mm) • N
• P.261

S ↓

A100-SLSB16-165 cv

MONO CURVE

Rigidity value
($\mu\text{m}/\text{kN}$)

• P.258

Imbalance value(g-mm) • N
• P.261

S ↓

Fig. 1





Fig. 2

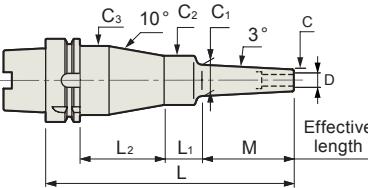


Compatibility table
for HRD-01S

[] Available [X] Not available

[▲] Usable by raising the
heating unit. → P.257

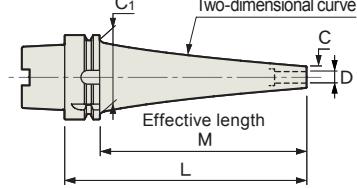Fig. 3



■ Std.Access.

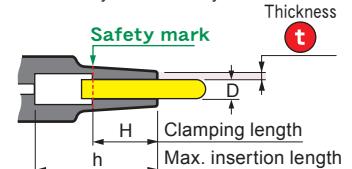
• Coolant duct (fixed type) → p.246

■ Note

• Swing type coolant ducts are available upon request.
For details, please contact us.

■ Caution

• Setting cutters · Be sure to insert the tool beyond the safety mark.



CODE	Fig.	ϕD	ϕC	t	L	M	L1	L2	ϕC_1	ϕC_2	ϕC_3	H	h	Kg	N	S ↓	Scale model	
A100-SLSA3-110-M 42	1	3	6	1.5	110	42	39	—	10.4	26	—	9	80	2.2	19.8	9.4	○	
					135	67			13				105	2.3	20.9	15.1		1
					140	42	69		10.4				110		19.9	10.1		4
					165	67			13	25			136	2.2	21	16		2
					97	39			16.2	26			135	2.3	22.2	21		5
					170	42	33	66	10.4				140	2.6	20.2	10		7
					195	67			13				165		21.3	15.9		3
					97	69	—	16.2	25	—		166	2.3	22.3	22.5		6	
-225-M 97	2				225		33	66		26	40		195	2.7	22.6	22.2		8
					90	22	39	—	9.8	26	—	9	60	2.2	20.2	2.9	○	9
					110	42			11.9				80		20.6	5.5		10
					120	22	69		9.8	25			91		20.3	3.3		13
					135	67	39		14.5	26			105	2.3	21.4	9		11
					140	42	69		11.9				110		20.7	6.1		16
					150	22	33	66	9.8				120	2.6	20.6	3.2		14
					165	67	69	—	14.5	25	—		136	2.3	21.5	10.1		12
-SLRA3- 90-M 22	1	3	7.5	2.25	90	22	39	—	9.8	26	—	9	135		22.4	13.1	○	17
					110	42			11.9				140	2.6	21	6		19
					120	22	69		9.8	25			165		21.8	9.9		15
					135	67	39		14.5	26			170		22.5	14.7		18
					140	42	69		11.9				185		24.5	15.8		20
					150	22	33	66	9.8				195	2.7	22.8	14.4		21
					165	67	69	—	14.5	25	—		210		24.6	16.4		23
					97	39			17.7				225	3.2	24.9	16.3		24
-110-M 42	2				170	42	33	66	11.9				230		24.5	15.8		
					195	67			14.5				245		24.5	15.8		
					97	69	—	17.7				260		24.5	15.8			
					127	39			20.8	36			275		24.5	15.8		
					225	97	33	66	17.7	26	40		290		24.5	15.8		
					127	69	—	20.8	36	—		305		24.5	15.8			
					255		28	71					320		24.5	15.8		
													335		24.5	15.8		
-M 97	1				97	69	—	17.7					350		24.5	15.8		
					127	39			20.8	36			365		24.5	15.8		
					225	97	33	66	17.7	26	40		380		24.5	15.8		
					127	69	—	20.8	36	—		395		24.5	15.8			
					255		28	71					410		24.5	15.8		
													425		24.5	15.8		
													440		24.5	15.8		
													455		24.5	15.8		
-M127	1				97	69	—	17.7					470		24.5	15.8		
					127	39			20.8	36			485		24.5	15.8		
					225	97	33	66	17.7	26	40		500		24.5	15.8		
					127	69	—	20.8	36	—			515		24.5	15.8		
					255		28	71					530		24.5	15.8		
													545		24.5	15.8		
													560		24.5	15.8		
													575		24.5	15.8		
-225-M 97	2				97	33	66	17.7	26	40			590		24.5	15.8		
					127	69	—	20.8	36	—			605		24.5	15.8		
					225		28	71					620		24.5	15.8		
													635		24.5	15.8		
													650		24.5	15.8		
													665		24.5	15.8		
													680		24.5	15.8		
													695		24.5	15.8		
-M127	1				97	69	—	17.7					710		24.5	15.8		
					127	39			20.8	36			725		24.5	15.8		
					225		28	71					740		24.5	15.8		
													755		24.5	15.8		
													770		24.5	15.8		
													785		24.5	15.8		
													800		24.5	15.8		
													815		24.5	15.8		
-255-M127	2				97	33	66	17.7	26	40			830		24.5	15.8		
					127	69	—	20.8	36	—			845		24.5	15.8		
					225		28	71					860		24.5	15.8		
													875		24.5	15.8		

	CODE	Fig.	φD	φC	t	L	M	L ₁	L ₂	φC ₁	φC ₂	φC ₃	H	h	Kg lbs	N	S	Feature
MONO 3°	A100-SLFB3- 90-M 22	1	3	9.5	3.25	90	22	39	—	11.8	26	—	9	60	2.2	19.8	1.9	○
MONO CURVE	-110-M 42					110	42			13.9				80	2.3	20.3	3.3	
MONO Series	-120-M 22					120	22	69		11.8				90		19.9	2.3	
MONO	-135-M 67					135	67	39		16.5				105		21.4	5.5	
MONO	A100					140	42	69		13.9	25			111	2.2	20.4	4.1	
MONO	-140-M 42	2				150	22	33	66	11.8	26	40		120	2.6	20.2	2.3	○
MONO	-150-M 22	1				165	67	69	—	16.5				135	2.4	21.5	6.5	
MONO	-165-M 67	2				170	42	33	66	13.9		40		140	2.6	20.7	3.9	
MONO	-170-M 42					195	67			16.5				165		21.8	6.3	
MONO	-195-M 67																	
MONO	A100-SLSA4-110-M 42	1	4	7	1.5	110	42	39	—	11.4	25	—	12	81	2.1	21	7.2	○
MONO	-135-M 67					135	67			14				106	2.2		11.8	
MONO	-140-M 42					140	42	69		11.4				111		21.1	8	
MONO	-165-M 67					165	67			14				136	2.3		13.1	
MONO	-M 97					97	39			17.2	26			135		22.4	16.9	
MONO	-170-M 42	2				170	42	33	66	11.4		40		140	2.6	21.4	8	
MONO	-195-M 67	1				195	67			14	25	39		166			12.9	
MONO	-M 97	2				97	69	—		17.2					2.3	22.5	18.7	
MONO	-225-M 97					225		33	66			39		196	2.6	22.8	18.3	
MONO	-SLRA4- 90-M 22	1	4	10	3	90	22	39	—	12.3	25	—	12	61	2.1	20.3	1.8	○
MONO	-110-M 42					110	42			14.4	26			80	2.3	21	3.2	
MONO	-120-M 22					120	22	69		12.3	25			91	2.2	20.4	2.3	
MONO	-135-M 67					135	67	39		17				106		22	5.3	
MONO	-140-M 42					140	42	69		14.4				111		21.1	4	
MONO	-150-M 22	2				150	22	33	66	12.3	26	40		120	2.6	20.7	2.2	
MONO	-165-M 67	1				165	67	69	—	17				135	2.4	22.1	6.3	
MONO	-M 97	2				97	39			20.2	25			136	2.2	23.5	7.9	
MONO	-170-M 42					170	42	33	66	14.4		39		141	2.6	21.4	3.8	
MONO	-195-M 67	1				195	67			17				166		22.5	6.3	
MONO	-M 97	2				97	69	—		20.2	26			165	2.4	23.5	9.5	
MONO	-M127	1				127	39			23.3	32			166		26.7	9.6	
MONO	-225-M 97	2				225	97	33	66	20.2	26	40		195	2.7	23.9	9.2	
MONO	-M127	1				127	69	—		23.3	32	—		196	2.6	26.8	10.7	
MONO	-255-M127	2				255		30	69			46		226	3	27.2	10.4	
HYPER VERSION	-SLFB4- 90-M 22	1	4	12	4	90	22	39	—	14.3	25	—	12	61	2.1	20.1	1.4	○
Z	-110-M 42					110	42			16.4	26			80	2.3	20.8	2.3	
Z	-120-M 22					120	22	69		14.3	25			91	2.2	20.2	1.9	
Z	-135-M 67					135	67	39		19	26			105	2.3	22	3.7	
Z	-140-M 42					140	42	69		16.4	25			111		20.8	3.1	
Z	-150-M 22	2				150	22	33	66	14.3		39		121	2.6	20.5	1.8	
Z	-165-M 67	1				165	67	69	—	19	26	—		135	2.4	22.1	4.7	
Z	-170-M 42	2				170	42	33	66	16.4	25	39		141	2.6	21.2	2.9	
Z	-195-M 67					195	67			19				166		22.4	4.7	
STRAIGHT arbor	-SLSA4-165 CV	3	4	7	1.5	165	136	—	—	85	—	—	12	133	3.4	29	2.5	○
OTHERS	-195 CV					195	166							163	3.7	30.6	3.3	
OTHERS	-225 CV					225	196							196	4.3	33	3.8	
OTHERS	-255 CV					255	226							226	4.4	34.1	5.6	
OTHERS	-285 CV					285	256							256	4.6	35.5	7.6	
OTHERS	-315 CV					315	286							286	4.9	37.1	9.8	
OTHERS	-345 CV					345	316							316	5.2	38.8	12.4	
PERIPHERALS	A100-SLSA3/16-165 CV	3	.19	.31	.06	6.50	5.35	—	—	3.35	—	—	.59	5.35	7.0	25.2	2.4	○
PERIPHERALS	-195 CV					7.68	6.54							6.54	7.6	26.9	3.3	
PERIPHERALS	-225 CV					8.86	7.72							7.72	8.7	29.1	4	
PERIPHERALS	-255 CV					10.04	8.90							8.90	9.0	30	6	
PERIPHERALS	-285 CV					11.22	10.08							10.08	9.4	32.2	8.2	
PERIPHERALS	-315 CV					12.40	11.26							11.26	10.1	33.6	10.4	
PERIPHERALS	-345 CV					13.58	12.44							12.44	10.7	35.2	13.1	

CODE	Fig.	φD	φC	t	L	M	L ₁	L ₂	φC ₁	φC ₂	φC ₃	H	h	Kg lbs	N	S	Scale model					
A100-SLSA6-110-M 42	1	6	9	1.5	110	42	39	—	13.4	25	—	18	81	2.1	21.3	4.9	▲					
					135	67			16				106	2.2	22.8	8.2						
					140	42	69		13.4				111		21.4	5.8						
					165	67			16				136	2.3	22.9	9.5						
					97	39			19.2	32			135		25.3	11.1						
	2				170	42	33	66	13.4	25	39		141	2.6	21.7	5.6						
					195	67			16				166		23.2	9.1						
	1				97	69	—		19.2	32	—			2.4	25.4	11.9						
					225		30	69			46		196	2.9	25.7	11.7						
	-SLSB6-110-M 42	1	6	10	2	110	42	39	—	14.4	25	—	18	81	2.1	22.2	3.8	○				
						135	67			17				106	2.2	24.3	6.3					
						140	42	69		14.4				111	2.2	22.3	4.7					
						165	67			17				136	2.3	24.4	7.7					
						97	39			20.2	32					27.3	8.6					
	2					170	42	33	66	14.4	26	40		140	2.6	22.6	4.6					
						195	67			17	25	39		166		24.7	7.4					
	1					97	69	—		20.2	36	—		165		27.4	9.5					
						127	39			23.3	32			166	2.4	29.8	11.3					
	2					225	97	28	71	20.2	36	50		195	3.2	27.8	9.3	▲				
						127	69	—		23.3	32	—		196	2.5	29.9	12.4					
	1					157	39			26.5						32.3	13.6					
						255	127	30	69	23.3		46		226	3	30.3	12.1					
	2					157	69	—		26.5		—			2.6	32.4	15.1					
						285		30	69			46		256	3.1	32.8	14.6					
-SLRB6- 90-M 22	1	6	14	4	90	22	39	—	16.3	32	—	18	61	2.2	21.1	1	○					
					110	42			18.4				81	2.3	22.8	1.6						
					120	22	69		16.3				91	2.4	21.3	1.2						
					135	67	39		21				106	2.3	24.9	2.7						
					140	42	69		18.4				111	2.4	22.9	2						
	2				150	22	30	69	16.3		46		121	2.8	21.6	1.2						
					165	67	69	—	21		—		136	2.5	25	3.2						
	1				170	42	30	69	18.4		46		141	2.9	23.3	1.9						
					195	67			21				168	3.2	25.3	2.9						
-SLFB6- 90-M 22	1	6	14	4	90	22	39	—	16.3	32	—	18	61	2.2	21.1	1	○					
					110	42			18.4				81	2.3	22.8	1.6						
					120	22	69		16.3				91	2.4	21.3	1.2						
					135	67	39		21				105		24.9	2.6						
					140	42	69		18.4				111		22.9	2						
	2				150	22	30	69	16.3		46		121	2.8	21.6	1.2						
					165	67	69	—	21		—		136	2.5	25	3.2						
	1				170	42	30	69	18.4		46		141	2.9	23.3	1.9						
					195	67			21				166		25.3	3.1						
	A100				285	256																
					315	286																
					345	316																
					165	136	—	—	85	—	—	18	136	3.3	28.8	2.1	○					
					195	166							166	4	32	2.3						
					225	196							196	4.1	32.4	3.6						
					255	226							226	4.8	35.9	3.9						
A100-SLSA1/4-165 CV	3	6	9	1.5	6.50	5.35	—	—	3.35	—	—	.71	5.35	8.0	27.1	1.5	▲					
					7.68	6.54							6.54	8.2	27.8	2.5						
					8.86	7.72							7.72	8.4	28.5	3.9						
					10.04	8.90							8.90	9.8	32.7	4.2						
					11.22	10.08							10.08	10.4	34.3	5.6						
					12.40	11.26							11.26	11.0	36.1	7.4						
					13.58	12.44							12.44	11.6	37.5	9.5						

CODE	Fig.	φD	φC	t	L	M	L ₁	L ₂	φC ₁	φC ₂	φC ₃	H	h	Kg lbs	N	S	Scale model
A100-SLSA6-110-M 42	1	6	9	1.5	110	42	39	—	13.4	25	—	18	81	2.1	21.3	4.9	81
-135-M 67					135	67			16				106	2.2	22.8	8.2	84
-140-M 42					140	42	69		13.4				111		21.4	5.8	82
-165-M 67					165	67			16				136	2.3	22.9	9.5	85
-M 97					97	39			19.2	32			135		25.3	11.1	87
-170-M 42	2				170	42	33	66	13.4	25	39		141	2.6	21.7	5.6	83
-195-M 67					195	67			16				166		23.2	9.1	86
-M 97	1				97	69	—		19.2	32	—			2.4	25.4	11.9	88
-225-M 97	2				225		30	69			46		196	2.9	25.7	11.7	89
-SLSB6-110-M 42	1	6	10	2	110	42	39	—	14.4	25	—	18	81	2.1	22.2	3.8	90
-135-M 67					135	67			17				106	2.2	24.3	6.3	93
-140-M 42					140	42	69		14.4				111	2.2	22.3	4.7	91
-165-M 67					165	67			17				136	2.3	24.4	7.7	94
-M 97					97	39			20.2	32					27.3	8.6	96
-170-M 42	2				170	42	33	66	14.4	26	40		140	2.6	22.6	4.6	92
-195-M 67					195	67			17	25	39		166		24.7	7.4	95
-M 97	1				97	69	—		20.2	36	—		165		27.4	9.5	97
-M127					127	39			23.3	32			166	2.4	29.8	11.3	99
-225-M 97	2				225	97	28	71	20.2	36	50		195	3.2	27.8	9.3	98
-M127	1				127	69	—		23.3	32	—		196				

	CODE	Fig.	ϕD	ϕC	t	L	M	L ₁	L ₂	ϕC_1	ϕC_2	ϕC_3	H	h	Kg	N	S	Feature	Scale model
	A100-SLSA8-110-M 42	1	8	11	1.5	110	42	39	—	15.4	36	—	24	80	2.3	23.2	3.2	○	137
	-135-M 67					135	67			18	32			106		25.8	5.5		140
	-140-M 42					140	42	69		15.4	36			110	2.5	23.4	3.5		138
	-165-M 67					165	67			18				135		26	5.8		141
	-M 97						97	39		21.2	32			136	2.3	29	8.1		143
	-170-M 42	2				170	42	28	71	15.4	36	50		140	3.1	23.7	3.4		139
	-195-M 67					195	67	30	69	18	32	46		166	2.9	26.3	5.9		142
	-M 97	1					97	69	—	21.2		—			2.5	29.1	8.9		144
	-225-M 97	2				225		28	71		36	50		195	3.2	29.5	8.3		145
	-SLSB8-110-M 42	1	8	13	2.5	110	42	39	—	17.4	32	—	24	81	2.2	24.3	2.1	○	146
	-135-M 67					135	67			20				106	2.3	27.5	3.6		149
	-140-M 42					140	42	69		17.4				111	2.4	24.5	2.6		147
	-165-M 67					165	67			20				136		27.7	4.2		150
	-M 97						97	39		23.2						31.4	5.4		152
	-170-M 42	2				170	42	28	71	17.4	36	50		140	3.1	24.8	2.4		148
	-195-M 67					195	67	30	69	20	32	46		166	2.9	28	4		151
	-M 97	1					97	69	—	23.2		—			2.5	31.5	6.3		153
	-M127						127	39		26.3					2.4	35.3	7.3		155
	-225-M 97	2				225	97	30	69	23.2		46		196	3	31.9	6		154
	-M127	1					127	69	—	26.3		—			2.6	35.4	8.5		156
	-M157						157	39		29.5	42					39.1	8.1		158
	-255-M127	2				255	127	30	69	26.3	32	46		226	3.1	35.7	8.2	▲	157
	-M157	1					157	69	—	29.5	42	—			2.9	39.3	8.7		159
	-285-M157	2				285		28	71			56		256	3.6	39.6	8.6		160
	-SLRB8- 90-M 22	1	8	18	5	90	22	39	—	20.3	32	—	24	61	2.2	21.8	0.7	×	161
	-110-M 42					110	42			22.4				81	2.3	24.4	1.1	○	164
	-120-M 22					120	22	69		20.3				91	2.4	22	1	×	162
	-135-M 67					135	67	39		25				106		27.6	1.8	○	167
	-140-M 42					140	42	69		22.4				111		24.5	1.6		165
	-150-M 22	2				150	22	30	69	20.3		46		121	2.9	22.3	1	×	163
	-165-M 67	1				165	67	69	—	25		—		136	2.5	27.8	2.4	○	168
	-170-M 42	2				170	42	28	71	22.4	36	50		140	3.1	24.9	1.3		166
	-195-M 67					195	67	30	69	25	32	46		166	3	28.1	2.2		169
	-SLFB8- 90-M 22	1	8	18	5	90	22	39	—	20.3	36	—	24	60	2.3	21.8	0.7	×	170
	-110-M 42					110	42			22.4				80		24.4	1.1	○	173
	-120-M 22					120	22	69		20.3	32			91	2.4	22	1	×	171
	-135-M 67					135	67	39		25	36			105		27.6	1.7	○	176
	-140-M 42					140	42	69		22.4				110	2.6	24.5	1.3		174
	-150-M 22	2				150	22	30	69	20.3	32	46		121	2.9	22.3	1	×	172
	-165-M 67	1				165	67	69	—	25		—		136	2.5	27.8	2.4	○	177
	-170-M 42	2				170	42	28	71	22.4	36	50		140	3.1	24.9	1.3		175
	-195-M 67					195	67	30	69	25	32	46		166	3	28.1	2.2		178
	-SLSA8-165 cv	3	8	11	1.5	165	136	—	—	85	—	—	24	136	3.7	30.7	1.4	○	179
	-195 cv					195	166							166		31	2.3		180
	-225 cv					225	196							196	4.6	35.3			181
	-255 cv					225	226							226		35.9	3.6	▲	182
	-285 cv					285	256							256	4.9	37.4	4.8		183
	-315 cv					315	286							286	5.7	41.9	5		184
	-345 cv					345	316							311	6.1	45.1	6		185
	-SLRA8-195 cv	3	8	16	4	195	166	—	—	85	—	—	24	166	3.7	28.5	1.4	○	186
	-225 cv					225	196							196	4.4	32.3	1.6		187
	-255 cv					255	226							226	4.6	33.6	2.2	▲	188
	-285 cv					285	256							256	4.8	34.8	3		189
	-SLFA8-195 cv	3	8	16	4	195	166	—	—	85	—	—	24	166	3.7	28.5	1.4	○	190
	-225 cv					225	196							196	4.4	32.3	1.6		191
	-255 cv					255	226							226	4.6	33.6	2.2	▲	192
	-285 cv					285	256							256	4.8	34.8	3		193

CODE	Fig.	φD	φC	t	L	M	L ₁	L ₂	φC ₁	φC ₂	φC ₃	H	h	Kg lbs	N	S	Scale model	Feature
A100-SLSA5/16-165 CV	3	5/16	.43	.06	6.50	5.35	—	—	3.35	—	—	.94	5.35	7.8	26.6	1.5	○	194
					7.68	6.54							6.54	7.9	27.2	2.4		195
					8.86	7.72							7.72	9.6	31.2	2.5		196
					10.04	8.90							8.90		32.4	3.9		197
					11.22	10.08							10.08	10.2	34.2	5.3		198
					12.40	11.26							11.26	11.9	38.4	5.4		199
					13.58	12.44							12.44	12.3	43.5	6.6		200
					-SLRA5/16-195 CV												○	201
					-225 CV												▲	202
					-255 CV												○	203
					-285 CV												▲	204
-SLFA5/16-195 CV	3	5/16	.63	.16	7.68	6.54	—	—	3.35	—	—	.94	6.54	8.3	28	1.4	○	205
					8.86	7.72							7.72	9.7	32.2	1.6		206
					10.04	8.90							8.90	10.1	33.5	2.3		207
					11.22	10.08							10.08	10.6	35.1	3.1		208
					-225 CV												○	209
					-255 CV												▲	210
					-285 CV												○	211
					-M 97												▲	212
					-135-M 67												○	213
					-140-M 42												▲	214
A100-SLSA10-110-M 42	1	10	13	1.5	110	42	39	—	17.4	25	—	30	81	2.2	24.6	2.7	○	215
					135	67			20	32							○	216
					140	42	69		17.4	25							▲	217
					165	67			20	36							○	218
					97	39			23.2	32							▲	219
					-170-M 42												○	220
					-195-M 67												▲	221
					-M 97												○	222
					-225-M 97												▲	223
					-SLSB10-110-M 42												○	224
-SLSB10-110-M 42	1	10	16	3	110	42	39	—	20.4	32	—	30	81	2.3	25.8	1.2	○	225
					135	67			23								▲	226
					140	42	69		20.4								○	227
					165	67			23								▲	228
					97	39			26.2								○	229
					-170-M 42												▲	230
					-195-M 67												○	231
					-M 97												▲	232
					-M127												○	233
					-225-M 97												▲	234
-SLRB10- 90-M 22	1	10	22	6	90	22	39	—	24.3	32	—	30	61	2.3	22.2	0.6	×	235
					110	42			26.4								○	236
					120	22	69		24.3								×	237
					135	67	39		29	42							○	238
					140	42	69		26.4	32							×	239
					150	22	28	71	24.3	36	50						○	240
					165	67	69	—	29								×	241
					170	42	28	71	26.4		50						○	242
					195	67			29	42	56						×	243
					-SLFB10- 90-M 22												○	244
-SLFB10- 90-M 22	1	10	22	6	90	22	39	—	24.3	32	—	30	61	2.3	22.2	0.6	×	245
					110	42			26.4								○	246
					120	22	69		24.3	32							×	247
					135	67	39		29	36							○	248
					140	42	69		26.4								×	249
					150	22	30	69	24.3	32	46						○	250
					165	67	69	—	29	36	—						×	251
					170	42	30	69	26.4	32	46						○	252
					195	67	28	71	29	42	56						×	253
					-110-M 42												○	254
-110-M 42	1	10	22	6	110	42			26.4								×	255
					120	22	69		24.3	32							○	256
					135	67	39		29	36							×	257
					140	42	69		26.4								○	258
					150	22	30	69	24.3	32	46						×	259
					165	67	69	—	29	36	—						○	260
					170	42	30	69	26.4	32	46						×	261
					195	67	28	71	29	42	56						○	262
					-120-M 22												×	263
					-135-M 67												○	264
-135-M 67	1	10	22	6	110	42			26.4								×	265
					120	22	69		24.3	32							○	266
					135	67	39		29	36							×	267
					140	42	69		26.4								○	268
					150	22	30	69	24.3	32	46						×	269
					165	67	69	—	29	36	—						○	270
					170	42	30	69	26.4	32	46						×	271
					195	67	28	71	29	42	56						○	272
					-140-M 42												×	273
					-150-M 22												○	274
-150-M 22	1	10	22	6	110	42			26.4								×	275

	CODE	Fig.	φD	φC	t	L	M	L ₁	L ₂	φC ₁	φC ₂	φC ₃	H	h	Kg lbs	N	S	Feature
	A100-SLSA10-165 CV	3	10	13	1.5	165	136	—	—	85	—	—	30	136	3.5	29.4	1.4	○
	-195 CV					195	166							166	4.3	33.6	1.5	○
	-225 CV					225	196							196	4.2	33.4	2.4	▲
	-255 CV					255	226							226	4.5	34.3	3.5	
	-285 CV					285	256							251	5.1	38.3	3.6	
	-315 CV					315	286							286		39.9	4.8	
	-345 CV					345	316							311	5.9	42.7	5.5	
	-SLRA10-165 CV	3	10	19	4.5	165	136	—	—	85	—	—	30	136	3.5	27.6	1	○
	-195 CV					195	166							166	4	30.1	1.1	○
	-225 CV					225	196							196	4.1	31.1	1.6	▲
	-255 CV					255	226							226	4.9	35.3	1.7	
	-285 CV					285	256							256	5	36.2	2.4	
	-SLFA10-165 CV	3	10	19	4.5	165	136	—	—	85	—	—	30	136	3.5	27.6	1	○
	-195 CV					195	166							166	4	30.1	1.1	○
	-225 CV					225	196							196	4.1	31.1	1.6	▲
	-255 CV					255	226							226	4.9	35.3	1.7	
	-285 CV					285	256							256	5	36.2	2.4	
	A100-SLSA3/8-165 CV	3	3/8	.49	.06	6.50	5.35	—	—	3.35	—	—	1.18	5.35	7.5	26	1.4	○
	-195 CV					7.68	6.54							6.54	9.2	30	1.5	○
	-225 CV					8.86	7.72							7.72		30.4	2.5	▲
	-255 CV					10.04	8.90							8.90	9.4	32.2	3.8	
	-285 CV					11.22	10.08							10.08	10.5	38.4	4	
	-315 CV					12.40	11.26							11.26	11.6	38.2	5.2	
	-345 CV					13.58	12.44							12.44	12.2	44	6.2	
	-SLRA3/8-165 CV	3	3/8	.73	.18	6.50	5.35	—	—	3.35	—	—	1.18	5.35	8.5	28.9	0.8	○
	-195 CV					7.68	6.54							6.54	8.8	30.1	1.1	○
	-225 CV					8.86	7.72							7.72	9.2	31.3	1.6	▲
	-255 CV					10.04	8.90							8.90	10.9	35.5	1.7	
	-285 CV					11.22	10.08							10.08	11.3	36.6	2.4	
	-SLFA3/8-165 CV	3	3/8	.73	.18	6.50	5.35	—	—	3.35	—	—	1.18	5.35	8.5	28.9	0.8	○
	-195 CV					7.68	6.54							6.54	8.8	30.1	1.1	○
	-225 CV					8.86	7.72							7.72	9.2	31.3	1.6	▲
	-255 CV					10.04	8.90							8.90	10.9	35.5	1.7	
	-285 CV					11.22	10.08							10.08	11.3	36.6	2.4	
	A100-SLSA3/8-165 CV	3	3/8	.73	.18	6.50	5.35	—	—	3.35	—	—	1.18	5.35	8.5	28.9	0.8	○
	-195 CV					7.68	6.54							6.54	8.8	30.1	1.1	○
	-225 CV					8.86	7.72							7.72	9.2	31.3	1.6	▲
	-255 CV					10.04	8.90							8.90	10.9	35.5	1.7	
	-285 CV					11.22	10.08							10.08	11.3	36.6	2.4	
	A100-SLSA12-110-M 42	1	12	15	1.5	110	42	39	—	19.4	32	—	30	79	2.2	27	1.9	○
	-135-M 67					135	67			22				104	2.3	32.5	3.4	○
	-140-M 42					140	42	69		19.4				109	2.4	27.2	2.4	○
	-165-M 67					165	67			22				134		32.6	4.1	○
	-M 97					97	39			25.2				2.3	39.4	5.1		▲
	A100					170	42	28	71	19.4	36	50		135	3.1	27.5	2.1	
	-170-M 42	2				195	67	30	69	22	32	46		164	2.9	32.9	3.9	
	-195-M 67					97	69	—		25.2	36	—		160	2.7	39.6	5.5	
	-M 97	1				225	30	69		32	46			194	3	39.9	5.8	▲
	-225-M 97	2				110	42	39	—	23.4	32	—	30	79	2.3	28.4	1.2	○
	-SLSB12-110-M 42	1	12	19	3.5	135	67			26				104		34.7	2	○
	-135-M 67					140	42	69		23.4				109	2.4	28.5	1.7	○
	-140-M 42					165	67			26				134	2.5	34.8	2.7	○
	-165-M 67					97	39			29.2	42			133	2.6	42.9	2.5	○
	-M 97					170	42	28	71	23.4	36	50		135	3.1	28.9	1.4	○
	-170-M 42	2				195	67	30	69	26	32	46		164	3	35.2	2.5	○
	-195-M 67					97	69	—		29.2	50	—		160	3.1	43.2	2.6	○
	-M 97	1				225	97	99		29.2	50			163	2.7	50.4	3.3	○
	-M127					127	39			32.3	42			190	3.4	43.6	2.8	▲
	-225-M 97					127	69			32.3	42			192	3	50.8	3.8	
	-M127					157	39			35.5				193	2.9	58	4.2	
	-M157					255	127	28	71	32.3		56		222	3.6	51.1	3.7	
	-255-M127	2				157	69	—		35.5		—		252	3.1	58.3	4.8	
	-M157	1				285	28	71		42	56			252	3.7	58.7	4.7	
	-285-M157	2																

CODE	Fig.	φD	φC	t	L	M	L ₁	L ₂	φC ₁	φC ₂	φC ₃	H	h	Kg lbs	N	S	Scale model	Feature					
A100-SLRB12- 90-M 22	1	12	26	7	90	22	39	—	28.3	42	—	30	58	2.4	26.5	0.4	X	309					
					110	42			30.4				78	2.5	29.2	0.6		312					
					120	22	69		28.3				87	2.6	26.8	0.5		310					
					135	67	39		33				103		35.5	0.9		315					
					140	42	69		30.4				107	2.7	29.6	0.8		313					
					150	22	99		28.3	50			117	3.3	27.2	0.5		311					
					165	67	69		33		42		132	2.9	35.8	1.1		316					
					170	42	99		30.4	50			135	3.3	29.9	0.8		314					
					195	67	28	71	33		42	56	162	3.5	36.2	1.1		317					
					-SLFB12- 90-M 22				28.3				58	2.4	26.5	0.4	X	318					
						-110-M 42			30.4				78	2.5	29.2	0.6		321					
					-120-M 22				28.3				87	2.6	26.8	0.5		319					
					-135-M 67				33				100	2.7	35.5	0.8		324					
					-140-M 42				30.4				105	3	29.6	0.6		322					
					A100	-150-M 22		2	28.3	42	56		117	3.3	27.2	0.5		320					
					-165-M 67		1		33				132	2.9	35.8	1.1		325					
					-170-M 42				30.4	50			135	3.3	29.9	0.8		323					
					-195-M 67		2		33				162	3.5	36.2	1.1		326					
					-SLSA12-165 CV		3	12	15	1.5	—	85	—	—	30	133	4.2	34.1	1.2	○			
					-195 CV				195				163	4.1	33.6		328						
					-225 CV				225				175	4.8	38.3	1.8	329						
					-255 CV				255				190		37.8	2.6	330						
					-285 CV				285				251	5.5	42.5	3.5	331						
					-315 CV				315				281	5.9	44.6	4.3	332						
					-345 CV				345				311	6.2	46.7	5.3	333						
					-SLRA12-165 CV		3	12	22	5	165	136	—	—	85	—	—	30	133	3.6	27.9	0.8	×
					-195 CV				195				163	4.4	32.2		334						
					-225 CV				225				159		32.7	1.3	○	335					
					-255 CV				255				221	4.6	36.1	1.6	▲	336					
					-285 CV				285				251	5	38.5	2.1	▲	337					
					-SLFA12-165 CV		3	12	22	5	165	136	—	—	85	—	—	30	133	3.6	27.9	0.8	×
						-195 CV			195				163	4.4	32.2		339						
					-225 CV				225				159		32.7	1.3	○	340					
					-255 CV				255				221	4.6	36.1	1.6	▲	341					
					-285 CV				285				251	5	38.5	2.1	▲	342					
					A100-SLSA1/2-165 CV		3	1/2	.62	.06	6.50	5.35	—	—	3.35	—	—	1.18	5.28	7.5	26.8	1.2	○
					-195 CV				7.68				6.46	9.2	31.2	1.3	344						
					-225 CV				8.86				6.89	9.6	32.7	1.9	345						
					-255 CV				10.04				7.48	10.1	34.2	2.8	346						
					-285 CV				11.22				9.92	10.2	39.6	3.8	347						
					-315 CV				12.40				11.10	11.0	42.4	4.7	348						
					-345 CV				13.58				12.28	11.8	45.9	5.9	349						
					-SLRA1/2-165 CV		3	1/2	.89	.20	6.50	5.35	—	—	3.35	—	—	1.18	5.20	8.8	31.7	0.6	×
					-195 CV				7.68				5.71	9.4	31.5	0.9	351						
					-225 CV				8.86					11.2	35.8	1.0	○	352					
					-255 CV				10.04				8.74	12.1	42.1	1.1	▲	353					
					-285 CV				11.22				9.92	10.8	41.0	2.2	▲	354					
					-SLFA1/2-165 CV		3	1/2	.89	.20	6.50	5.35	—	—	3.35	—	—	1.18	5.20	8.8	31.7	0.6	×
						-195 CV			7.68				5.71	9.4	31.5	0.9	355						
					-225 CV				8.86					11.2	35.8	1.0	○	356					
					-255 CV				10.04				8.74	12.1	42.1	1.1	▲	357					
					-285 CV				11.22				9.92	10.8	41.0	2.2	▲	358					


	CODE	Fig.	φD	φC	t	L	M	L ₁	L ₂	φC ₁	φC ₂	φC ₃	H	h	Kg lbs	N	S	Feature	Scale model
MONO 3°	A100-SLSB16-110-M 42	1	16	24	4	110	42	39	—	28.4	42	—	32	78	2.4	34.7	0.7	Shrink-fit Heater	361
MONO CURVE	-135-M 67					135	67			31				103	2.5	45	1.2		364
MONO Series	-140-M 42					140	42	69		28.4				107	2.7	35	0.9		362
2PIECE type	-165-M 67					165	67			31				132	2.8	45.4	1.4		365
UNO	-M 97					97	39			34.2				133	2.7	57.4	1.7		367
HYPER VERSION	-170-M 42					170	42	99		28.4	50			135	3.2	35.4	0.9		363
Z	-195-M 67					195	67			31				160	3.3	45.7	1.4		366
STRAIGHT arbor	-M 97					97	69			34.2	42			162	2.9	57.8	2.1		368
OTHERS	-M127					127	39			37.3	50			160	3	69.8	2.2		370
PERIPHERALS	-225-M 97					225	97	99		34.2				190	3.5	58.1	2.1		369
Technical data	-M127	2				127	69			37.3	53			3.4	70.2	2.3			371
	-M157	1				157	39			40.5				193	3.3	82.3	2.6		373
	-255-M127	2				255	127	28	71	37.3	67			220	4.3	70.6	2.3		372
	-M157					157	69	—		40.5	—			3.7	82.6	2.9			374
	-285-M157	2				285	28	71		67				250	4.6	83			375
	-SLRB16- 90-M 22	1	16	32	8	90	22	39	—	34.3	42	—	32	58	2.4	26.5	0.4		376
	-110-M 42					110	42			36.4				78	2.5	34.8	0.5		379
	-120-M 22					120	22	69		34.3				87	2.7	26.9			377
	-135-M 67					135	67	39		39				103		45.2	0.7		382
	-140-M 42					140	42	69		36.4				107	2.8	35.2			380
	-150-M 22					150	22	99		34.3	50			115	3.2	27.2	0.5		378
	-165-M 67					165	67	69		39	42			132	3	45.5	1		383
	-170-M 42	2				170	42	28	71	36.4		56		137	3.5	35.5	0.7		381
	-195-M 67					195	67			39				162	3.6	45.9	0.9		384
	-SLFB16- 90-M 22	1	16	32	8	90	22	39	—	34.3	42	—	32	58	2.4	26.5	0.4		385
	 -110-M 42					110	42			36.4				78	2.5	34.8	0.5		388
	-120-M 22					120	22	69		34.3				87	2.7	26.9			386
	-135-M 67					135	67	39		39				103		45.2	0.7		388
	A100 -140-M 42	2				140	42	69		36.4		56		107	2.8	35.2			391
	-150-M 22	1				150	22	28	71	34.3		—		117	3.4	27.2	0.5		387
	-165-M 67					165	67	69	—	39				132	3	45.5	1		392
	-170-M 42	2				170	42	99		36.4	50			135	3.4	35.5	0.7		390
	-195-M 67					195	67	28	71	39	42	56		162	3.6	45.9	0.9		393
	-SLSB16-165 CV	3	16	21	2.5	165	136	—	—	85	—	—	32	131	4.2	34.2	0.6		394
	-195 CV					195	166							161	4	33.7	1.1		395
	-225 CV					225	196							191	4.8	38.4	1.2		396
	-255 CV					255	226							221	4.7	38	2		397
	-285 CV					285	256							251	5.5	42.6			398
	-315 CV					315	286							281	5.9	44.8	2.6		399
	-345 CV					345	316							311	6.2	46.9	3.3		400
	A100-SLSB5/8-165 CV	3	5/8	.82	.10	6.50	5.35	—	—	3.35	—	—	1.26	5.20	8.8	31.9	0.6		401
	-195 CV					7.68	6.54							6.38	8.6	32.6	1.2		402
	-225 CV					8.86	7.72							7.56	10.4	37.6			403
	-255 CV					10.04	8.90							8.74	10.1	38.3	2.0		404
	-285 CV					11.22	10.08							9.92	11.9	43.4	2.2		405
	-315 CV					12.40	11.26							11.10	12.7	46.3	2.8		406
	-345 CV					13.58	12.44							12.28	13.5	49.1	3.5		407
	A100-SLSB20-110-M 42	1	20	29	4.5	110	42	39	—	33.4	42	—	40	78	2.5	37.4	0.6		408
	-135-M 67					135	67			36				103		52.8	0.9		411
	-140-M 42					140	42	69		33.4				107	2.7	37.8	0.8		409
	-165-M 67					165	67			36				132	2.8	53.2	1.2		412
	-M 97					97	39			39.2	53			133	2.9	71.3	1.1		414

CODE	Fig.	ϕD	ϕC	t	L	M	L ₁	L ₂	ϕC_1	ϕC_2	ϕC_3	H	h	Kg lbs	N	S	Scale model	Feature
A100-SLSB20-170-M 42	2	20	29	4.5	170	42	28	71	33.4	42	56	40	137	3.4	38.1	0.8	410	Shrink-fit Heater
					195	67			36				162	3.5	53.5	1.2	413	
					97	69	—		39.2	53	—		3.3	71.7	1.3	415		
					127	39			42.3				163	3.2	91	1.5	417	
					225	97	28	71	39.2		67		190	4.3	72	1.3	416	
	1	225	127	69	127	69	—		42.3	50	—	3.5	91.4	1.9		418	MONO 3°	
					157	39			45.5	53			193		109.6		420	MONO CURVE
					255	127	99		42.3	50			220	3.8	91.8	2.3	419	
					157	69			45.5	53			3.9	109.9	2.2	421		
					285		28	71			67		250	4.8	110.3		422	
-SLRB20-110-M 42	1	20	38	9	110	42	39	—	42.4	53	—	40	78	2.8	37.5	0.3	423	MONO Series
					135	67			45				103	3.1	53	0.5	426	
					140	42	69		42.4				105	3.2	37.9	0.4	424	
	2	170	42	28	165	67			45			40	130	3.5	53.3	0.6	427	
					170	42	28	71	42.4	53	67		135	4.1	38.2	0.4	425	
					195	67			45				160	4.4	53.7	0.6	428	
-SLFB20-110-M 42	1	20	38	9	110	42	39	—	42.4	53	—	40	78	2.8	37.5	0.3	429	2PIECE type
					135	67			45				103	3.1	53	0.5	432	
					140	42	69		42.4				105	3.2	37.9	0.4	430	
					165	67			45				130	3.5	53.3	0.6	433	
					170	42	28	71	42.4		67		135	4.1	38.2	0.4	431	
-195-M 67	1	20	38	9	195	67	99	—	45	50	—	40	160	3.7	53.7	0.9	434	
					110	42	39	—	42.4	53	—		78	2.8	37.5	0.3	435	
					135	67			45				103	3.1	53	0.5	436	
					140	42	69		42.4				105	3.2	37.9	0.4	437	
					165	67			45				130	3.5	53.3	0.6	438	
					170	42	28	71	42.4		67		135	4.1	38.2	0.4	439	
-SLSB20-165 CV	3	20	26	3	165	136	—	—	85	—	—	40	132	4	33.6	0.6	440	UNO
					195	166							161	4.9	38.1	0.7	441	
					225	196							191	4.6	37.4	1.2	442	
					255	226							221	5.5	42.1	1.3	443	
					285	256							251	5.2	41.2	2.1	444	
					315	286							281	6.1	46	2.3	445	
					345	316							311	6.4	47.9	2.9	446	
A100-SLSB3/4-165 CV	3	3/4	.99	.12	6.50	5.35	—	—	3.35	—	—	1.50	5.20	8.6	31.5	0.6	447	HYPER VERSION
					7.68	6.54							6.38	10.4	36.6	0.7	448	Z
					8.86	7.72							7.56	10.0	37.5	1.2	449	STRAIGHT arbor
					10.04	8.90							8.74	11.7	42.6	1.3	450	OTHERS
					11.22	10.08							9.92	11.4	43.5	2.2	451	PERIPHERALS
					12.40	11.26							11.10	13.1	48.6	2.3	452	Technical data
					13.58	12.44							12.28	13.8	51.6	3.0	453	
A100-SLRB25-110-M 42	1	25	45	10	110	42	39	—	49.6	53	—	45	78	2.9	40.7	0.3	454	
					140		69						105	3.3	41	0.4	455	
					170		28	71					135	4.2	41.4		456	
-SLFB25-110-M 42	1	25	45	10	110	42	39	—	49.6	53	—	45	78	2.9	40.7	0.3	457	
					140		69						105	3.2	41	0.5	458	
					170		28	71					135	4.2	41.4	0.4	459	
A100-SLRB32-110-M42	1	32	54	11	110	42	39	—	58.4	63	—	50	77	3.2	26.9	0.2	460	
					140		69						107	3.7	33.4	0.3	461	
					170		28	71					132	4.9	42.8		462	

Φ70 Nozzle (HRB-03S)

Required for shrinking the SLRB32.

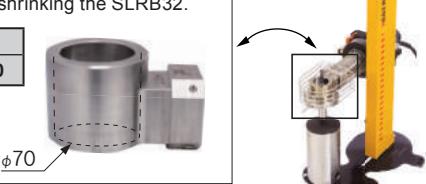CODE
HRB-NZL70



HEAT ROBO Baby3000S

A100-SLRA3-195-M127	A100-SLRA3-225-M127	A100-SLRA3-255-M127
15.8 ↓	16.4 ↓	16.3 ↓
A100-SLFB3-90-M22	A100-SLFB3-120-M22	A100-SLFB3-150-M22
1.9 ↓	2.3 ↓	2.3 ↓
A100-SLFB3-110-M42	A100-SLFB3-140-M42	A100-SLFB3-170-M42
3.3 ↓	4.1 ↓	3.9 ↓
A100-SLFB3-135-M67	A100-SLFB3-165-M67	A100-SLFB3-195-M67
5.5 ↓	6.5 ↓	6.3 ↓

Feature

Shrink-fit Heater

MONO 3°
MONO CURVE

MONO Series

2PIECE type

UNO

HYPER
VERSION

Z

STRAIGHT
arbor

OTHERS

PERIPHERALS
Technical data

φ4

Feature

Shrink-fit Heater

MONO 3°
MONO CURVE

MONO Series

2PIECE type

UNO

HYPER VERSION




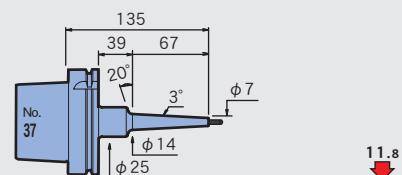
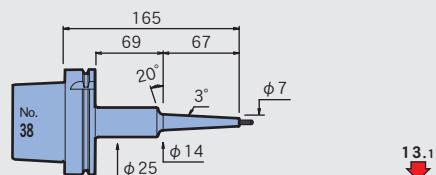
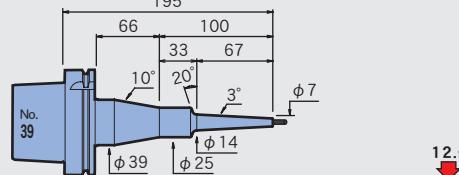
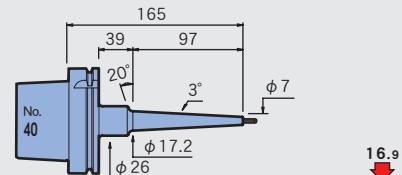
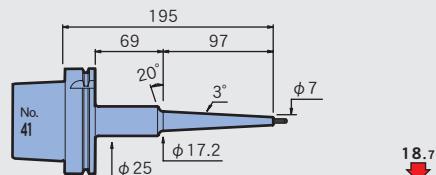
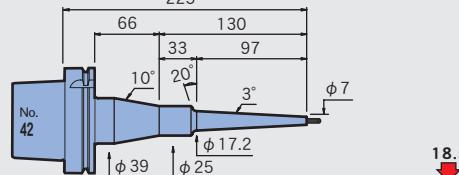
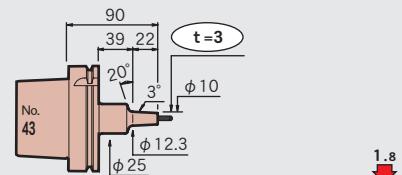
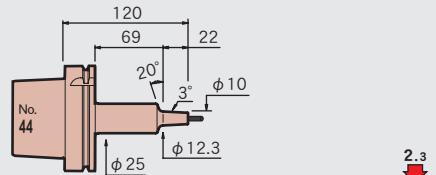
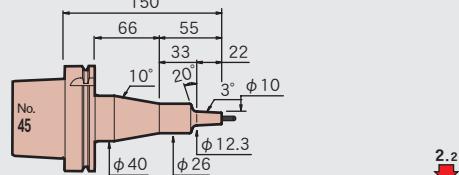
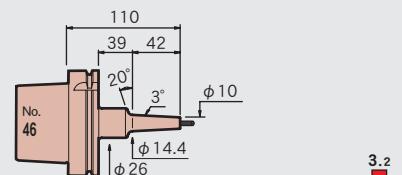
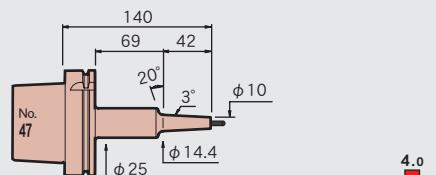
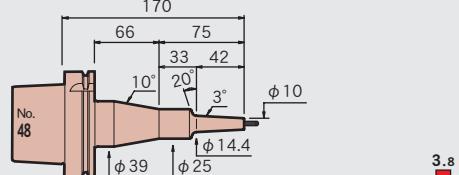
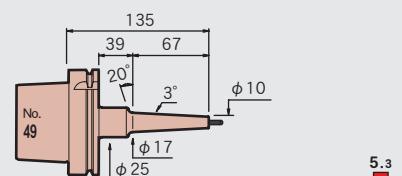
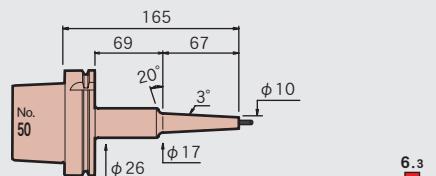
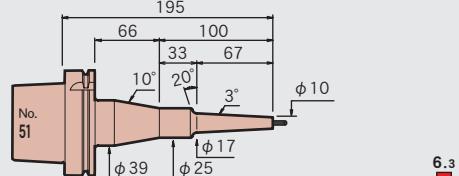
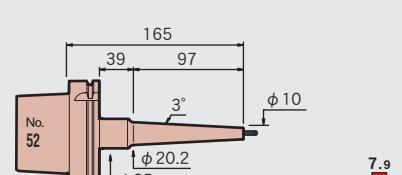
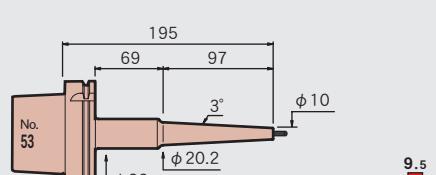
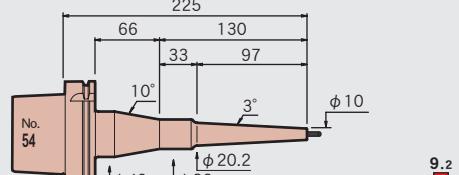
Z

STRAIGHT arbor

OTHERS

PERIPHERALS

Technical data

A100-SLSA4-110-M42**A100-SLSA4-140-M42****A100-SLSA4-170-M42****A100-SLSA4-135-M67****A100-SLSA4-165-M67****A100-SLSA4-195-M67****A100-SLSA4-165-M97****A100-SLSA4-195-M97****A100-SLSA4-225-M97****A100-SLRA4-90-M22****A100-SLRA4-120-M22****A100-SLRA4-150-M22****A100-SLRA4-110-M42****A100-SLRA4-140-M42****A100-SLRA4-170-M42****A100-SLRA4-135-M67****A100-SLRA4-165-M67****A100-SLRA4-195-M67****A100-SLRA4-165-M97****A100-SLRA4-195-M97****A100-SLRA4-225-M97**


		A100	
A100-SLRA4-195-M127		A100-SLRA4-225-M127	






















Feature
Shrink-fit Heater
MONO 3°
MONO CURVE






















MONO Series
2PIECE type
UNO








HYPER VERSION
Z
STRAIGHT arbor
OTHERS

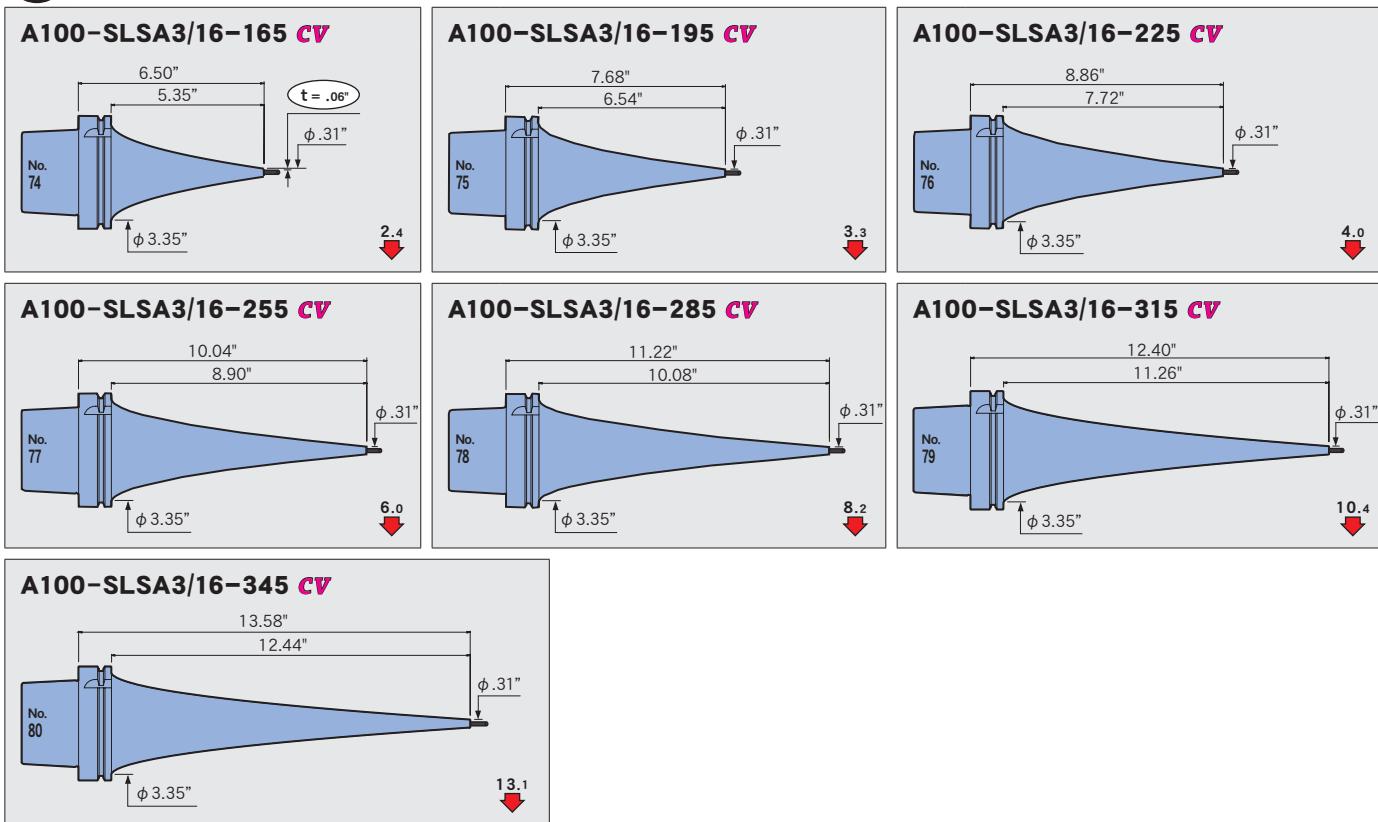Technical PERIPHERALS
OTHERS

$\phi \frac{3}{16}$ 

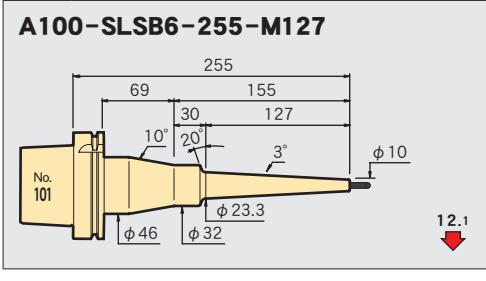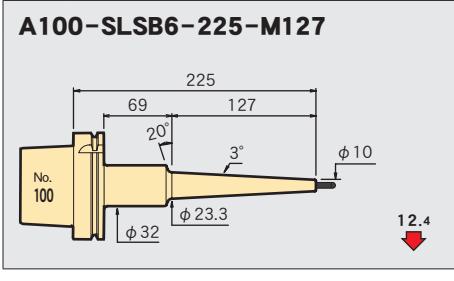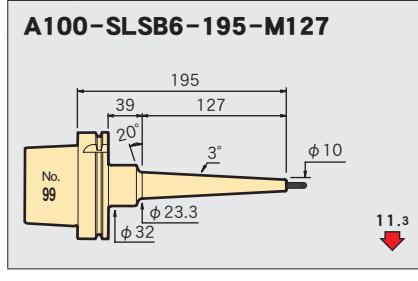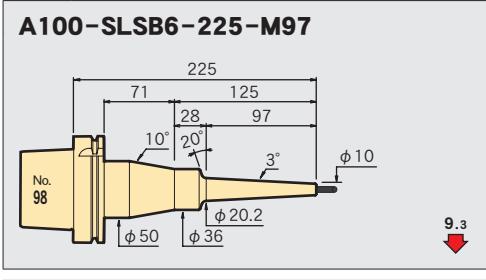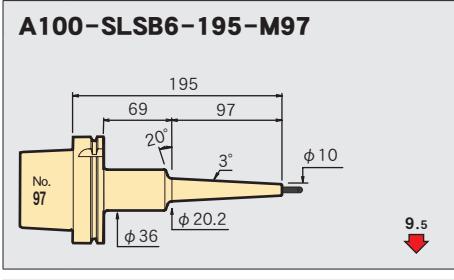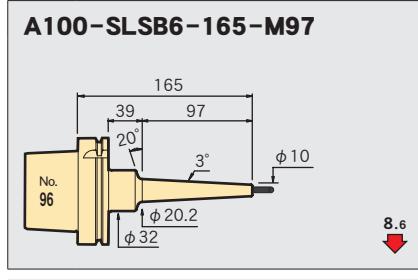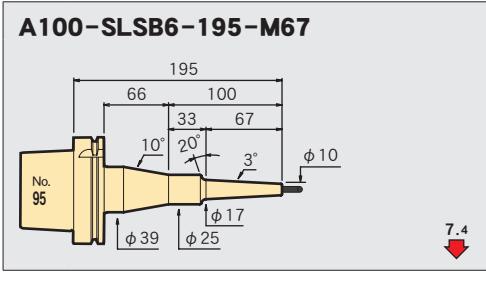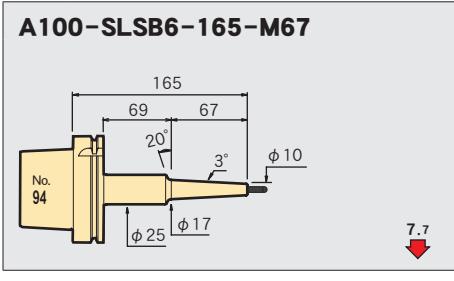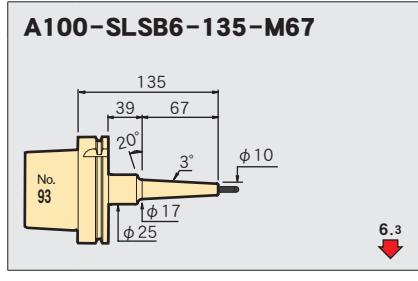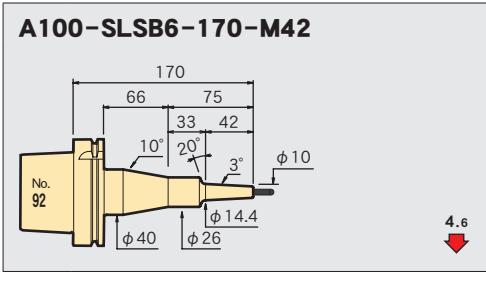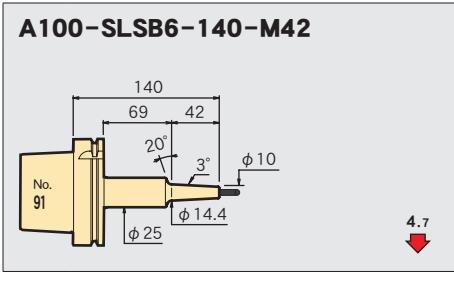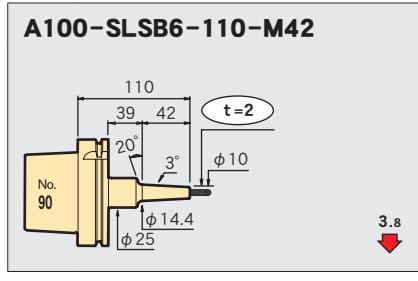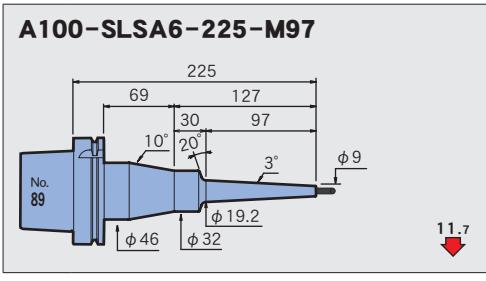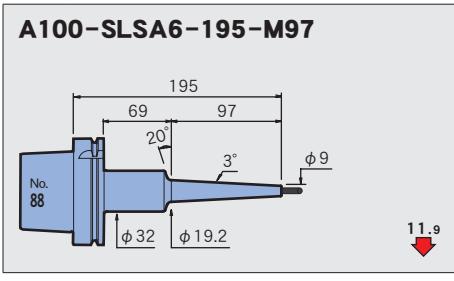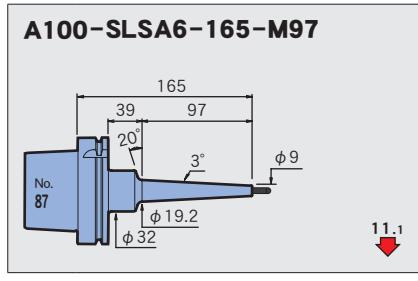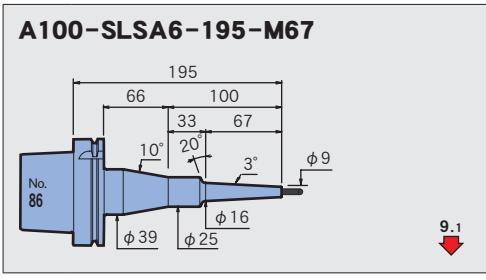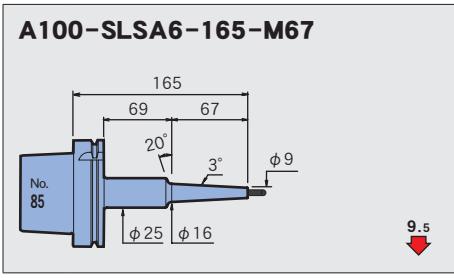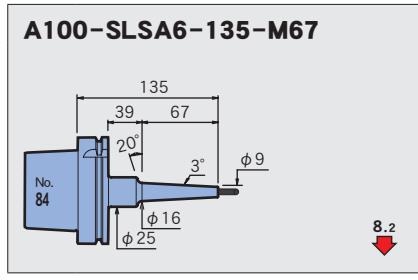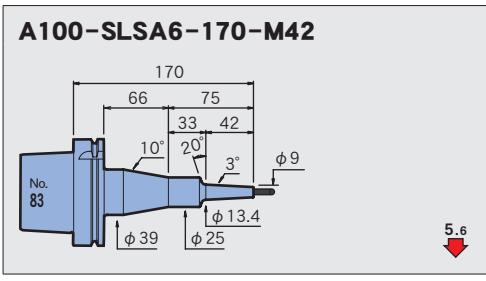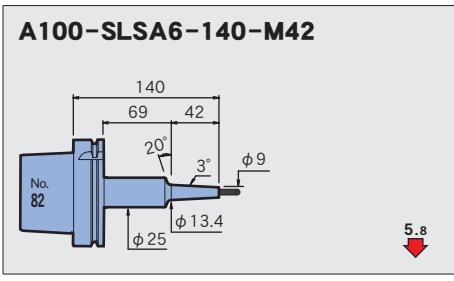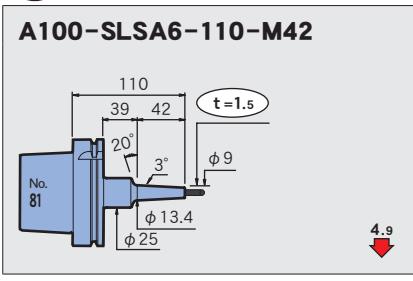Φ 6

A100-SLSB6-225-M157	A100-SLSB6-255-M157	A100-SLSB6-285-M157
		
A100-SLRB6-90-M22	A100-SLRB6-120-M22	A100-SLRB6-150-M22
		
A100-SLRB6-110-M42	A100-SLRB6-140-M42	A100-SLRB6-170-M42
		
A100-SLRB6-135-M67	A100-SLRB6-165-M67	A100-SLRB6-195-M67
		
A100-SLFB6-90-M22	A100-SLFB6-120-M22	A100-SLFB6-150-M22
		
A100-SLFB6-110-M42	A100-SLFB6-140-M42	A100-SLFB6-170-M42
		
A100-SLFB6-135-M67	A100-SLFB6-165-M67	A100-SLFB6-195-M67
		

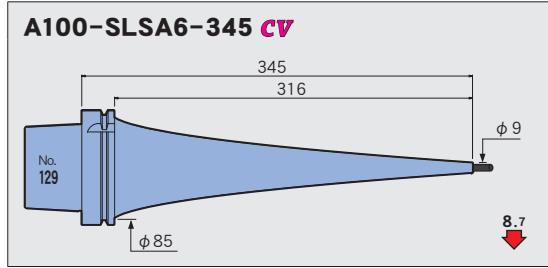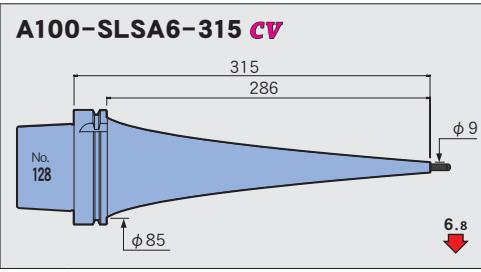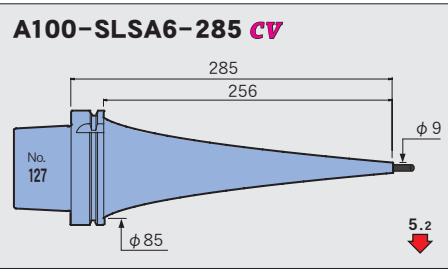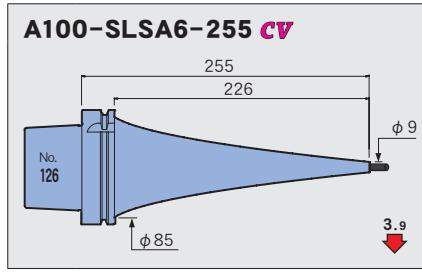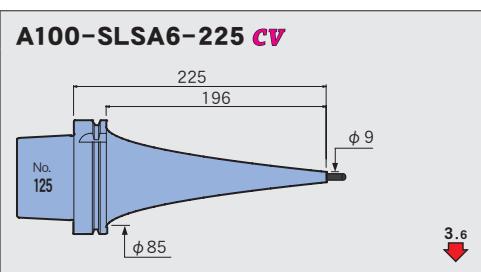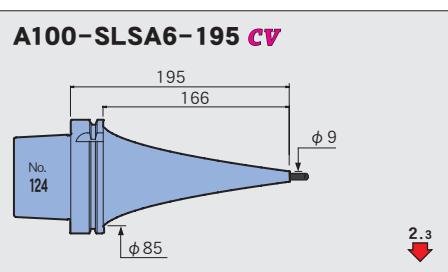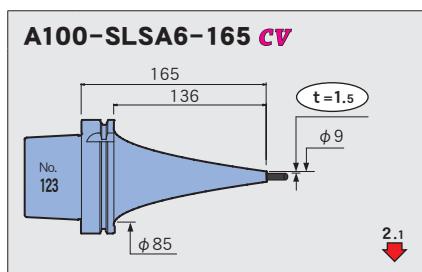

Feature

Shrink-fit Heater

MONO 3°
MONO CURVE

MONO Series

2PIECE type

UNO

HYPER
VERSION



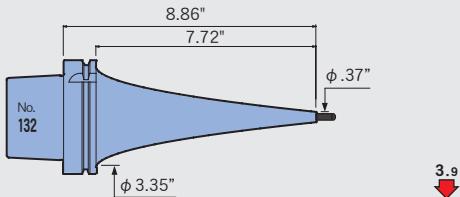
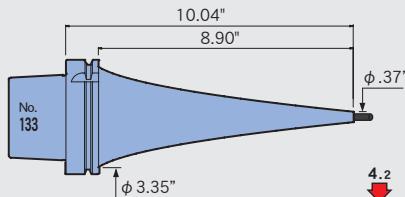
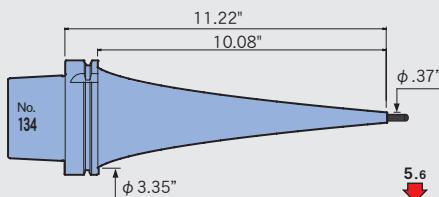
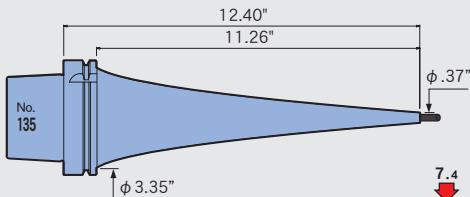
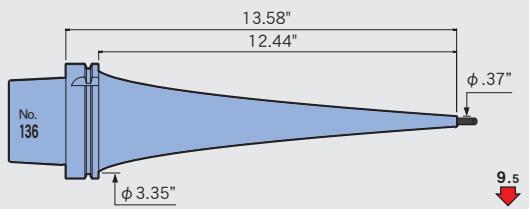
Z






















STRAIGHT
arbor

OTHERS


PERIPHERALS
















Technical data

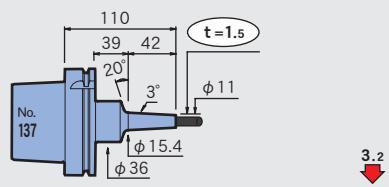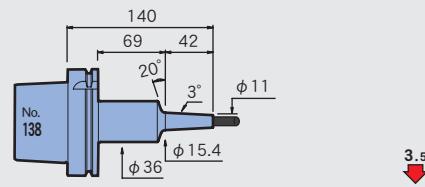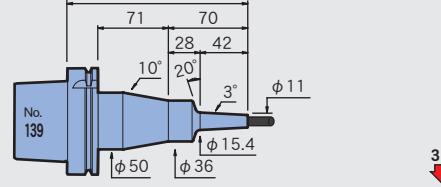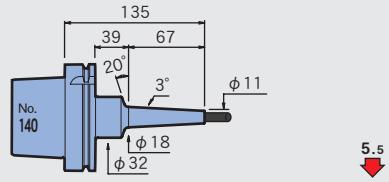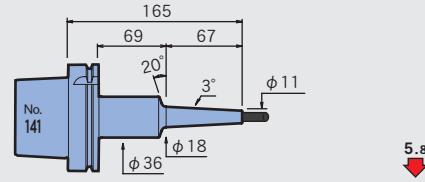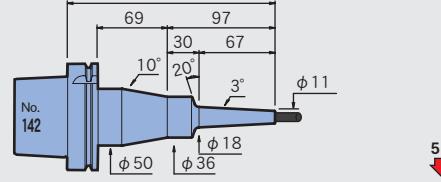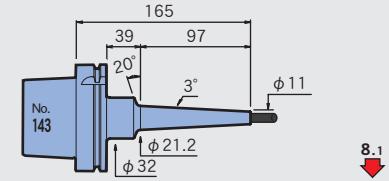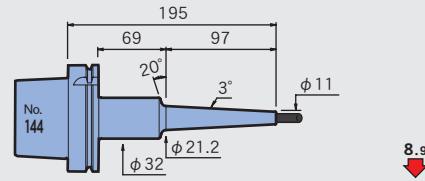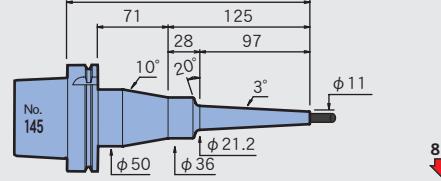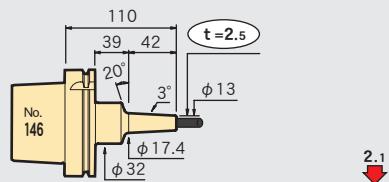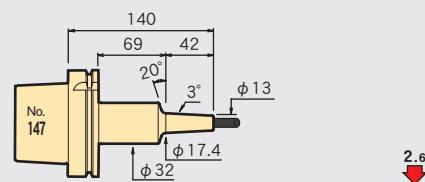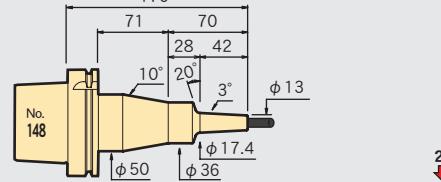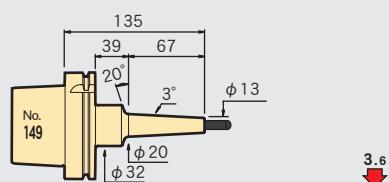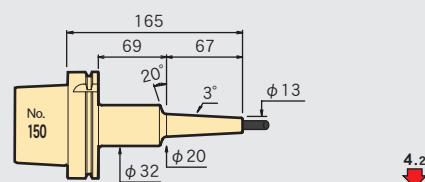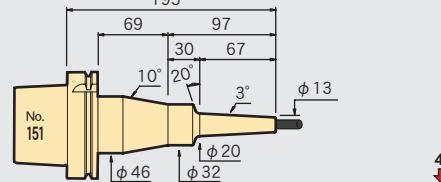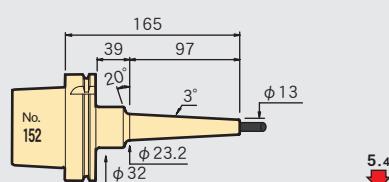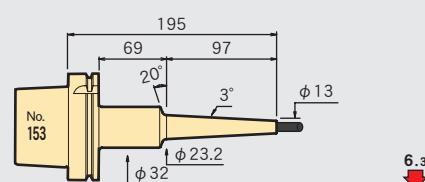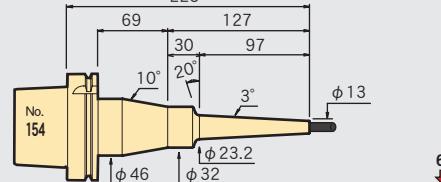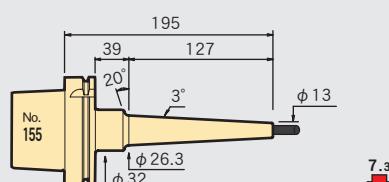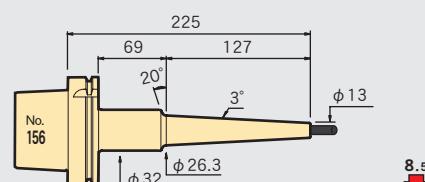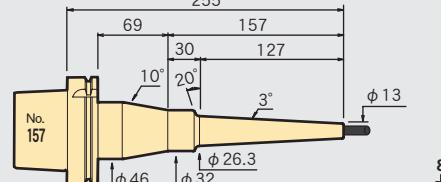$\phi \frac{1}{4}$ **A100-SLSA1/4-165 CV****A100-SLSA1/4-195 CV****A100-SLSA1/4-225 CV****A100-SLSA1/4-255 CV****A100-SLSA1/4-285 CV****A100-SLSA1/4-315 CV****A100-SLSA1/4-345 CV**






















Φ8**A100-SLSA8-110-M42****A100-SLSA8-140-M42****A100-SLSA8-170-M42****A100-SLSA8-135-M67****A100-SLSA8-165-M67****A100-SLSA8-195-M67****A100-SLSA8-165-M97****A100-SLSA8-195-M97****A100-SLSA8-225-M97****A100-SLSB8-110-M42****A100-SLSB8-140-M42****A100-SLSB8-170-M42****A100-SLSB8-135-M67****A100-SLSB8-165-M67****A100-SLSB8-195-M67****A100-SLSB8-165-M97****A100-SLSB8-195-M97****A100-SLSB8-225-M97****A100-SLSB8-195-M127****A100-SLSB8-225-M127****A100-SLSB8-255-M127**

A100-SLSB8-225-M157	A100-SLSB8-255-M157	A100-SLSB8-285-M157
8.1	8.7	8.6
A100-SLRB8-90-M22	A100-SLRB8-120-M22	A100-SLRB8-150-M22
0.7	1.0	1.0
A100-SLRB8-110-M42	A100-SLRB8-140-M42	A100-SLRB8-170-M42
1.1	1.6	1.3
A100-SLRB8-135-M67	A100-SLRB8-165-M67	A100-SLRB8-195-M67
1.8	2.4	2.2
A100-SLFB8-90-M22	A100-SLFB8-120-M22	A100-SLFB8-150-M22
0.7	1.0	1.0
A100-SLFB8-110-M42	A100-SLFB8-140-M42	A100-SLFB8-170-M42
1.1	1.3	1.3
A100-SLFB8-135-M67	A100-SLFB8-165-M67	A100-SLFB8-195-M67
1.7	2.4	2.2

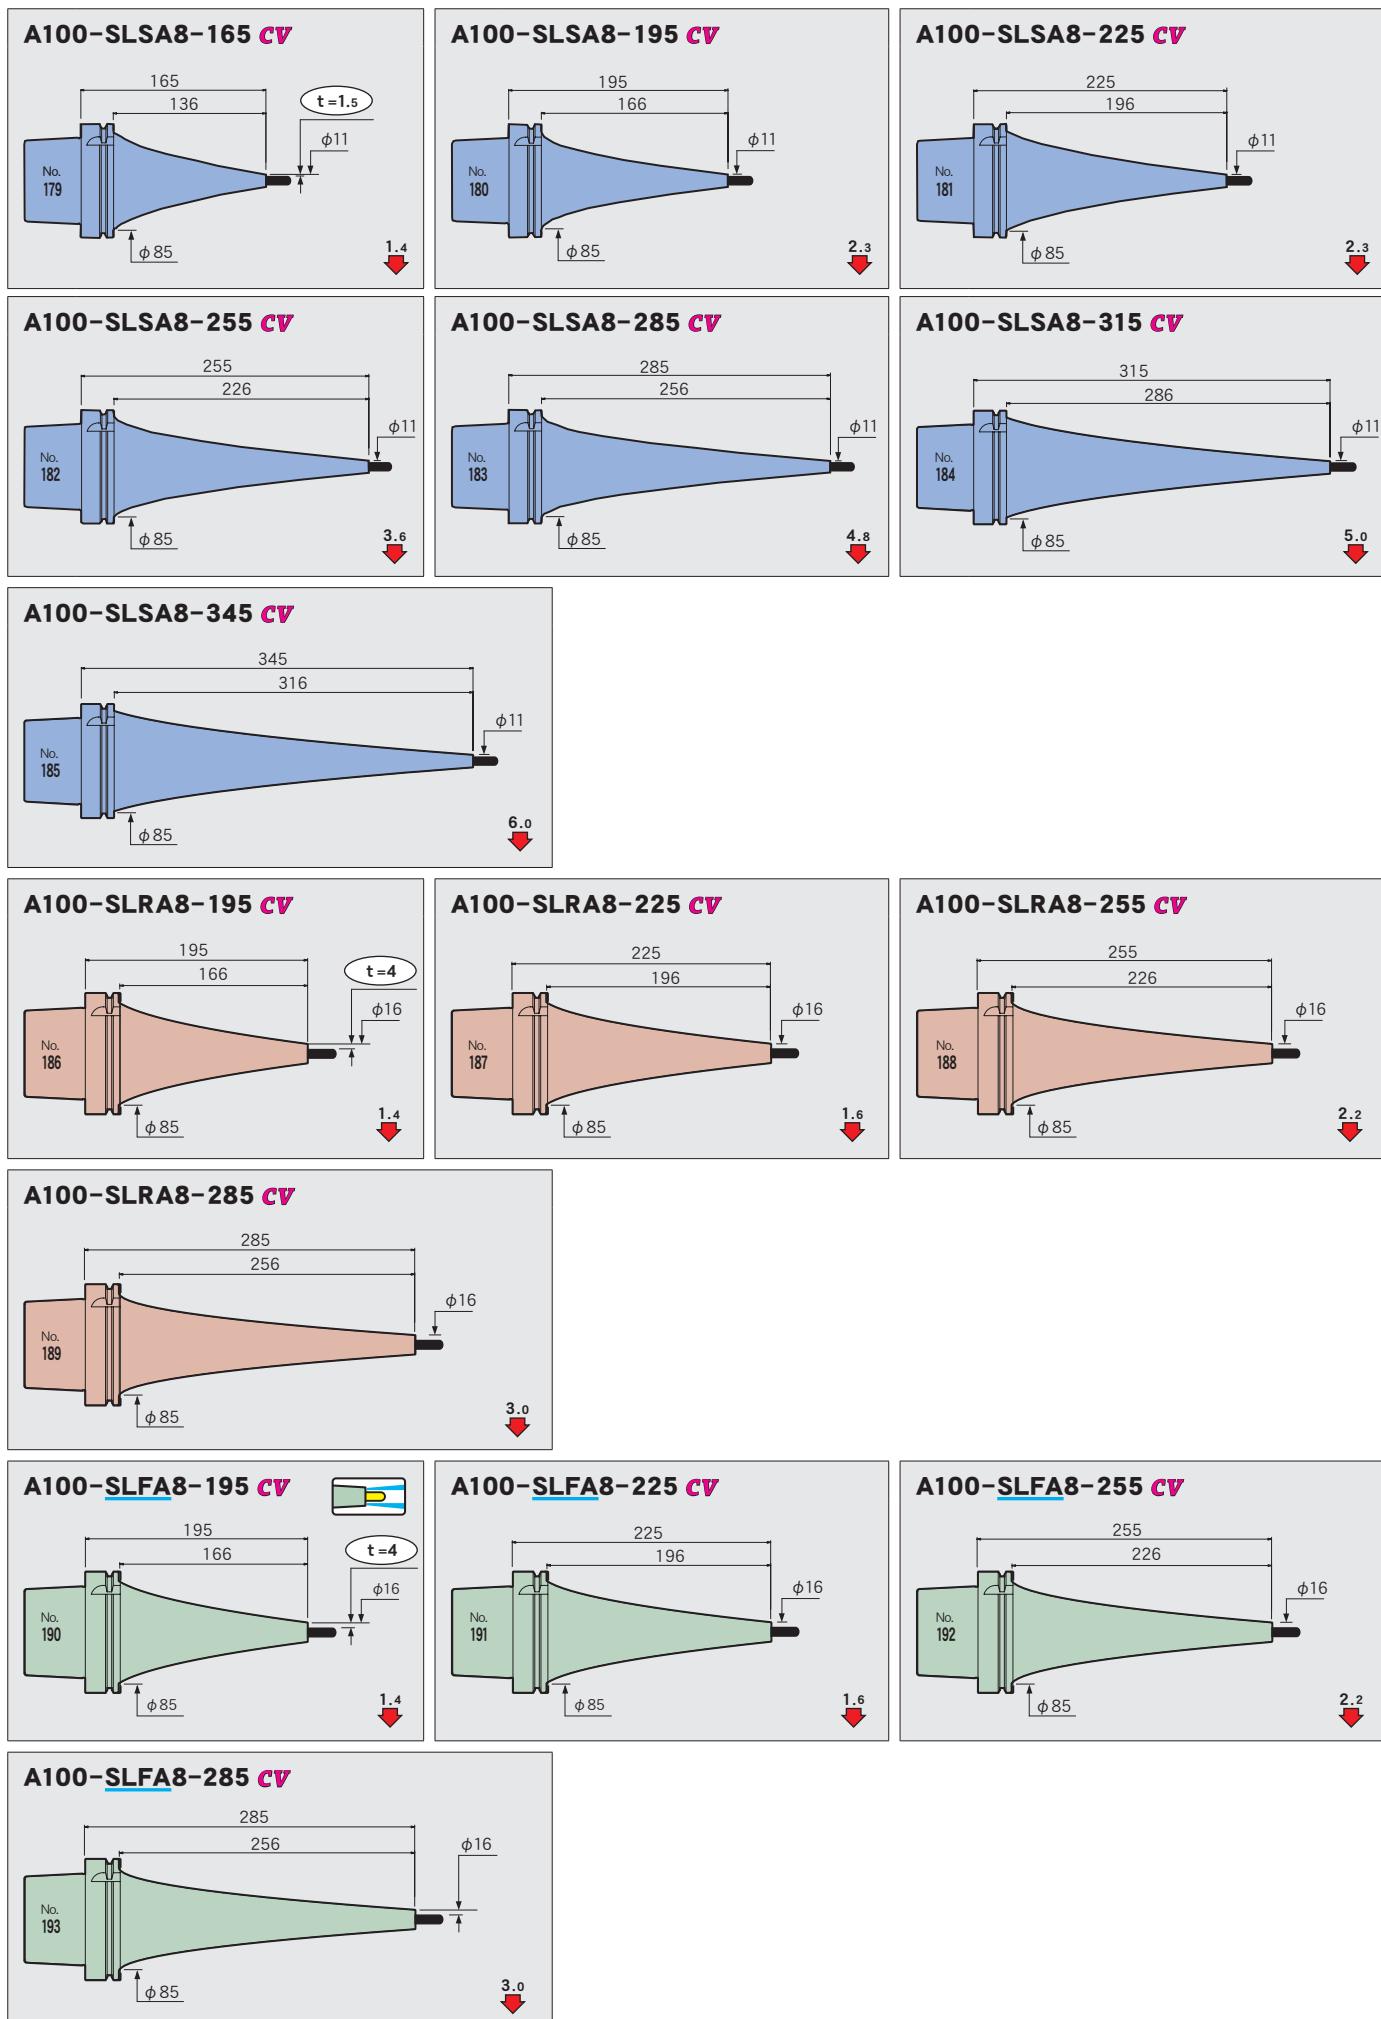







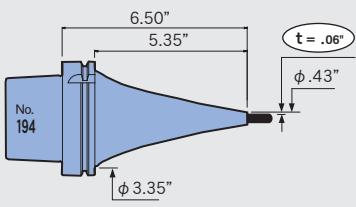

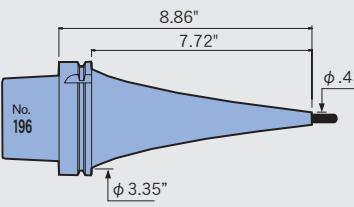
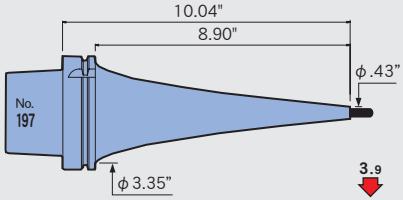
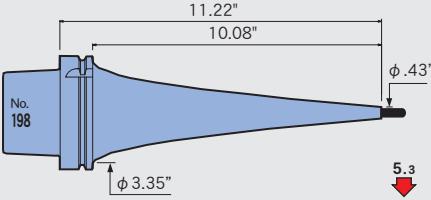
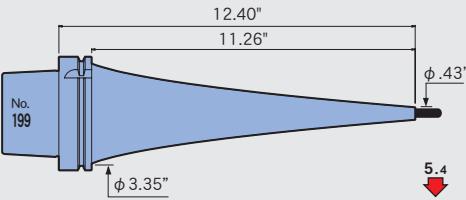
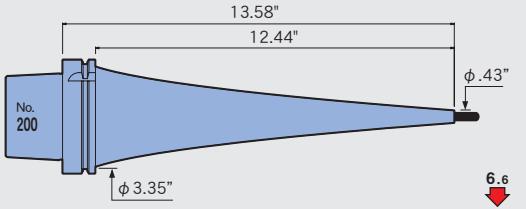
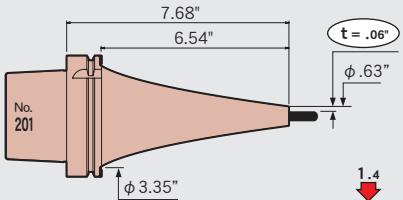
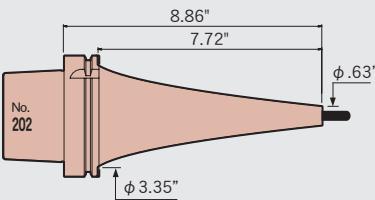
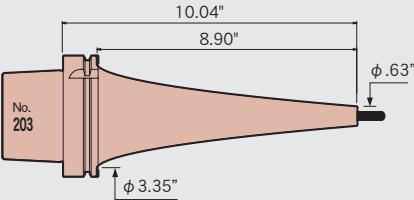
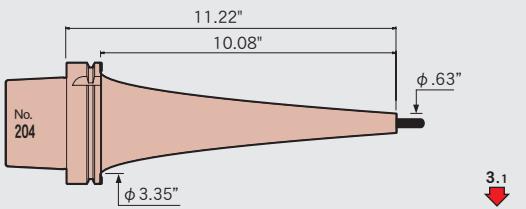
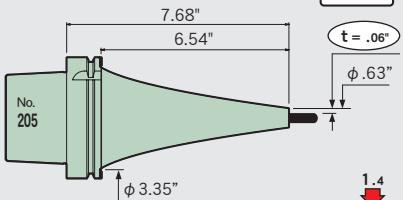
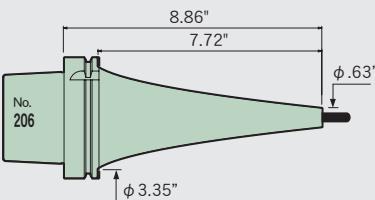
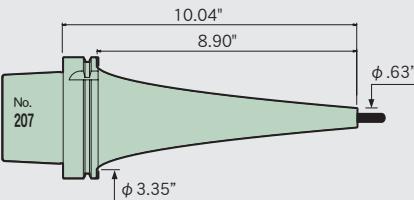
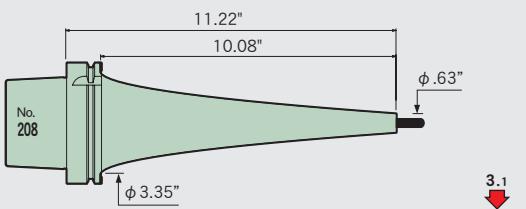
$\phi \frac{5}{16}$ **A100-SLSA5/16-165 CV****A100-SLSA5/16-195 CV****A100-SLSA5/16-225 CV****A100-SLSA5/16-255 CV****A100-SLSA5/16-285 CV****A100-SLSA5/16-315 CV****A100-SLSA5/16-345 CV****A100-SLRA5/16-195 CV****A100-SLRA5/16-225 CV****A100-SLRA5/16-255 CV****A100-SLRA5/16-285 CV****A100-SLFA5/16-195 CV****A100-SLFA5/16-225 CV****A100-SLFA5/16-255 CV****A100-SLFA5/16-285 CV**

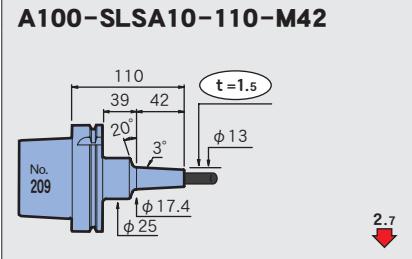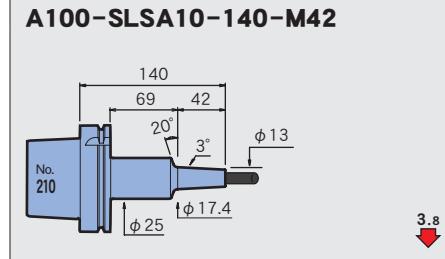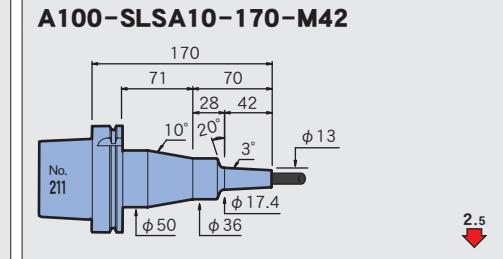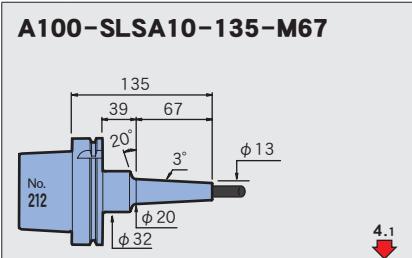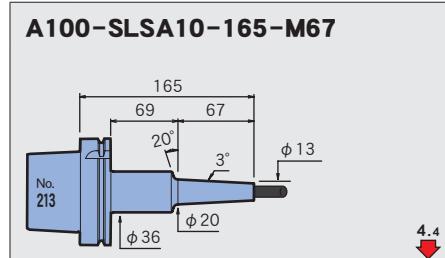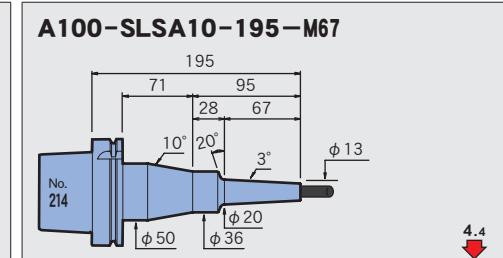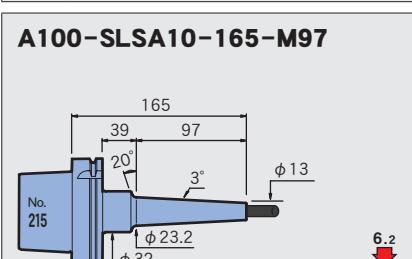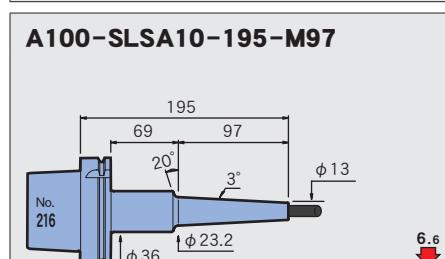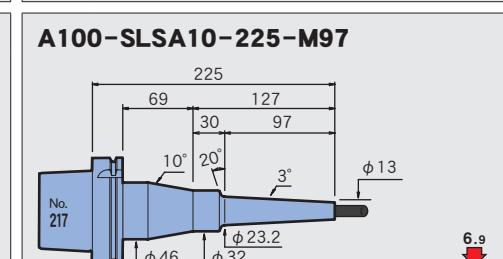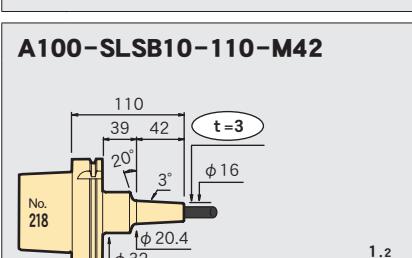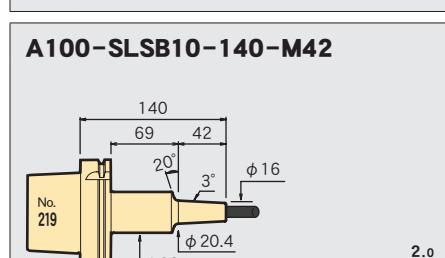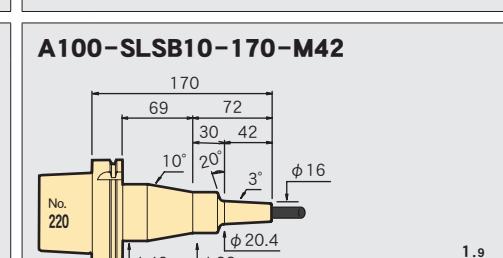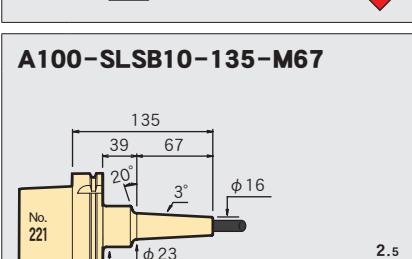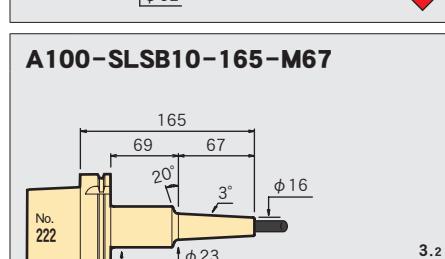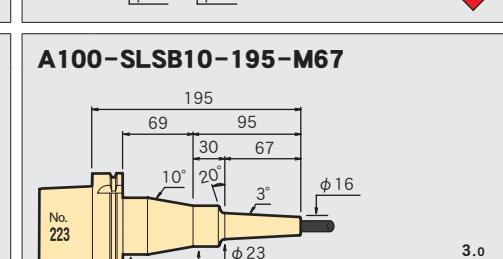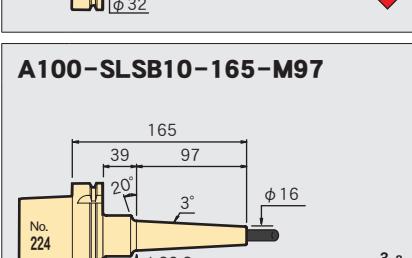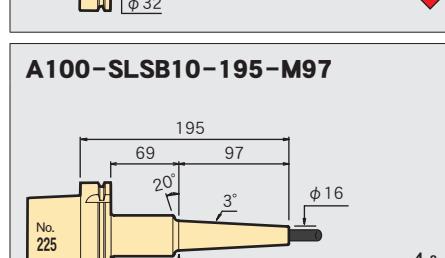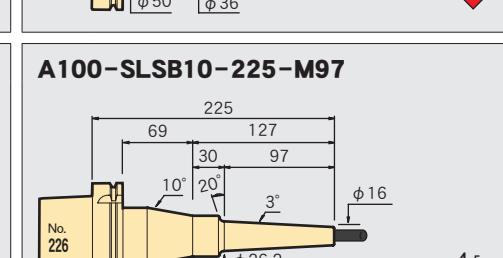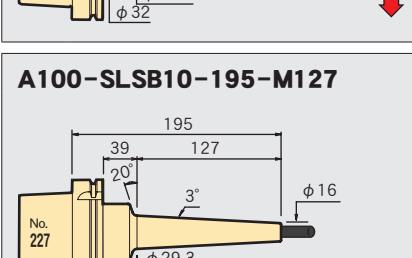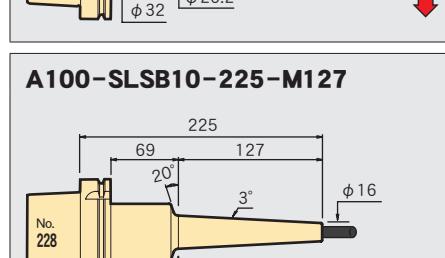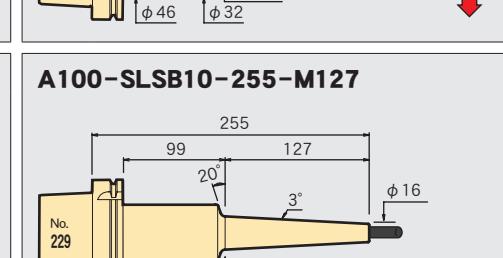Φ 10

A100-SLSA10-110-M42  No. 209 110 39 42 20° 3° t=1.5 φ13 φ17.4 φ25 2.7 ↓	A100-SLSA10-140-M42  No. 210 140 69 42 20° 3° φ13 φ25 φ17.4 3.8 ↓	A100-SLSA10-170-M42  No. 211 170 71 70 28 42 10° 20° 3° φ13 φ50 φ36 φ17.4 2.5 ↓
A100-SLSA10-135-M67  No. 212 135 39 67 20° 3° φ13 φ20 φ32 4.1 ↓	A100-SLSA10-165-M67  No. 213 165 69 67 20° 3° φ13 φ20 φ36 4.4 ↓	A100-SLSA10-195-M67  No. 214 195 71 95 28 67 10° 20° 3° φ13 φ20 φ36 4.4 ↓
A100-SLSA10-165-M97  No. 215 165 39 97 20° 3° φ13 φ23.2 φ32 6.2 ↓	A100-SLSA10-195-M97  No. 216 195 69 97 20° 3° φ13 φ23.2 φ36 6.6 ↓	A100-SLSA10-225-M97  No. 217 225 69 127 30 97 10° 20° 3° φ13 φ23.2 φ32 φ46 6.9 ↓
A100-SLSB10-110-M42  No. 218 110 39 42 20° 3° t=3 φ16 φ20.4 φ32 1.2 ↓	A100-SLSB10-140-M42  No. 219 140 69 42 20° 3° φ16 φ20.4 φ32 2.0 ↓	A100-SLSB10-170-M42  No. 220 170 69 72 30 42 10° 20° 3° φ16 φ20.4 φ32 φ46 1.9 ↓
A100-SLSB10-135-M67  No. 221 135 39 67 20° 3° φ16 φ23 φ32 2.5 ↓	A100-SLSB10-165-M67  No. 222 165 69 67 20° 3° φ16 φ23 φ32 3.2 ↓	A100-SLSB10-195-M67  No. 223 195 69 95 30 67 10° 20° 3° φ16 φ23 φ36 φ50 3.0 ↓
A100-SLSB10-165-M97  No. 224 165 39 97 20° 3° φ16 φ26.2 φ32 3.8 ↓	A100-SLSB10-195-M97  No. 225 195 69 97 20° 3° φ16 φ26.2 φ32 4.8 ↓	A100-SLSB10-225-M97  No. 226 225 69 127 30 97 10° 20° 3° φ16 φ26.2 φ32 φ46 4.5 ↓
A100-SLSB10-195-M127  No. 227 195 39 127 20° 3° φ16 φ29.3 φ42 4.6 ↓	A100-SLSB10-225-M127  No. 228 225 69 127 20° 3° φ16 φ29.3 φ42 5.0 ↓	A100-SLSB10-255-M127  No. 229 255 99 127 20° 3° φ16 φ29.3 φ50 5.0 ↓

Feature
Shrink-fit Heater
MONO 3°
MONO CURVE
MONO Series
2PIECE type
UNO
HYPER VERSION
Z
STRAIGHT arbor
OTHERS
PERIPHERALS
Technical

	Feature
	Shrink-fit Heater
	MONO 3° MONO CURVE
	MONO Series
	2PIECE type
	UNO
	HYPER VERSION
	Z
	STRAIGHT arbor
	OTHERS
	PERIPHERALS
	Technical data

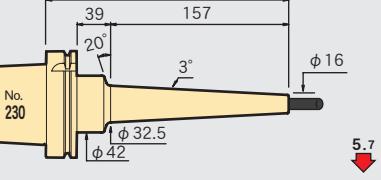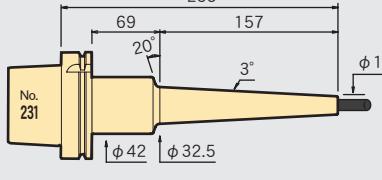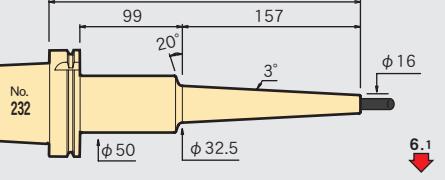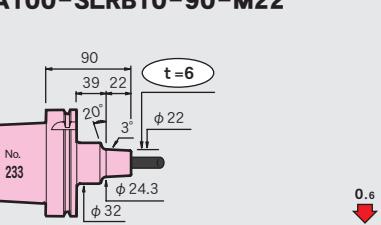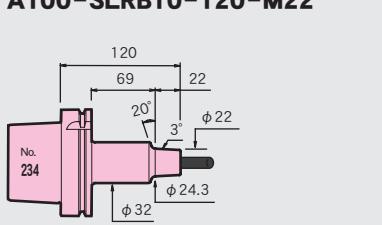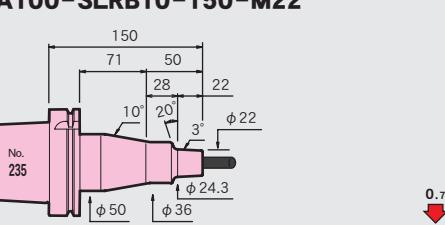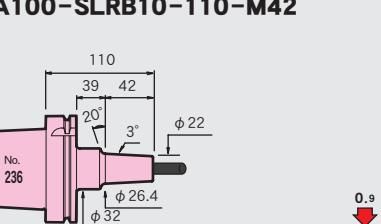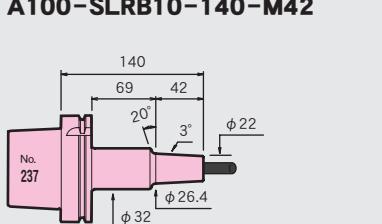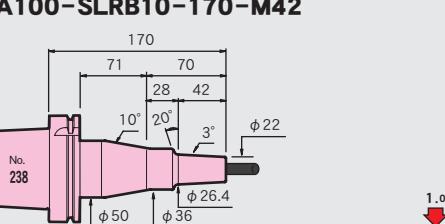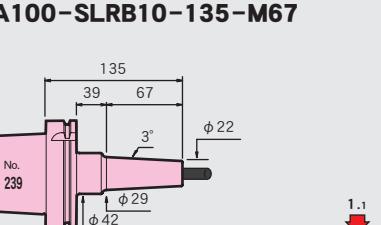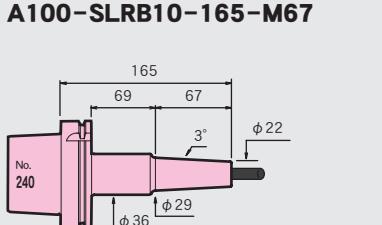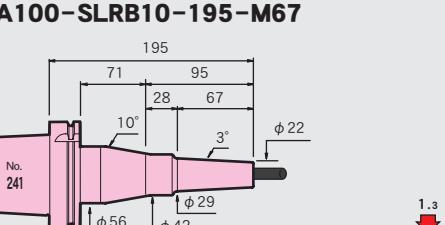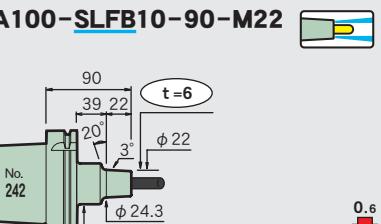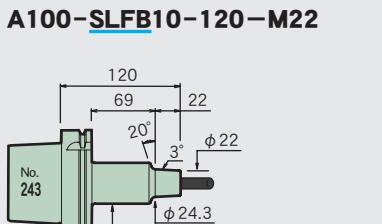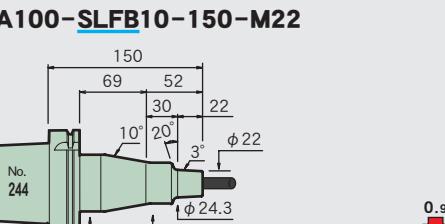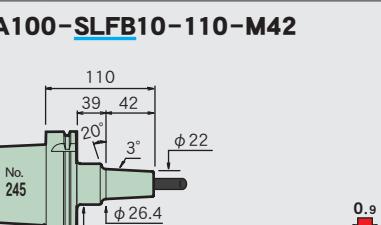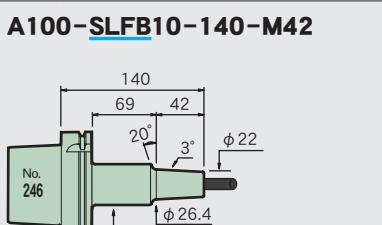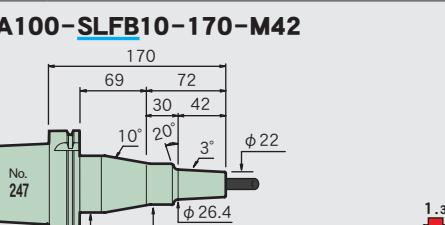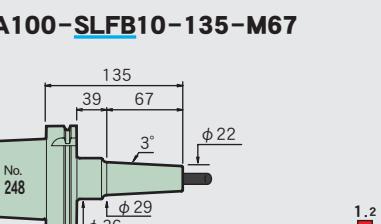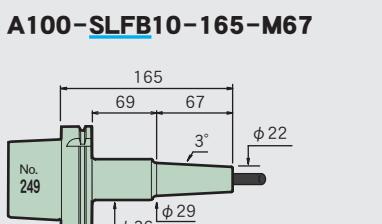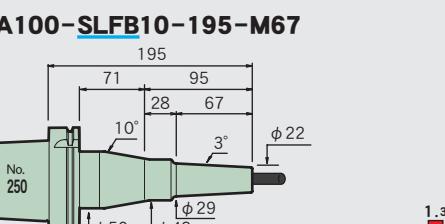A100-SLSB10-225-M157  5.7	A100-SLSB10-255-M157  6.2	A100-SLSB10-285-M157  6.1
A100-SLRB10-90-M22  0.6	A100-SLRB10-120-M22  0.9	A100-SLRB10-150-M22  0.7
A100-SLRB10-110-M42  0.9	A100-SLRB10-140-M42  1.4	A100-SLRB10-170-M42  1.0
A100-SLRB10-135-M67  1.1	A100-SLRB10-165-M67  1.6	A100-SLRB10-195-M67  1.3
A100-SLFB10-90-M22  0.6	A100-SLFB10-120-M22  0.9	A100-SLFB10-150-M22  0.9
A100-SLFB10-110-M42  0.9	A100-SLFB10-140-M42  1.1	A100-SLFB10-170-M42  1.3
A100-SLFB10-135-M67  1.2	A100-SLFB10-165-M67  1.6	A100-SLFB10-195-M67  1.3

		A100	Feature
A100-SLSA10-165 CV	No. 251		Shrink-fit Heater
A100-SLSA10-195 CV	No. 252		
A100-SLSA10-225 CV	No. 253		
A100-SLSA10-255 CV	No. 254		
A100-SLSA10-285 CV	No. 255		
A100-SLSA10-315 CV	No. 256		
A100-SLSA10-345 CV	No. 257		
A100-SLRA10-165 CV	No. 258		
A100-SLRA10-195 CV	No. 259		
A100-SLRA10-225 CV	No. 260		
A100-SLRA10-255 CV	No. 261		
A100-SLRA10-285 CV	No. 262		
A100-SLFA10-165 CV	No. 263		
A100-SLFA10-195 CV	No. 264		
A100-SLFA10-225 CV	No. 265		
A100-SLFA10-255 CV	No. 266		
A100-SLFA10-285 CV	No. 267		

$\phi \frac{3}{8}$

Shrink-fit Heater

MONO 3° MONO CURVE

MONO Series

2PIECE type

UNO

HYPER VERSION

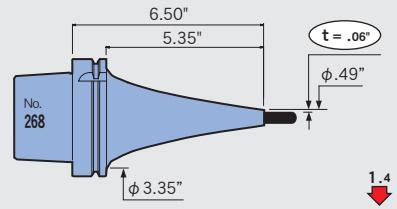
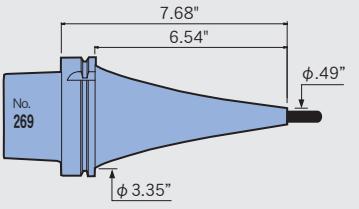
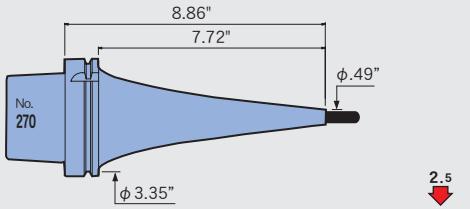
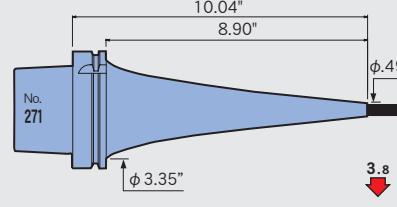
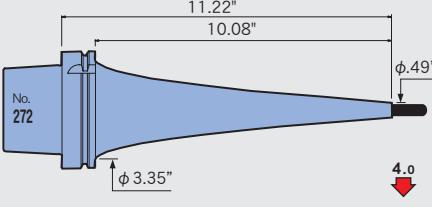
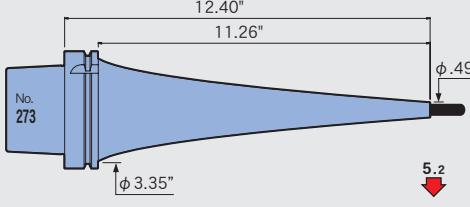
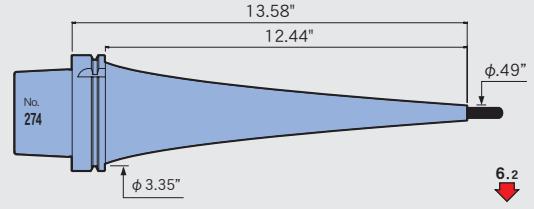
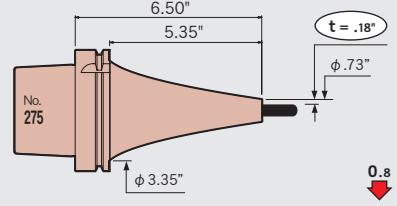
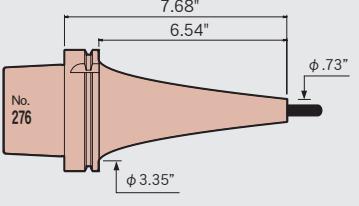
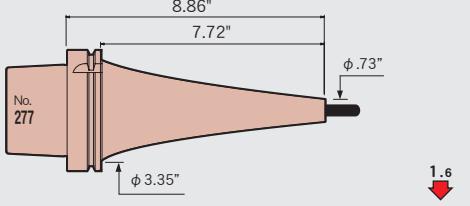
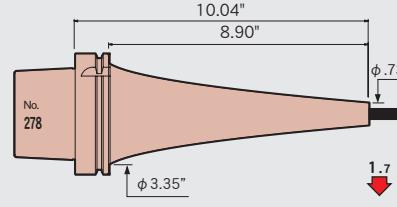
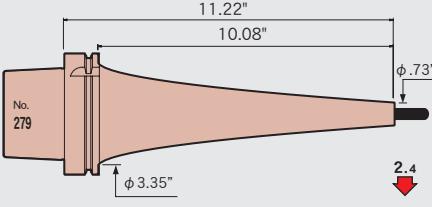
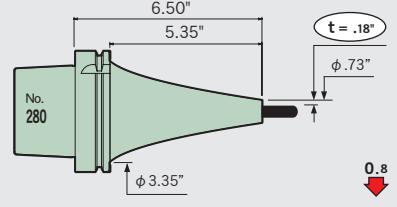
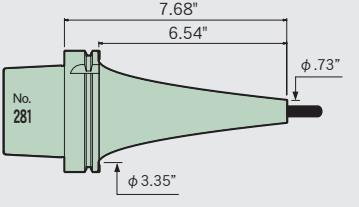
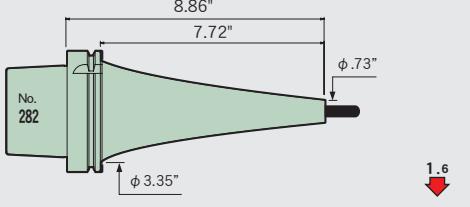
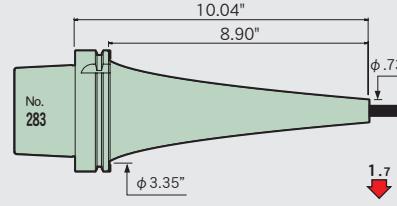
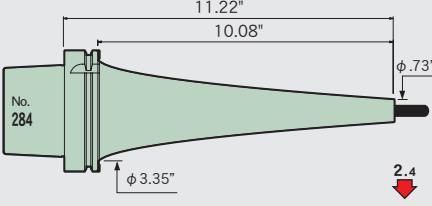
Z


STRAIGHT arbor

OTHERS

PERIPHERALS

Technical data

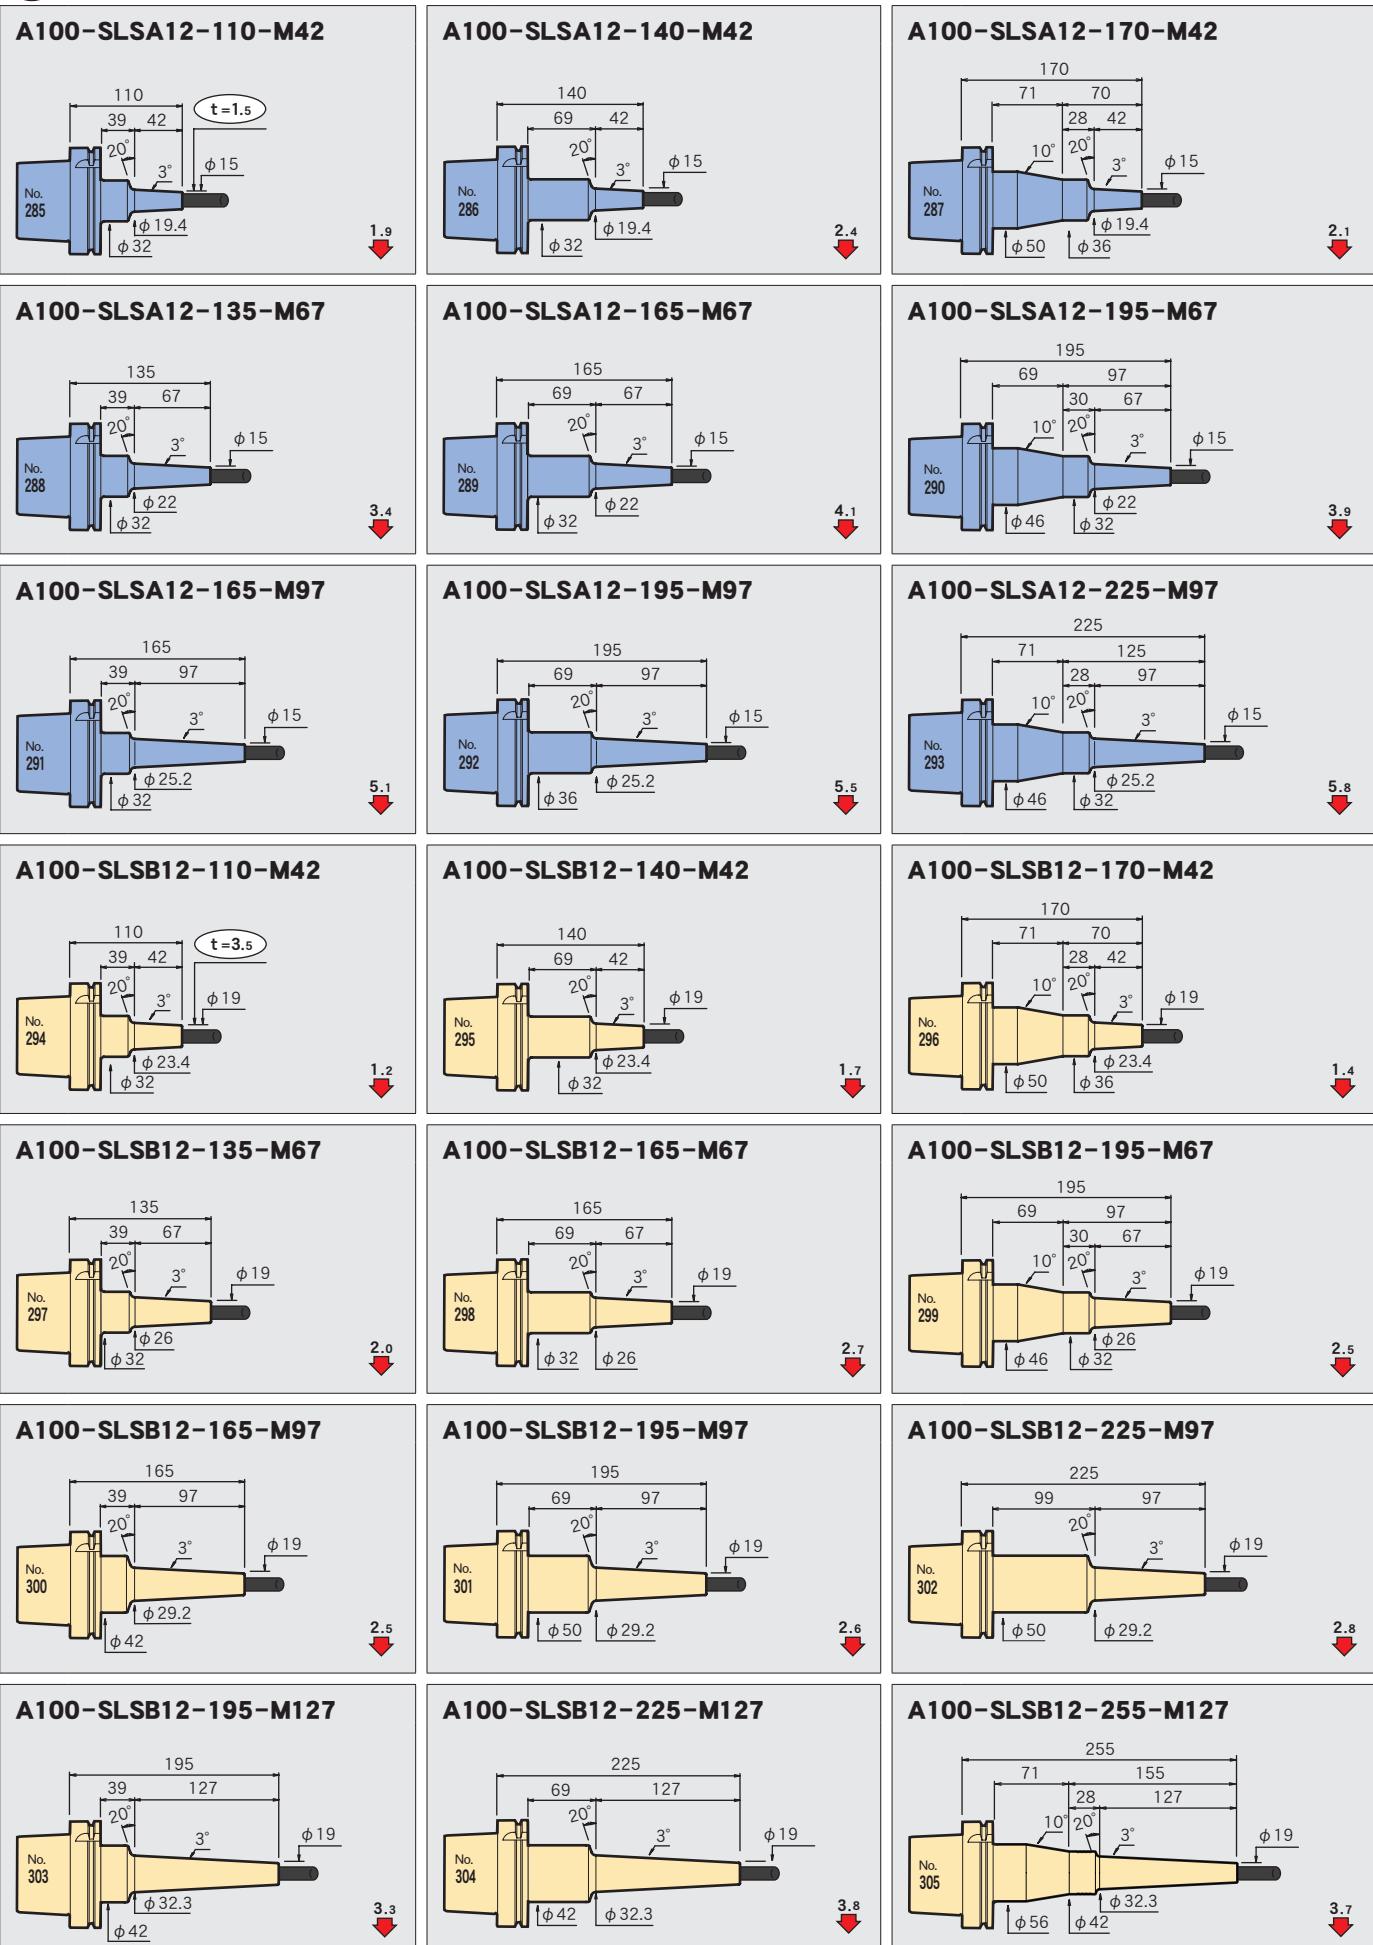A100-SLSA3/8-165 CV**A100-SLSA3/8-195 CV****A100-SLSA3/8-225 CV****A100-SLSA3/8-255 CV****A100-SLSA3/8-285 CV****A100-SLSA3/8-315 CV****A100-SLSA3/8-345 CV****A100-SLRA3/8-165 CV****A100-SLRA3/8-195 CV****A100-SLRA3/8-225 CV****A100-SLRA3/8-255 CV****A100-SLRA3/8-285 CV****A100-SLFA3/8-165 CV****A100-SLFA3/8-195 CV****A100-SLFA3/8-225 CV****A100-SLFA3/8-255 CV****A100-SLFA3/8-285 CV**

Φ 12

Feature

Shrink-fit Heater

MONO 3°
MONO CURVE

MONO Series

2PIECE type

UNO

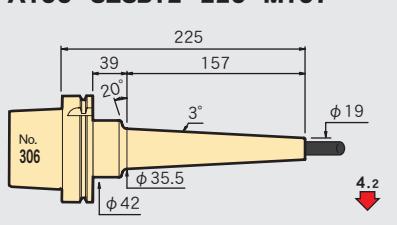
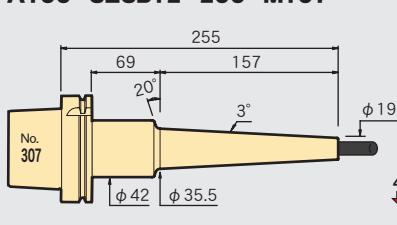
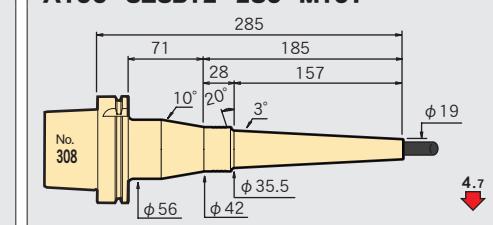
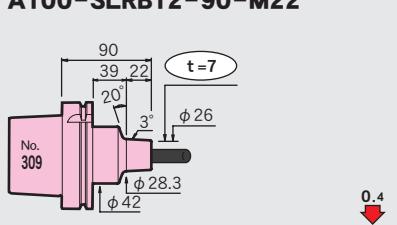
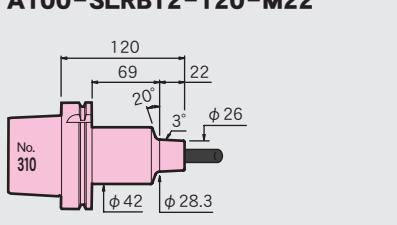
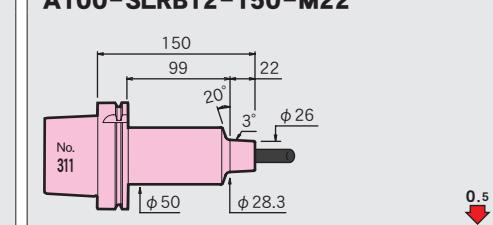
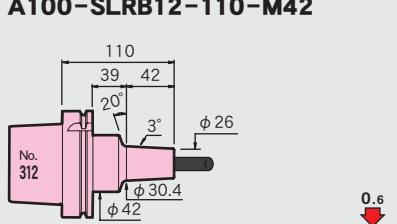
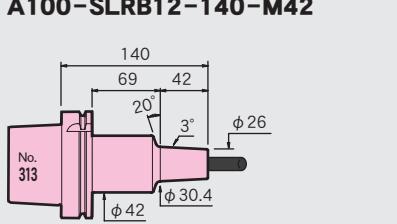
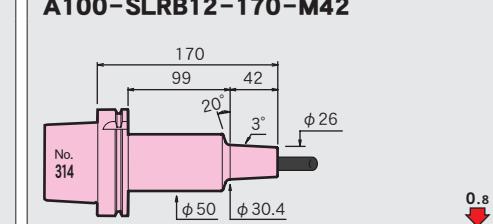
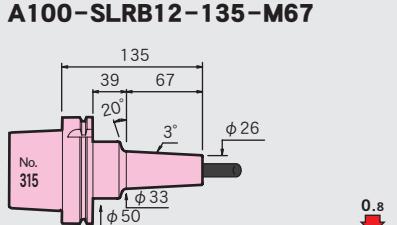
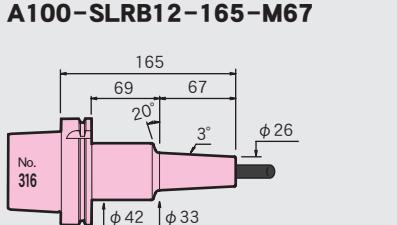
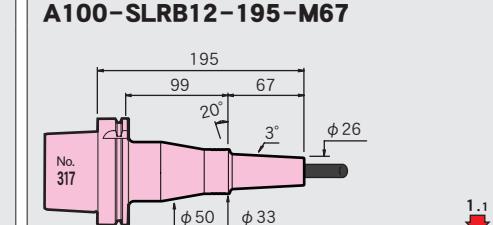
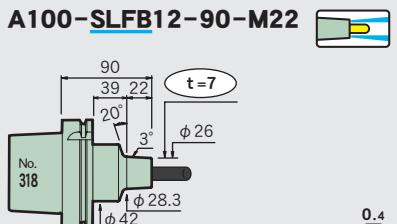
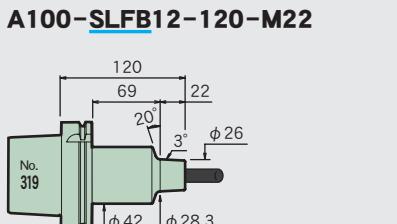
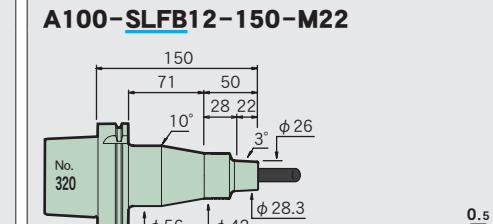
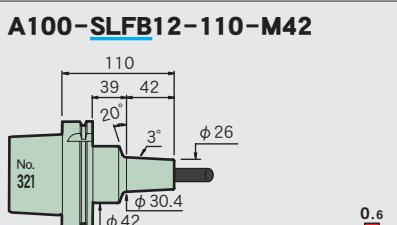
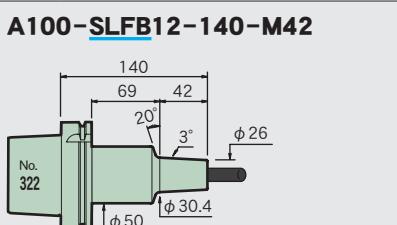
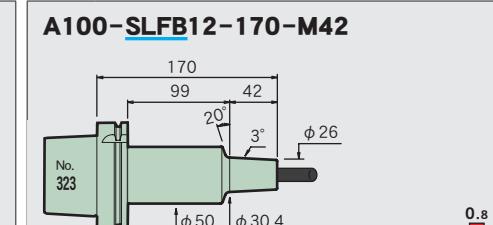
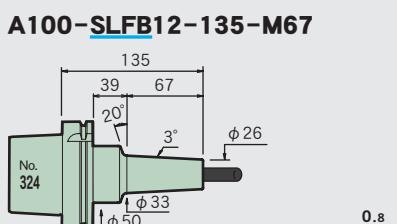
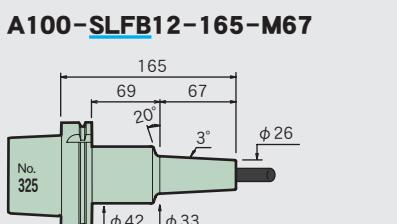
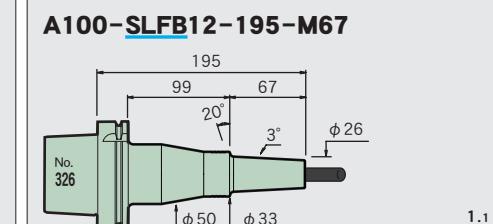
HYPER VERSION


















Z


















STRAIGHT
arbor


OTHERS

PERIPHERALS
Technical




















A100-SLSB12-225-M157	A100-SLSB12-255-M157	A100-SLSB12-285-M157
		
A100-SLRB12-90-M22	A100-SLRB12-120-M22	A100-SLRB12-150-M22
		
A100-SLRB12-110-M42	A100-SLRB12-140-M42	A100-SLRB12-170-M42
		
A100-SLRB12-135-M67	A100-SLRB12-165-M67	A100-SLRB12-195-M67
		
A100-SLFB12-90-M22	A100-SLFB12-120-M22	A100-SLFB12-150-M22
		
A100-SLFB12-110-M42	A100-SLFB12-140-M42	A100-SLFB12-170-M42
		
A100-SLFB12-135-M67	A100-SLFB12-165-M67	A100-SLFB12-195-M67
		

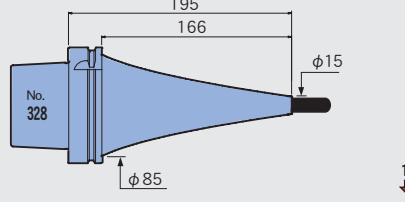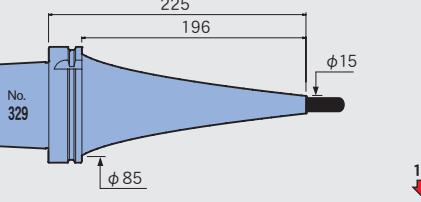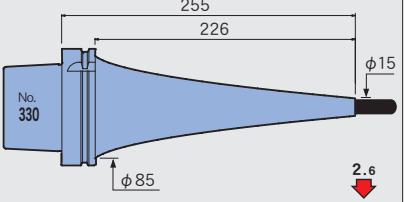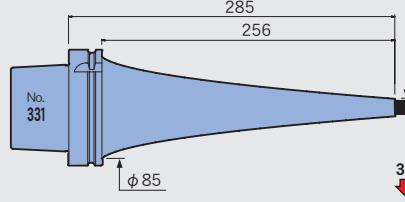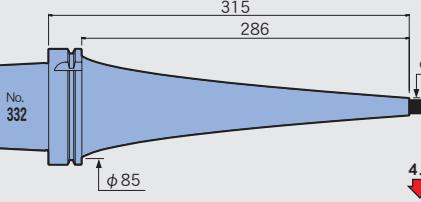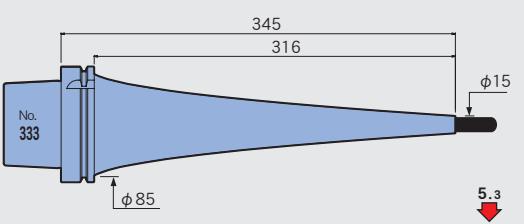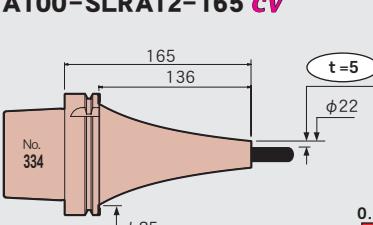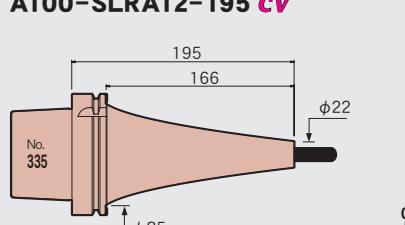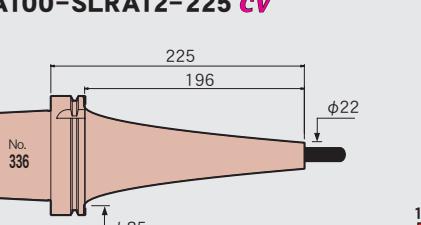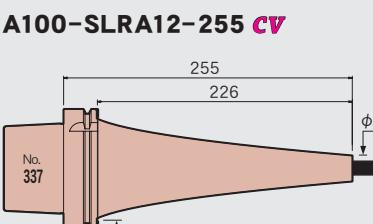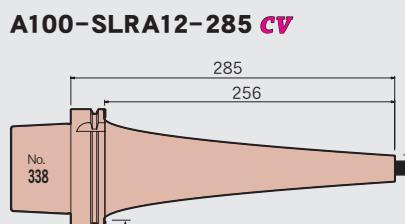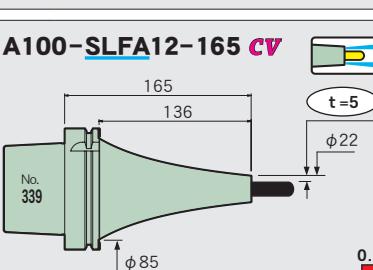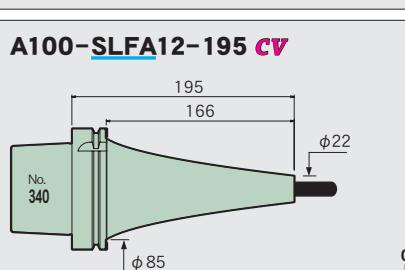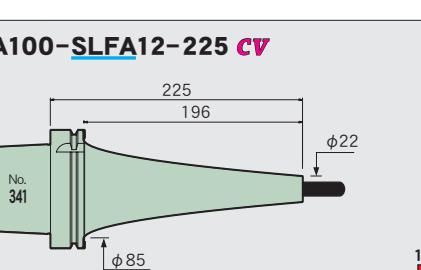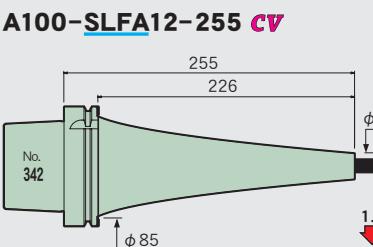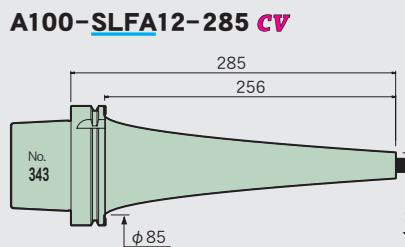
		A100	Feature
A100-SLSA12-165 CV		A100-SLSA12-195 CV	
No. 327	165 136 $t = 1.5$ $\phi 15$ $\phi 85$ 1.2 ↓	No. 328	195 166 $\phi 15$ $\phi 85$ 1.2 ↓
A100-SLSA12-225 CV		A100-SLSA12-255 CV	
No. 329	225 196 $\phi 15$ $\phi 85$ 1.8 ↓	No. 330	255 226 $\phi 15$ $\phi 85$ 2.6 ↓
A100-SLSA12-285 CV		A100-SLSA12-315 CV	
No. 331	285 256 $\phi 15$ $\phi 85$ 3.5 ↓	No. 332	315 286 $\phi 15$ $\phi 85$ 4.3 ↓
A100-SLSA12-345 CV			
No. 333	345 316 $\phi 15$ $\phi 85$ 5.3 ↓		
A100-SLRA12-165 CV		A100-SLRA12-195 CV	
No. 334	165 136 $t = 5$ $\phi 22$ $\phi 85$ 0.8 ↓	No. 335	195 166 $\phi 22$ $\phi 85$ 0.8 ↓
A100-SLRA12-225 CV			
No. 336	225 196 $\phi 22$ $\phi 85$ 1.3 ↓		
A100-SLRA12-255 CV		A100-SLRA12-285 CV	
No. 337	255 226 $\phi 22$ $\phi 85$ 1.6 ↓	No. 338	285 256 $\phi 22$ $\phi 85$ 2.1 ↓
A100-SLFA12-165 CV		A100-SLFA12-195 CV	
No. 339	165 136 $t = 5$ $\phi 22$ $\phi 85$ 0.8 ↓	No. 340	195 166 $\phi 22$ $\phi 85$ 0.8 ↓
A100-SLFA12-225 CV			
No. 341	225 196 $\phi 22$ $\phi 85$ 1.3 ↓		
A100-SLFA12-255 CV		A100-SLFA12-285 CV	
No. 342	255 226 $\phi 22$ $\phi 85$ 1.6 ↓	No. 343	285 256 $\phi 22$ $\phi 85$ 2.1 ↓

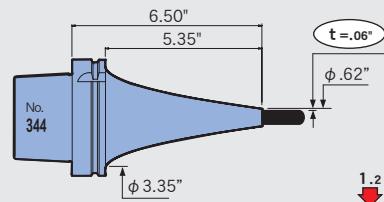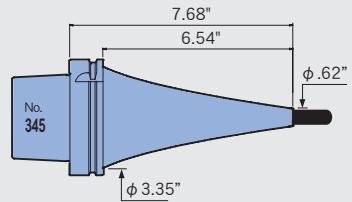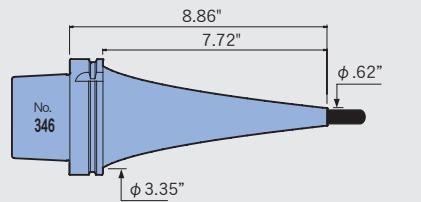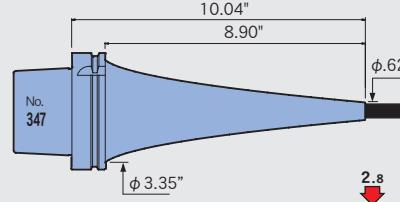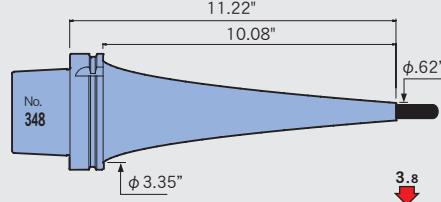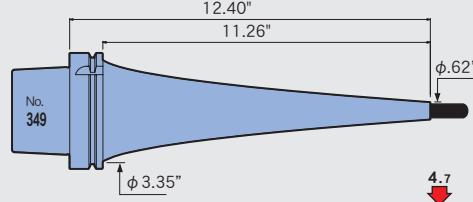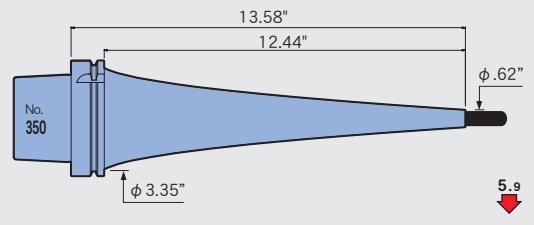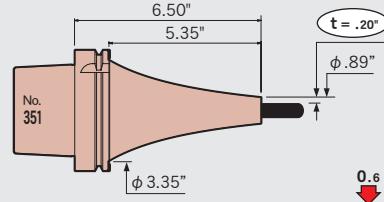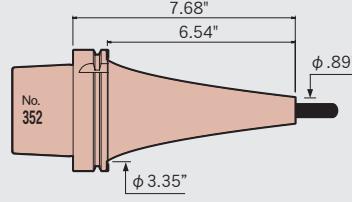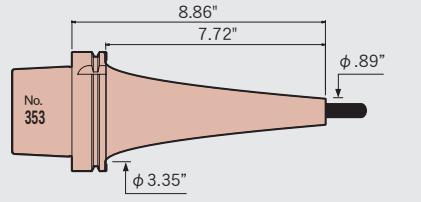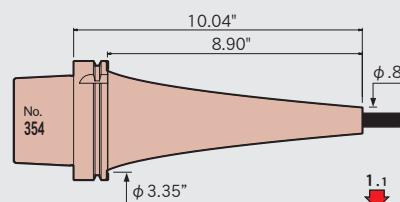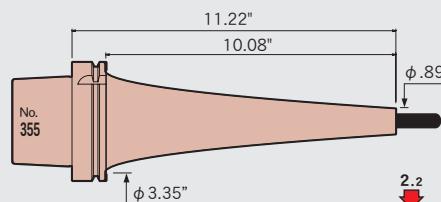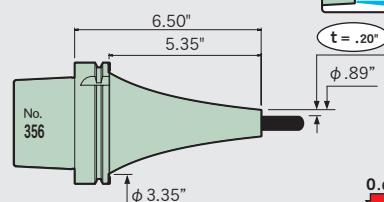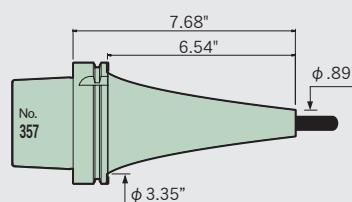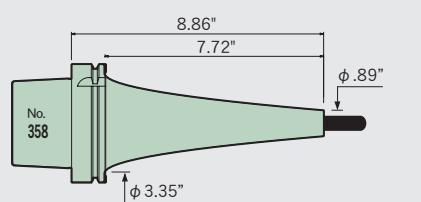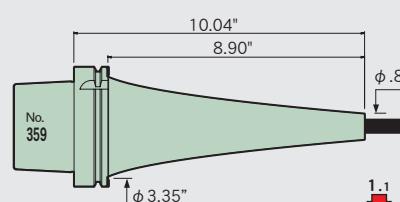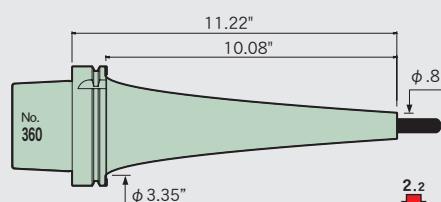$\phi \frac{1}{2}$ **A100-SLSA1/2-165 CV****A100-SLSA1/2-195 CV****A100-SLSA1/2-225 CV****A100-SLSA1/2-255 CV****A100-SLSA1/2-285 CV****A100-SLSA1/2-315 CV****A100-SLSA1/2-345 CV****A100-SLRA1/2-165 CV****A100-SLRA1/2-195 CV****A100-SLRA1/2-225 CV****A100-SLRA1/2-255 CV****A100-SLRA1/2-285 CV****A100-SLFA1/2-165 CV****A100-SLFA1/2-195 CV****A100-SLFA1/2-225 CV****A100-SLFA1/2-255 CV****A100-SLFA1/2-285 CV**

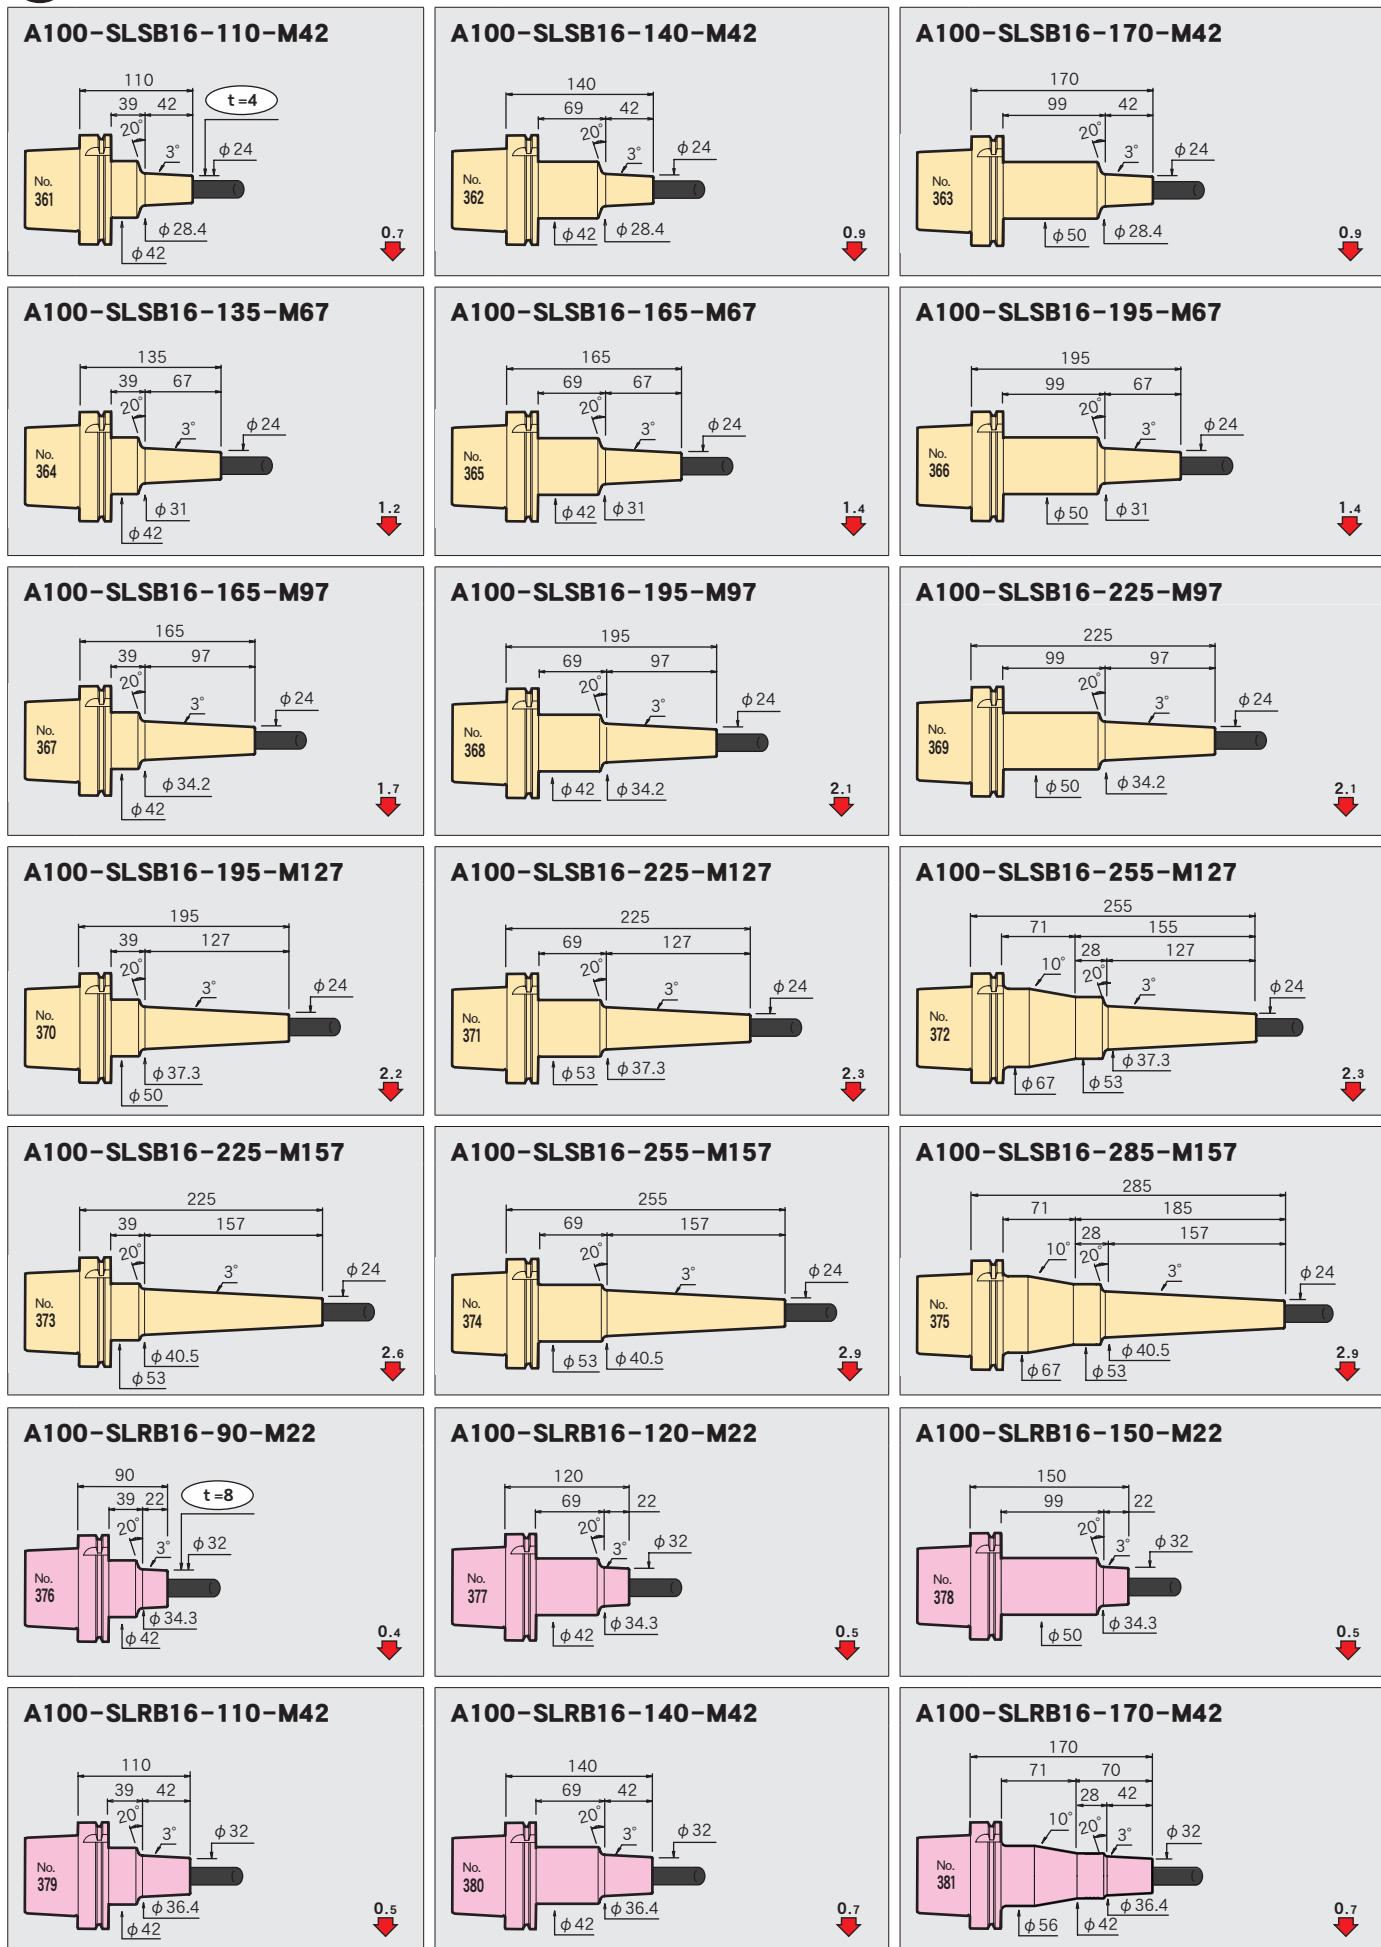Φ 16

Feature	
Shrink-fit Heater	
MONO 3° MONO CURVE	
MONO Series	
2PIECE type	
UNO	
HYPER VERSION	
Z	
STRAIGHT arbor	
OTHERS	
PERIPHERALS	
Technical data	















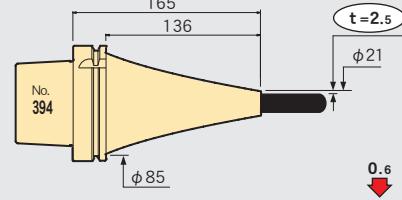

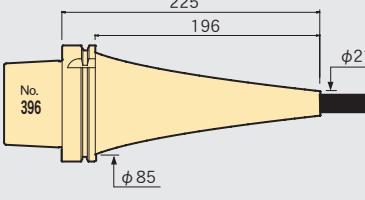
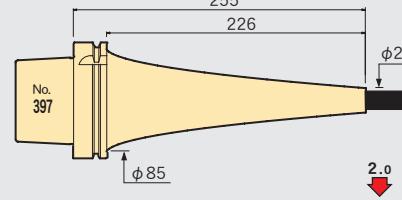
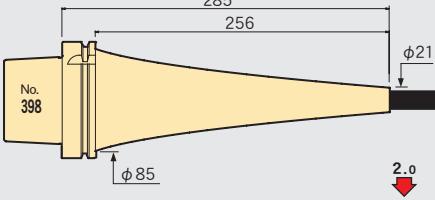
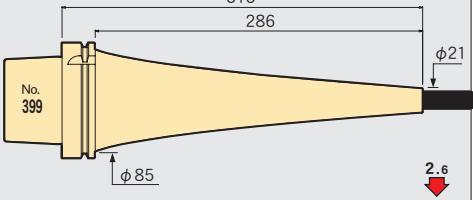
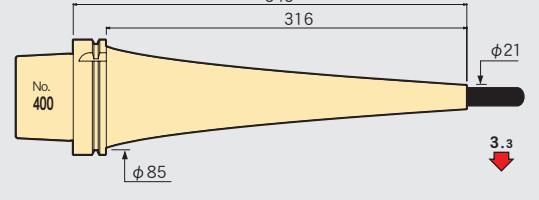
A100-SLRB16-135-M67**A100-SLRB16-165-M67****A100-SLRB16-195-M67****A100-SLFB16-90-M22****A100-SLFB16-120-M22****A100-SLFB16-150-M22****A100-SLFB16-110-M42****A100-SLFB16-140-M42****A100-SLFB16-170-M42****A100-SLFB16-135-M67****A100-SLFB16-165-M67****A100-SLFB16-195-M67****A100-SLSB16-165 CV****A100-SLSB16-195 CV****A100-SLSB16-225 CV****A100-SLSB16-255 CV****A100-SLSB16-285 CV****A100-SLSB16-315 CV****A100-SLSB16-345 CV**













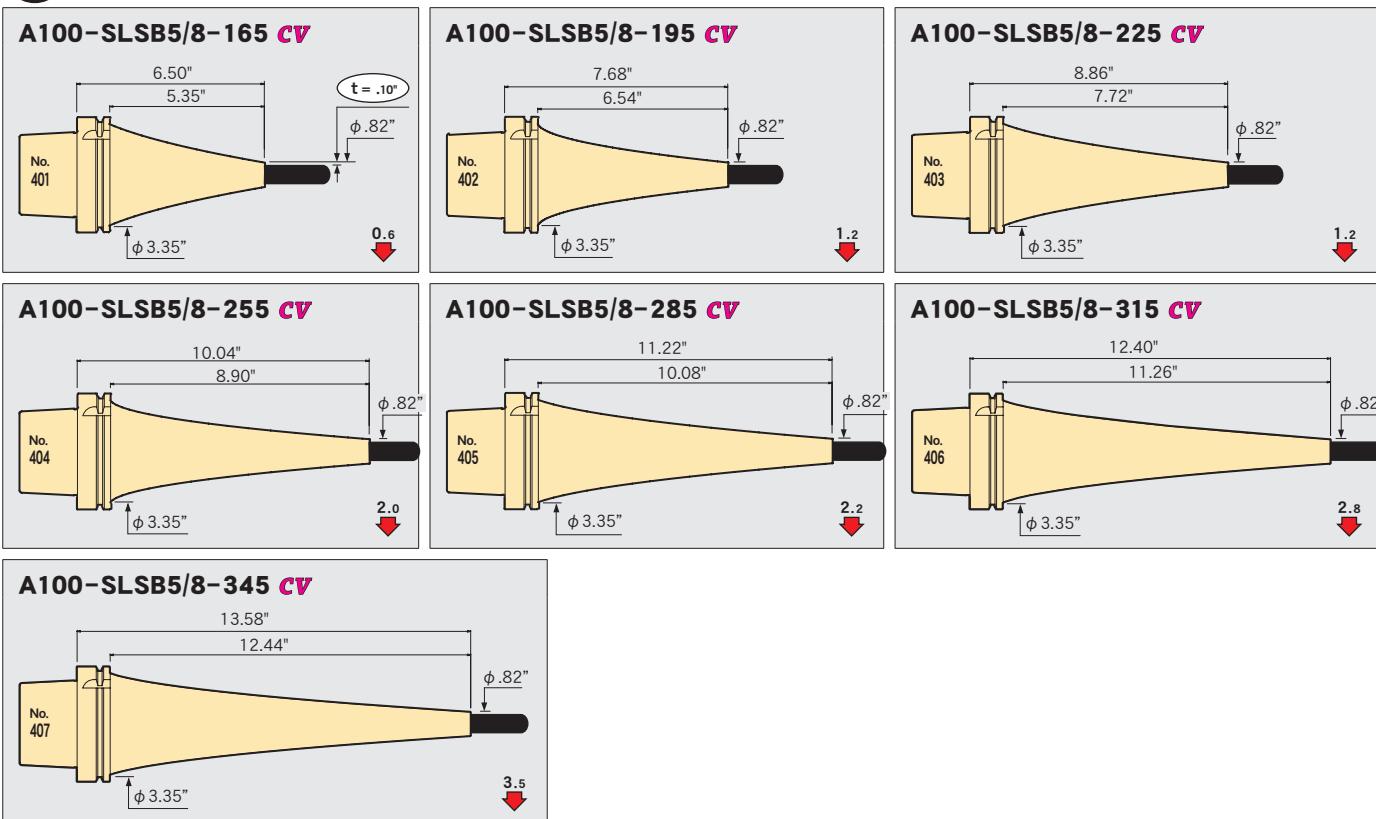
$\phi \frac{5}{8}$ 

Technical	PERIPHERALS	OTHERS	STRAIGHT arbor	Z	HYPER VERSION	UNO	2PIECE type	MONO Series	MONO 3° MONO CURVE	Shrink-fit Heater	Feature
157											

φ 20

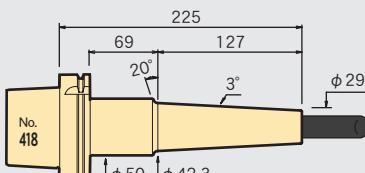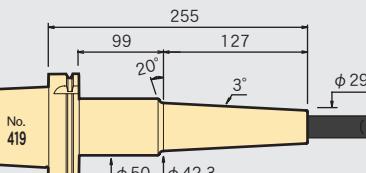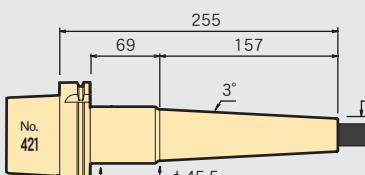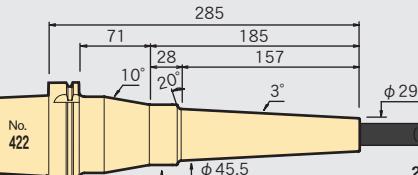Feature
Shrink-fit Heater
MONO 3°
MONO CURVE
MONO Series
2PIECE type
UNO
HYPER VERSION
Z
STRAIGHT arbor
OTHERS
PERIPHERALS
Technical data

A100-SLSB20-110-M42**A100-SLSB20-140-M42****A100-SLSB20-170-M42****A100-SLSB20-135-M67****A100-SLSB20-165-M67****A100-SLSB20-195-M67****A100-SLSB20-165-M97****A100-SLSB20-195-M97****A100-SLSB20-225-M97****A100-SLSB20-195-M127****A100-SLSB20-225-M127****A100-SLSB20-255-M127****A100-SLSB20-225-M157****A100-SLSB20-255-M157****A100-SLSB20-285-M157****A100-SLRB20-110-M42****A100-SLRB20-140-M42****A100-SLRB20-170-M42****A100-SLRB20-135-M67****A100-SLRB20-165-M67****A100-SLRB20-195-M67**

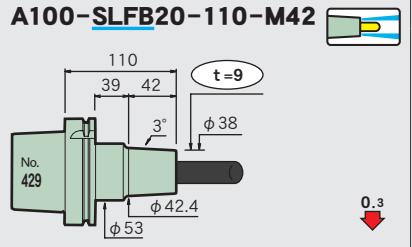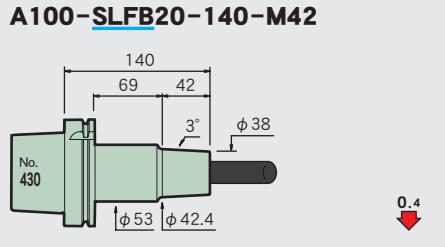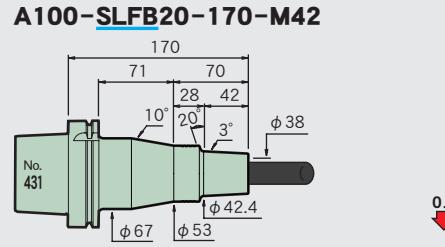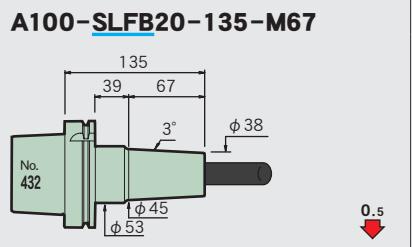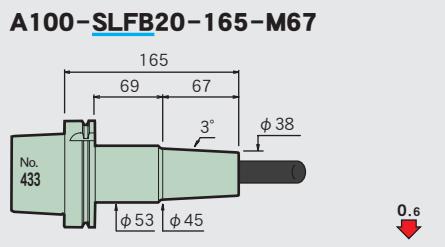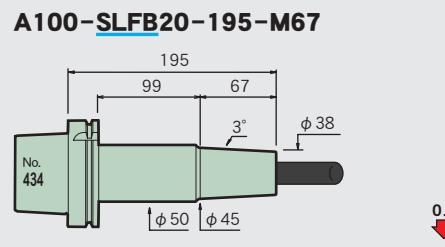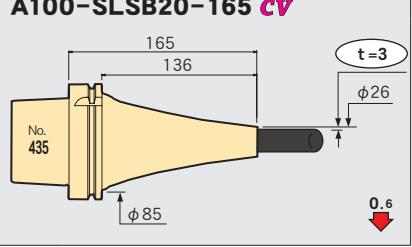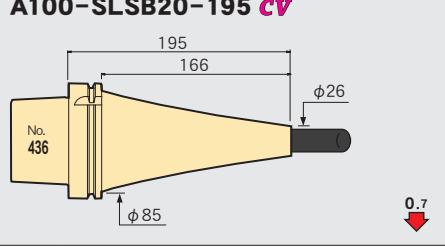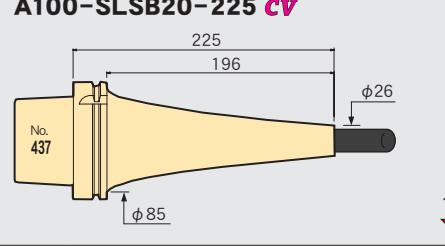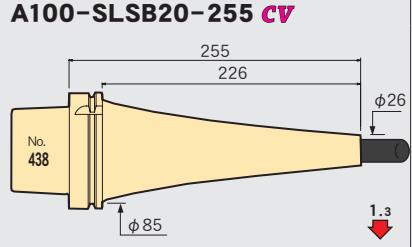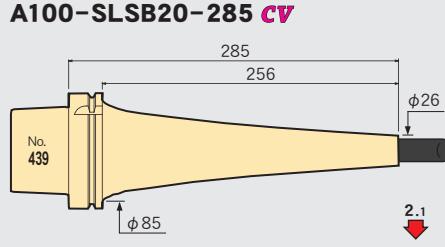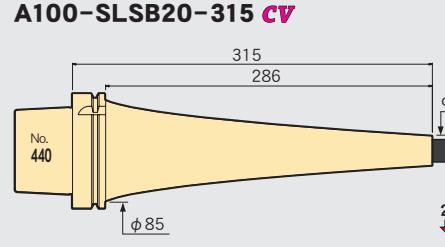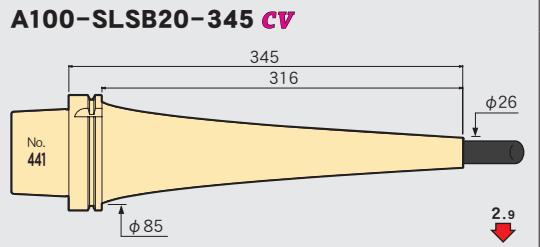A100-SLFB20-110-M42	A100-SLFB20-140-M42	A100-SLFB20-170-M42
		
A100-SLFB20-135-M67	A100-SLFB20-165-M67	A100-SLFB20-195-M67
		
A100-SLSB20-165 CV	A100-SLSB20-195 CV	A100-SLSB20-225 CV
		
A100-SLSB20-255 CV	A100-SLSB20-285 CV	A100-SLSB20-315 CV
		
A100-SLSB20-345 CV		
		

Feature
 Shrink-fit Heater
 MONO 3°
 MONO CURVE
 MONO Series
 2PIECE type
 UNO
 HYPER VERSION
 Z
 STRAIGHT arbor
 OTHERS
 PERIPHERALS
 Technical data
 159

A100 S=1:7

3/4

Feature

Shrink-fit Heater

MONO^{3°}
MONO CURVE

MONO Series

2PIECE type

UNO

HYPER
VERSION

Z

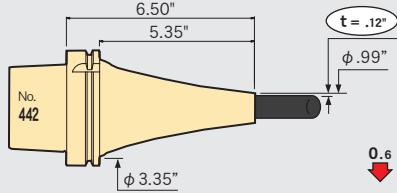
STRAIGHT
arbor

OTHERS


PERIPHERALS

Technical
data


A100-SLSB3/4-165 CV




A100-SLSB3/4-195 CV

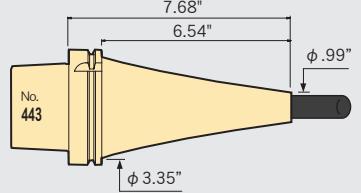


A100-SLSB3/4-225 CV

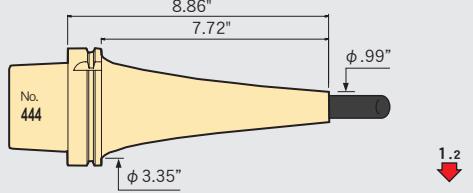


A100-SLSB3/4-255 CV

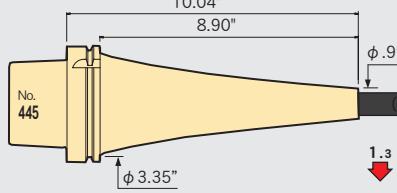


A100-SLSB3/4-285 CV

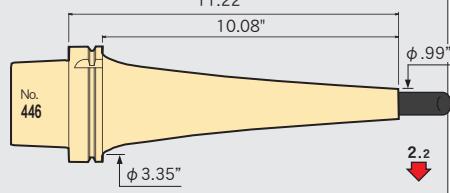

A100-SLSB3/4-315 CV

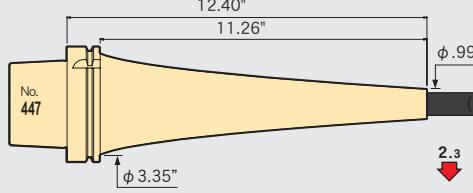


A100-SLSB3/4-345 CV

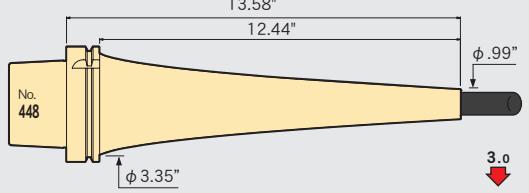


25

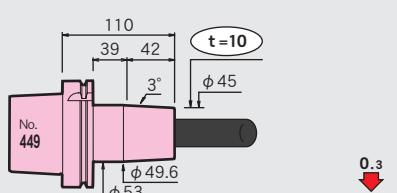
A100-SLRB25-110-M42




A100-SLRB25-140-M42

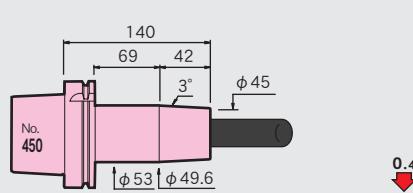


A100-SLRB25-170-M42

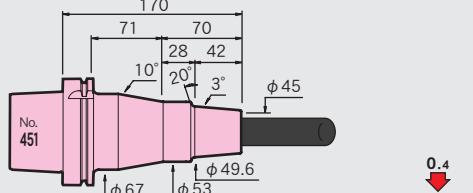


A100-SLFB25-110-M42

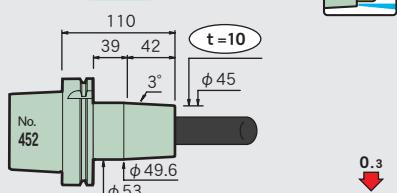

A100-SLFB25-140-M42

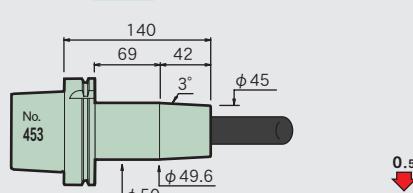


A100-SLFB25-170-M42

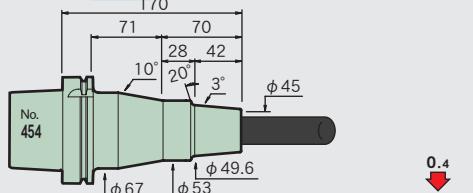


32

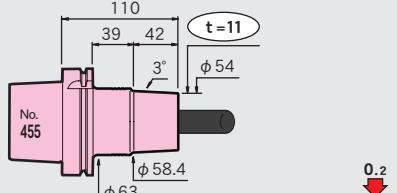
A100-SLRB32-110-M42



A100-SLRB32-140-M42

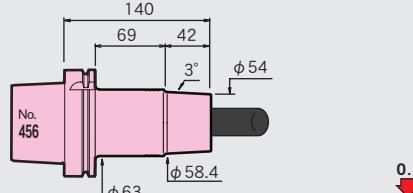

A100-SLRB32-170-M42

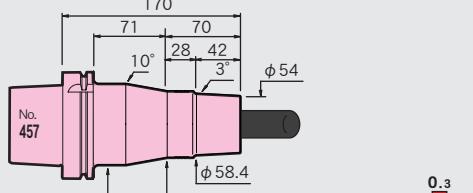

φ70 Nozzle (HRB-03S)

Required for shrinking the SLRB32.

CODE
HRB-NZL70




HEAT ROBO Baby3000S

MST


E25

E25-SLSA3-50

MONO 3°

**Caution**

- The coolant duct is not sold with a holder. Consult us if you need it.
- Setting cutters - Be sure to insert the tool beyond the safety mark.



CODE	ϕD	ϕC	t	L	M	L_1	ϕC_1	H	h	Kg	N	S	Scale model
E25-SLSA3-35	3	6	1.5	35	17	8	7.8	9	29	0.06	0.37	3.6	1
													2
													3
E25-SLSA3.175-35	3.175	6.175	1.5	35	17	8	8	9	29	0.06	0.37	3.5	4
													5
													6
E25-SLSA4-35	4	7	1.5	35	17	8	8.8	12	29	0.06	0.38	2.8	7
													8
													9
E25-SLSA4-35	4	10	3	35	17	8	10.4	12	44	0.06	0.4	5.3	10
													11
													12
E25-SLSA5-35	5	8	1.5	35	17	8	9.8	15	26	0.06	0.38	2.2	1
													2
													3
E25-SLSA6-35	6	9	1.5	35	17	8	10.8	18	26	0.05	0.38	1.8	4
													5
													6
-SLRA6-35	12	3	35	17	8	13.8	26	0.07	0.43	3.6	0.39	1.1	7
													8
													9

A short carbide end-mill for the shrink-fit holder

The shrink-fit holder doesn't need standard length cutting tools, because it has shorter insertion length.

A short end-mill for the shrink-fit holder \bullet P.262

Short shank

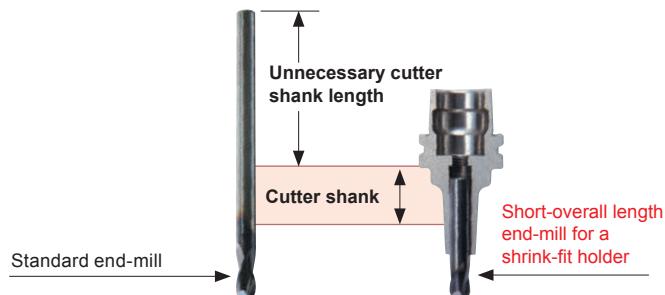


Short cutting flute



The shortest cutter projection

Increase rigidity

**Centering bar**

To identify workpiece datum position

**Cleaning tool**


Use when cleaning the machine spindle taper. Replaceable leather strip.

CODE
SCT-E25

■ Std. Access. • Spare leather set

**Be aware of max. insertion length (h)!**

If you insert cutter beyond the max. insertion length (h), the machine spindle might not be able to clamp the holder properly and thus damage the spindle. Please use our exclusive adapter to recognize the max. insertion length when you shrink-fit.

**Measuring instrument tool holder**

Use when centering a workpiece. The spring collet (C10-6-P) and the centering bar (ST6-CEB102) are required and sold separately. Fasten nuts by hand.

CODE
E25-CEH10-37















■ Caution • Not usable for machining.




Holder stand

• P.13

**SODICK**UH430L/UH650L
TT1-400A/OPM250L**MITSUI SEIKI ROKU-ROKU**
VL30
MEGA-SS Series
Android


φ 3**E25-SLSA3-35****E25-SLSA3-50****E25-SLRA3-35****φ 3.175****E25-SLSA3.175-35****E25-SLSA3.175-50****φ 4****E25-SLSA4-35****E25-SLSA4-50****E25-SLRA4-35****φ 5****E25-SLSA5-35****φ 6****E25-SLSA6-35****E25-SLSA6-50****E25-SLRA6-35**

E32



Caution


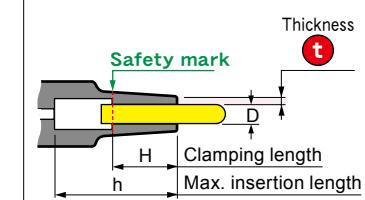
- The coolant duct is not sold with a holder. Consult us if you need it.
- Setting cutters - Be sure to insert the tool beyond the safety mark.



CODE	Fig.	ϕD	ϕC	t	L	M	L1	ϕC_1	ϕC_2	H	h	Kg lbs	N	S	Scale model														
E32-SLSA3-50-M22	1	3	6	1.5	50	22	8	8.3	20	9	42	0.1	0.4	4.7	1														
															2														
															3														
-70-M42															4														
															5														
															6														
-85-M42															7														
															8														
															9														
-SLRA3-50-M22	1	3	7.5	2.25	50	22	8	9.8	20	9	42	0.1	0.4	2.8	10														
															11														
															12														
-70-M42															13														
															14														
															15														
-85-M42															16														
															17														
															18														
-SLRA4-50-M22	1	4	10	3	50	22	8	12.3	20	12	42	0.2	0.4	1.7	19														
															20														
															21														
-70-M42															22														
															23														
															24														
-85-M42															25														
															26														
															27														
-SLSA4-60 CV	3	4	7	1.5	60	40	—	26	—	12	43	0.2	0.6	2.4	28														
															29														
															Z														
-90 CV															HYPER VERSION														
															arbor														
															STRAIGHT														
E32-SLSA3/16-60 CV	3	3/16	.31	.06	2.37	1.58	—	1.02	—	.59	1.69	0.4	0.6	2.4	OTHERS														
															PERIPHERALS														
															Technical														
E32-SLSA6-70-M42	1	6	9	1.5	70	42	8	13.4	20	18	62	0.2	0.5	4.8	Feature														
															Shrink-fit Heater														
															MONO 3°														
-SLRA6-50-M22	1	6	12	3	50	22	8	14.3	26	18	39	0.2	0.5	1.2	MONO CURVE														
															MONO Series														
















	Feature	
	Shrink-fit Heater	
MONO 3°	MONO CURVE	
MONO Series		
2PIECE type		
UNO		
HYPERS VERSION		
Z		
STRAIGHT arbor		
OTHERS		
PERIPHERALS		
Technical data		

CODE	Fig.	φD	φC	t	L	M	L ₁	φC ₁	φC ₂	H	h	Kg lbs	N	S	Scale model
E32-SLSA5/16-60 CV	3	5/16	.43	.06	2.37	1.58	—	1.02	—	.94	1.89	0.4	0.7	1.6	30
-90 CV					3.55	2.76					2.36	0.5	1	4	31
E32-SLRA10-55-M22	1	10	16	3	55	22	13	18.3	26	25	44	0.2	0.6	0.9	32
-SLSA10-60 CV	3	10	13	1.5	60	40	—	26	—	30	48	0.2	0.8	1.4	33
-90 CV					90	70					60		1.1	3.5	34
E32-SLSA3/8-60 CV	3	3/8	.49	.06	2.37	1.58	—	1.02	—	1.18	1.89	0.4	0.8	1.4	35
-90 CV					3.55	2.76					2.36	0.5	1.1	3.5	36
E32-SLRA12-55-M22	1	12	20	4	55	22	13	22.3	26	30	44	0.2	0.7	0.7	37
E32-SLRA16-55-M35	2	16	26	5	55	35	—	—	—	32	44	0.2	0.6	0.7	38

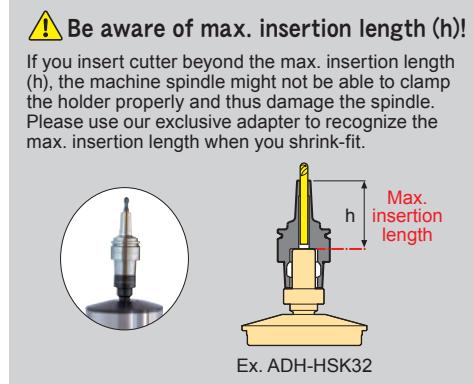

SUGINO	Xion- III , Xion- II -5AX
SODICK	UH430L, UH650L
DMG MORI	HSC 20 linear
MAKINO	V22, V33i, iQ300
MITSUI SEIKI	VL30
MITSUBISHI	μV1
YASDA	YMC430



Φ 3**E32-SLSA3-50-M22****E32-SLSA3-70-M42****E32-SLSA3-85-M42****E32-SLRA3-50-M22****E32-SLRA3-70-M42****E32-SLRA3-85-M42****Φ 3.175****E32-SLSA3.175-50-M22****Φ 4****E32-SLSA4-50-M22****E32-SLSA4-70-M42****E32-SLSA4-85-M42****E32-SLRA4-50-M22****E32-SLRA4-70-M42****E32-SLRA4-85-M42****E32-SLSA4-60 CV****E32-SLSA4-90 CV**

Feature

Shrink-fit Heater
MONO 3°
MONO CURVE

MONO Series

2PIECE type

UNO

HYPER VERSION















Z






STRAIGHT arbor

OTHERS



PERIPHERALS

Technical data

$\phi \frac{3}{16}$  $\phi 6$  $\phi \frac{1}{4}$  $\phi 8$ 


$\phi \frac{5}{16}$  $\phi 10$ Shrink-fit Heater
FeatureMONO 3°
MONO CURVE

MONO Series


 $\phi \frac{3}{8}$ 

2PIECE type

UNO

HYPER
VERSION $\phi 12$ 

Z

 $\phi 16$ STRAIGHT
arbor

OTHERS

PERIPHERALS

Technical data




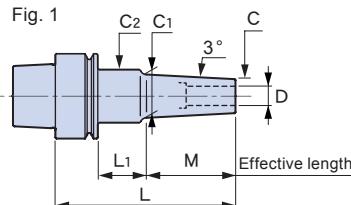
E40

E40-SLRA10-55-M22

MONO 3°

Rigidity value
($\mu\text{m}/\text{kgf}$) **P. 258**

Imbalance value(g·mm) **N**
P. 261





E40-SLRA6-90 cv

E40-SLRA6-90 cv

→ Rigidity value
($\mu\text{m/kgf}$) P.258

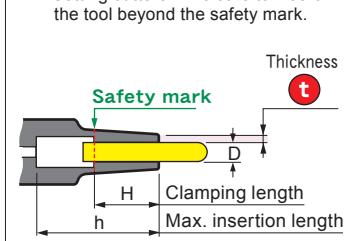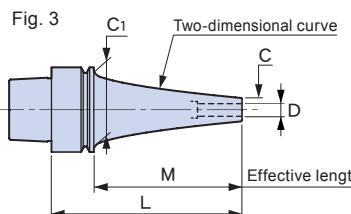→ Imbalance
value(g·mm) N P.261



CV: Curve





















Thickness:








CODE	Fig.	ϕD	ϕC	t	L	M	L ₁	ϕC_1	ϕC_2	H	h	Kg lbs	N	S	Scale model	
E40-SLRA6- 50-M22	1	6	12	3	50	22	8	14.3	26	18	39	0.2	0.7	1.2	32	
- 70-M42					70	42		16.4			54	0.3	0.8	2.3	33	
- 85-M42					85				25		69		1.2	2.5	34	
-110-M67					110	67		19			94	0.4		4.1	35	
-SLSA6- 90 CV	3	6	9	1.5	90	70	—	34	—	18	74	0.3	1.6	2.5	36	
-120 CV					120	100					104	0.4	1.9	5.6	37	
-150 CV					150	130					134	0.5	2.5	7.7	38	
-SLRA6- 90 CV	3	6	13	3.5	90	70	—	34	—	18	74	0.4	1.7	1.7	39	
-120 CV					120	100					104	0.5	2.4	2.6	40	
E40-SLSA1/4- 90 CV	3	1/4	.37	.06	3.55	2.76	—	1.34	—	0.71	2.91	0.8	1.7	2.5	41	
-120 CV					4.73	3.94					4.09	0.9	2	5.6	42	
-150 CV					5.91	5.12					5.28	1.1	2.6	7.7	43	
-SLRA1/4- 90 CV	3	1/4	.53	.14	3.55	2.76	—	1.34	—	0.71	2.91	0.8	1.8	1.7	44	
-120 CV					4.73	3.94					4.09	1.0	2.5	2.6	45	
E40-SLSA8- 60-M22	1	8	11	1.5	60	22	18	13.3	26	24	49	0.3	1	1.5	46	
- 80-M42					80	42		15.4			64			3.3	47	
-100-M42					100			38			84		1.5	3.8	48	
-SLRA8- 50-M22	1	8	14	3	50	22	8	16.3	26	20	39	0.2	0.7	0.9	49	
- 85-M42					85	42		23	18.4	25	69		1.2	2.1	50	
-100-M42					100			38			84		1.5	2.4	51	
-SLSA8- 90 CV	3	8	11	1.5	90	70	—	34	—	24	74	0.3	1.7	2.2	52	
-120 CV					120	100					104		2	3.4	53	
-150 CV					150	130					134		3	5.1	54	
-SLRA8- 90 CV	3	8	16	4	90	70	—	34	—	24	74	0.4	1.8	1.6	55	
-120 CV					120	100					104		2.5	2.4	56	
E40-SLSA5/16- 90 CV	3	5/16	.43	.06	3.55	2.76	—	1.34	—	0.94	2.91	0.8	1.7	2.2	57	
-120 CV					4.73	3.94					4.09	0.9	2.1	3.4	58	
-150 CV					5.91	5.12					5.28		2.8	5.1	59	
-SLRA5/16- 90 CV	3	5/16	.63	.16	3.55	2.76	—	1.34	—	0.94	2.91	0.9	2.2	1.6	60	
-120 CV					4.73	3.94					4.09		1.1	2.6	61	
E40-SLSA10- 60-M22	1	10	13	1.5	60	22	18	15.3	26	30	49	0.3	1	1.2	62	
- 80-M42					80	42		17.4			64			1.1	2.4	63
-100-M42					100			38			89		1.5	3.1	64	
-SLRA10- 55-M22	1	10	16	3	55	22	13	18.3	26	25	44	0.3	0.9	0.8	65	
- 85-M42					85	42		23	20.4	25	30		1.2	1.7	66	
-100-M42					100			38			64		0.4	1.6	67	
-SLSA10- 90 CV	3	10	13	1.5	90	70	—	34	—	30	74	0.3	1.7	2	68	
-120 CV					120	100					104	0.4	2.4	3.2	69	
-150 CV					150	130					134		3.1	5	70	
-SLRA10- 90 CV	3	10	19	4.5	90	70	—	34	—	30	74	0.4	2.1	1.1	71	
-120 CV					120	100					104		2.9	2	72	
E40-SLSA3/8- 90 CV	3	3/8	.49	.06	3.55	2.76	—	1.34	—	1.18	2.91	0.8	1.8	2	73	
-120 CV					4.73	3.94					4.09		2.5	3.2	74	
-150 CV					5.91	5.12					5.28		3.2	5	75	
-SLRA3/8- 90 CV	3	3/8	.73	.185	3.55	2.76	—	1.34	—	1.18	2.91	0.9	2.3	1.1	76	
-120 CV					4.73	3.94					4.09		3	2	77	
E40-SLRA12- 55-M22	1	12	20	4	55	22	13	22.3	26	25	44	0.3	1	0.6	78	
- 85-M42					85	42		23	24.4	32	30		1.6	1.1	79	
E40-SLRA16- 55-M22	1	16	26	5	55	22	13	28.3	34	32	44	0.3	1.2	0.4	80	
E40-SLRA20- 60-M40	2	20	32	6	60	40	—	34	—	38	49	0.4	1.6	0.4	81	

OKK
DMG MORI
MITSUI SEIKI
ROKU-ROKU

GR400
HSC 30 linear
VL30
CEGA-SS Series



φ 3**E40-SLSA3-50-M22****E40-SLSA3-70-M42****E40-SLSA3-85-M42****E40-SLSA3-110-M67****E40-SLRA3-50-M22****E40-SLRA3-70-M42****E40-SLRA3-85-M42****E40-SLRA3-110-M67****φ 3.175****E40-SLSA3.175-50-M22****φ 4****E40-SLSA4-50-M22****E40-SLSA4-70-M42****E40-SLSA4-85-M42****E40-SLSA4-110-M67****E40-SLRA4-50-M22****E40-SLRA4-70-M42****E40-SLRA4-85-M42****E40-SLRA4-110-M67****E40-SLSA4-90 CV****E40-SLSA4-120 CV****E40-SLSA4-150 CV**

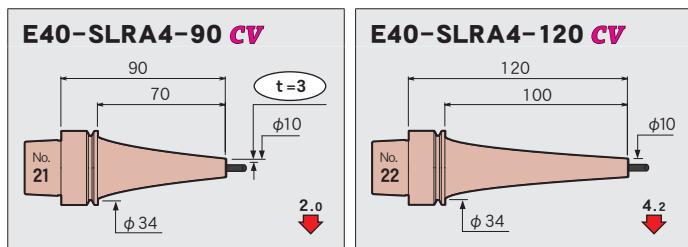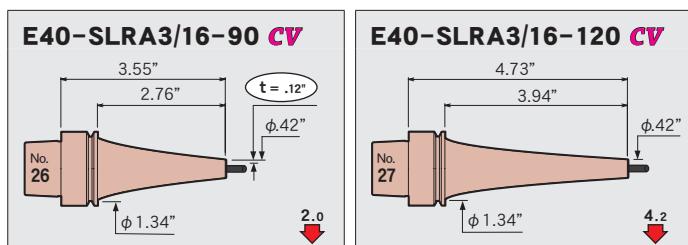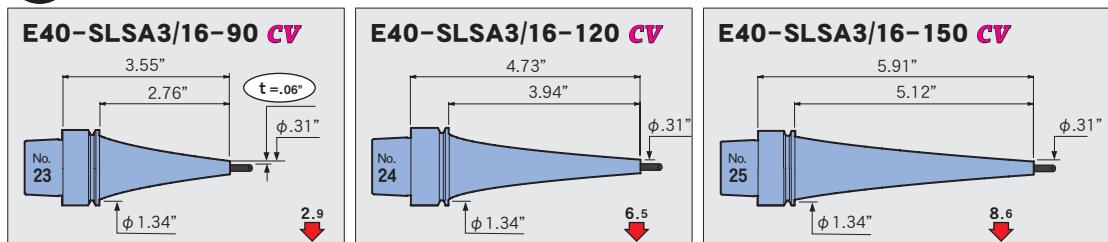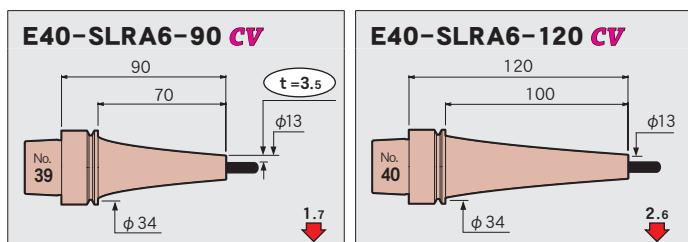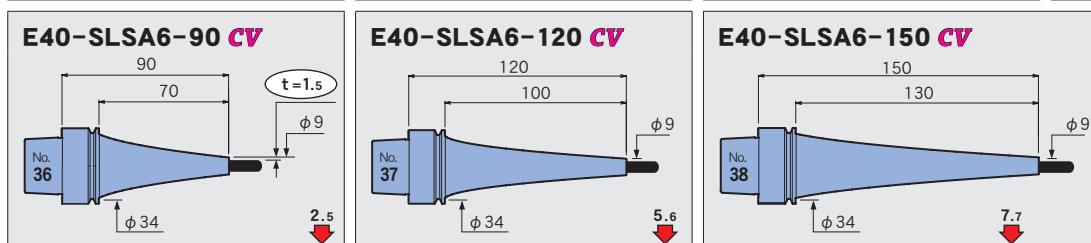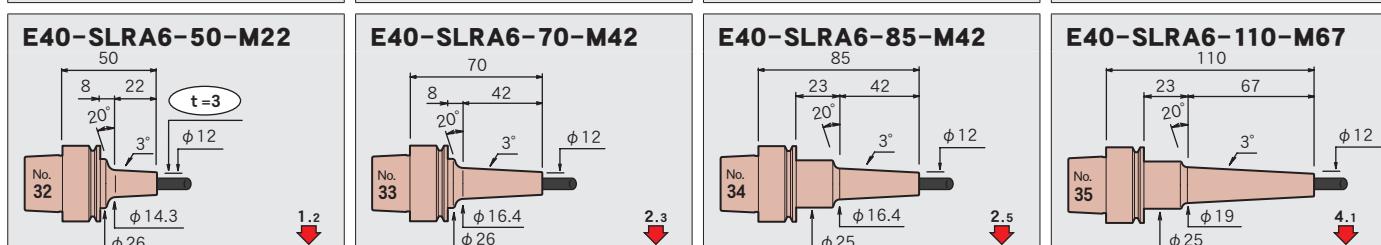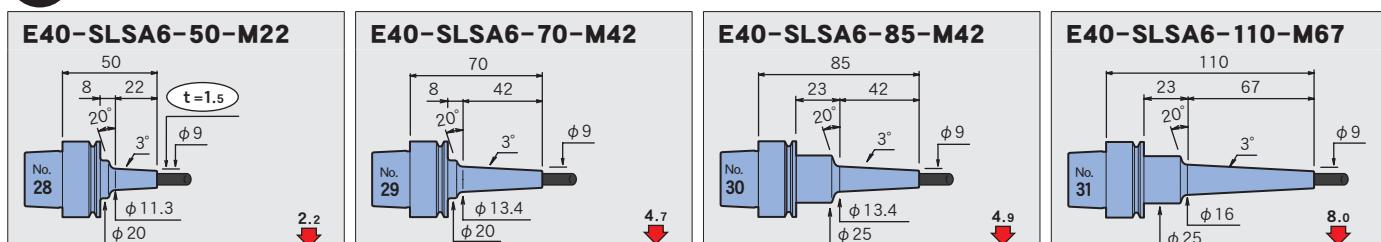 $\phi \frac{3}{16}$  $\phi 6$ 

E40

S=1:4

Φ 1/4

Feature

Shrink-fit Heater

MONO 3°
MONO CURVE

MONO Series

2PIECE type

UNO



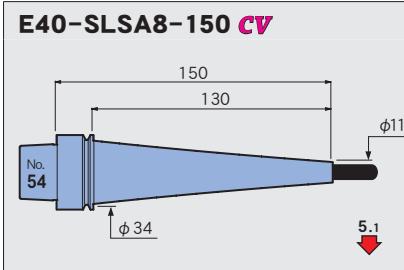










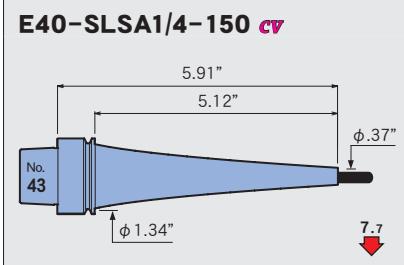


HYPER
VERSION

















Z

STRAIGHT
arbor

OTHERS

PERIPHERALS

Technical
data

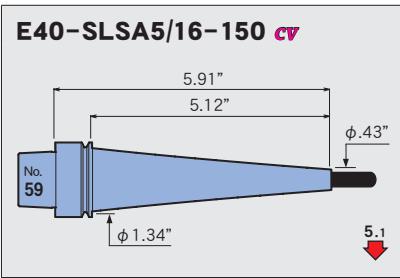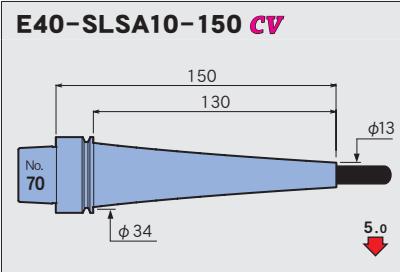$\phi \frac{5}{16}$  $\phi 10$ Feature
Shrink-fit HeaterMONO 3°
MONO CURVE

MONO Series

2PIECE type

UNO



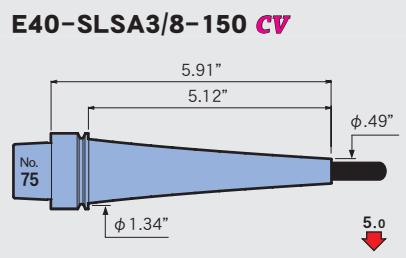






HYPER VERSION

Z

STRAIGHT arbor

OTHERS

Technical data
PERIPHERALS

E40**S=1:4** **$\phi \frac{3}{8}$**  **$\phi 12$**  **$\phi 16$**  **$\phi 20$** 

Feature

Shrink-fit Heater

MONO 3°
MONO CURVE

MONO Series

2PIECE type

UNO

HYPER VERSION

Z

STRAIGHT arbor

OTHERS

PERIPHERALS

Technical data


E50

E50-SLSA8-65-M22

MONO 3°



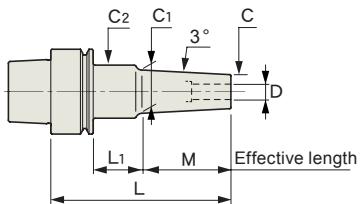Fig. 1




E50-SLSA6-150 cv

MONO CURVE



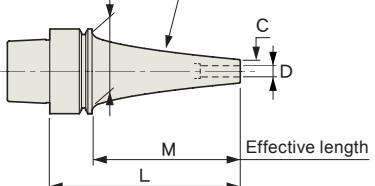Fig. 2 Two-dimensional curve




Compatibility table for HRD-01S

[○] Available [✗] Not available

■ Caution

- The coolant duct is not sold with a holder. Consult us if you need it.
- Setting cutters - Be sure to insert the tool beyond the safety mark.



CV: Curve

Thickness

CODE	Fig.	ϕD	ϕC	t	L	M	L1	ϕC_1	ϕC_2	H	h	Kg lbs	N	S	Scale model
E50-SLSA3- 60-M22	1	3	6	1.5	60	22	12	8.3	20	9	50	0.4	1.3	4.7	○ 1
- 75-M22					75		27		25		61	0.5		4.5	
- 80-M42					80	42	12	10.4	20		70			9.3	
- 95-M42					95		27		25		81		1.7	9.1	
-SLRA3- 75-M22	1	3	7.5	2.25	75	22	27	9.8	25	9	61	0.5	1.7	2.8	○ 5
- 95-M42					95	42		11.9			81			5.3	
- 120-M67					120	67		14.5			106		1.8	8.9	
- 150-M97					150	97		17.7			136	0.6		12.9	
-SLFB3- 75-M22	1	3	9.5	3.25	75	22	27	11.8	25	9	61	0.5	1.8	1.9	○ 9
E50-SLSA4- 75-M22	1	4	7	1.5	75	22	27	9.3	25	12	61	0.5	1.3	3.6	○ 10
- 95-M42					95	42		11.4			81		1.8	7.2	
-SLRA4- 75-M22	1	4	10	3	75	22	27	12.3	25	12	61	0.5	1.7	1.7	○ 12
- 95-M42					95	42		14.4			81		1.8	3.1	
- 120-M67					120	67		17			106	0.6		5.2	
- 150-M97					150	97		20.2			135	0.7	2.2	7.8	
-SLFB4- 75-M22	1	4	12	4	75	22	27	14.3	25	12	61	0.5	1.9	1.4	○ 16
-SLSA4- 90 CV	2	4	7	1.5	90	64	—	42	—	12	74	0.6	2.2	1.8	○ 17
- 120 CV					120	94					104		2.6	4.2	
- 150 CV					150	124					134	0.7	3.3	6	
- 180 CV					180	154					164	0.8	3.5	12	
-SLRA4-120 CV	2	4	10	3	120	94	—	42	—	12	104	0.7	2.8	2.7	○ 21
- 150 CV					150	124					134	0.8	3.4	4.1	
E50-SLSA3/16- 90 CV	2	3/16	.31	.06	3.55	2.52	—	1.65	—	0.59	2.83	1.4	2.6	1.7	○ 23
- 120 CV					4.73	3.71					4.02	1.4	2.8	4.2	
- 150 CV					5.91	4.89					5.20	1.7	3.5	6	
- 180 CV					7.09	6.07					6.38	1.7	3.7	12	
-SLRA3/16-120 CV	2	3/16	.42	.12	4.73	3.71	—	1.65	—	0.59	4.02	1.6	3.4	2.7	○ 27
- 150 CV					5.91	4.89					5.20	1.7	3.6	4.1	



Technical data	CODE	Fig.	φD	φC	t	L	M	L ₁	φC ₁	φC ₂	H	h	Kg lbs	N	S ↓	Feature	Scale model	
	E50-SLSA6- 75-M22	1	6	9	1.5	75	22	27	11.3	25	18	61	0.5	1.3	2.3	○	29	
Shrink-fit Heater	- 95-M42					95	42		13.4			81		1.6	4.8			
	-120-M67					120	67		16			106		1.8	8.1			
	-150-M97					150	97		19.2			32		135	0.6		2.3	11
MONO 3° MONO CURVE	-SLSB6- 95-M42	1	6	10	2	95	42	27	14.4	25	18	81	0.5	1.8	3.7	○	30	
	-120-M67					120	67		17			106		0.6	6.2			
	-150-M97					150	97		20.2			32		135	0.7		2.3	8.5
MONO Series	-SLRA6- 75-M22	1	6	12	3	75	22	27	14.3	25	18	61	0.5	1.5	1.3	○	36	
	- 95-M42					95	42		16.4			81		1.8	2.5			
	-120-M67					120	67		19			106		0.6	1.9		4.1	
2PIECE type	-SLRB6- 95-M42	1	6	14	4	95	42	27	18.4	32	18	80	0.6	2.2	1.6	○	39	
	-SLFB6- 75-M22	1	6	14	4	75	22	27	16.3	32	18	60	0.6	2.1	1	○	40	
	-SLSA6- 90 CV	2	6	9	1.5	90	64	—	42	—	18	74	0.6	2.3	1.6	○	41	
	-120 CV					120	94		104			2.7		3.5				
	-150 CV					150	124		134			0.7		3.4	5.4			
	-180 CV					180	154		164			0.9		4.2	7.6			
	-SLRA6-120 CV	2	6	13	3.5	120	94	—	42	—	18	104	0.8	3.3	1.8	○	45	
	-150 CV					150	124		132			0.9		4	2.7			
UNO	E50-SLSA1/4- 90 CV	2	1/4	.37	.06	3.55	2.52	—	1.65	—	0.71	2.83	1.4	2.6	1.6	○	47	
	-120 CV					4.73	3.71		4.02			1.4		2.9	3.5			
	-150 CV					5.91	4.89		5.20			1.7		3.6	5.4			
	-180 CV					7.09	6.07		6.38			1.9		4.3	7.6			
HYPER VERSION	-SLRA1/4-120 CV	2	1/4	.53	.14	4.73	3.71	—	1.65	—	0.71	4.02	1.6	3.4	1.8	○	51	
	-150 CV					5.91	4.89		5.20			2		4.2	2.7			
Z	E50-SLSA8- 65-M22	1	8	11	1.5	65	22	17	13.3	26	24	49	0.5	1.5	1.5	○	53	
	- 75-M22					75	27		15.4			61		1.6	1.6			
	- 85-M42					85	42		17			26		67	3.2			
	- 95-M42					95	27		25			81		0.5	2.2		3.5	
	-120-M67					120	67		18			32		105	0.6		2.3	5.4
	-150-M97					150	97		21.2			—		132	0.7		2.4	8.1
STRAIGHT arbor	-SLSB8- 95-M42	1	8	13	2.5	95	42	27	17.4	32	24	80	0.6	2.2	2.1	○	59	
	-120-M67					120	67		20			105		0.6	2.3		3.5	
	-150-M97					150	97		23.2			—		135	0.7		2.4	5.3
OTHERS	-SLRA8- 60-M22	1	8	14	3	60	22	12	16.3	26	24	44	0.5	1.4	0.9	○	62	
	- 75-M22					75	27		18.4			61		1.5	1.1			
	- 95-M42					95	42		—			81		1.8	2			
	-SLRB8- 95-M42	1	8	18	5	95	42	27	22.4	32	24	80	0.6	2.2	1.1	○	65	
	-120-M67					120	67		25			105		0.7	2.3		1.7	
	-SLFB8- 75-M22	1	8	18	5	75	22	27	20.3	32	24	60	0.6	2.2	0.7	×	67	
	-SLSA8- 90 CV	2	8	11	1.5	90	64	—	42	—	24	74	0.6	2.5	1.4	○	68	
	-120 CV					120	94		104			0.7		3.2	2.2			
	-150 CV					150	124		134			3.5		4.9				
	-180 CV					180	154		164			0.8		4.2	7.1			
OTHERS	-SLRA8-120 CV	2	8	16	4	120	94	—	42	—	24	102	0.8	3.8	1.3	○	72	
	-150 CV					150	124		132			0.9		4	2.7			
PERIPHERALS	E50-SLSA5/16- 90 CV	2	5/16	.43	.06	3.55	2.52	—	1.65	—	0.94	2.83	1.4	2.6	1.4	○	74	
	-120 CV					4.73	3.71		4.02			1.6		3.4	2.2			
	-150 CV					5.91	4.89		5.20			1.7		3.6	4.9			
	-180 CV					7.09	6.07		6.38			1.9		4.4	7.1			
Technical data	-SLRA5/16-120 CV	2	5/16	.63	.16	4.73	3.71	—	1.65	—	0.94	4.02	1.8	4	1.3	○	78	
	-150 CV					5.91	4.89		5.20			1.9		4.2	2.7			

























CODE	Fig.	ϕD	ϕC	t	L	M	L ₁	ϕC_1	ϕC_2	H	h	Kg lbs	N	S	Scale model
E50-SLSA10- 65-M22	1	10	13	1.5	65	22	17	15.3	26	30	49	0.5	1.5	1.1	80
- 75-M22					75		27		25		61		1.6	1.3	81
- 85-M42					85	42	17	17.4	26		64		2.4		82
- 95-M42					95		27		25		81		2.2	2.6	83
-120-M67					120	67		20	32		105	0.6	2.3	4.1	84
-150-M97					150	97		23.2			64	0.7	2.5	6.2	85
-SLSB10- 95-M42	1	10	16	3	95	42	27	20.4	32	30	80	0.6	2.2	1.5	86
-120-M67					120	67		23			105	0.7	2.4	2.4	87
-150-M97					150	97		26.2			135		2.5	3.7	88
-SLRA10- 75-M22	1	10	16	3	75	22	27	18.3	25	30	60	0.6	1.5	1	89
-SLRB10- 95-M42	1	10	22	6	95	42	27	26.4	32	30	80	0.7	2.3	0.9	90
-120-M67					120	67		29	42		107	0.8	3.2	1.1	91
-SLFB10- 75-M22	1	10	22	6	75	22	27	24.3	32	30	60	0.6	2.2	0.6	92
-SLSA10- 90 CV	2	10	13	1.5	90	64	—	42	—	30	74	0.6	2.5	1.3	93
-120 CV					120	94					104	0.7	3.3	2.1	94
-150 CV					150	124					134	0.8	4.1	3.4	95
-180 CV					180	154					162		4.3	6.9	96
-SLRA10-150 CV	2	10	19	4.5	150	124	—	42	—	30	132	0.9	4.4	2.2	97
E50-SLSA3/8- 90 CV	2	3/8	.49	.06	3.55	2.52	—	1.65	—	1.18	2.83	1.4	2.6	1.3	98
-120 CV					4.73	3.71					4.02	1.6	3.4	2.1	99
-150 CV					5.91	4.89					5.20	1.9	4.2	3.4	100
-180 CV					7.09	6.07					6.38	1.9	4.5	6.9	101
-SLRA3/8-150 CV	2	3/8	.73	.185	5.91	4.89	—	1.65	—	1.18	5.20	2.0	4.7	2.2	102
E50-SLSA12- 65-M22	1	12	15	1.5	65	22	17	17.3	26	25	49	0.5	1.6	0.9	103
- 75-M22					75		27		25	30	60		1.7	1.1	104
- 95-M42					95	42		19.4	32		80		2.2	1.9	105
-120-M67					120	67		22			105	0.6	2.4	3.3	106
-SLSB12- 95-M42	1	12	19	3.5	95	42	27	23.4	32	30	80	0.6	2.3	1.2	107
-120-M67					120	67		26			105	0.7	2.5	1.9	108
-150-M97					150	97		29.2			135	0.9	3.5	2.5	109
-SLRA12- 75-M22	1	12	20	4	75	22	27	22.3	25	30	62	0.6	1.6	0.9	110
-SLRB12- 95-M42	1	12	26	7	95	42	27	30.4	42	30	82	0.8	3.1	0.6	111
-120-M67					120	67		33			107	0.9	3.3	0.9	112
-SLFB12- 75-M22	1	12	26	7	75	22	27	28.3	42	30	62	0.7	3	0.4	113
E50-SLSB16- 95-M42	1	16	24	4	95	42	27	28.4	42	32	82	0.7	3.2	0.7	114
-120-M67					120	67		31			107	0.8	3.5	1.2	115
-SLRA16- 60-M22	1	16	26	5	60	22	12	28.3	34	32	44	0.6	1.7	0.4	116
-SLRB16- 75-M22	1	16	32	8	75	22	27	34.3	42	32	62	0.7	3	0.4	117
-SLFB16- 75-M22	1	16	32	8	75	22	27	34.3	42	32	62	0.7	3	0.4	118
E50-SLSB20- 95-M42	1	20	29	4.5	95	42	27	33.4	42	40	82	0.7	3.3	0.6	119
-SLRA20- 65-M22	1	20	32	6	65	22	17	34.3	40	38	49	0.6	2.2	0.3	120



E50

S=1:5

φ 3

Feature

Shrink-fit Heater

MONO 3°

MONO CURVE

MONO Series

2PIECE type

UNO

HYPER VERSION





















Z

STRAIGHT arbor

OTHERS

PERIPHERALS

Technical data

$\phi \frac{3}{16}$ 

E50

S=1:5

Feature
Shrink-fit HeaterMONO 3°
MONO CURVE

MONO Series

2PIECE type

UNO

HYPER VERSION





















Z
















STRAIGHT arbor

OTHERS

PERIPHERALS



















Technical data
















 **$\phi \frac{1}{4}$**  **$\phi 8$** 

E50-SLRB8-95-M42**E50-SLRB8-120-M67****E50-SLFB8-75-M22****E50-SLSA8-90 CV****E50-SLSA8-120 CV****E50-SLSA8-150 CV****E50-SLSA8-180 CV****E50-SLRA8-120 CV****E50-SLRA8-150 CV** $\phi \frac{5}{16}$ **E50-SLSA5/16-90 CV****E50-SLSA5/16-120 CV****E50-SLSA5/16-150 CV****E50-SLSA5/16-180 CV****E50-SLRA5/16-120 CV****E50-SLRA5/16-150 CV**Shrink-fit Heater
MONO 3°
MONO CURVEMONO Series
2PIECE type
UNOHYPER
VERSION

Z








STRAIGHT
arborOTHERS
PERIPHERALSTechnical
data

$\phi 10$ 

$\phi \frac{3}{8}$  $\phi 12$ 

E50

S=1:5

φ 16**φ 20**

F63

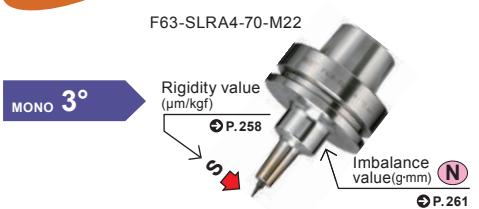


Fig.1






Fig.2



Compatibility table for HRD-01S

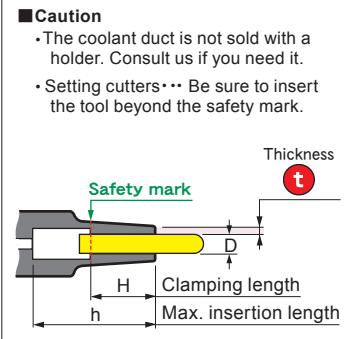- [○] Available [✗] Not available
- [▲] Usable by raising the heating unit. → P.257
- [★] Use heating coil No. 2.



CODE	Fig.	ϕD	ϕC	t	L	M	L1	ϕC_1	ϕC_2	H	h	Kg	N	S	Scale model
F63-SLSA3- 75-M37	1	3	6	1.5	75	37	12	9.9	26	9	58	0.7	1.5	8	1
- 95-M42					95	42	27	10.4	25		78		1.8	9.1	2
-SLRA3- 70-M22	1	3	7.5	2.25	70	22	22	9.8	26	9	53	0.7	1.7	2.8	3
- 75-M22					75				25		54		1.8		4
- 95-M42					95	42		11.9			78		1.9	5.3	5
-SLFB3- 75-M22	1	3	9.5	3.25	75	22	27	11.8	25	9	58	0.7	1.9	1.9	6
- 95-M42					95	42		13.9			78	0.8	2	3.2	7
-120-M67					120	67		16.5			103			5.4	8
F63-SLSA4- 95-M42	1	4	7	1.5	95	42	27	11.4	25	12	78	0.7	1.9	7.2	9
-SLRA4- 75-M22	1	4	10	3	75	22	27	12.3	25	12	58	0.7	1.8	1.7	10
- 95-M42					95	42		14.4			78	0.8	1.9	3.1	11
-SLFB4- 75-M22	1	4	12	4	75	22	27	14.3	25	12	58	0.7	2	1.3	12
- 95-M42					95	42		16.4			78	0.8		2.2	13
-120-M67					120	67		19			103		2.1	3.6	14
-SLSA4- 90 CV	2	4	7	1.5	90	64	—	53	—	12	65	0.9	2.7	1.8	15
-120 CV					120	94					95	1	3.6	2.7	16
-150 CV					150	124					125	1.2	4.4	4	17
-180 CV					180	154					154	1.3	5	6.6	18
-210 CV					210	184					185		5.3	11.6	19
-240 CV					240	214					214	1.6	6.5	14	20
-270 CV					270	244					245	1.9	8.8	11.9	21
-300 CV					300	274					275	2	9.7	15.9	22
-SLRA4-120 CV	2	4	10	3	120	94	—	53	—	12	95	1	3.6	1.9	23
-150 CV					150	124					125	1.1	4.4	2.9	24
-180 CV					180	154					155	1.4	6	3.3	25
-210 CV					210	184					185	1.5	6.2	5.6	26



CODE		Fig.	φD	φC	t	L	M	L ₁	φC ₁	φC ₂	H	h	Kg lbs	N	S	Feature	Scale model						
F63-SLSA3/16- 90 CV		2	3/16	.31	.06	3.54	2.52	—	2.09	—	.59	2.56	2	2.8	2.0	○	27						
						4.72	3.70					3.74	2.3	3.6	2.6		28						
						5.91	4.88					4.92	2.6	4.5	4.0		29						
						7.09	6.06					6.06	2.7	5.2	6.5		30						
						8.27	7.24					7.24	3.2	6.4	8.4		31						
						9.45	8.43					8.43	3.6	7.6	10.6		32						
						10.63	9.61					9.61	4	8.9	13.2		33						
						11.81	10.79					10.83	4.5	10	16.1		34						
						-SLRA3/16-120 CV		2	3/16	.42	.12	4.72	3.70	—	2.09	—	.59	3.70	2.3	3.8	1.8	○	35
						5.91	4.88					4.88	2.7	5	2.4		36						
						7.09	6.06					6.10	2.8	5.3	4.3		37						
						8.27	7.24					7.24	2.8	5.8	5.7		38						
F63-SLSA6- 75-M37		1	6	9	1.5	75	37	12	12.9	26	18	58	0.7	1.5	4	○	39						
						95	42					78	0.7	1.9	4.8		40						
-SLSB6- 95-M42		1	6	10	2	95	42	27	14.4	25	18	78	0.7	1.9	3.7	○	41						
-SLRA6- 75-M22		1	6	12	3	75	22	27	14.3	25	18	58	0.7	1.8	1.3	○	42						
- 95-M42						95	42					78	0.8	1.9	2.4	○	43						
-SLFB6- 75-M22		1	6	14	4	75	22	27	16.3	32	18	58	0.8	2.2	1	○	44						
-SLSA6- 90 CV		2	6	9	1.5	90	64	—	53	—	18	65	0.9	2.8	1.6	○	45						
-120 CV						120	94					95	1	3.6	2.3		46						
-150 CV						150	124					125	1.2	4.4	3.6		47						
-180 CV						180	154					154	1.3	5.2	5.7		48						
-210 CV						210	184					184	1.5	6.4	7.3		49						
-240 CV						240	214					214	1.6	6.7	12		50						
-270 CV						270	244					245	2	9.7	8.5	▲	51						
-300 CV						300	274					275	2.2	10.6	11.7	▲	52						
-SLRA6- 90 CV		2	6	13	3.5	90	64	—	53	—	18	65	1	3.4	0.8	★	53						
-120 CV						120	94					95	1.2	4.3	1.2	○	54						
-150 CV						150	124					125	1.3	5.2	1.9	○	55						
-180 CV						180	154					155	1.4	6.1	2.8	○	56						
-210 CV						210	184					185	1.5	6.6	4.8	○	57						
-SLFA6- 90 CV		2	6	13	3.5	90	64	—	53	—	18	65	1	3.4	0.8	★	58						
-120 CV						120	94					95	1.2	4.3	1.2	○	59						
-150 CV						150	124					125	1.3	5.2	1.9	○	60						
-180 CV						180	154					155	1.4	6.1	2.8	○	61						
-210 CV						210	184					185	1.5	6.6	4.8	○	62						
F63-SLSA1/4- 90 CV		2	1/4	.37	.06	3.54	2.52	—	2.09	—	.71	2.56	2	2.9	1.6	○	63						
-120 CV						4.72	3.70					3.74	2.2	3.6	2.4		64						
-150 CV						5.91	4.88					4.92	2.5	4.5	3.7		65						
-180 CV						7.09	6.06					6.10	2.8	5.4	5.5		66						
-210 CV						8.27	7.24					7.24	3.4	7.2	7.5		67						
-240 CV						9.45	8.43					8.43	3.6	7.8	9.6		68						
-270 CV						10.63	9.61					9.65	4.2	9.1	11.3	▲	69						
-300 CV						11.81	10.79					10.79	4.7	11.2	11.8	▲	70						
-SLRA1/4- 90 CV		2	1/4	.53	.14	3.54	2.52	—	2.09	—	.71	2.52	2.2	3.5	0.8	★	71						
-120 CV						4.72	3.70					3.74	2.6	4.4	1.2	○	72						
-150 CV						5.91	4.88					4.92	2.8	5.3	1.9	○	73						
-180 CV						7.09	6.06					6.06	3.1	6.4	2.9	○	74						
-210 CV						8.27	7.24					7.24	3.2	6.8	4.9	○	75						



CODE	Fig.	φD	φC	t	L	M	L ₁	φC ₁	φC ₂	H	h	Kg lbs	N	S	Scale model	
F63-SLFA1/4- 90 CV	2	1/4	.53	.14	3.54	2.52	—	2.09	—	.71	2.52	2.2	3.5	0.8	★	
					4.72	3.70					3.74	2.6	4.4	1.2	76	
					5.91	4.88					4.92	2.8	5.3	1.9	77	
					7.09	6.06					6.06	3.1	6.4	2.9	78	
					8.27	7.24					7.24	3.2	6.8	4.9	79	
F63-SLSA8- 95-M42	1	8	11	1.5	95	42	27	15.4	25	24	78	0.7	1.9	3.4	80	
					-SLSB8- 95-M42	95					78	0.8	2.3	2.1	81	
					-SLRA8- 75-M22	75	27	16.3	25	24	58	0.7	1.9	1.1	82	
					- 95-M42	95					78	0.8		2	83	
					-SLFB8- 75-M22	75	22	20.3	32	24	58	0.8	2.2	0.7	84	
F63	2	8	18	5	90	64	—	53	—	24	65	0.9	2.9	1.4	85	
					120	94					94	1.1	3.8	2	86	
					150	124					124	1.3	5	2.7	87	
					180	154					155		5.2	5	88	
					210	184					184	1.5	6.6	6.6	89	
					240	214					214	1.8	7.8	8.3	90	
					270	244					244	2.1	10.7	6.9	91	
					300	274					274	2.3	11.9	8.9	92	
					-SLRA8- 90 CV	90	4	53	—	24	65	1	3.4	0.7	93	
					-120 CV	120					95	1.2	4.6	1	94	
F63	2	8	16		-150 CV	150					125	1.4	5.9	1.4	95	
					-180 CV	180					155	1.6	7	2	96	
					-210 CV	210					185		7.6	3.5	97	
					-SLFA8- 90 CV	90	4	53	—	24	65	1	3.4	0.7	98	
					-120 CV	120					95	1.2	4.6	1	99	
F63	2	8	16		-150 CV	150					125	1.4	5.9	1.4	100	
					-180 CV	180					155	1.6	7	2	101	
					-210 CV	210					185		7.6	3.5	102	
					F63-SLSA5/16- 90 CV	3.54	2.52	—	2.09	.94	2.56	2	2.9	1.5	103	
					-120 CV	4.72	3.70				3.70	2.2	3.8	2.0	104	
F63	2	5/16	.43	.06	-150 CV	5.91	4.88				4.88	2.7	5.1	2.8	105	
					-180 CV	7.09	6.06				6.10	2.8	5.4	5.2	106	
					-210 CV	8.27	7.24				7.17	3.2	7.4	6.0	107	
					-240 CV	9.45	8.43				8.43	3.9	8.9	6.8	108	
					-270 CV	10.63	9.61				9.65	4.5	10	8.5	109	
					-300 CV	11.81	10.79				10.79	5	12.3	9.0	110	
					-SLRA5/16- 90 CV	3.54	2.52	—	2.09	.94	2.52	2.2	3.5	0.7	111	
F63	2	5/16	.63	.16	-120 CV	4.72	3.70				3.70	2.6	4.8	1.0	112	
					-150 CV	5.91	4.88				4.88	3	6.1	1.5	113	
					-180 CV	7.09	6.06				6.06	3.5	7.3	2.1	114	
					-210 CV	8.27	7.24				7.24	3.5	7.8	3.6	115	
					-SLFA5/16- 90 CV	3.54	2.52	—	2.09	.94	2.52	2.2	3.5	0.7	116	
F63	2	5/16	.63	.16	-120 CV	4.72	3.70				3.70	2.6	4.8	1.0	117	
					-150 CV	5.91	4.88				4.88	3	6.1	1.5	118	
					-180 CV	7.09	6.06				6.06	3.5	7.3	2.1	119	
					-210 CV	8.27	7.24				7.24	3.5	7.8	3.6	120	
					F63-SLSA10-95-M42	1	10	13	1.5	95	42	27	17.4	25	30	74
F63	1	10	16	3	-SLSB10-95-M42	95	42	27	20.4	32	74	0.8	2.3	1.4	122	
					-SLRA10-75-M22	75	22				54	0.8	1.9	1	123	
					-SLFB10-75-M22	75	22				54	0.8	2.3	0.6	124	

SLFA
SLFB

	CODE	Fig.	ϕD	ϕC	t	L	M	L ₁	ϕC_1	ϕC_2	H	h	Kg lbs	N	S	Feature	Scale model						
MONO 3° MONO CURVE	F63-SLSA10- 90 CV -120 CV -150 CV -180 CV F63 -210 CV -240 CV -270 CV -300 CV	2	10	13	1.5	90	64	—	53	—	30	65	0.9	2.9	1.3	○	126						
						120	94					95	1.2	4.4			127						
						150	124					125	1.3	5.2	2.2		128						
						180	154					154	1.5	6.3	3.4		129						
						210	184					184	1.6	6.8	6		130						
						240	214					212	2	9.4	5.8		131						
						270	244					244	2.1	10.9	6.6		132						
						300	274					274	2.3	12.2	8.5		133						
						-SLRA10- 90 CV -120 CV -150 CV -180 CV -210 CV		2	10	19	4.5	90	64	—	53	—	30	65	1	3.5	0.6	○	134
						120	94					95	1.2	4.6	0.9		135						
						150	124					125	1.4	5.8	1.4		136						
						180	154					155	1.6	7.2	2		137						
						210	184					185		8	3.1		138						
						-SLFA10- 90 CV -120 CV -150 CV -180 CV -210 CV		2	10	19	4.5	90	64	—	53	—	30	65	1	3.5	0.6	○	139
						120	94					95	1.2	4.6	0.9		140						
						150	124					125	1.4	5.8	1.4		141						
						180	154					155	1.6	7.2	2		142						
						210	184					185		8	3.1		143						
						F63-SLSA3/8- 90 CV -120 CV -150 CV -180 CV -210 CV		3	3/8	.49	.06	3.54	2.52	—	2.09	—	1.18	2.56	2	2.9	1.3	○	144
						4.72	3.70					3.74	2.3	3.8	2.2		145						
						5.91	4.88					4.88	2.6	5.2	2.6		146						
						7.09	6.06					6.06	3.1	6.4	3.6		147						
						8.27	7.24					7.24	3.5	7.8	4.9		148						
						9.45	8.43					8.46	4.1	9	6.0	▲	149						
						10.63	9.61					9.61	4.6	11.2	6.8		150						
						11.81	10.79					10.79	5	12.5	8.8		151						
						-SLRA3/8- 90 CV -120 CV -150 CV -180 CV -210 CV		3	3/8	.73	.185	3.54	2.52	—	2.09	—	1.18	2.52	2.2	3.5	0.7	○	152
						4.72	3.70					3.70	2.6	4.8	1.0		153						
						5.91	4.88					4.88	3	6.1	1.4		154						
						7.09	6.06					6.06	3.4	7.4	2.0		155						
						8.27	7.24					7.28	3.9	8.3	2.9		156						
						-SLFA3/8- 90 CV -120 CV -150 CV -180 CV -210 CV		3	3/8	.73	.185	3.54	2.52	—	2.09	—	1.18	2.52	2.2	3.5	0.7	○	157
						4.72	3.70					3.70	2.6	4.8	1.0		158						
						5.91	4.88					4.88	3	6.1	1.4		159						
						7.09	6.06					6.06	3.4	7.4	2.0		160						
						8.27	7.24					7.28	3.9	8.3	2.9		161						
						F63-SLSA12- 95-M42	1	12	15	1.5	95	42	27	19.4	32	30	74	0.8	2.3	1.8	○	162	
						-SLSB12- 95-M42	1					27	23.4	32	30		163						
						-SLRA12- 75-M22	1					27	22.3	25	30		164						
						-SLFB12- 75-M22	1					27	28.3	42	30		165						
						-SLSA12- 90 CV -120 CV -150 CV -180 CV -210 CV	2	12	15	1.5	90	64	—	53	—	30	64	1	3.4	0.9	○	166	
						120	94					94	1.2	4.7	1.2		167						
						150	124					124	1.3	5.2	2.4		168						
						180	154					154	1.5	6.5	3.3		169						
						210	184					184	1.7	7.7	4.6		170						
						240	214					212	2	9.6	5.5	▲	171						
						270	244					244	2.2	11.8	5.4		172						
						-SLRA12- 90 CV -120 CV -150 CV -180 CV -210 CV	2	12	22	5	90	64	—	53	—	30	64	1	3.6	0.6	X	173	
						120	94					94	1.3	5.5	0.7		174						
						150	124					124	1.5	6.7	1.1		175						
						180	154					154	1.6	7.5	1.8		176						
						210	184					184	1.7	8.5	2.8		177						

























CODE	Fig.	φD	φC	t	L	M	L ₁	φC ₁	φC ₂	H	h	Kg lbs	N	S	Scale model
F63-SLFA12- 90 CV	2	12	22	5	90	64	—	53	—	30	64	1	3.6	0.6	X
					120	94					94	1.3	5.5	0.7	
					150	124					124	1.5	6.7	1.1	O
					180	154					154	1.6	7.5	1.8	
					210	184					184	1.7	8.5	2.8	
F63-SLSA1/2- 90 CV	3	1/2	.62	.06	3.54	2.52	—	2.09	—	1.18	2.52	2.1	3.6	0.8	O
					4.72	3.70					3.70	2.5	4.9	1.2	
					5.91	4.88					4.88	2.6	5.3	2.4	
					7.09	6.06					6.06	3	6.7	3.4	
					8.27	7.24					7.17	3.6	9.3	3.6	
					9.45	8.43					8.35	4.1	11.5	4.3	▲
					10.63	9.61					9.53	4.7	13.3	5.1	
-SLRA1/2- 90 CV	3	1/2	.89	.20	3.54	2.52	—	2.09	—	1.18	2.44	2.2	4	0.5	X
					4.72	3.70					3.70	2.9	5.7	0.7	
					5.91	4.88					4.88	3.3	7	1.1	O
					7.09	6.06					5.98	3.3	8.3	1.9	
					8.27	7.24					7.24	4.4	10.4	2.0	
-SLFA1/2- 90 CV	3	1/2	.89	.20	3.54	2.52	—	2.09	—	1.18	2.44	2.2	4	0.5	X
					4.72	3.70					3.70	2.9	5.7	0.7	O
					5.91	4.88					4.88	3.3	7	1.1	
					7.09	6.06					5.98	3.3	8.3	1.9	
					8.27	7.24					7.24	4.4	10.4	2.0	
-SLFB16- 75-M22	1	16	32	8	75	22	27	34.3	42	32	54	1	3.1	0.3	
F63-SLSB16- 90 CV	2	16	21	2.5	90	64	—	53	—	32	62	1.1	3.9	0.6	
					120	94					92	1.4	5.8	0.8	
					150	124					122	1.5	6.9	1.5	
					180	154					152	1.9	8.8	1.9	
					210	184					182	2	9.9	3	
					240	214					212	2.3	11.8	3.7	
					270	244					242	2.7	13.7	4.6	
F63-SLSB5/8- 90 CV	3	5/8	.82	.10	3.54	2.52	—	2.09	—	1.26	2.44	2.1	3.9	0.6	
					4.72	3.70					3.62	2.7	5.9	0.8	
					5.91	4.88					4.80	2.9	7	1.5	
					7.09	6.06					5.98	3.5	9	1.9	
					8.27	7.24					7.17	3.7	10.1	3.0	
					9.45	8.43					8.35	4.3	12.1	3.7	
					10.63	9.61					9.53	4.8	14.1	4.6	
-SLFB20- 75-M22*	1	20	38	9	75	22	27	40.3	50	40	53	1.1	3.6	0.3	
F63-SLSB20- 90 CV	2	20	26	3	90	64	—	51	—	40	62	1.1	4.2	0.5	
					120	94		53			92	1.4	6.2	0.8	
					150	124					122	1.6	7.6	1.3	
					180	154					152	2	9.6	1.8	
					210	184					182	2.3	11.6	2.3	
					240	214					212	2.6	13.7	3	
					270	244					242	3.1	16.3	3.4	
F63-SLSB3/4- 90 CV	3	3/4	.99	.12	3.54	2.52	—	2.09	—	1.50	2.44	2.2	4.1	0.6	
					4.72	3.70					3.62	2.7	6.3	0.8	
					5.91	4.88					4.80	2.9	7.6	1.4	
					7.09	6.06					5.98	3.5	9.7	1.8	
					8.27	7.24					7.17	4	11.8	2.4	
					9.45	8.43					8.35	4.5	14	3.1	
					10.63	9.61					9.53	5.1	16.1	3.9	
F63-SLFB25- 75-M22	1	25	45	10	75	22	27	47.3	50	45	53	1.1	3.7	0.2	



*1 When shrinking the SLFB20 with HEAT ROBO DENJI 5000(HRD-02S), the standard heating coil cannot be used. Please use the heating coil No.4.

178	Shrink-fit Heater
179	
180	
181	
182	
183	MONO 3°
184	MONO CURVE
185	
186	
187	
188	MONO Series
189	2PIECE type
200	UNO
201	
202	
203	
204	
205	
206	
207	
208	
209	
210	
211	
212	
213	
214	
215	
216	
217	
218	
219	
220	
221	
222	
223	
224	
225	
226	
227	
228	
229	
230	

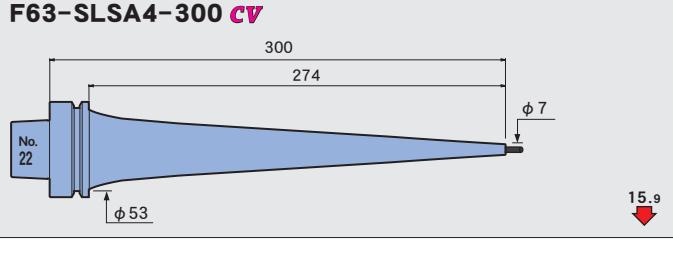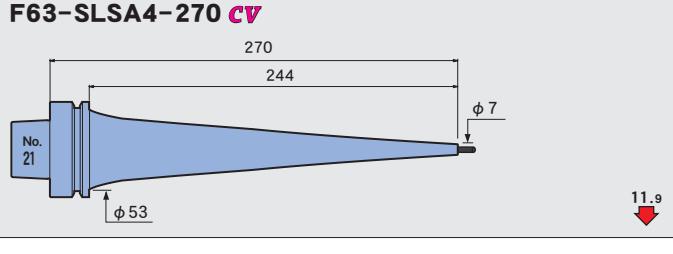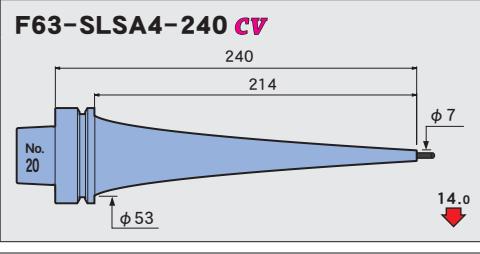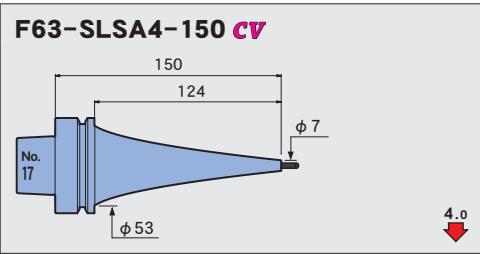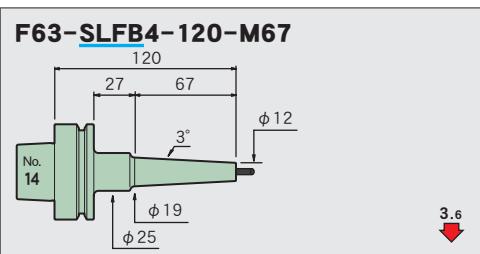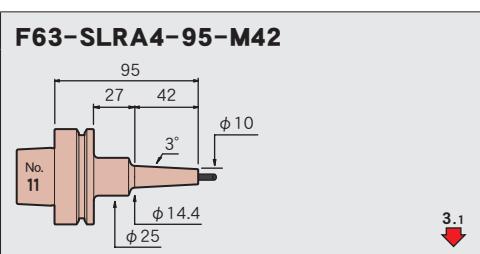φ 3**φ 4**

Feature

Shrink-fit Heater

MONO 3°

MONO CURVE

MONO Series

2PIECE type

UNO

HYPER VERSION

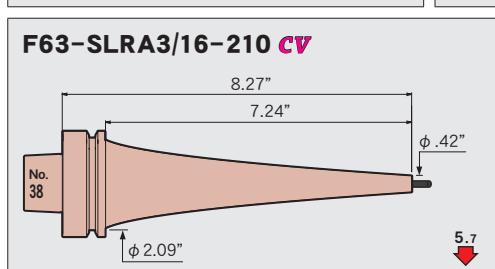
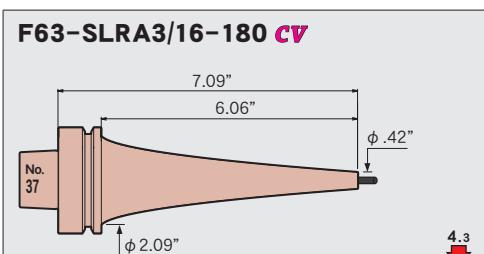
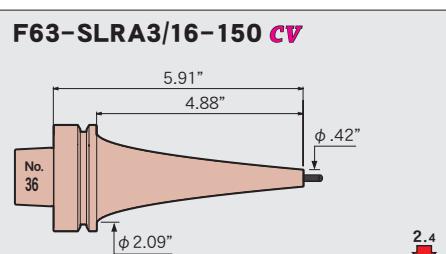
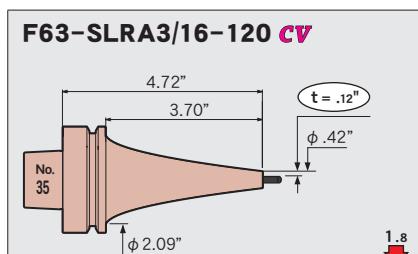
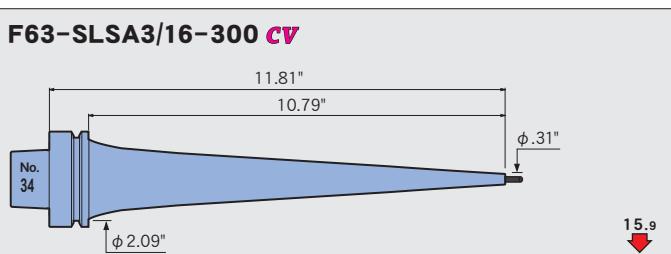
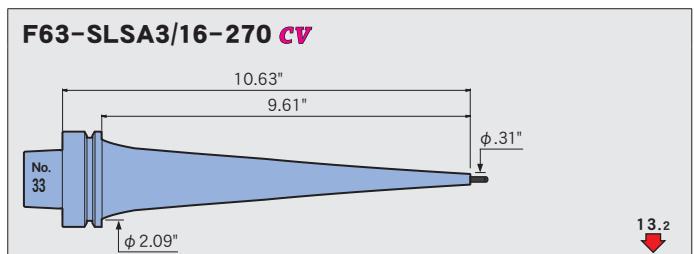
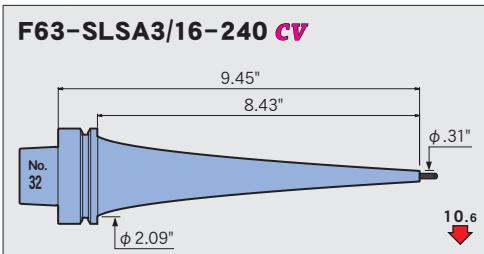
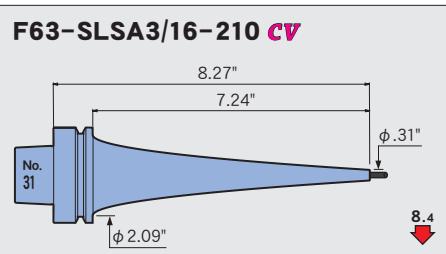
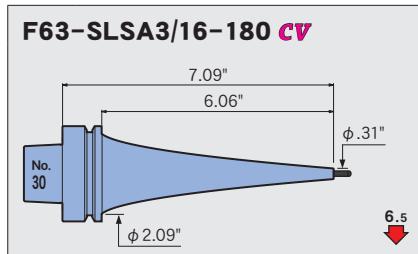
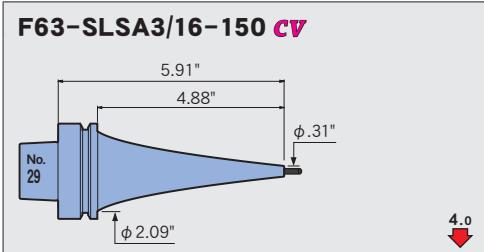
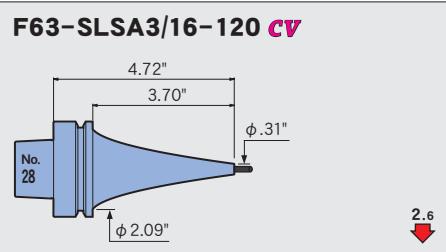
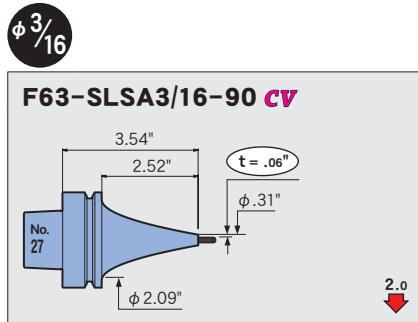
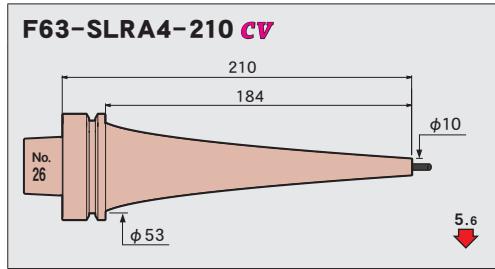
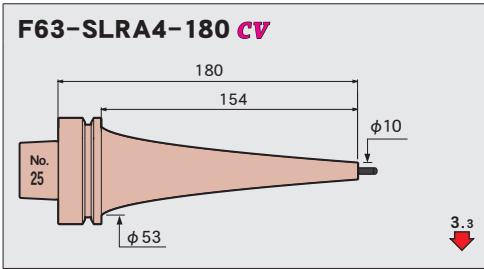
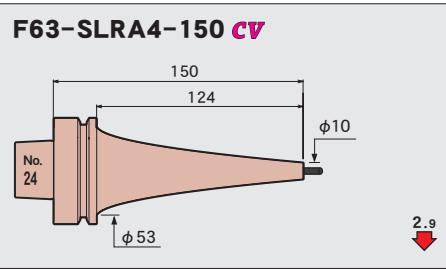
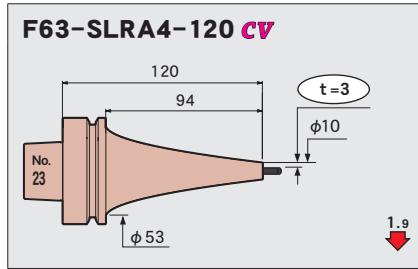
Z

STRAIGHT arbor

OTHERS

PERIPHERALS

Technical data



Feature
Shrink-fit Heater

MONO 3°
MONO CURVE

MONO Series

2PIECE type

UNO

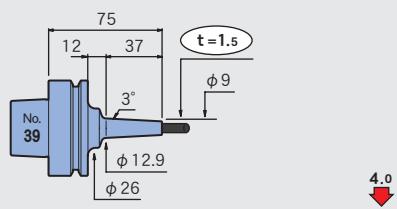
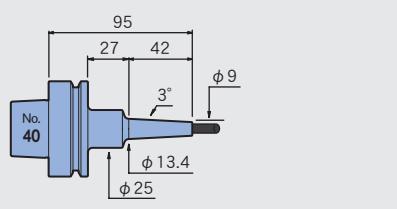
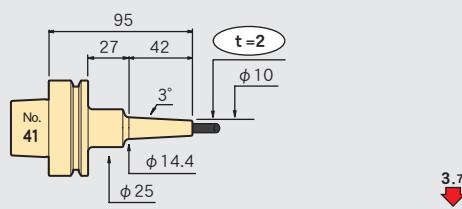
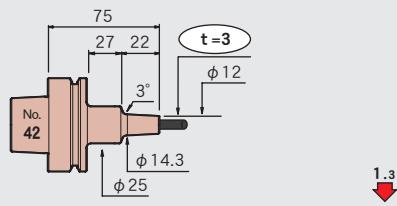
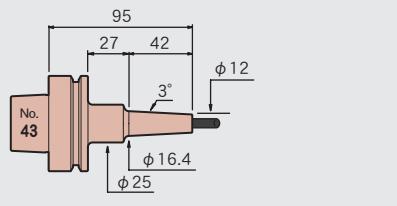
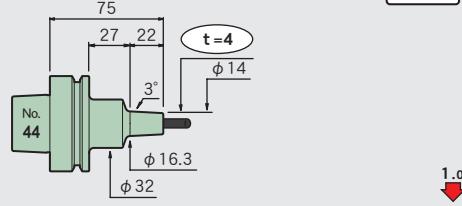
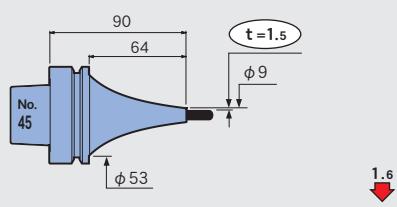
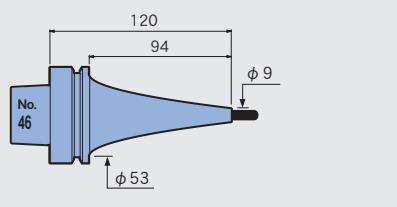
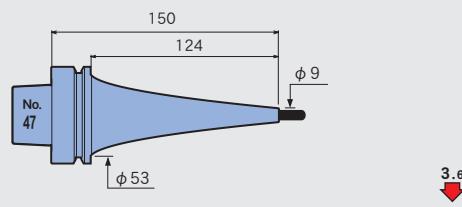
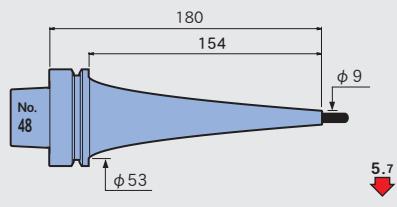
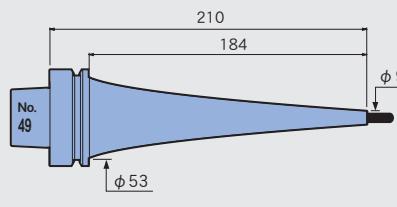
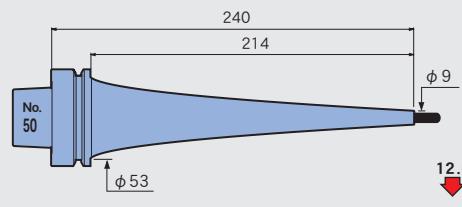
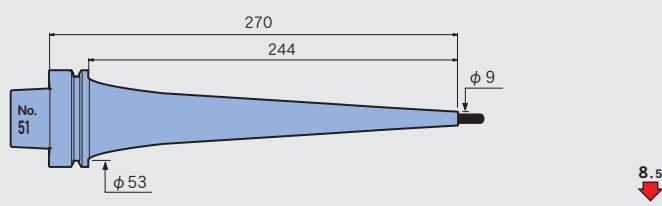
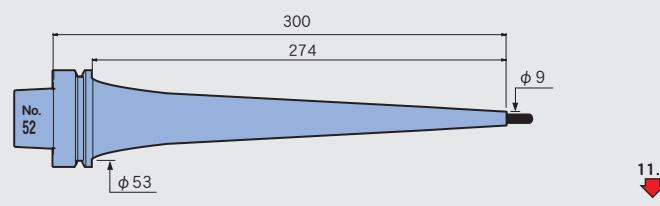
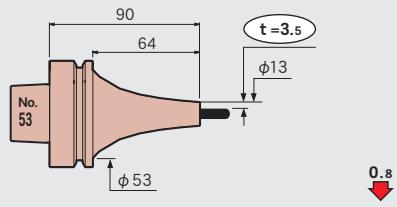
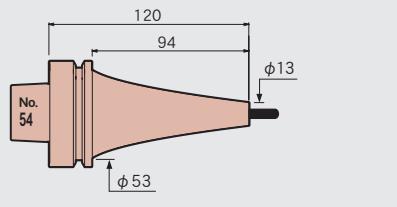
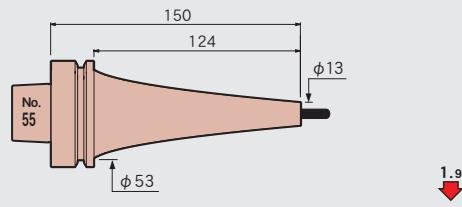
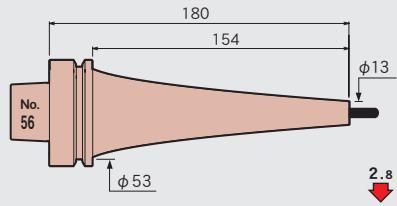
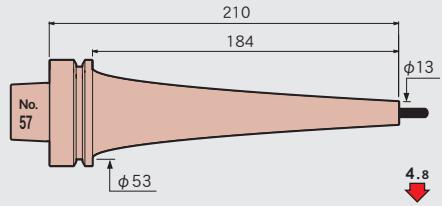
HYPER VERSION








Z

STRAIGHT arbor

OTHERS

PERIPHERALS
Technical data

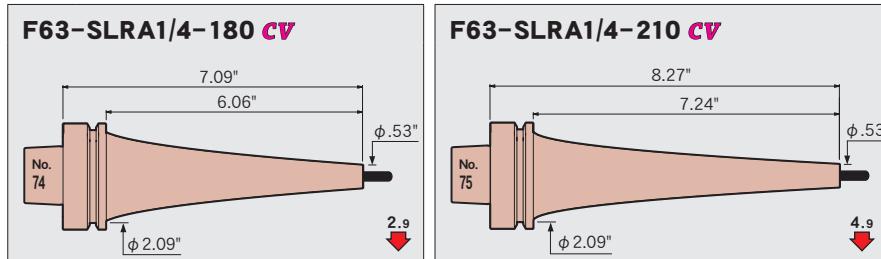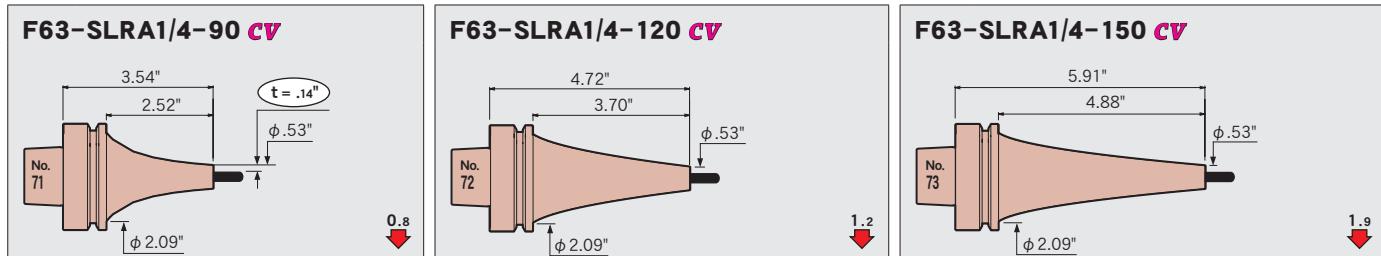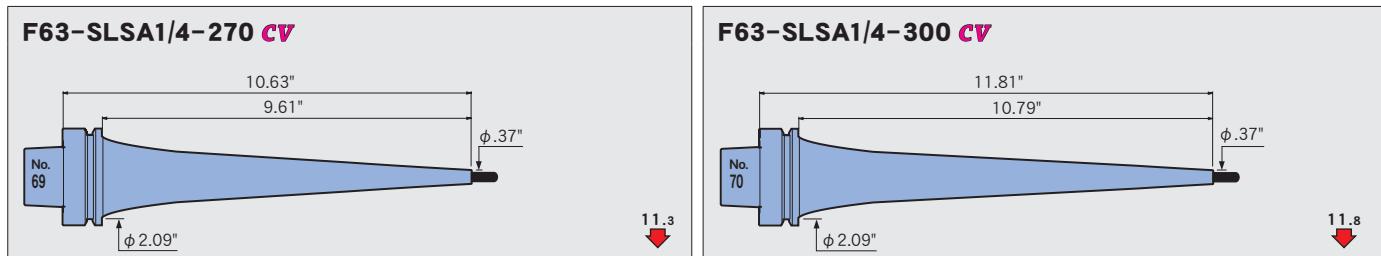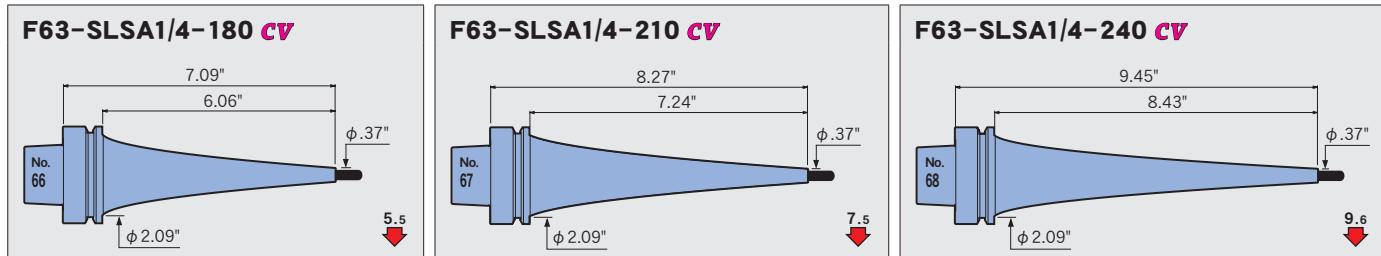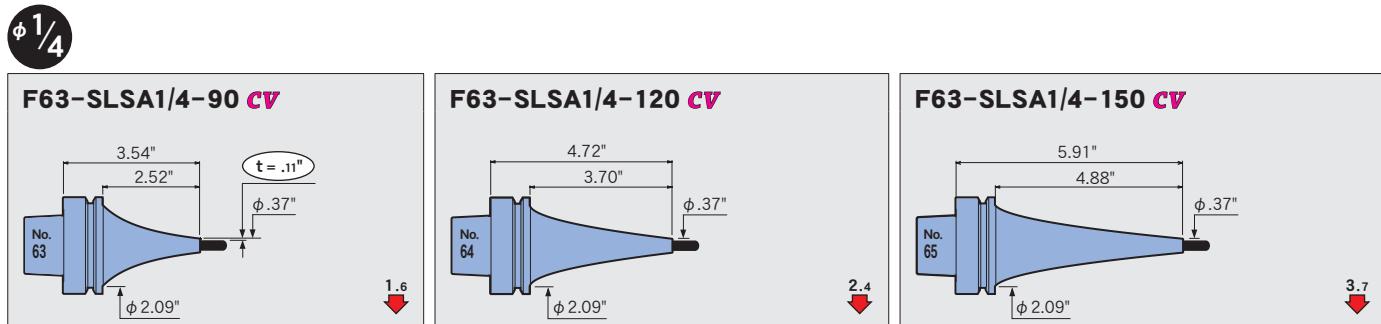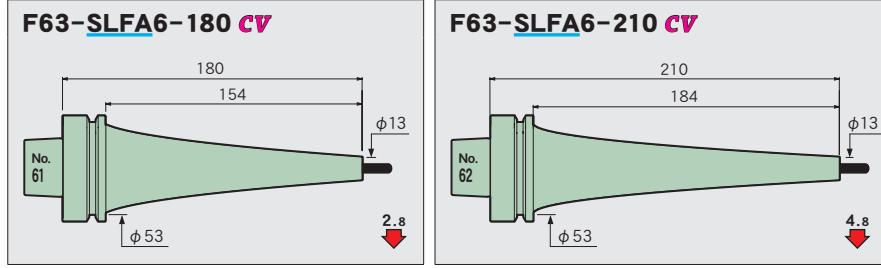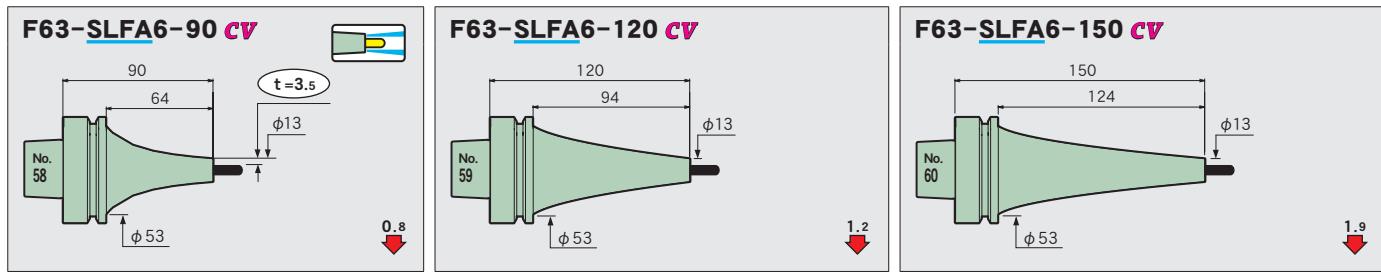φ 6**F63-SLSA6-75-M37****F63-SLSA6-95-M42****F63-SLSB6-95-M42****F63-SLRA6-75-M22****F63-SLRA6-95-M42****F63-SLFB6-75-M22****F63-SLSA6-90 CV****F63-SLSA6-120 CV****F63-SLSA6-150 CV****F63-SLSA6-180 CV****F63-SLSA6-210 CV****F63-SLSA6-240 CV****F63-SLSA6-270 CV****F63-SLSA6-300 CV****F63-SLRA6-90 CV****F63-SLRA6-120 CV****F63-SLRA6-150 CV****F63-SLRA6-180 CV****F63-SLRA6-210 CV**



Feature
Shrink-fit Heater

MONO 3°
MONO CURVE

MONO Series

2PIECE type

UNO




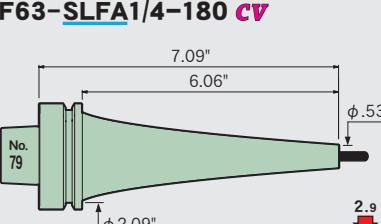
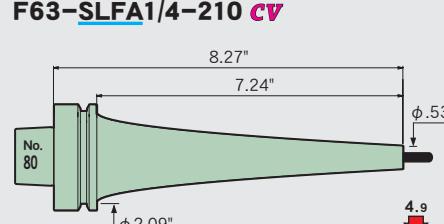
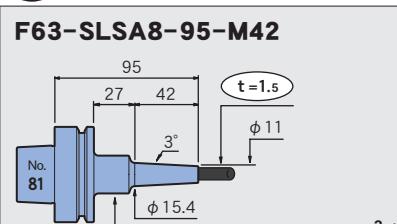

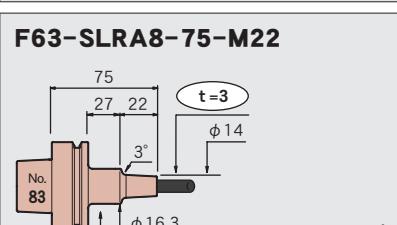

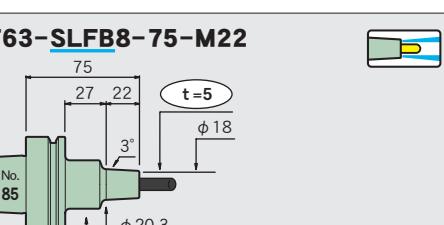
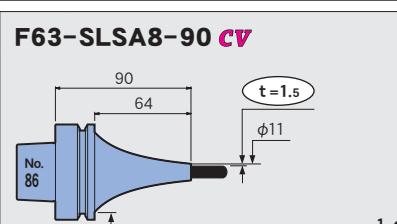

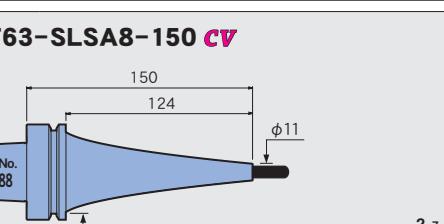
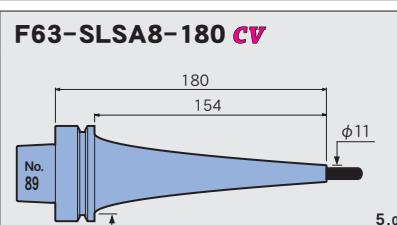

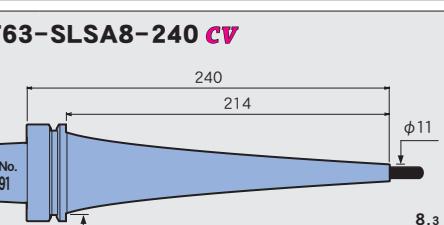
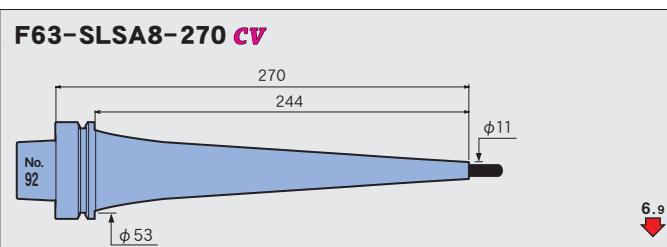
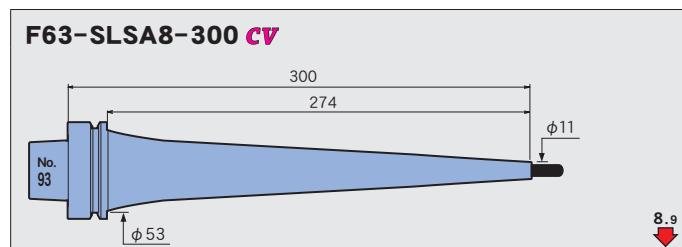
HYPER VERSION



Z

STRAIGHT arbor

OTHERS

PERIPHERALS
Technical

F63-SLFA1/4-90 CV	F63-SLFA1/4-120 CV	F63-SLFA1/4-150 CV
 No. 76 3.54" 2.52" $t = .14"$ φ.53" φ 2.09" 0.8 ↓	 No. 77 4.72" 3.70" φ.53" φ 2.09" 1.2 ↓	 No. 78 5.91" 4.88" φ.53" φ 2.09" 1.9 ↓
F63-SLFA1/4-180 CV	F63-SLFA1/4-210 CV	
 No. 79 7.09" 6.06" φ.53" φ 2.09" 2.9 ↓	 No. 80 8.27" 7.24" φ.53" φ 2.09" 4.9 ↓	
φ 8		
F63-SLSA8-95-M42	F63-SLSB8-95-M42	
 No. 81 95 27 42 $t = 1.5$ φ 11 φ 15.4 φ 25 3.4 ↓	 No. 82 95 27 42 $t = 2.5$ φ 13 φ 17.4 φ 32 2.1 ↓	
F63-SLRA8-75-M22	F63-SLRA8-95-M42	F63-SLFB8-75-M22
 No. 83 75 27 22 $t = 3$ φ 14 φ 16.3 φ 25 1.1 ↓	 No. 84 95 27 42 $t = 3$ φ 14 φ 18.4 φ 25 2.0 ↓	 No. 85 75 27 22 $t = 5$ φ 18 φ 20.3 φ 32 0.7 ↓
F63-SLSA8-90 CV	F63-SLSA8-120 CV	F63-SLSA8-150 CV
 No. 86 90 64 $t = 1.5$ φ 11 φ 53 1.4 ↓	 No. 87 120 94 φ 11 φ 53 2.0 ↓	 No. 88 150 124 φ 11 φ 53 2.7 ↓
F63-SLSA8-180 CV	F63-SLSA8-210 CV	F63-SLSA8-240 CV
 No. 89 180 154 φ 11 φ 53 5.0 ↓	 No. 90 210 184 φ 11 φ 53 6.6 ↓	 No. 91 240 214 φ 11 φ 53 8.3 ↓
F63-SLSA8-270 CV	F63-SLSA8-300 CV	
 No. 92 270 244 φ 11 φ 53 6.9 ↓	 No. 93 300 274 φ 11 φ 53 8.9 ↓	

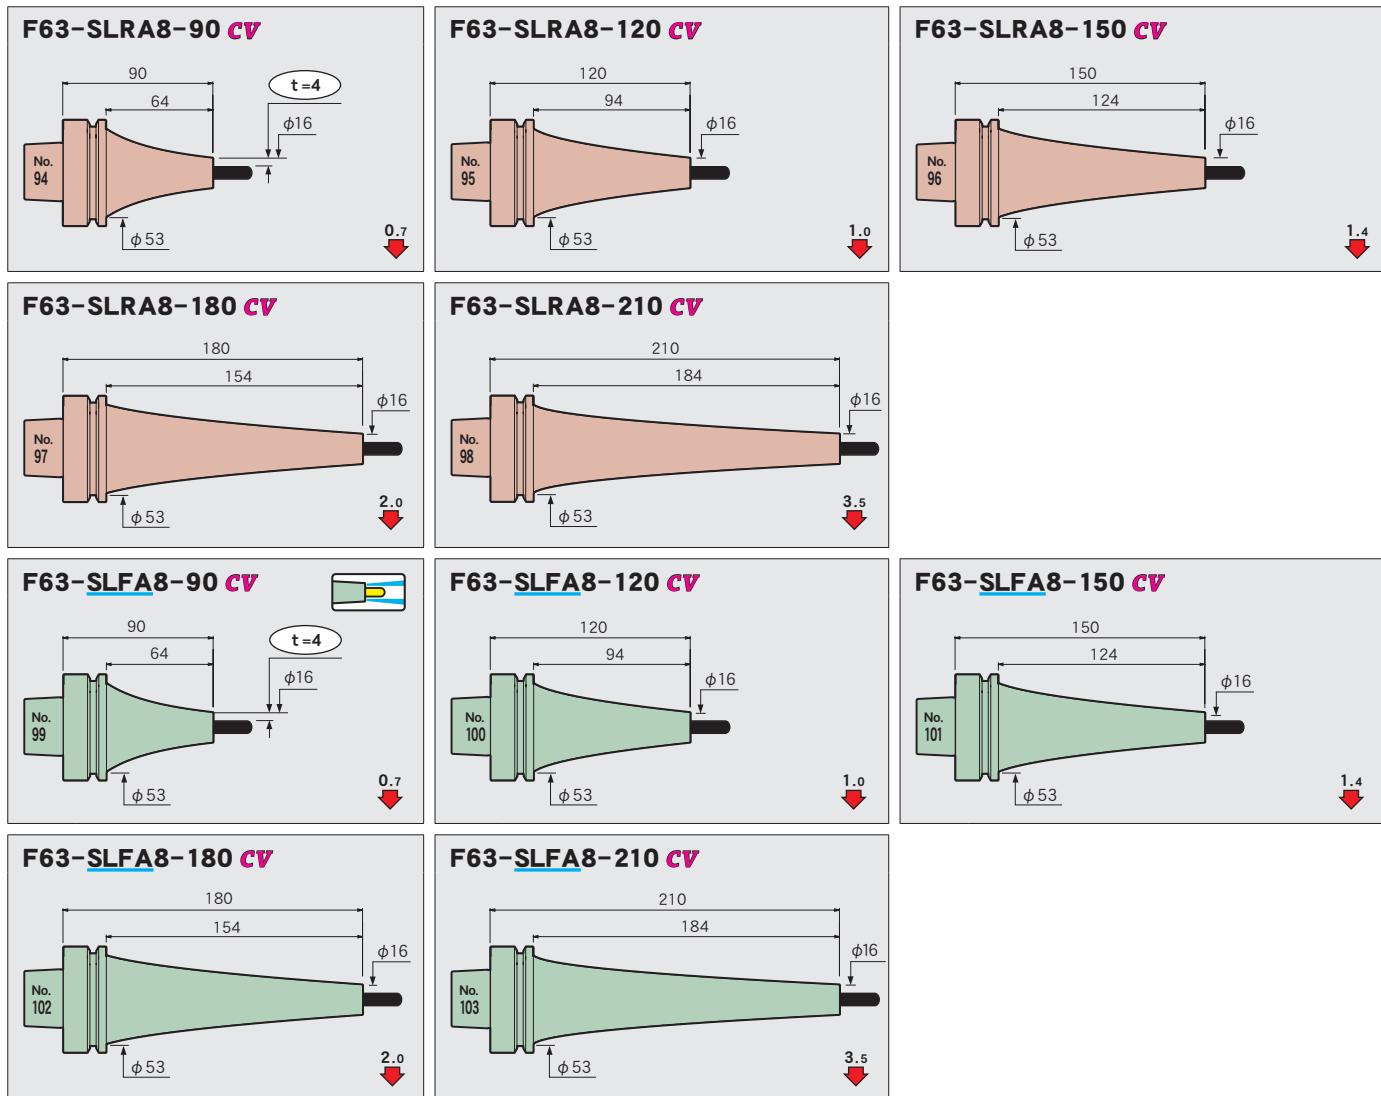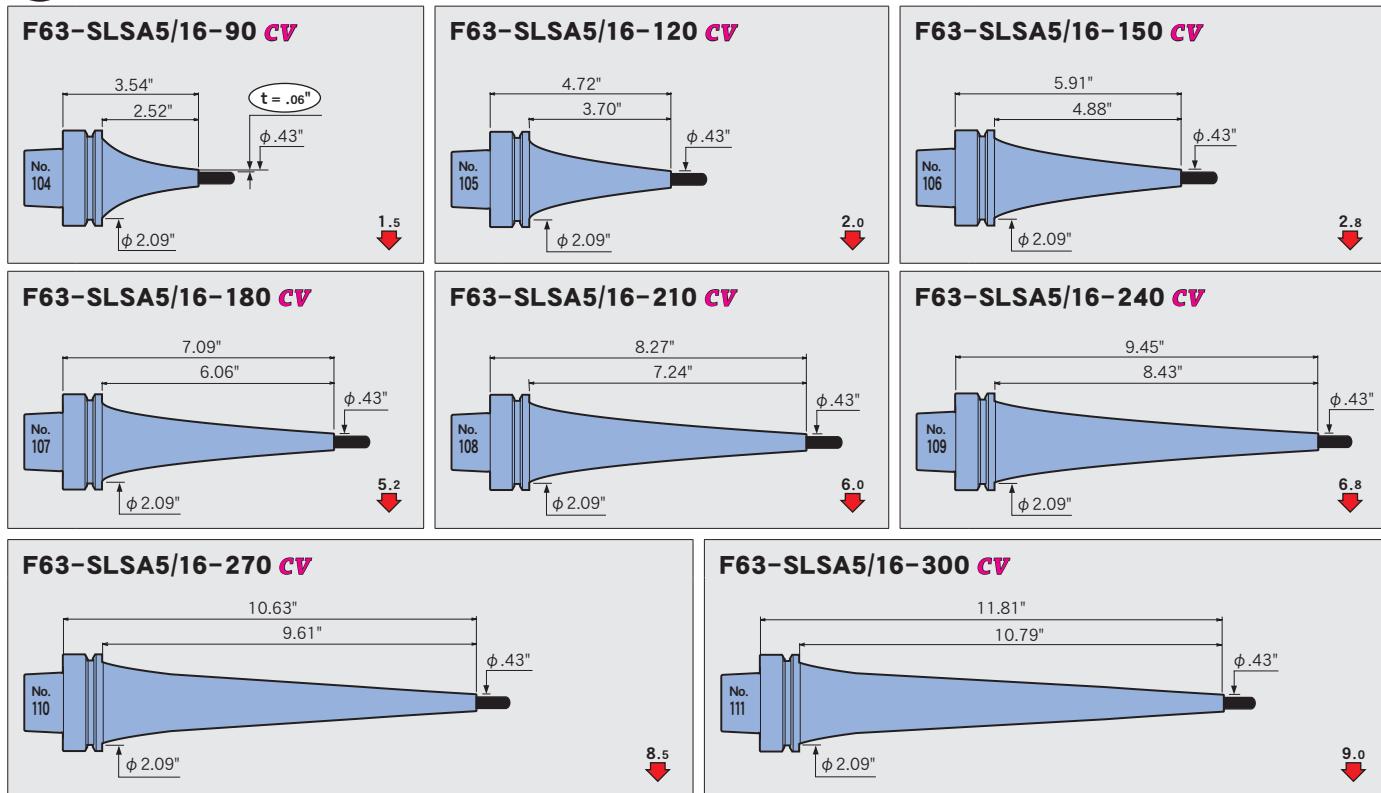 $\phi \frac{5}{16}$ 

Feature
Shrink-fit Heater

MONO 3°
MONO CURVE

MONO Series

2PIECE type

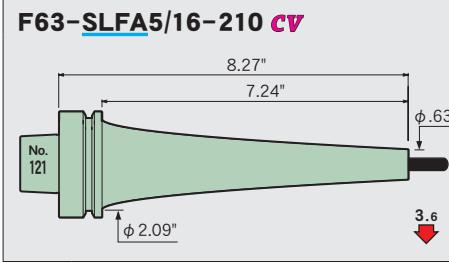
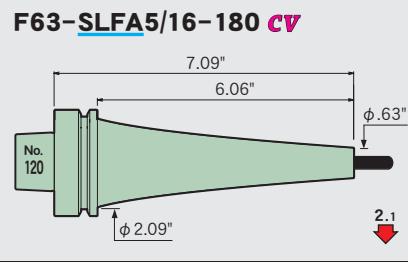
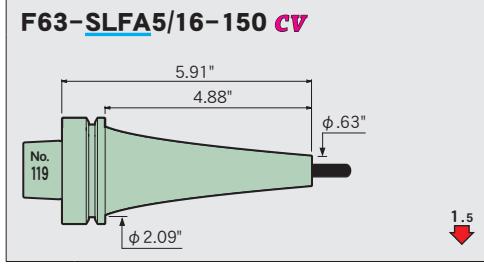
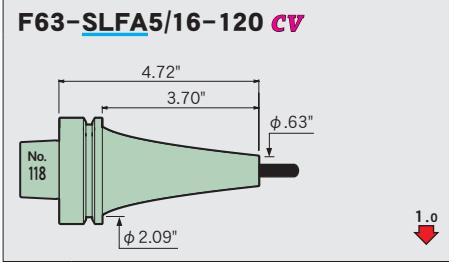
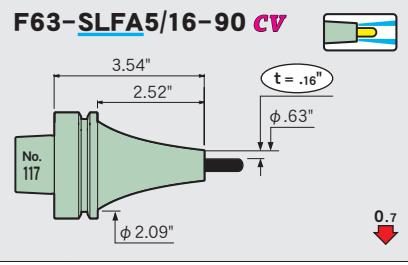
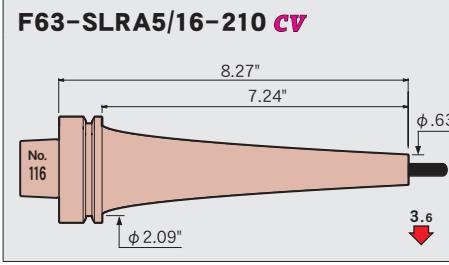
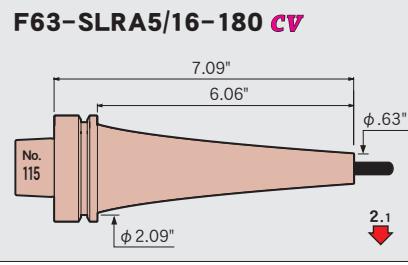
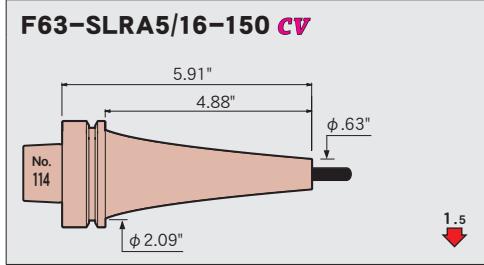
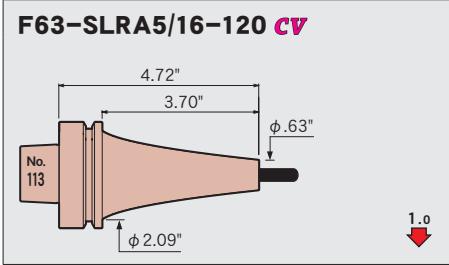
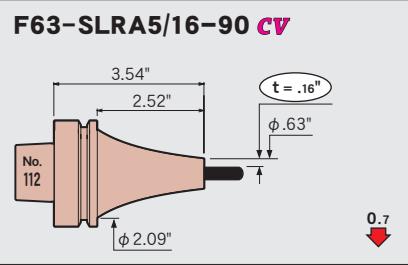
UNO

HYPER VERSION


Z

STRAIGHT arbor
OTHERS

PERIPHERALS
Technical



Φ 10

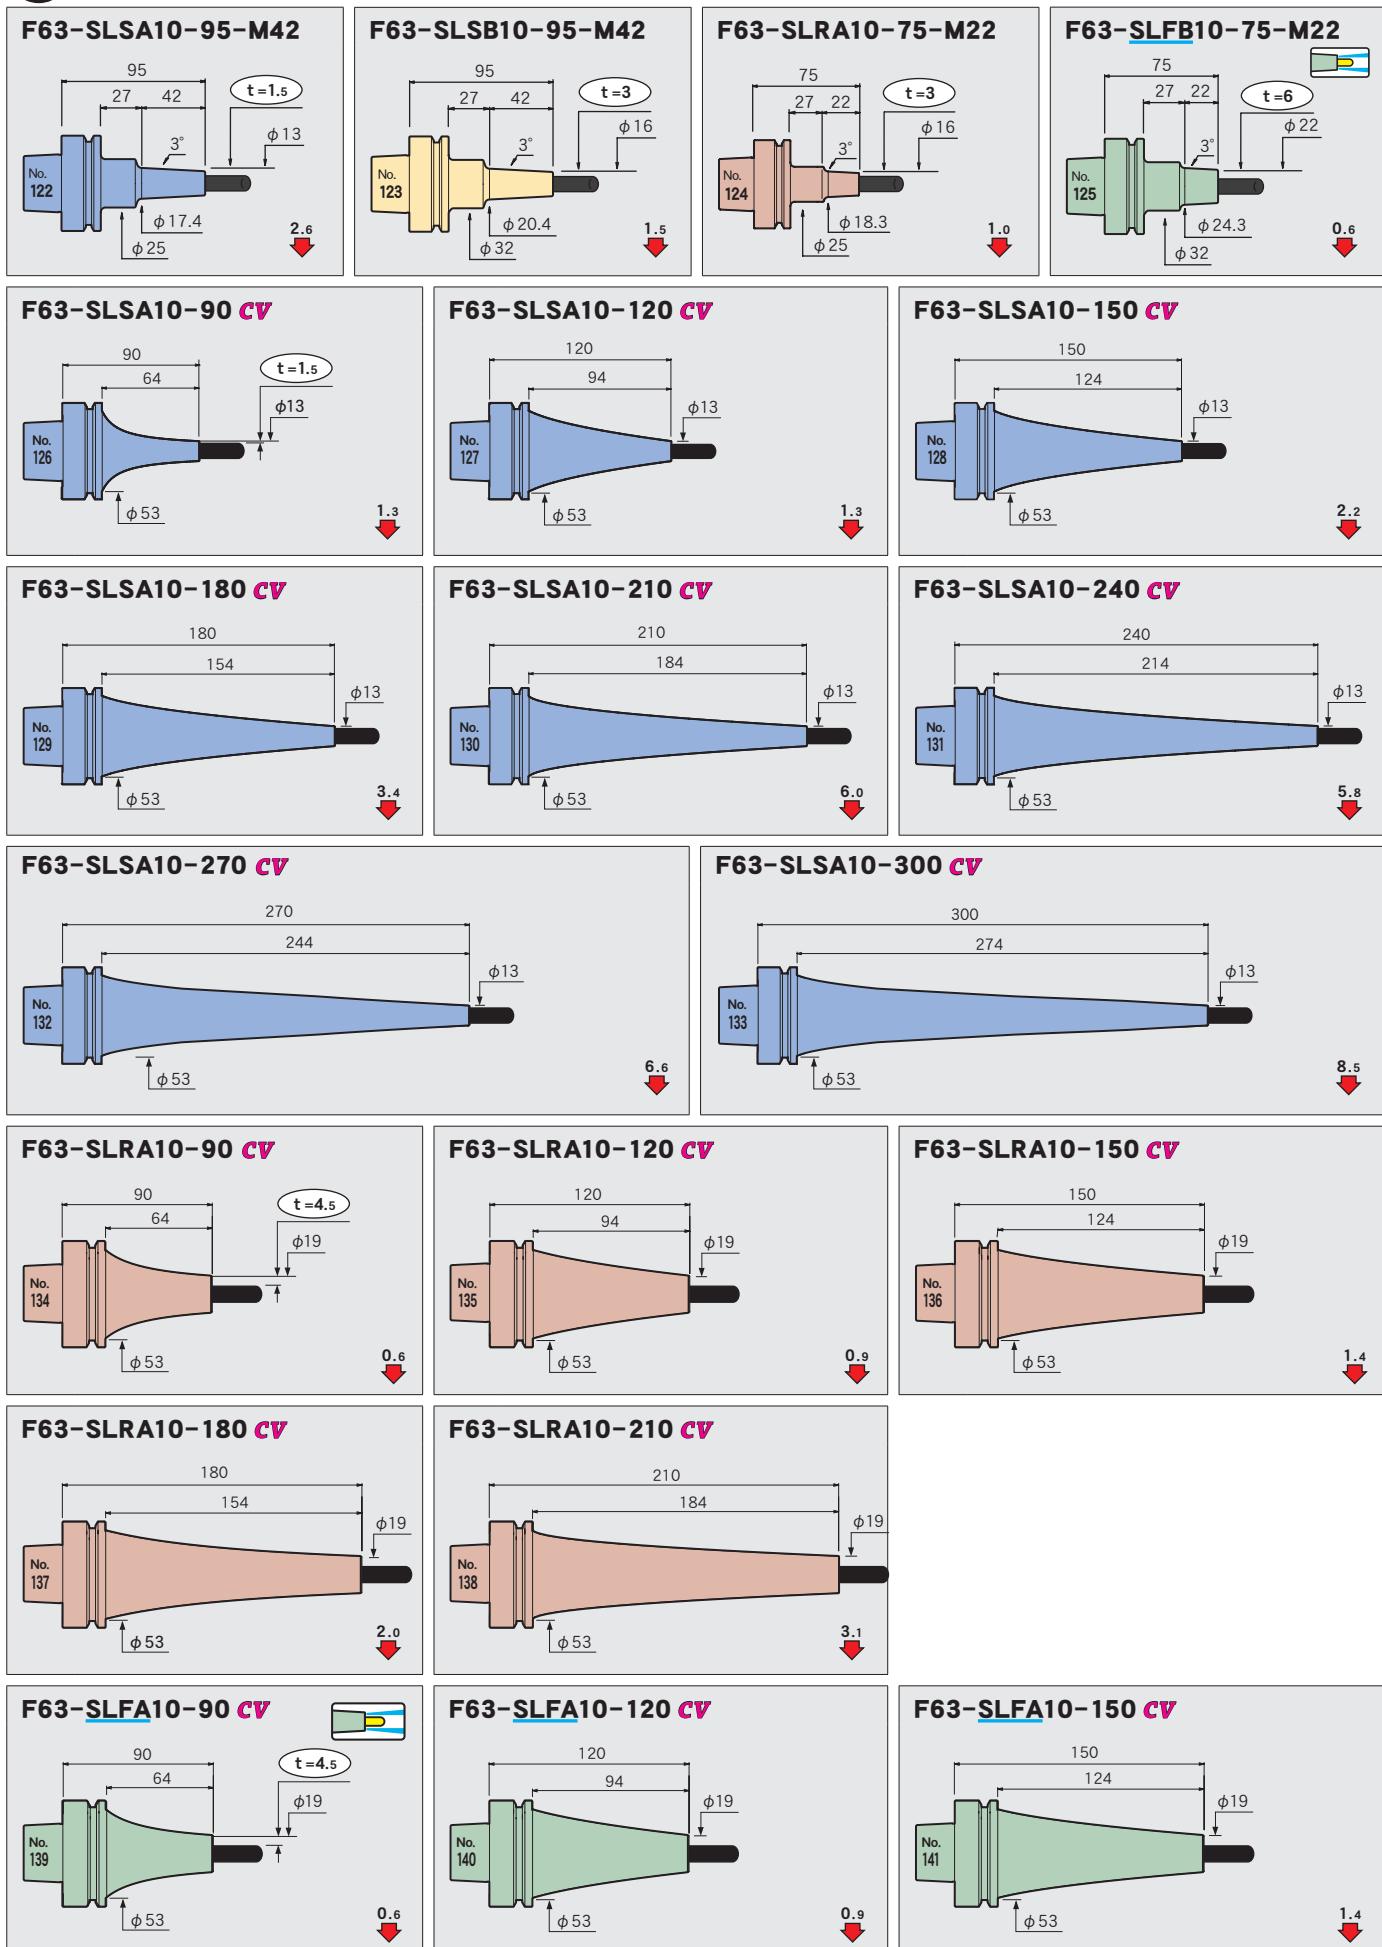

Feature

Shrink-fit Heater

MONO 3°
MONO CURVE

MONO Series

2PIECE type

UNO

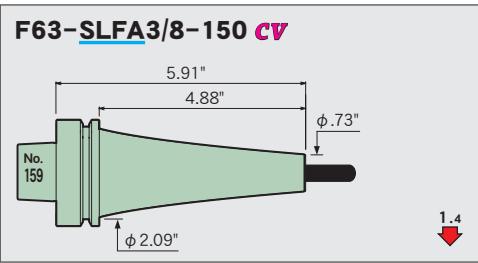
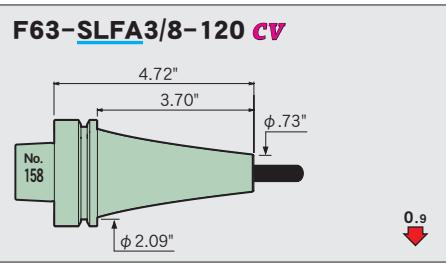
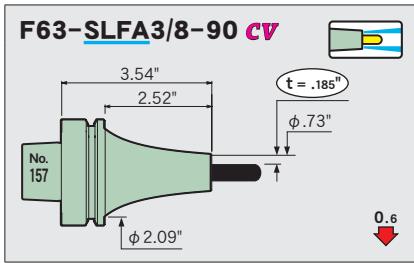
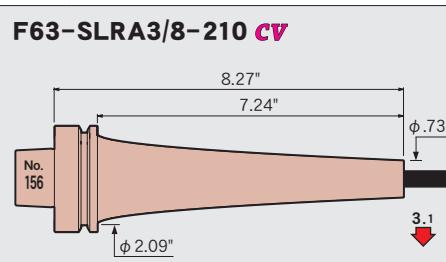
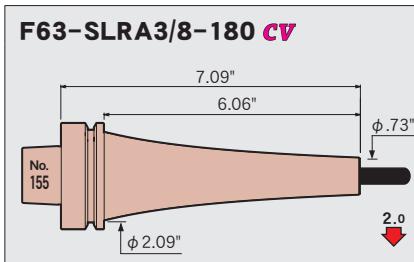
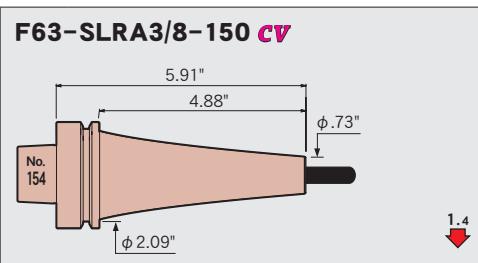
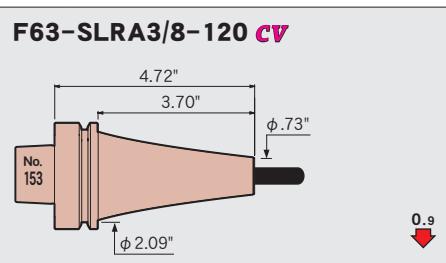
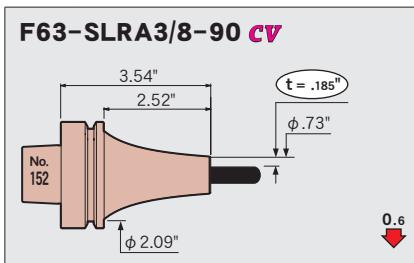
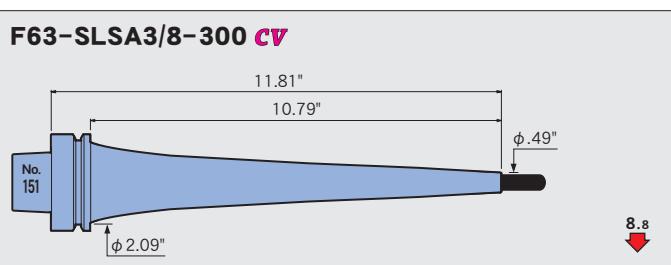
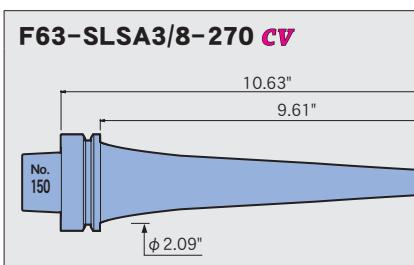
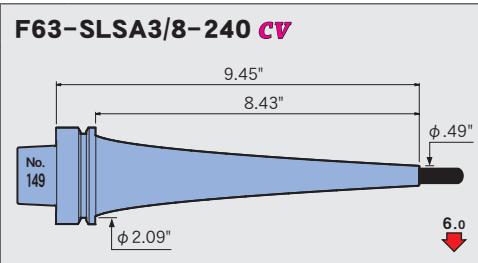
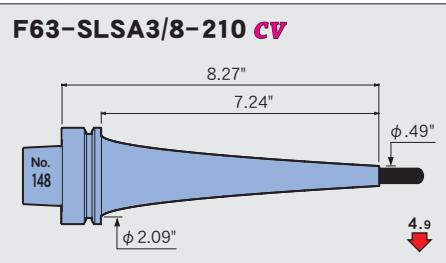
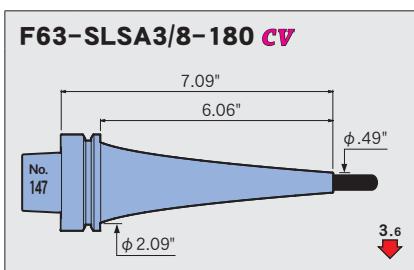
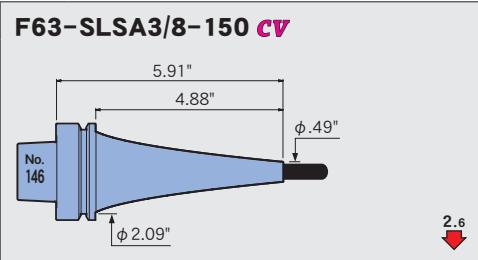
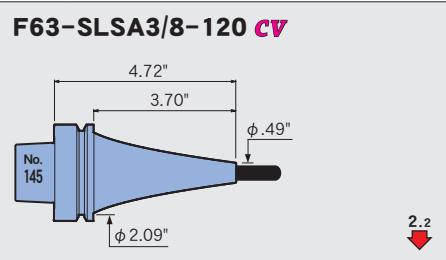
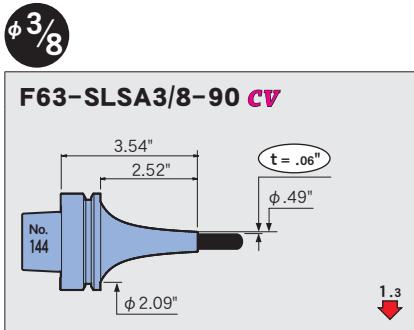
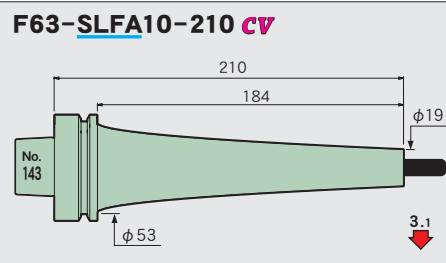
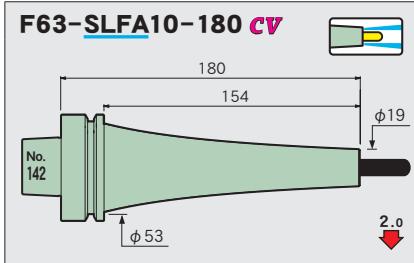
HYPER VERSION

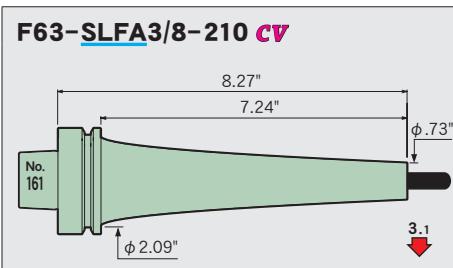
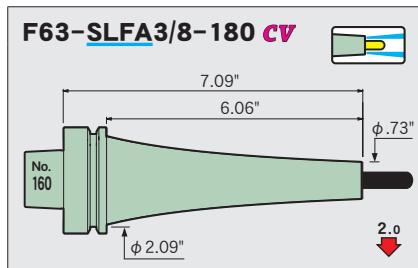
Z

STRAIGHT arbor

















OTHERS

Technical PERIPHERALS





Φ 12

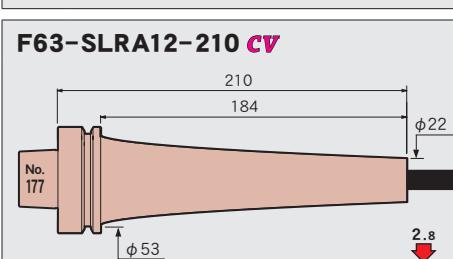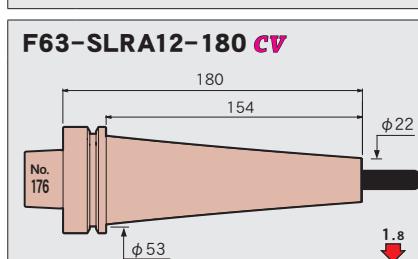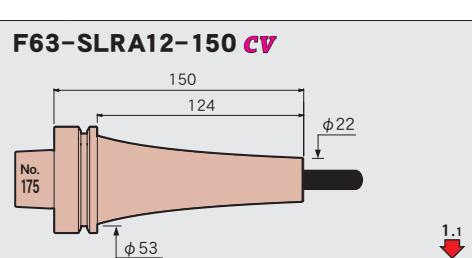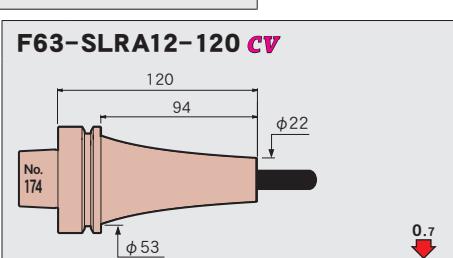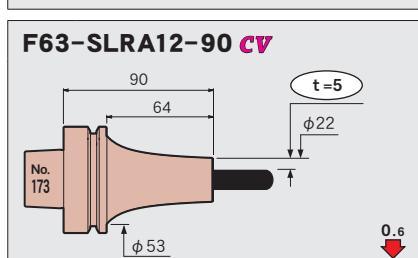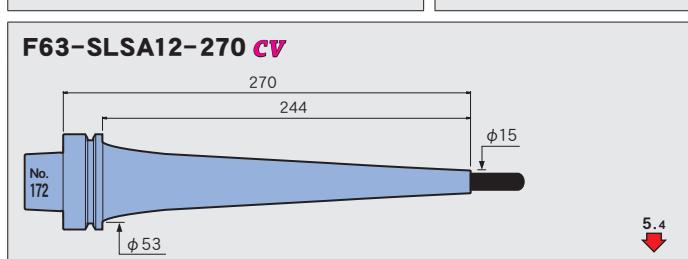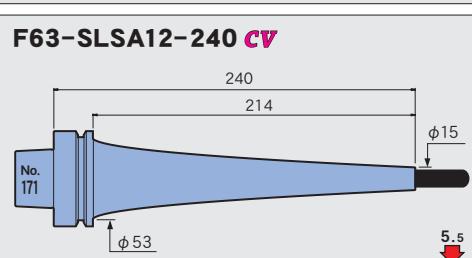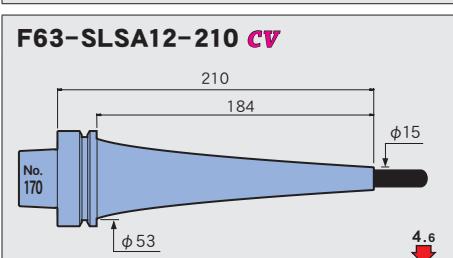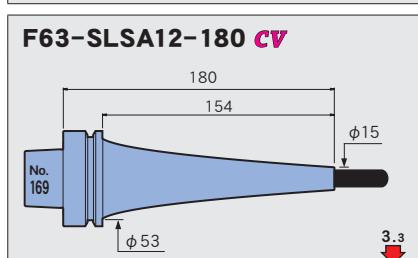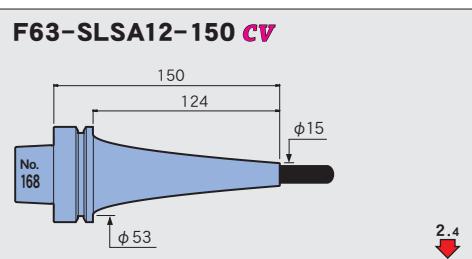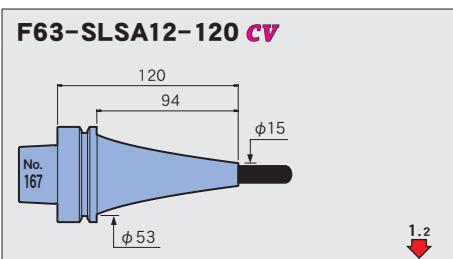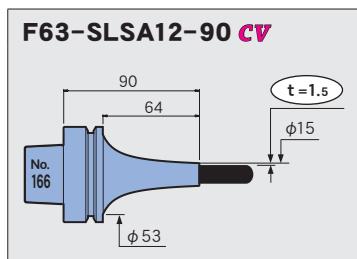

Feature
Shrink-fit Heater
MONO 3°
MONO CURVE

MONO Series
2PIECE type
UNO

HYPER
VERSION
Z
STRAIGHT
arbor

OTHERS
PERIPHERALS

Technical
data

F63 S=1:5

Feature

Shrink-fit Heater

MONO 3°
MONO CURVE

MONO Series

2PIECE type

UNO

HYPER
VERSION

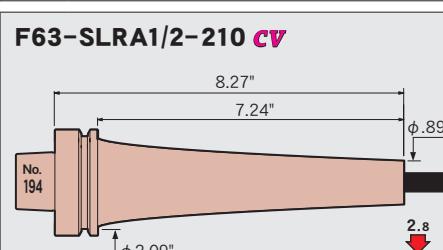
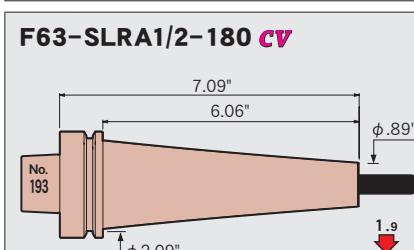
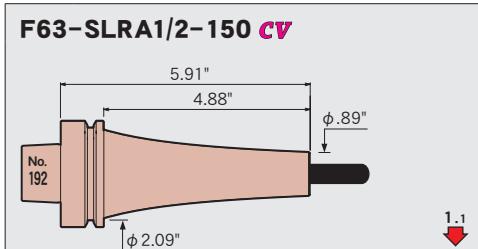
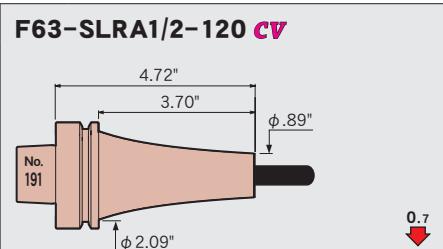
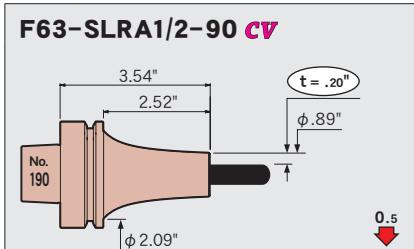
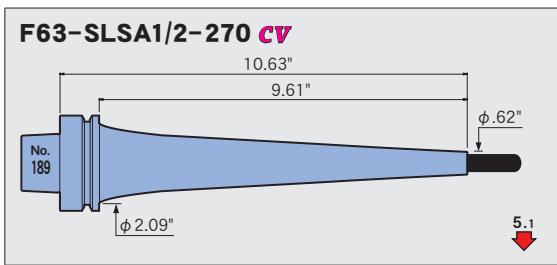
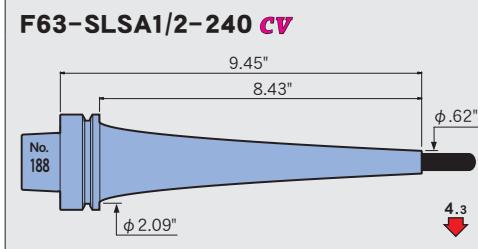
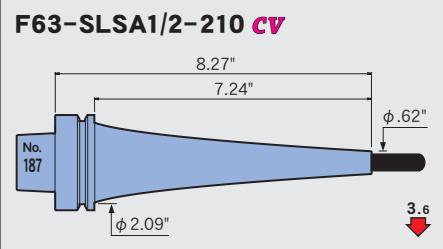
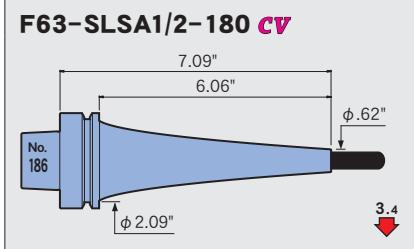
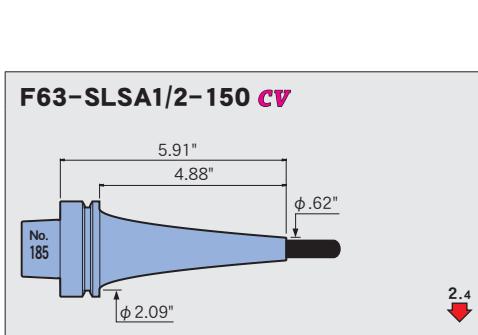
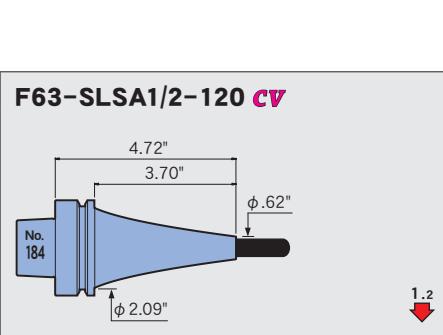
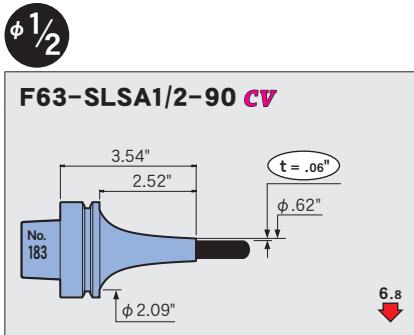
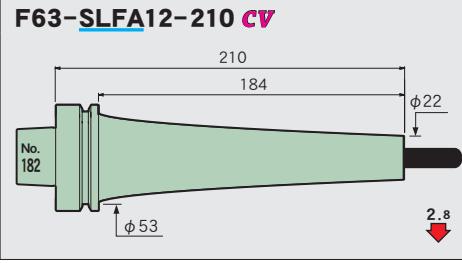
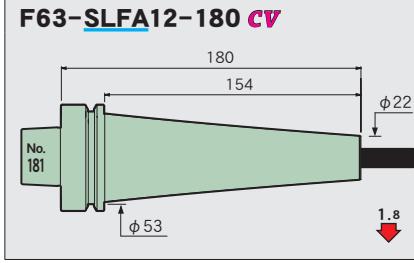
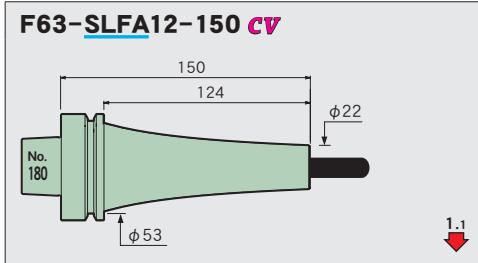
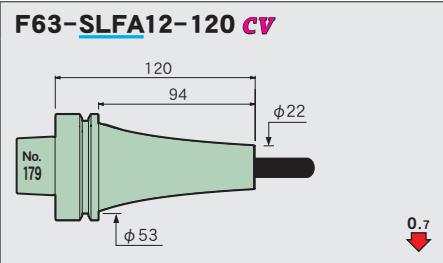
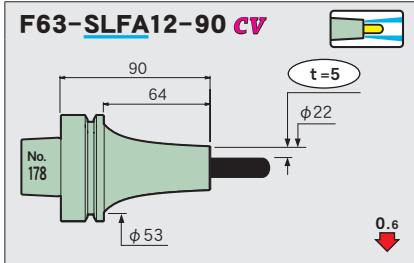
Z

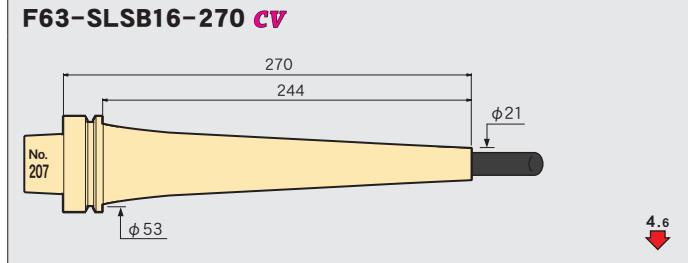
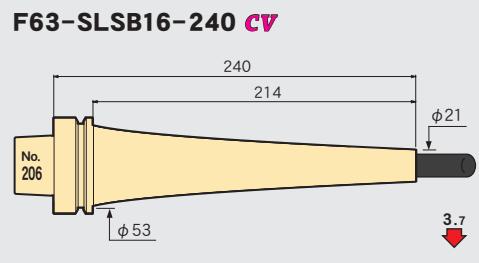
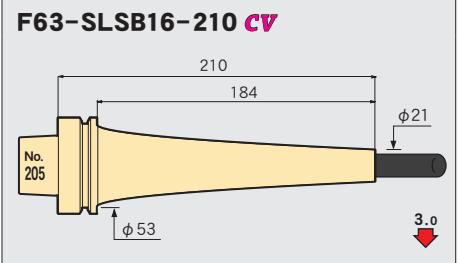
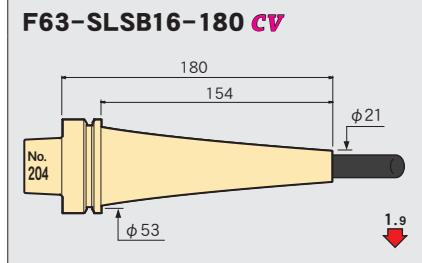
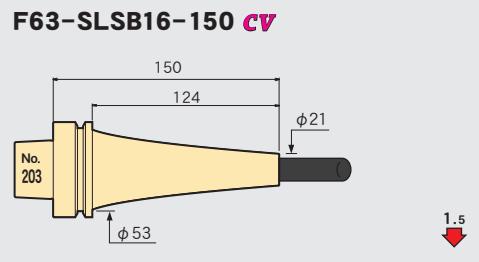
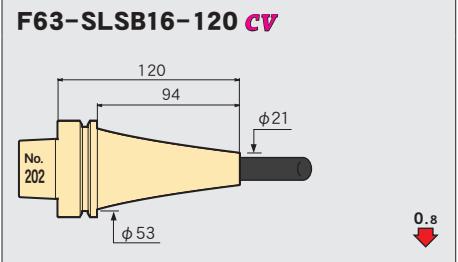
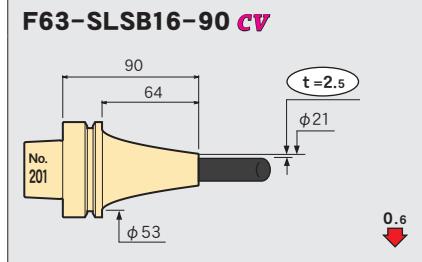
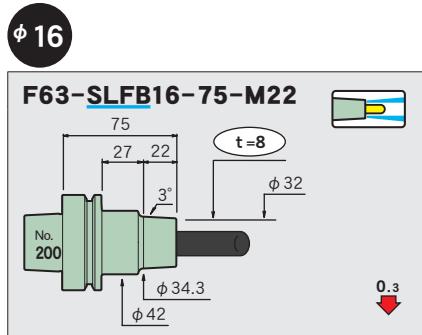
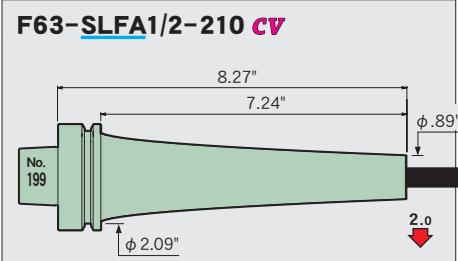
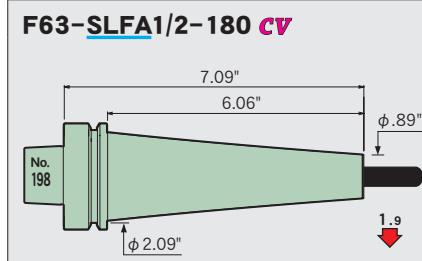
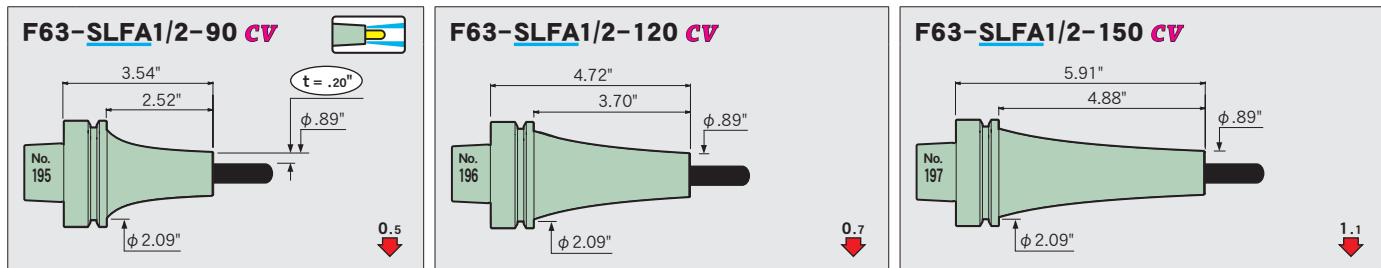
STRAIGHT
arbor

OTHERS

PERIPHERALS

Technical
data





Feature
Shrink-fit Heater

MONO 3°
MONO CURVE

MONO Series

2PIECE type

UNO

HYPER VERSION

Z

STRAIGHT
arbor

OTHERS

PERIPHERALS
Technical data

F63

S=1:5

 $\phi \frac{5}{8}$

Feature

Shrink-fit Heater

MONO 3°
MONO CURVE

MONO Series

2PIECE type

UNO

HYPER
VERSION

Z


STRAIGHT
arbor

OTHERS


PERIPHERALS

Technical
data


F63-SLSB5/8-90 CV




F63-SLSB5/8-120 CV




F63-SLSB5/8-150 CV

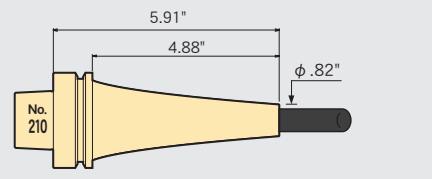


F63-SLSB5/8-180 CV

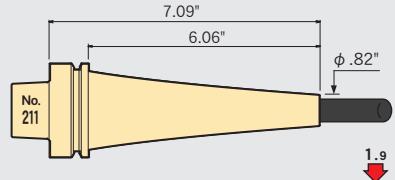


F63-SLSB5/8-210 CV

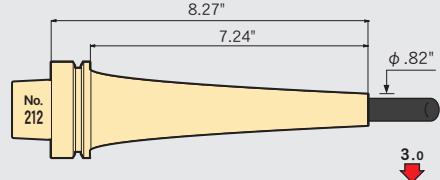


F63-SLSB5/8-240 CV

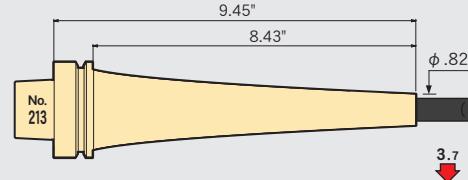


F63-SLSB5/8-270 CV

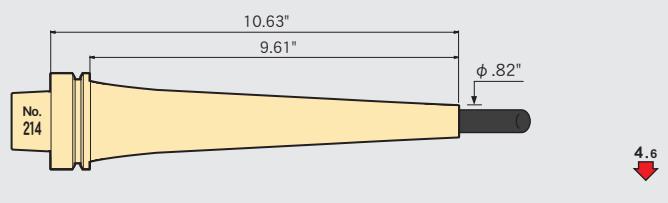 $\phi 20$

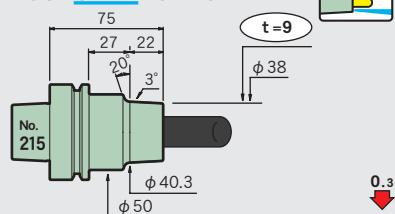
F63-SLFB20-75-M22




F63-SLSB20-90 CV

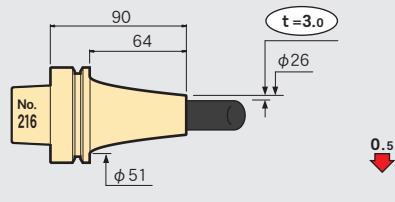


F63-SLSB20-120 CV

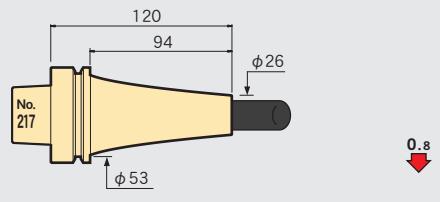


F63-SLSB20-150 CV

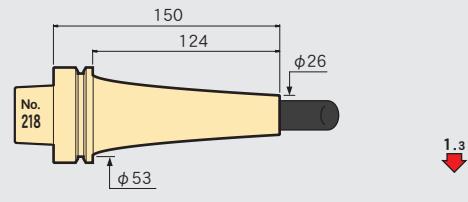


F63-SLSB20-180 CV

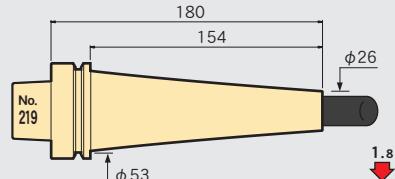


F63-SLSB20-210 CV








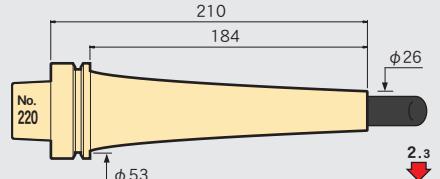


F63-SLSB20-240 CV

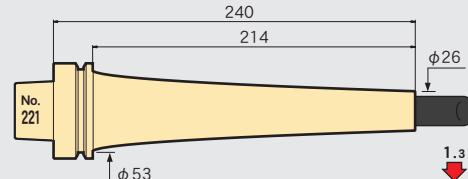

F63-SLSB20-270 CV

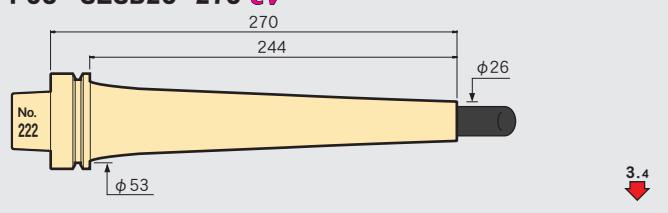

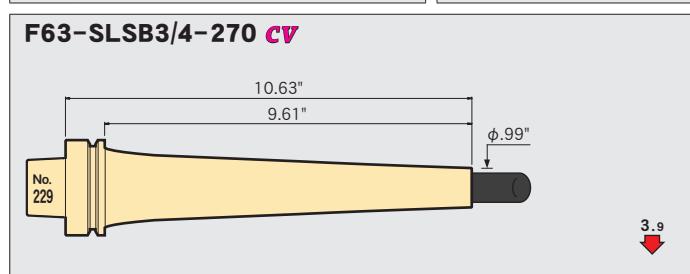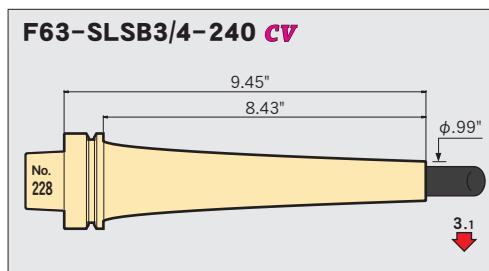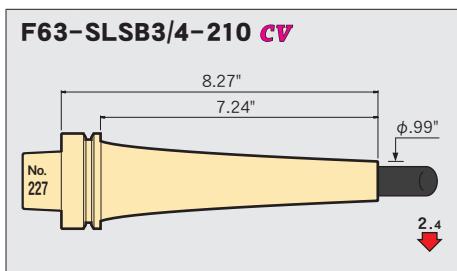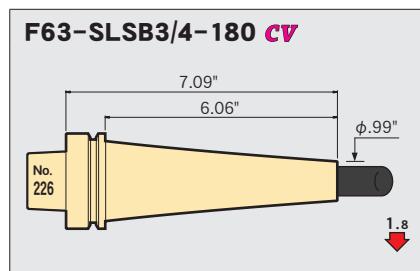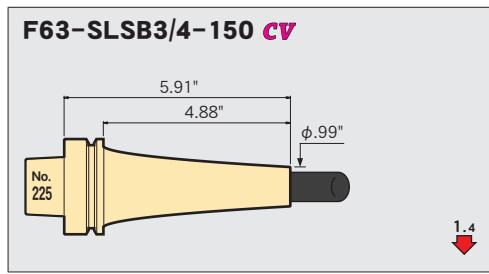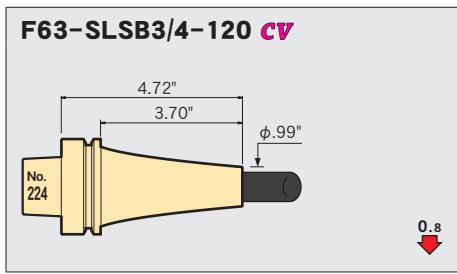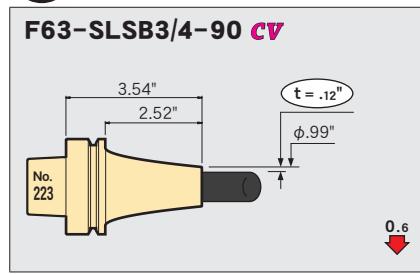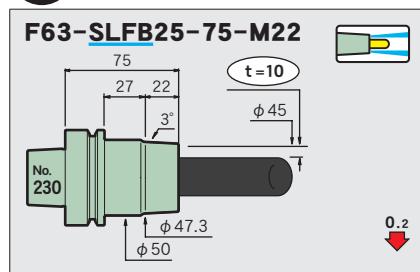$\phi \frac{3}{4}$  $\phi 25$ 

Feature

Shrink-fit Heater

MONO 3°
MONO CURVE

MONO Series

2PIECE type

UNO

HYPER
VERSION

Z

STRAIGHT
arbor

OTHERS


PERIPHERALS

Technical
data

15T



MONO 3°




Compatibility table
for HRD-01S

[○] Available [x] Not available

■Caution

• Setting cutters... Be sure to insert the tool beyond the safety mark.

Thickness



BROTHER TC-20A
TC-20B

Thickness

CODE	φD	φC	t	L	M	L1	φC1	φC2	H	h	Kg	N	S	Scale model
15TR3-SLSA 3-40	3	6	1.5	40	22	5.5	8.3	18	9	46	0.1	0.3	4.7	1
														2
15TR3-SLSA3.175-40	3.175	6.175	1.5	40	22	5.5	8.5	18	9	46	0.1	0.3	4.4	3
														4
15TR3-SLSA 4-40	4	7	1.5	40	22	5.5	9.3	18	12	46	0.1	0.3	3.6	5
														6
15TR3-SLSA 5-40	5	8	1.5	40	22	5.5	10.3	18	15	46	0.1	0.3	2.9	7
														8
15TR3-SLSA 6-60	6	9	1.5	60	42	5.5	13.4	18	18	66	0.1	0.4	4.9	9
														10
15TR3-SLRA 6-35	12	3	35	19.6	2.9	14.1	—	—	46	0.2	1.2	11	X	
15TR3-SLRA 8-35													X	
15TR3-SLRA10-35	10	16	3	35	19.6	2.9	18.1	—	20	51	0.1	0.4	0.8	12

S=1:3

φ 3	15TR3-SLSA3-40	15TR3-SLSA3-60	15TR3-SLSA3.175-40	15TR3-SLSA3.175-60
	No.1	No.2	No.3	No.4
	40	60	40	60
	5.5 22 20° 3° t=1.5 φ 8.3 φ 18 4.7 ↓	5.5 42 20° 3° t=6 φ 10.4 φ 18 9.3 ↓	5.5 22 20° 3° t=1.5 φ 8.5 φ 18 4.4 ↓	5.5 42 20° 3° t=6.175 φ 10.6 φ 18 8.8 ↓
φ 4	15TR3-SLSA4-40	15TR3-SLSA4-60	15TR3-SLSA5-40	15TR3-SLSA5-60
	No.5	No.6	No.7	No.8
	40	60	40	60
	5.5 22 20° 3° t=1.5 φ 9.3 φ 18 3.6 ↓	5.5 42 20° 3° t=7 φ 11.4 φ 18 7.3 ↓	5.5 22 20° 3° t=1.5 φ 10.3 φ 18 2.9 ↓	5.5 42 20° 3° t=8 φ 12.4 φ 18 5.9 ↓
φ 6	15TR3-SLSA6-60	15TR3-SLRA6-35	15TR3-SLRA8-35	15TR3-SLRA10-35
	No.9	No.10	No.11	No.12
	60	35	35	35
	5.5 42 20° 3° t=1.5 φ 13.4 φ 18 4.9 ↓	2.9 19.6 3° t=3 φ 14.1 φ 18 1.2 ↓	2.9 19.6 3° t=3 φ 16.1 φ 18 0.9 ↓	2.9 19.6 3° t=3 φ 18.1 φ 16 0.8 ↓
φ 8				
φ 10				


S20T

S20TR2-SLRA8-35

MONO 3°



SUGINO


Xion-II-5AX
NSV9
V9Compatibility table
for HRD-01S

[○] Available [✗] Not available














Caution

- Setting cutters... Be sure to insert the tool beyond the safety mark.

Thickness



CODE	ϕD	ϕC	t	L	M	L1	ϕC_1	ϕC_2	H	h				Scale model
S20TR2-SLSA 3-40 -60	3	6	1.5	40	22	5.5	8.3	20	9	46	0.1	0.4	4.6	○
														1 2
S20TR2-SLSA3.175-40 -60	3.175	6.175	1.5	40	22	5.5	8.5	20	9	46	0.1	0.4	4.4	○
														3 4
S20TR2-SLSA 4-40 -60	4	7	1.5	40	22	5.5	9.3	20	12	46	0.1	0.4	3.6	○
														5 6
S20TR2-SLSA 5-40 -60	5	8	1.5	40	22	5.5	10.3	20	15	46	0.1	0.4	2.8	○
														7 8
S20TR2-SLSA 6-60 -SLRA 6-35	6	9	1.5	60	42	5.5	13.4	20	18	66	0.1	0.5	4.7	○
														9 10
S20TR2-SLRA 8-35	8	14	3	35	19.6	2.9	16.1	—	20	51	0.1	0.4	0.9	✗
S20TR2-SLRA10-35	10	16	3	35	19.6	2.9	18.1	—	20	51	0.1	0.5	0.8	✗
S20TR2-SLRA12-45	12	20	4	45	32.5	—	23.4	—	30	51	0.2	0.6	0.8	✗

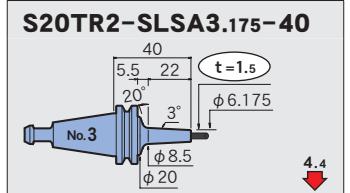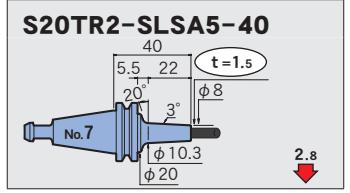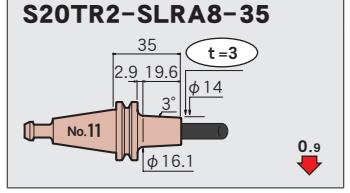S=1:4**φ3****φ3.175****φ4****φ5****φ6****φ8****φ10**

Feature

Shrink-fit Heater
MONO 3°
MONO CURVEMONO Series
2PIECE typeUNO
HYPER VERSION

Z

STRAIGHT
arbor
OTHERSPERIPHERALS
Technical
data

RS20

ROKU-ROKU MEGA


Compatibility table for HRD-01S

[<input checked="" type="checkbox"/>] Available	[<input type="checkbox"/>] Not available
---	--

■Caution

- Setting cutters... Be sure to insert the tool beyond the safety mark.


CODE	ϕD	ϕC	t	L	M	L ₁	ϕC_1	H	h	Kg	N	S	Scale model
RS20-SLSA 3-35	3	6	1.5	35	22.1	2.9	8.3	9	46	0.1	0.2	5.2	<input checked="" type="checkbox"/>
-SLSA 3.175-35	3.175	6.175	1.5	35	22.1	2.9	8.5	9	46	0.1	0.2	4.9	<input checked="" type="checkbox"/>
-SLSA 4-35	4	7	1.5	35	22.1	2.9	9.3	12	46	0.1	0.2	4	<input checked="" type="checkbox"/>
-SLSA 5-35	5	8	1.5	35	22.1	2.9	10.3	15	46	0.1	0.2	3.2	<input checked="" type="checkbox"/>
-SLRA 6-30	6	12	3	30	17.1	2.9	13.8	18	46	0.1	0.2	1.1	<input checked="" type="checkbox"/>
-SLRA 8-30	8	14	3	30	17.2	2.8	15.8	20	51	0.1	0.3	0.9	<input checked="" type="checkbox"/>
-SLRA10-30	10	16	3	30	17.6	2.4	17.9	20	51	0.1	0.4	0.7	<input checked="" type="checkbox"/>

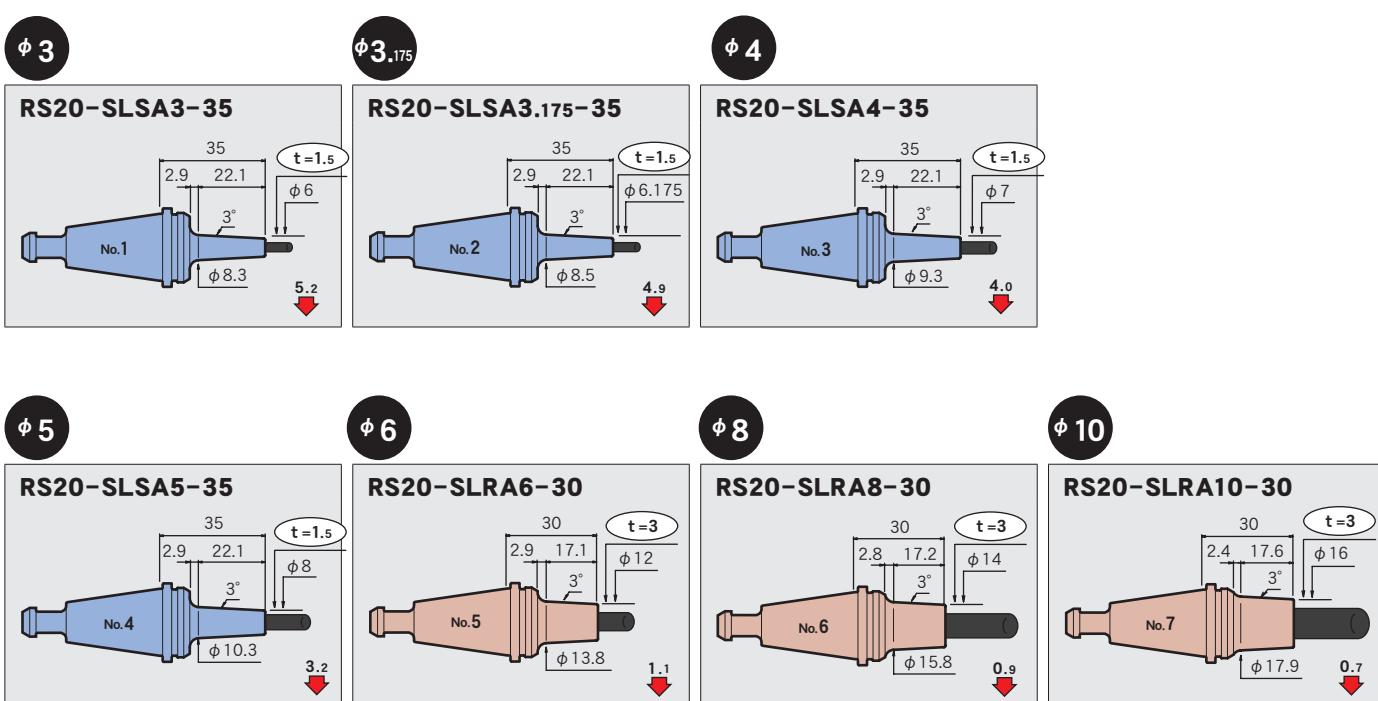

CT50

CT50-SLSA1/4-225 cv

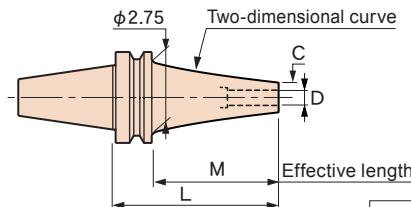MONO CURVE



	Compatibility table for HRD-01S
[○] Available	[✗] Not available
[▲] Usable by raising the heating unit.→P.257	

■ Option


- Retention knob

■ Caution

- Retention knob···Use a retention knob with hole, or remove the retention knob and heat it.

- Setting cutters···Be sure to insert the tool beyond the safety mark.

Thickness



CV: Curve

Thickness

CODE	φD	φC	t	L	M	H	h	lbs	N	S	Scale model
CT50-SLSA3/16-165 CV	3/16	.31	.06	6.50	5.12	.59	8.66	8.4	13.7	2.6	○
				7.68	6.30		9.84	8.7	14.7	4	▲
				8.86	7.48		11.02	9.1	15.7	5.9	
				10.04	8.66		12.20	9.4	17.4	8.2	
				11.22	9.84		13.39	10.0	18.9	10.5	
				12.40	11.02		14.57	10.5	20.5	13.3	
CT50-SLSA1/4 -165 CV	1 / 4	.37	.06	6.50	5.12	.71	8.66	8.5	13.1	2.4	○
				7.68	6.30		9.84	9.6	16	2.5	▲
				8.86	7.48		11.02	10.0	16.9	3.9	
				10.04	8.66		12.20		19.2	5.6	
				11.22	9.84		13.39	10.5	20.8	7.4	
				12.40	11.02		14.57	11.1	22.4	9.5	
CT50-SLSA5/16-165 CV	5/16	.49	.06	6.50	5.12	.94	8.66	9.0	15.2	1.5	○
				7.68	6.30		9.84	9.3	16.2	2.4	▲
				8.86	7.48		11.02	9.4	17.5	3.9	
				10.04	8.66		12.20	9.9	19.1	5.2	
				11.22	9.84		13.39	10.8	21.6	6	
				12.40	11.02		14.57	11.7	23.9	7.1	
-SLRA5/16-195 CV	5/16	.63	.16	7.68	6.30	.94	9.84	9.6	17	1.5	○
				8.86	7.48		11.02	10.8	19.9	1.6	▲
				10.04	8.66		12.20	10.9	20.4	2.6	
				11.22	9.84		13.39	11.6	23.5	3.2	
-SLFA5/16-195 CV	5/16	.63	.16	7.68	6.30	.94	9.84	9.6	17	1.5	○
				8.86	7.48		11.02	10.8	19.9	1.6	▲
				10.04	8.66		12.20	10.9	20.4	2.6	
				11.22	9.84		13.39	11.6	23.5	3.2	
CT50-SLSA3/8 -165 CV	3/ 8	.49	.06	6.50	5.12	1.18	8.66	8.9	14.9	1.5	○
				7.68	6.30		9.84	9.1	15.8	2.4	▲
				8.86	7.48		11.02	9.3	16.7	3.8	
				10.04	8.66		12.20	9.8	19.3	5	
				11.22	9.84		13.39	11.0	22.5	5.2	
				12.40	11.02		14.57	11.5	24.4	6.9	

Feature

Shrink-fit Heater
MONO 3°
MONO CURVE

MONO Series
2PIECE type

UNO

HYPER VERSION



















Z
STRAIGHT arbor

OTHERS

PERIPHERALS

Technical data

	CODE	ϕD	ϕC	t	L	M	H	h	lbs	N	S	Feature	Scale model
	CT50-SLRA3/8-165 CV	3/8	.73	.18	6.50	5.12	1.18	8.66	8.8	15.4	1	X	33
	-195 CV				7.68	6.30		9.84	9.2	16.9	1.5	O	34
	-225 CV				8.86	7.48		11.02	10.1	18.5	1.9	▲	35
	-255 CV				10.04	8.66		12.20		20.1	3		36
	-285 CV				11.22	9.84		13.39	11.3	23.3	3.3		37
	-SLFA3/8-165 CV	3/8	.73	.18	6.50	5.12	1.18	8.66	8.8	15.4	1	X	38
	 -195 CV				7.68	6.30		9.84	9.2	16.9	1.5	O	39
	-225 CV				8.86	7.48		11.02	10.1	18.5	1.9	▲	40
	-255 CV				10.04	8.66		12.20		20.1	3		41
	-285 CV				11.22	9.84		13.39	11.3	23.3	3.3		42
	CT50-SLSA1/2-165 CV	1/2	.62	.06	6.50	5.12	1.18	8.66	8.9	15.8	1.2	O	43
	-195 CV				7.68	6.30		9.84	9.3	17.5	1.9		44
	-225 CV				8.86	7.48		11.02	9.8	19.1	2.7		45
	-255 CV				10.04	8.66		12.20	10.3	20.8	3.8	▲	46
	-285 CV				11.22	9.84		13.39	10.7	26.5	4.7		47
	-315 CV				12.40	11.02		14.57	11.4	28.8	5.2		48
	-SLRA1/2-165 CV	1/2	.89	.20	6.50	5.12	1.18	8.66	9.2	16.4	0.8	X	49
	-195 CV				7.68	6.30		9.84	9.5	17.8	1.3		50
	-225 CV				8.86	7.48		11.02	10.7	21	1.4	O	51
	-255 CV				10.04	8.66		12.20	11.0	22.4	2.1	▲	52
	-285 CV				11.22	9.84		13.39	11.9	29.6	2.3		53
	-SLFA1/2-165 CV	1/2	.89	.20	6.50	5.12	1.18	8.66	9.2	16.4	0.8	X	54
	 -195 CV				7.68	6.30		9.84	9.5	17.8	1.3	O	55
	-225 CV				8.86	7.48		11.02	10.7	21	1.4	▲	56
	-255 CV				10.04	8.66		12.20	11.0	22.4	2.1		57
	-285 CV				11.22	9.84		13.39	11.9	29.6	2.3		58
	CT50-SLSB5/8-165 CV	5/8	.82	.10	6.50	5.12	1.26	8.66	8.6	17.5	1.1		59
	-195 CV				7.68	6.30		9.84	9.3	20.2	1.5		60
	-225 CV				8.86	7.48		11.02	9.9	22.9	2		61
	-255 CV				10.04	8.66		12.20	10.1	24.3	3.1		62
	-285 CV				11.22	9.84		13.39	10.7	27	3.9		63
	-315 CV				12.40	11.02		14.57	11.4	29.7	4.8		64
	CT50-SLSB3/4-165 CV	3/4	.99	.12	6.50	5.12	1.50	8.66	9.1	19	0.8		65
	-195 CV				7.68	6.30		9.84	9.7	21.9	1.2		66
	-225 CV				8.86	7.48		11.02	9.8	23.9	1.8		67
	-255 CV				10.04	8.66		12.20	10.4	26.8	2.5		68
	-285 CV				11.22	9.84		13.39	11.1	29.7	3.2		69
	-315 CV				12.40	11.02		14.57	11.7	32.6	4.1		70

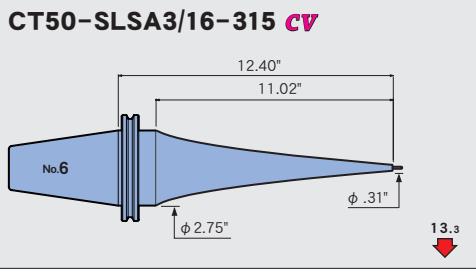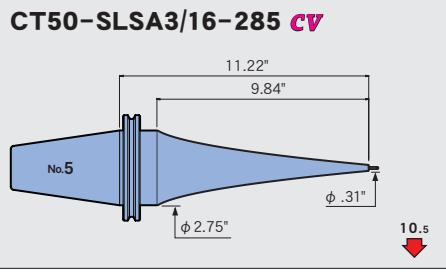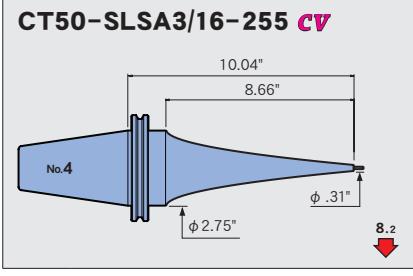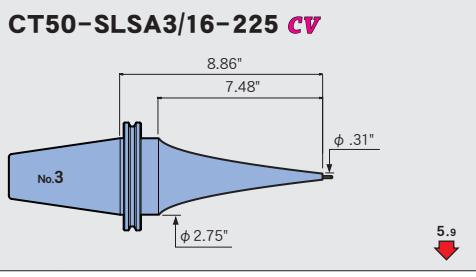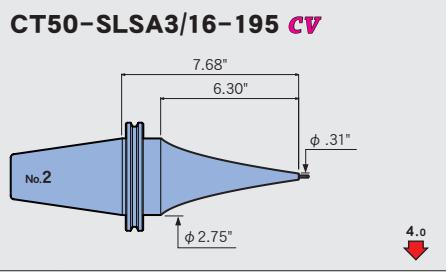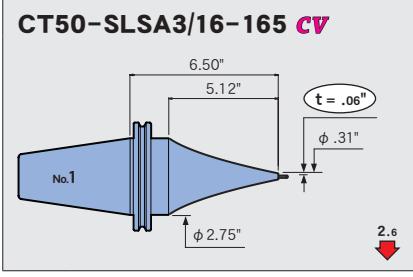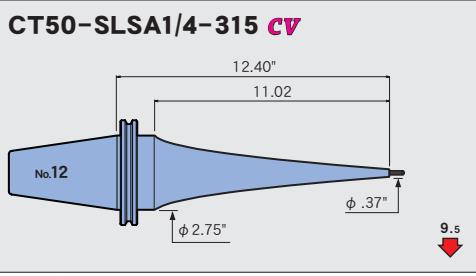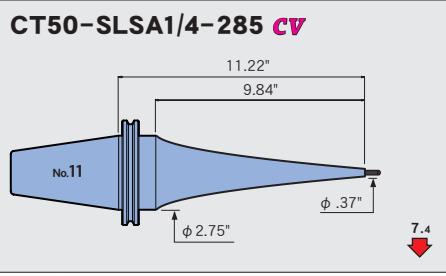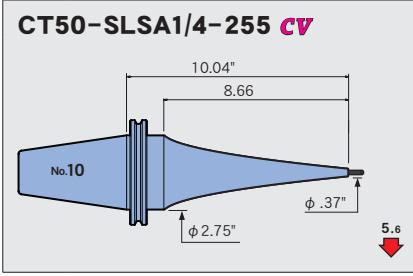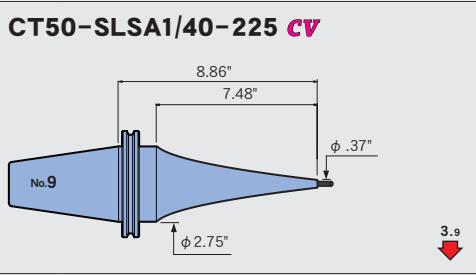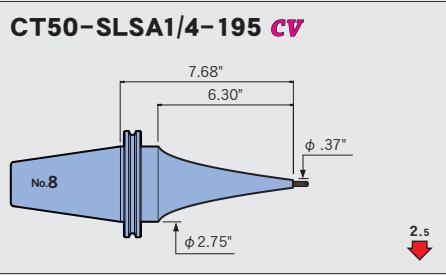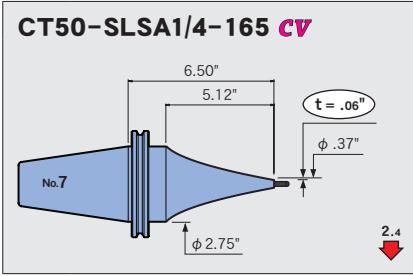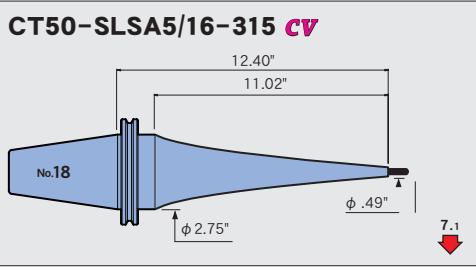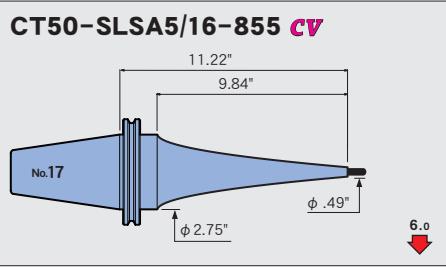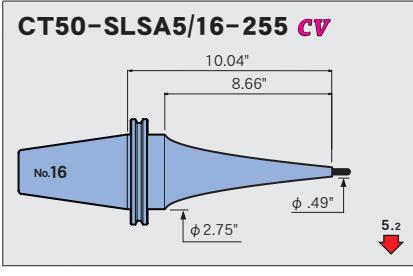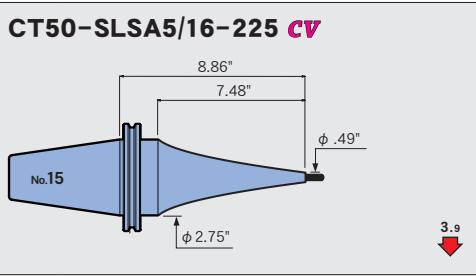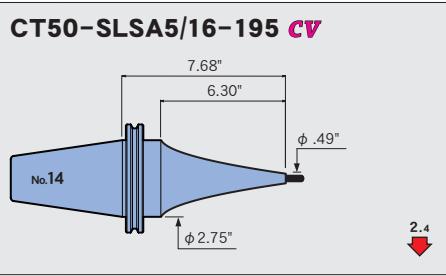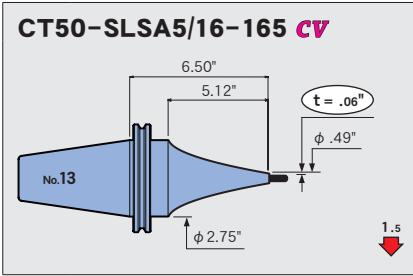$\phi \frac{3}{16}$  $\phi \frac{1}{4}$  $\phi \frac{5}{16}$ 

Feature

Shrink-fit Heater

MONO 3°
MONO CURVE

MONO Series

2PIECE type

UNO

HYPER
VERSION

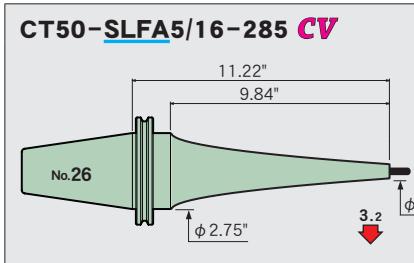
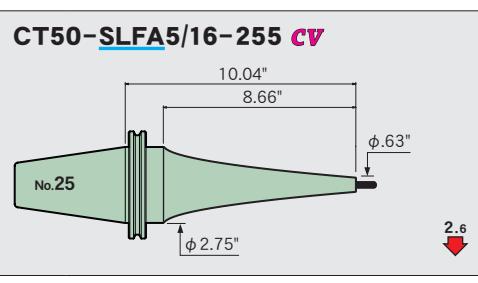
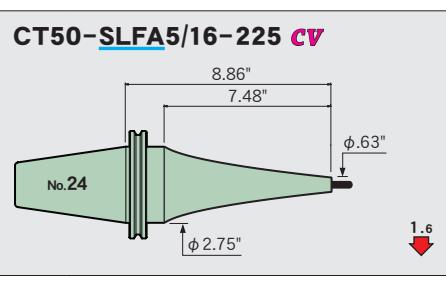
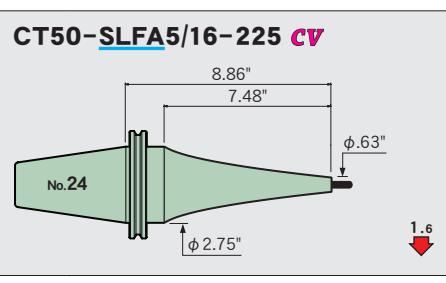
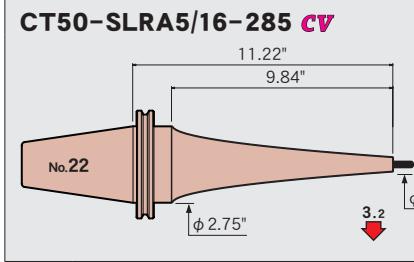
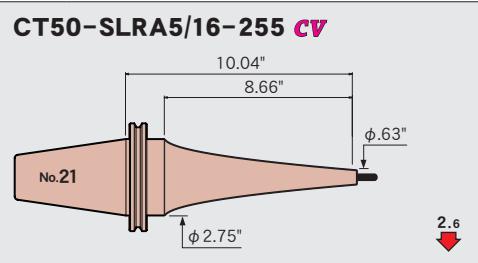
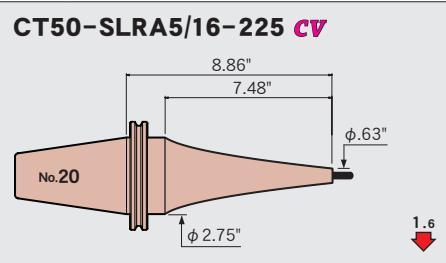
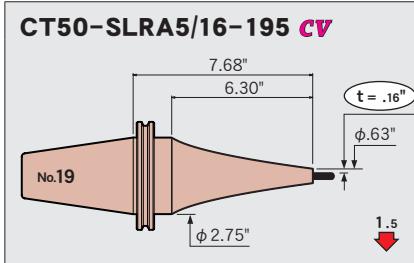
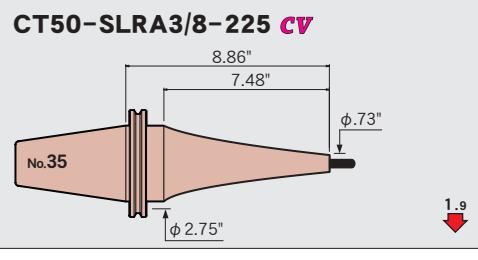
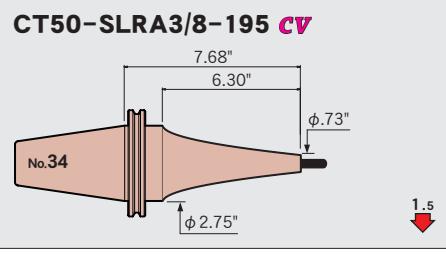
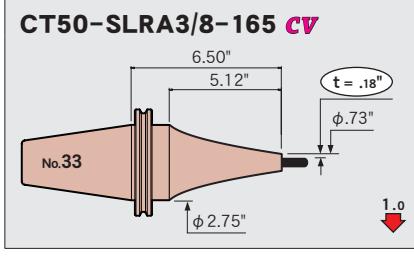
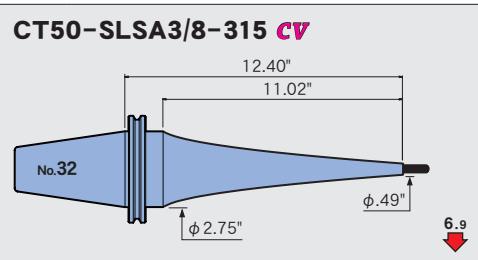
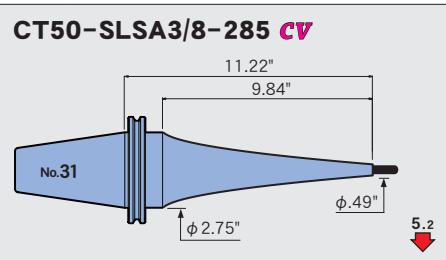
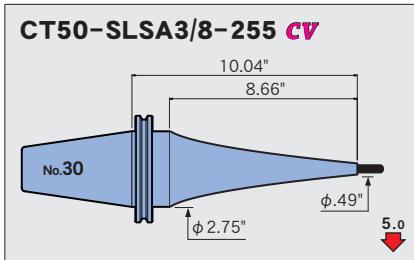
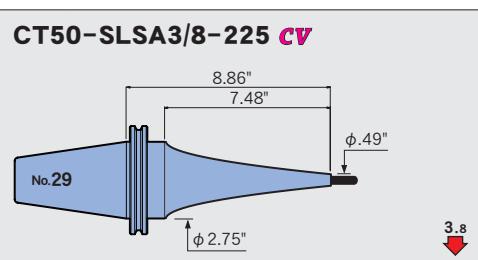
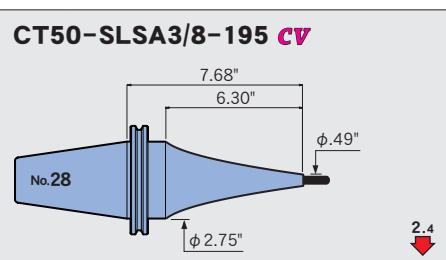
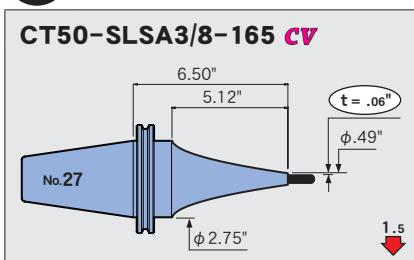
Z



















STRAIGHT
arbor

OTHERS

PERIPHERALS

Technical data

 $\phi \frac{3}{8}$ 

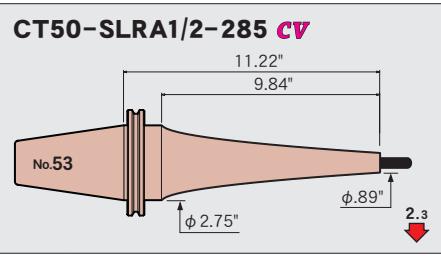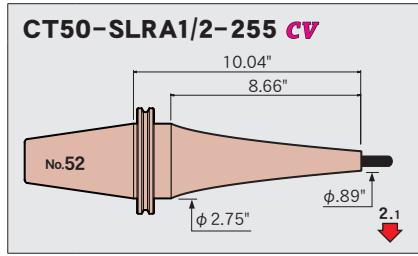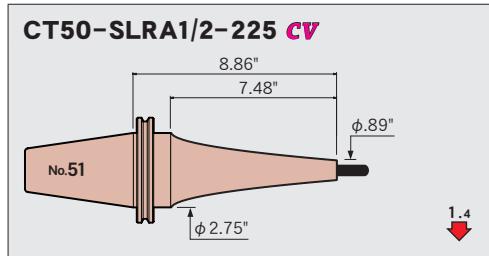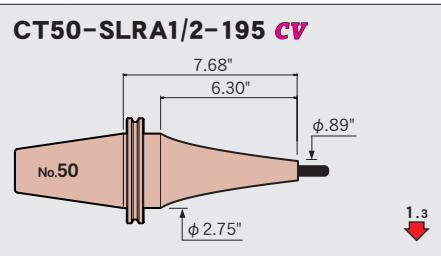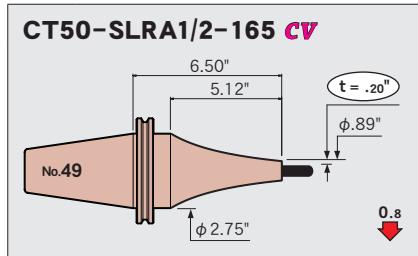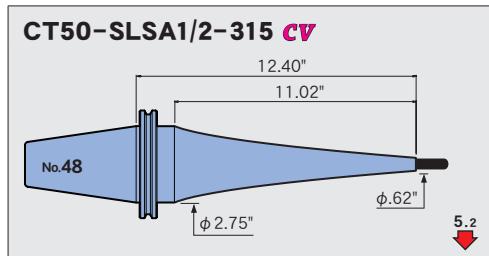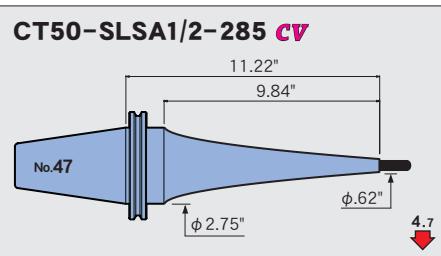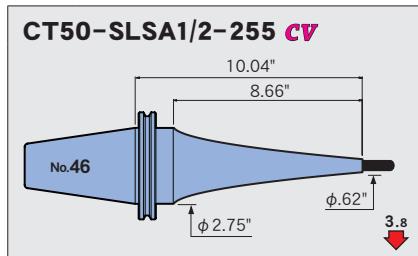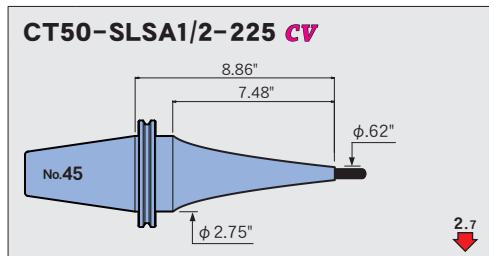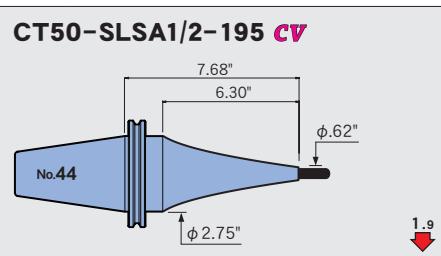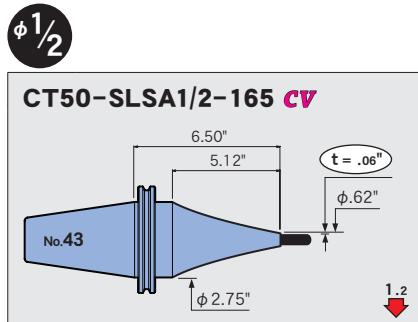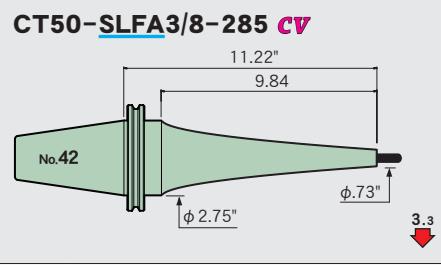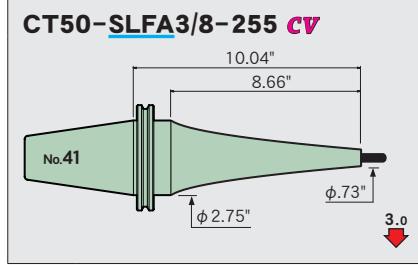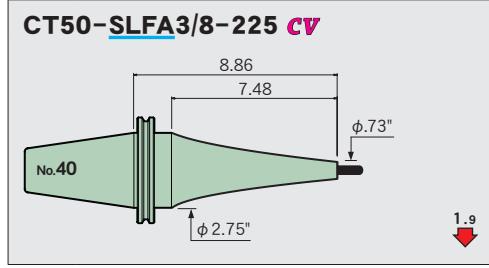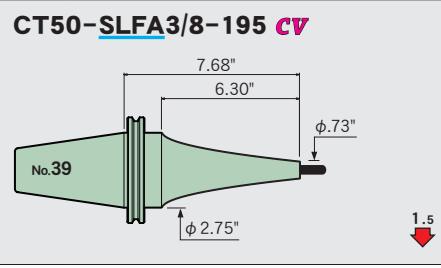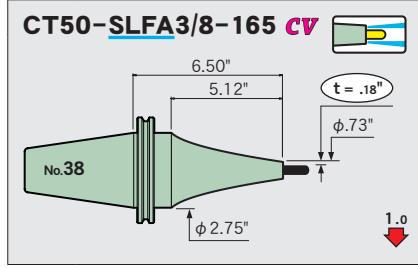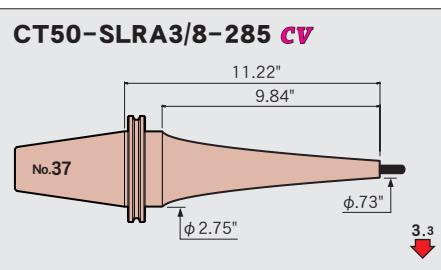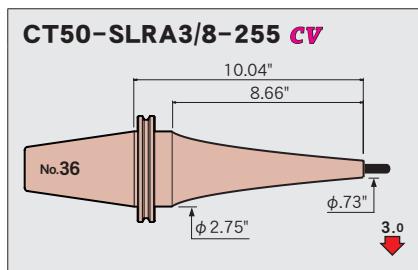

Feature

Shrink-fit Heater

MONO 3°
MONO CURVE

MONO Series

2PIECE type

UNO

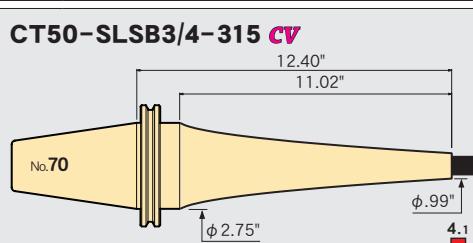
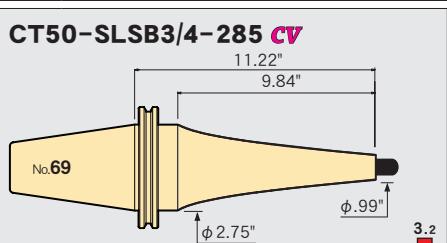
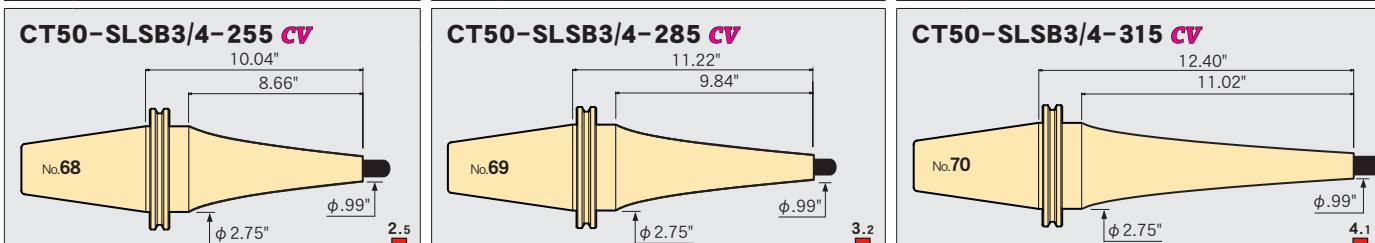
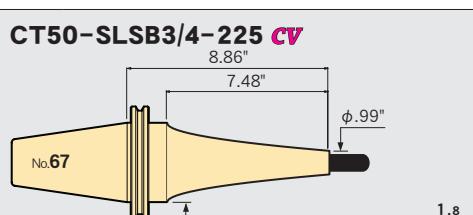
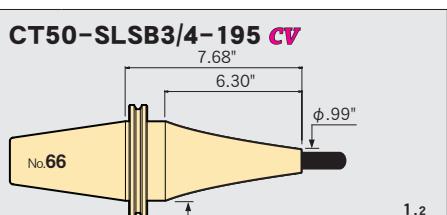
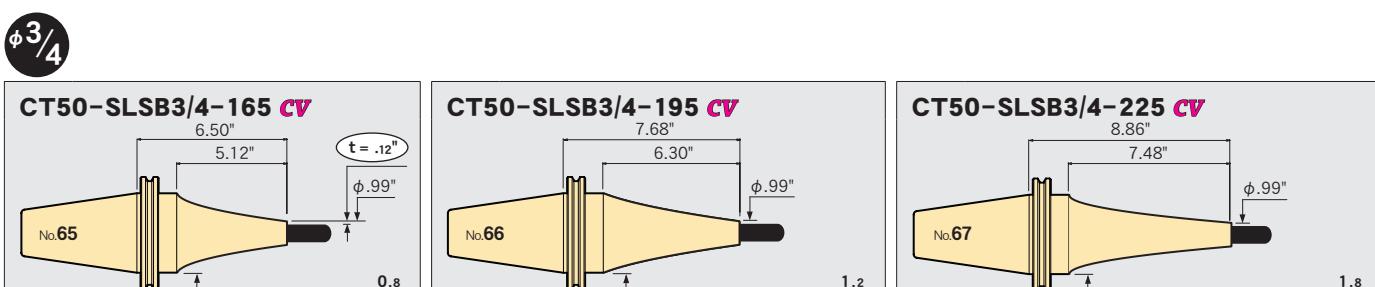
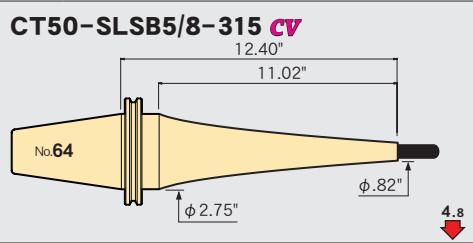
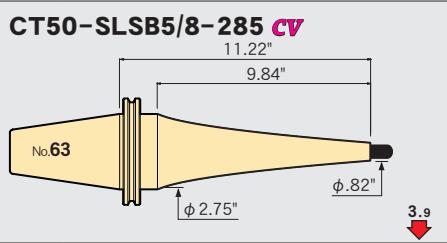
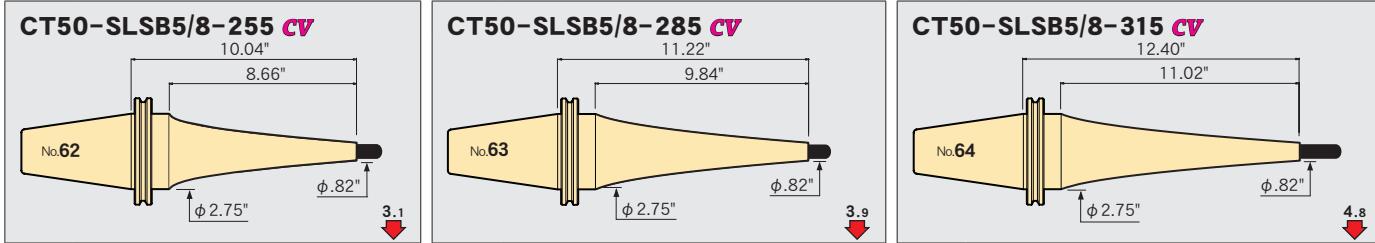
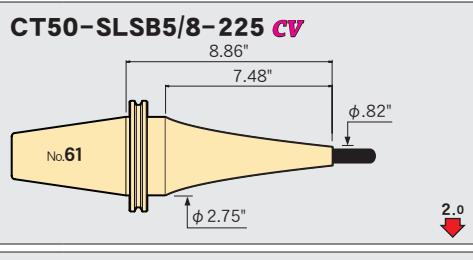
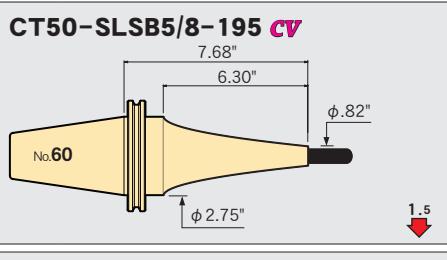
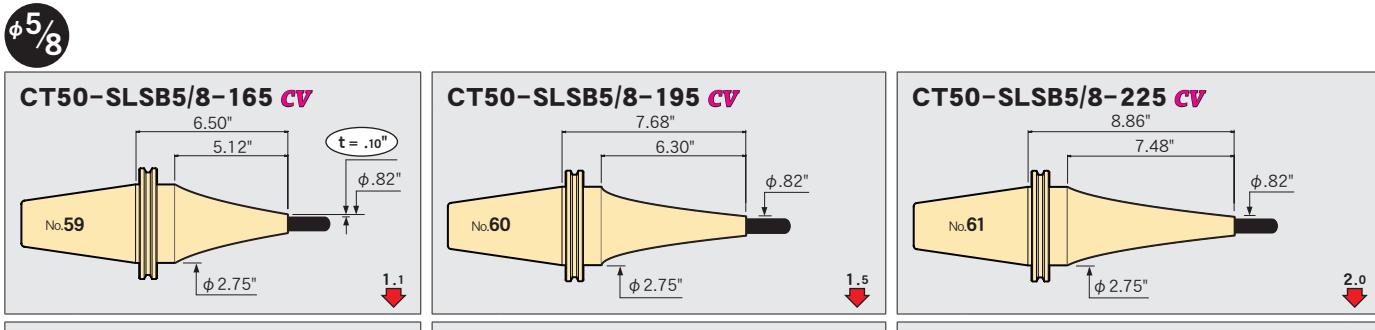
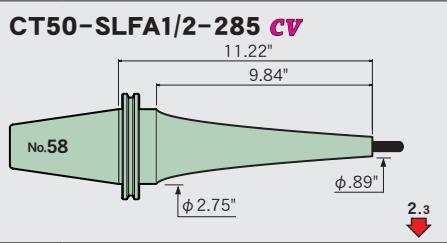
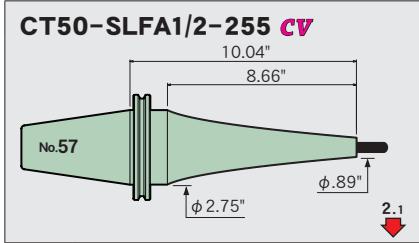
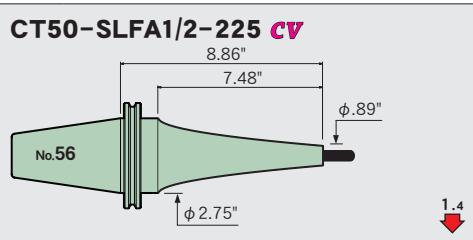
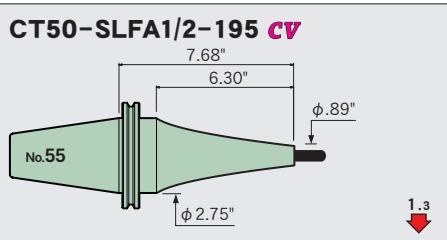
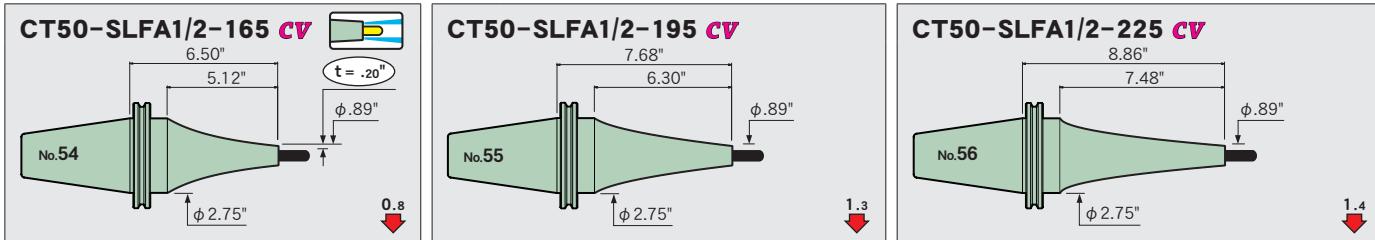
HYPER VERSION

Z



STRAIGHT
arbor

OTHERS

PERIPHERALS
Technical



2 PIECE type

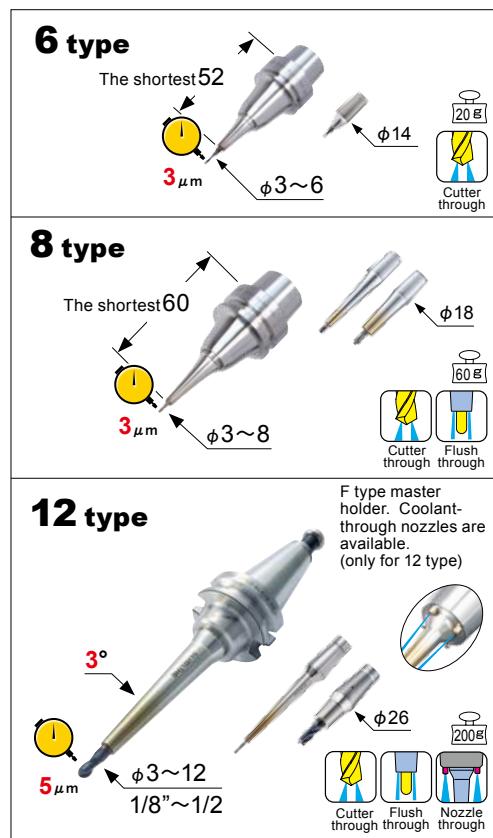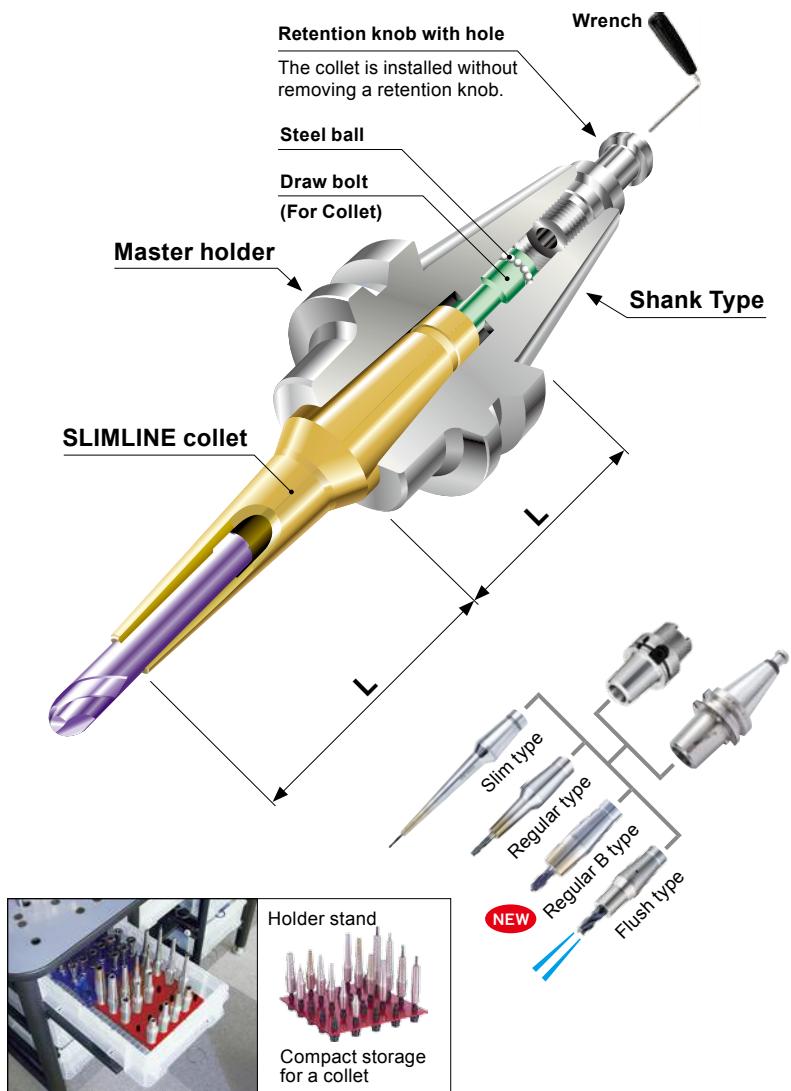

MASTER HOLDER
BT40 - SL K 12 - 45 F

Shank Type SLIMLINE Type L Coolant-through


PAGE	Type	Part Number	Inch
214	6 type	BT30 HSK-A40, A50 HSK-E32, E40, E50	—
215	8 type	BT30, BT40 HSK-A40, A50, A63 HSK-E40, E50, F63	—
216	12 type	BT30, BT40, BT50 HSK-A50, A63, A100 HSK-E50, F63 CT40, CT50 DN40, DN50	○

SLIMLINE COLLET
CS 12 - 3 - 110

Collet type ϕD L

Nose shape

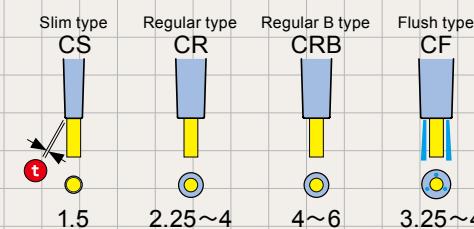Thickness t ... 4 types



NEW Thick type

Master holder 6 type

Feature

Shrink-fit Heater

MONO 3°
MONO CURVE

MONO series

2PIECE type

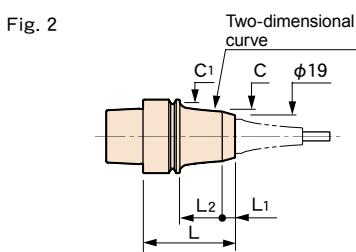
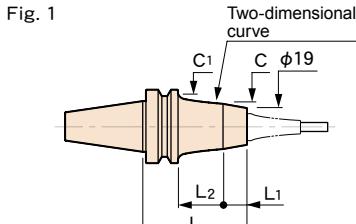
UNO

HYPER VERSION

Z

STRAIGHT arbor

OTHERS

PERIPHERALS
Technical data

CODE	Fig.	L	L ₁	L ₂	φC	φC ₁	Kg	N
BT30-SLK 6-35-MAS1 -MAS2 -65-MAS1 -MAS2	1	35	13	—	—	34	0.5	1.4
		65	15	28	25.1		0.6	2.2
		37	17	—	—	34	0.2	3
		50	7	23	23.5		0.3	3.9
A40-SLK 6-37 50	1	42	16	—	—	42	0.4	5.3
		55	7	22	24.6		0.5	6.4
E32-SLK 6-37 -50	2	37	7	10	26	—	0.2	1.3
		50		23				2.2
E40-SLK 6-37 -50	2	37	17	—	—	34	0.3	1.7
		50	7	23	23.5			2.6
E50-SLK 6-42 -55	2	42	16	—	—	42	0.5	3.4
		55	7	22	24.6		0.6	4.4

■ Option

- SLIMLINE collet 6 type
- Wrench.

■ Std.Access.

- Coolant duct (HSK-A)
- Retention knob (BT30) → P.244


■ Note

- A dedicated retention knob is supplied with the BT30 as a standard accessory. When ordering, specify machine maker and model number. To replace the retention knob, please contact us.

■ Caution

- If the SLIMLINE collet can't be removed from a master holder, follow the procedure on P.256.
- HSK-E shank doesn't come with a coolant duct and cannot be attached. Consult us if you need it.


SLIMLINE collet 6 type


■ Note

- S refers to the deflection value of an E32-SLK6-37 and the SLIMLINE collet 6 type combination. The values are comparable for any shank combination.

■ Caution

- Setting cutters... Be sure to insert the tool beyond the safety mark.




CODE	φD	φC	t	L	M	H	s	N	g	h
CS6-3-15 -30 -45	3	6	1.5	15	12	9	1.5	0.1	20	24
				30	27		3.2	0.2	30	39
				45	42		9	0.3	40	54
CR6-3-30 -45	3	7.5	2.25	30	27	9	1.3	0.1	30	39
				45	42		6.2	0.3	40	54
CS6-4-15 -30 -45	4	7	1.5	15	12	12	1.2	0.1	30	24
				30	27		2.8	0.2		39
				45	42		7.9	0.4	40	54
CR6-4-30 -45	4	10	3	30	27	12	1	0.1	30	39
				45	42		4.4	0.5	50	54
CS6-6-15 -30 -45	6	9	1.5	15	12	15	1	0.1	20	24
				30	27		2.4	0.3	30	35
				45	42		6.5	0.5	40	
CR6-6-30 -45	6	12	3	30	27	15	0.8	0.2	20	35
				45	42		4	0.6		


⚠ Don't insert the cutter shank to the max. insertion length (h).

If the cutting tool shank face touches the bottom of the holder, the collet will not be installed properly and it may cause poor accuracy. Be sure to pay attention to this by using CS6 and CS8 with L = 15 and 25, because their "h" dimension is very short. We recommend you use the short overall length tool for SLIMLINE (6 type & 8 type) because its insertion length is short.

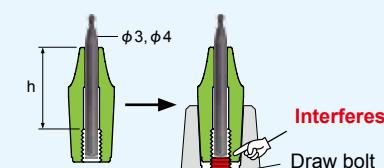When cutting off a tool shank, please remove any burrs on the cutting surface of the tool shank carefully.


**Wrench
(both for 6 and 8 type)**

Used for clamping of master holders (type 6 & type 8) and SLIMLINE collet (type 6 & type 8).




CODE	Tool
TW-4	HSK-A, E, F, BT40
DW-14	BT30

Holder stand

⊕ P.13



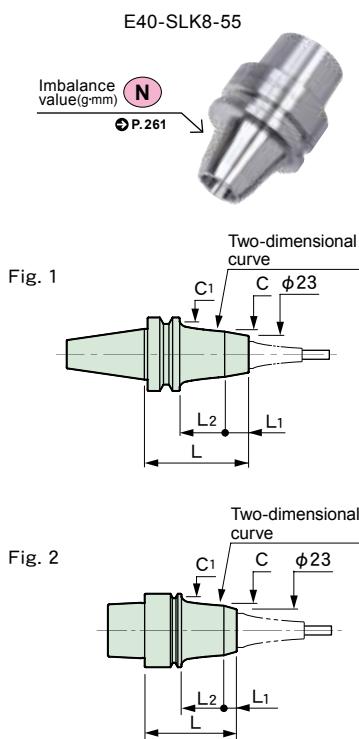Master holder 8 type



CODE	Fig.	L	L ₁	L ₂	φC	φC ₁	Kg	N
BT30-SLK8-35-MAS1 -MAS2 -65-MAS1 -MAS2	1	35	13	—	—	34	0.4	1.5
		65	15	28	27.5		0.6	2.3
		40	13	—	—		1	1.8
		70	15	28	31.2		1.2	2.5
A40-SLK8-50 -70	2	50	7	23	27	34	0.3	2.5
		70	15	35	27.3		0.4	3.3
A50-SLK8-55 -75	2	55	7	22	28.1	42	0.5	4
		75	15	34	28.7		0.6	4.8
A63-SLK8-55 -75	2	55	7	22	29.5	53	0.8	5.7
		75	15	34	30.5		0.9	5.9
E40-SLK8-50 -70	2	50	7	23	27	34	0.3	2.1
		70	15	35	27.3		0.4	2.9
E50-SLK8-55 -75	2	55	7	22	28.1	42	0.6	2.7
		75	15	34	28.7		0.7	3.5
F63M-SLK8-55 -75	2	55	7	22	29.5	53	0.8	4.4
		75	15	34	30.5		1	5.2

■ Option

- SLIMLINE collet 8 type
- Wrench

■ Std.Access.

- Coolant duct (HSK-A)
- Retention knob (BT30) → p.244

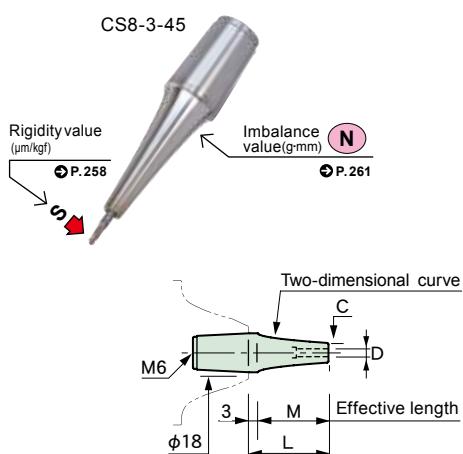
■ Note

- A dedicated retention knob is supplied with the BT30 as a standard accessory. When ordering, specify machine maker and model number. To replace the retention knob, please contact us.

■ Caution

- If the SLIMLINE collet can't be removed from a master holder, follow the procedure on p.256.
- HSK-E shank doesn't come with a coolant duct and cannot be attached. Consult us if you need it.


SLIMLINE collet 8 type



CODE	φD	φC	t	L	M	H	s	N	g	h
CS8-3-25 -45 -65	3	6	1.5	25	22	9	2.1	0.2	60	37.5
				45	42		4.8	0.4	70	57.5
				65	62		10.3	0.6	80	77.5
CR8-3-45 -65	3	7.5	2.25	45	42	9	3.6	0.5	70	57.5
				65	62		7.4	0.7	90	77.5
CF8-3-45 -65	3	9.5	3.25	45	42	9	2.8	0.5	80	57.5
				65	62		5.3	0.8	100	77.5
CS8-4-25 -45 -65	4	7	1.5	25	22	12	1.8	0.3	60	37.5
				45	42		4.4	0.5	70	57.5
				65	62		9.2	0.6	80	77.5
CR8-4-45 -65	4	10	3	45	42	12	2.7	0.6	80	57.5
				65	62		5.3	0.8	100	77.5
CF8-4-45 -65	4	12	4	45	42	12	2.3	0.7	90	57.5
				65	62		4.2	0.9	110	77.5
CS8-6-25 -45 -65	6	9	1.5	25	22	15	1.5	0.3	60	35
				45	42		3.7	0.6	80	
				65	62		7.6	0.8	90	
CR8-6-45 -65	6	12	3	45	42	15	2.5	0.7	90	35
				65	62		4.8	1	110	
CF8-6-45 -65	6	14	4	45	42	15	2.1	0.8	100	35
				65	62		3.9	1.1	120	
CS8-8-25 -45	8	11	1.5	25	22	20	1.4	0.4	60	37
				45	42		3.3	0.7	70	49
CR8-8-45	8	14	3	45	42	20	2.4	0.8	90	49
CF8-8-45	8	16	4	45	42	20	2.1	1.1	110	49





■ Note
s refers to the deflection value of an E40-SLK8-50 and SLIMLINE collet type 8 combination. The values are comparable for any shank combination.

■ Caution
• Setting cutters... Be sure to insert the tool beyond the safety mark.




Master holder 12 type

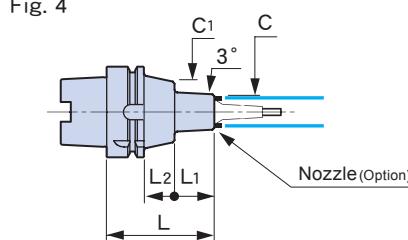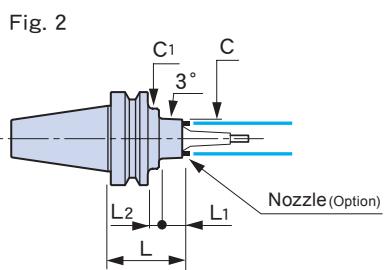Feature
Shrink-fit Heater
MONO 3°
MONO CURVE
MONO series
2PIECE type
UNO
HYPER VERSION
Z
STRAIGHT arbor
OTHERS
PERIPHERALS
Technical data



CODE	Fig.	L	ϕC	L ₁	L ₂	ϕC_1	Kg	N
BT30-SLK12- 35-MAS1	1	35	38	13	—	—	0.4	1
BT40-SLK12- 45	1	45	38	18	—	—	1.1	1.4
	2		41					1.6
	1	75	38	48			1.4	
	2		41					1.8
			135		108		2.2	3.2
BT50-SLK12- 75	1	75	38	25	12	65	4	4.7
	2		41					4.9
		105		55			4.4	5.3
							4.7	5.7
	1	135		85			6.4	14.8
							11	31.3
A50-SLK12- 75	3	75	38	49	—	—	0.8	4.8
A63-SLK12- 75	3	75	38	49	—	—	1	5
	4		41				1.1	5.5
	3	135	38	109			1.7	8.5
	4		41				1.9	8.6
A100-SLK12-105	3	105	38	43	33	65	3.4	41.3
	4		41				3.5	41.5
		135		73			3.8	42.2
	3						5.4	36.3
		225	38	163			6.4	46.5
			315		253			
E50-SLK12- 75	3	75	38	49	—	—	0.8	2.9
F63M-SLK12- 75	3	75	38	49	—	—	1	3.4
DN40AD-SLK12- 45	1	45	38	13.8	12.1	45	1	4.6
	2		41	7.9	18			4.3
	1	75	38	43.8	12.1		1.3	5.8
	2		41	55.9	—			5.5
DN50AD-SLK12- 75	1	75	38	40	15.9	70	3.4	12.6
	2		41				3.5	12.3
		135	41	100			4.3	19



CODE	Fig.	L	ϕ C	L1	L2	ϕ C1	lbs	N
CT40-SLK12- 45	1	1.77	1.61	1.02	—	1.75	2.4	2.4
- 45F	2						2.2	2.8
- 75	1	2.95	1.50	2.20			2.9	3.5
- 75F	2		1.61				3.1	3.9
-135F		5.31		4.56			4.6	6.8
CT50-SLK12- 75	1	2.95	1.50	1.57	.63	2.75	7.5	7.9
- 75F	2		1.61				7.7	8.3
-105F		4.13		2.76			8.6	11.3
-135F		5.31		3.94			9.5	14.4
-225	1	8.86	1.50	7.48			12.6	23
-315		12.40		8.86			17.6	28



■Option
• SLIMLINE collet 12type
• Wrench (W-135)
• Nozzles (nozzle model: NOZ)
• Retention knob (BT40, 50/ CT/ DN)
■Std. Access.
• Coolant duct, (HSK-A)
• Retention knob (BT30)

■Note

- A dedicated retention knob is supplied with the BT30 as a standard accessory. When ordering, specify machine maker and model number. To replace the retention knob, please contact us.

■Caution

- If the SLIMLINE collet can't be removed from a master holder, follow the procedure on p.256.
- HSK-E and F shank don't come with a coolant duct and cannot be attached. Consult us if you need it.

Wrench
Required for clamping the master holder and SLIMLINE collet.

CODE
W-135

■Note

- To fasten the BT30, use a commercially available 14 mm single-ended wrench.

Nozzle (For F-type)

CODE	Q'ty
NOZ-M4-12	12
-60	60

■Std. Access.

- Tightening wrench

■Note

- Four nozzles are required on the flush type master holder.

Retention knob with hole
There is no need to remove a retention knob with 6mm coolant-through hole when tightening or loosening SLIMLINE collet.

Feature
Shrink-fit Heater

MONO 3°
MONO CURVE

MONO Series

2PIECE type

UNO

HYPER VERSION

Z

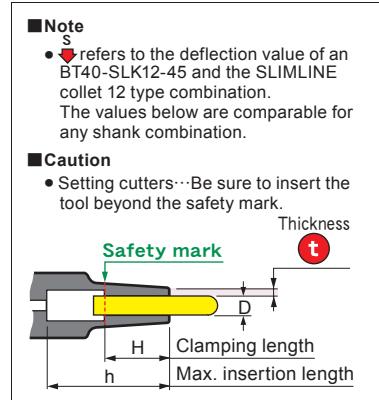
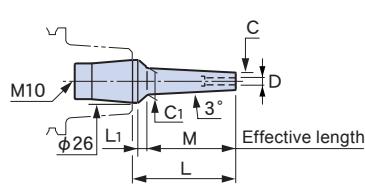
STRAIGHT
arbor

OTHERS

Technical PERIPHERALS
data

SLIMLINE collet 12 type

Feature
Shrink-fit Heater
MONO 3°
MONO CURVE
MONO series
2PIECE type
UNO
HYPER VERSION
Z
STRAIGHT arbor
OTHERS
PERIPHERALS
Technical data



CODE	ϕD	ϕC	\textcircled{t}	L	M	L_1	ϕC_1	H	\textcircled{S}	\textcircled{N}	$\textcircled{Kg lbs}$	h
CS12- 3- 35	3	6	1.5	35	22	9.5	8.4	10	4.8	0.5	0.2	60
				55	42		10.5		9.5			80
				80	67		13.1		15			105
				110	97		16.2		20.6			135
CR12- 3- 35	3	7.5	2.25	35	22	9.5	9.9	10	2.9	0.5	0.2	60
				55	42		12		5.5			80
				80	67		14.6		8.9			105
CF12- 3- 35	3	9.5	3.25	35	22	9.5	11.9	10	1.9	0.5	0.2	60
				55	42		14		3.3			80
				80	67		16.6		5.3			105
CS12-3.175- 35	3.175	6.175	1.5	35	22	9.5	8.5	10	4.6	0.5	0.2	60
				55	42		10.6		9			80
				80	67		13.2		14.3			105
				110	97		16.4		19.7			135
CS12-1/8- 35	1/8	.24	.059	1.38	.87	.37	.33	.39	4.4	0.5	0.35	2.56
				2.17	1.65		.42		8.7			3.35
				3.15	2.64		.52		14			4.33
				4.33	3.82		.64		19.3			5.51
CR12-1/8- 35	1/8	.36	.118	1.38	.87	.37	.45	.39	2	0.5	0.37	2.56
				2.17	1.65		.53		3.5			3.35
				3.15	2.64		.64		5.7			4.33
CF12-1/8- 35	1/8	.38	.128	1.38	.87	.37	.47	.39	1.8	0.6	0.40	2.56
				2.17	1.65		.55		3.1			3.35
				3.15	2.64		.66		5.1			4.33
CS12- 4- 35	4	7	1.5	35	22	9.5	9.4	12	3.8	0.5	0.2	60
				55	42		11.5		7.5			80
				80	67		14.1		11.9			105
				110	97		17.2		16.6			135
CR12- 4- 35	4	10	3	35	22	9.5	12.4	12	1.7	0.5	0.2	60
				55	42		14.5		3.1			80
				80	67		17.1		5.1			105
CF12- 4- 35	4	12	4	35	22	9.5	14.4	12	1.3	0.6	0.2	60
				55	42		16.5		2.2			80
				80	67		19.1		3.4			105
CS12-3/16- 35	3/16	.31	.059	1.38	.87	.37	.40	.59	3.1	0.6	0.35	2.56
				2.17	1.65		.48		6.2			3.35
				3.15	2.64		.58		10.3			4.33
				4.33	3.82		.71		14.2			5.51
CR12-3/16- 35	3/16	.42	.118	1.38	.87	.37	.51	.59	1.5	0.6	0.37	2.56
				2.17	1.65		.60		2.7			3.35
				3.15	2.64		.70		4.5			4.33


CODE	ϕD	ϕC	t	L	M	L_1	ϕC_1	H	S	N	Kg lbs	h	Feature
CF12-3/16 - 35	3/16	.50	.157	1.38	.87	.37	.59	.59	1.2	0.7	0.40	2.56	Shrink-fit Heater
- 55				2.17	1.65				1.9	0.8	0.46	3.35	
- 80				3.15	2.64				3.1	1	0.55	4.33	
CS12- 5- 35	5	8	1.5	35	22	9.5	10.4	15	3	0.5	0.2	60	MONO 3° MONO CURVE
- 55				55	42				6	0.6		80	
- 80				80	67				9.7	0.8		105	
- 110				110	97				13.6	1		135	
CS12- 6- 35	6	9	1.5	35	22	9.5	11.4	18	2.4	0.5	0.2	60	MONO Series
- 55				55	42				4.9	0.7		80	
- 80				80	67				8	0.8		105	
- 110				110	97				11.4	1		135	
CR12- 6- 35	6	12	3	35	22	9.5	14.4	18	1.3	0.6	0.2	60	2PIECE type
- 55				55	42				2.4	0.7		80	
- 80				80	67				3.9	0.9		105	
CRB12-6- 35	6	14	4	35	22	9.5	16.3	18	1.0	0.7	0.2	60	MONO 3° MONO CURVE
- 55				55	42				1.7	0.8		80	
- 80				80	67				2.7	1.0	0.3	105	
CF12- 6- 35	6	14	4	35	22	9.5	16.4	18	1	0.7	0.2	60	UNO
- 55				55	42				1.7	0.9		80	
- 80				80	67				2.7		0.3	105	
CS12-1/4- 35	1/4	.37	.059	1.38	.87	.37	.46	.71	2.2	0.6	0.35	2.56	HYPER VERSION
- 55				2.17	1.65				4.5	0.7	0.40	3.35	
- 80				3.15	2.64				7.4	0.9	0.46	4.33	
- 110				4.33	3.82				10.5	1.1	0.57	5.51	
CR12-1/4- 35	1/4	.49	.118	1.38	.87	.37	.58	.71	1.2	0.6	0.40	2.56	Z
- 55				2.17	1.65				2.2	0.8	0.44	3.35	
- 80				3.15	2.64				3.7	1	0.55	4.33	
CF12-1/4- 35	1/4	.56	.157	1.38	.87	.37	.66	.71	1	0.8	0.42	2.56	STRAIGHT arbor
- 55				2.17	1.65				1.9	0.9	0.49	3.35	
- 80				3.15	2.64				2.6	1.1	0.60	4.33	
CS12- 7- 35	7	10	1.5	35	22	9.5	12.4	20	2	0.6	0.2	60	OTHERS
- 55				55	42				4.1	0.7		80	
- 80				80	67				6.8	0.9		105	
- 110				110	97				9.7	1.2	0.3	135	
CS12-5/16- 35	5/16	.43	.059	1.38	.87	.37	.52	.98	1.6	0.6	0.37	2.56	PERIPHERALS
- 55				2.17	1.65				3.3	0.8	0.40	3.35	
- 80				3.15	2.64				5.6	1	0.49	4.33	
- 110				4.33	3.82				8.1	1.2	0.62	5.51	
CR12-5/16- 35	5/16	.55	.118	1.38	.87	.37	.64	.98	1	0.7	0.40	2.56	Z
- 55				2.17	1.65				1.9	0.8	0.46	3.35	
- 80				3.15	2.64				3.1	1	0.57	4.33	
CF12-5/16- 35	5/16	.55	.118	1.38	.87	.37	.64	.98	1	0.7	0.40	2.56	STRAIGHT arbor
- 55				2.17	1.65				1.9	0.8	0.46	3.35	
- 80				3.15	2.64				3.1	1	0.57	4.33	
CS12- 8- 35	8	11	1.5	35	22	9.5	13.4	25	1.6	0.6	0.2	60	OTHERS
- 55				55	42				3.4	0.7		80	
- 80				80	67				5.6	0.9		105	
- 110				110	97				8.2	1.2	0.3	135	
CR12- 8- 35	8	14	3	35	22	9.5	16.4	25	1.1	0.6	0.2	60	PERIPHERALS
- 55				55	42				1.9	0.8		80	
- 80				80	67				3.1	1	0.3	105	
CRB12- 8- 35	8	18	5	35	22	9.5	20.3	25	0.7	0.7	0.2	60	Technical data
- 55				55	42				1.1	0.9		80	
- 80				80	—				1.8		0.3	105	
CF12- 8- 35	8	16	4	35	22	9.5	18.4	25	0.9	0.8	0.2	60	PERIPHERALS
- 55				55	42				1.4	1		80	
- 80				80	67				2.3	1.2	0.3	105	

CODE		φD	φC	t	L	M	L ₁	φC ₁	H	S	N	Kg lbs	h			
CS12- 9- 35		9	12	1.5	35	22	9.5	14.4	30	1.4	0.7	0.2	60			
- 55					55	42		16.5		2.9	0.9					
- 80					80	67		19.1		4.8	1.1					
- 110					110	97		22.2		7.1	1.3					
CS12-3/8- 35		3/8	.49	.059	1.38	.87	.37	.58	1.18	1.3	0.7	0.35	2.36			
- 55					2.17	1.65		.67		2.6	0.8					
- 80					3.15	2.64		.77		4.4	1					
- 110					4.33	3.82		.89	.98	6.4	1.3					
CR12-3/8- 35		3/8	.61	.118	1.38	.87	.37	.70	1.18	0.9	0.7	0.40	2.36			
- 55					2.17	1.65		.78		1.6	0.9					
- 80					3.15	2.64		.89		2.6	1.1					
CF12-3/8- 35		3/8	.69	.157	1.38	.87		.78	1.18	0.8	0.9	0.42	2.36			
- 55					2.17	1.65		.86		1.3	1.1					
- 80					3.15	2.64		.97		2	1.3					
CS12-10- 35		10	13	1.5	35	22	9.5	15.4	30	1.3	0.8	0.2	60			
- 55					55	42		17.5		2.5	0.9					
- 80					80	67		20.1		4.3	1.1					
- 110					110	97		23.2		6.2	1.4					
CR12-10- 35		10	16	3	35	22	9.5	18.4	30	0.9	0.7	0.2	60			
- 55					55	42		20.5		1.6	0.9					
- 80					80	67		23.1		2.6	1.1					
CRB12-10- 35		10	22	6	35	22	9.5	24.3	30	0.6	0.9	0.2	60			
- 55					55	—		25.5		0.9	—					
- 80					80	—		—		1.5	1.1					
CF12-10- 35		10	18	4	35	22	9.5	20.4	30	0.7	0.9	0.2	60			
- 55					55	42		22.5		1.1	1.1					
- 80					80	—		—		1.9	1					
CS12-11- 35		11	14	1.5	35	22	9.5	16.4	30	1.1	0.9	0.2	60			
- 55					55	42		18.5		2.3	1					
- 80					80	67		21.1		3.8	1.3					
- 110					110	97		24.2		5.6	1.5					
CS12-12- 35		12	15	1.5	35	22	9.5	17.4	30	1	1	0.2	60			
- 55					55	42		19.5		2.1	1.1					
- 80					80	67		22.1		3.5	1.4					
- 110					110	—		—		5	1.3					
CR12-12- 35		12	20	4	35	22	9.5	22.4	30	0.7	0.9	0.2	60			
- 55					55	42		24.5		1.1	1.1					
- 80					80	—		25.5		1.9	1					
CF12-12- 35		12	20	4	35	22	9.5	22.4	30	0.7	1	0.2	60			
- 55					55	42		24.5		1.1	1.2					
- 80					80	—		—		1.9	1.1					
CS12-1/2- 35		1/2	.62	.059	1.38	.87	.37	.71	1.18	0.9	0.9	0.33	2.36			
- 55					2.17	1.65		.79		1.9	1.1					
- 80					3.15	2.64		.89		3.1	1.3					
- 110					4.33	3.68		.50	1	4.8	1.7					
CR12-1/2 -35		1/2	.81	.157	1.38	.87	.37	.91	1.18	0.6	1	0.42	2.36			
- 55					2.17	1.99		—	—	1.1	0.9					
- 80					3.15	1.80		1.20	1	1.8	2.2					
CF12-1/2 -35		1/2	.81	.157	1.38	.87	.37	.91	1.18	0.6	1.1	0.40	2.36			
- 55					2.17	1.99		—	—	1.1	1					
- 80					3.15	1.80		1.20	1	1.8	2.3					


Holder stand

Stands for SLIMLINE COLLETS, STRAIGHT arbor and compact holders (HSK-E25, E32). Selectable from four colors. Convenient to make arrangements by color-coding, etc.

CODE	Colors	Front face	Back face	Storage capacity
SDKT-RE	Red			
-BL	Blue	SLIMLINE collet	Small shank holders (HSK-E25/E32)	25 pieces each
-GR	Green			
-GD	Gold			

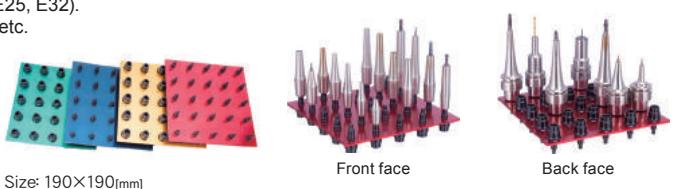

UNO

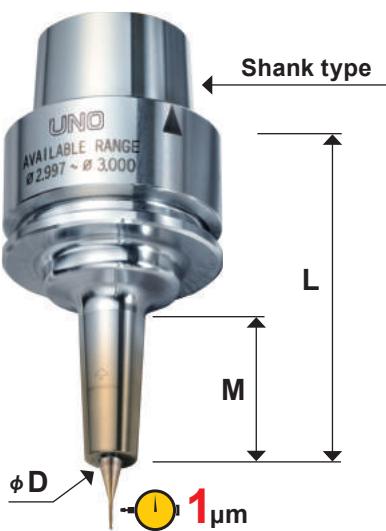

Run-out accuracy $1\mu\text{m}$

BLACK UNO

$0.5\mu\text{m}$

E32 - SL SA 3 - 50 - M22 UNO

Shank type

SLIMLINE

ϕD

L

Effective length

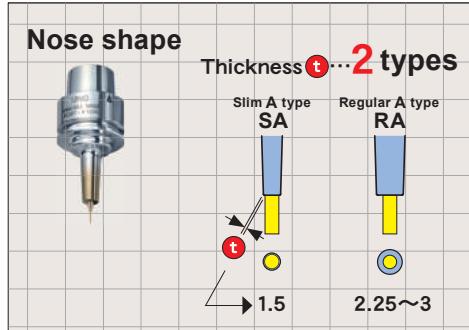
UNO
BLACK UNO

UNO

E25
E32
E40
E50
F63

BLACK UNO

E25
E32



Required cutter shank tolerance



- $\phi D=h4$ tolerance
- Roundness = $0.3\mu\text{m}$
- Cylindricity = $0.5\mu\text{m}$

Recommended cutting tools



株式会社 イワタツール
IWATA TOOL Co., Ltd.

NS TOOL


住友電工
SUMITOMO ELECTRIC

MOLDINO

KYOWA

UNION TOOL

EISEN



It allows superior finishing surface quality and extends the tool life of micro-cutting tools.

Runout accuracy

Tool life

Number of machined small-diameter holes

Holes

1000
900
800
700

1.3 times

UNO

($1\mu\text{m}$)

Using cutter
0.6mm
 $\phi 0.04\text{mm}$
Micro drill
Work-piece Revolution
Feed Step feed Coolant
Ceramics 12,000min⁻¹
0.0007mm/rev
0.004mm Dry

Positioning accuracy

Dispersion of run-out of drill and hole positioning accuracy

(μm)

3
2
1
0
-1
-2
-3

(μm)

● UNO

($1\mu\text{m}$)

▲ Collet chuck

($5\mu\text{m}$)

Using a cutting tool

$\phi 0.55\text{mm}$

NC Pointing drill
Work-piece S50C
Revolution 12,000min⁻¹
Feed 0.02mm/rev
Step feed 0.1mm
Coolant Mist


Eye-mark (\blacktriangle) at the highest run-out direction.
We inspect all the holders and mark " \blacktriangle " at the highest run-out point.



Delivered with the accuracy inspection sheet.

UNO

E32-SLRA4-50-M22 UNO




Note

- SLIMLINE UNO is available for other shank designs and internal bore sizes not listed in this chart. For more information, please contact us.

Caution

- HSK-E and F shank don't come with a coolant duct and cannot be attached. Consult us if you need it.
- Setting cutters... Be sure to insert the tool beyond the Safety mark.

Thickness




Thickness

CODE	ϕD	ϕC	t	L	M	L ₁	ϕC_1	ϕC_2	H	h	Kg	N	S
E25-SLRA3-35 UNO	3	7.5	2.25	35	17	8	9.3	18	9	29	0.05	0.37	2.3
	-SLRA4-35 UNO	4	10				11.8		12		0.06	0.38	1.4
	-SLSA3.175-35 UNO	3.175	6.175				8		9		0.05	0.37	3.5
E32-SLRA3-50-M22 UNO	3	7.5	2.25	50	22	8	9.8	20	9	42	0.14	0.4	2.8
	-SLRA4-50-M22 UNO	4	10				12.3		12		0.15		1.7
	-SLSA3.175-50-M22 UNO	3.175	6.175				8.5		9		0.14		4.4
E40-SLRA3-50-M22 UNO	3	7.5	2.25	50	22	8	9.8	20	9	42	0.2	0.7	2.8
	-SLRA4-50-M22 UNO	4	10				12.3		12		0.15		1.6
	-SLSA3.175-50-M22 UNO	3.175	6.175				8.5		9		0.14		4.4
E50-SLRA3-75-M22 UNO	3	7.5	2.25	75	22	27	9.8	25	9	65	0.5	1.7	2.8
	-SLRA4-75-M22 UNO	4	10				12.3		12		0.5		1.7
	F63-SLRA3-75-M22 UNO	3	7.5				9.8	25	9	54	0.7	1.8	2.8
	-SLRA4-75-M22 UNO	4	10				12.3		12	58			1.7

BLACK UNO

E32-SLRA4-50-M22 BLACK UNO




Note

- $\phi 6$ cutter shank is available upon request.

Caution

- HSK-E shank doesn't come with a coolant duct and cannot be attached. Consult us if you need it.
- Setting cutters... Be sure to insert the tool beyond the Safety mark.

Thickness



Thickness

CODE	ϕD	ϕC	t	L	M	L ₁	ϕC_1	ϕC_2	H	h	Kg	N	S
E25-SLRA3-35 BLACK UNO	3	7.5	2.25	35	17	8	9.3	18	9	29	0.05	0.37	2.3
	-SLRA4-35 BLACK UNO	4	10				11.8		12		0.06	0.38	1.4
	-SLSA3.175-35 BLACK UNO	3.175	6.175				8		9		0.05	0.37	3.5
E32-SLRA3-50-M22 BLACK UNO	3	7.5	2.25	50	22	8	9.8	20	9	42	0.14	0.4	2.8
	-SLRA4-50-M22 BLACK UNO	4	10				12.3		12		0.15		1.7
	-SLSA3.175-50-M22 BLACK UNO	3.175	6.175				8.5		9		0.14		4.4

Holder stand

P.13

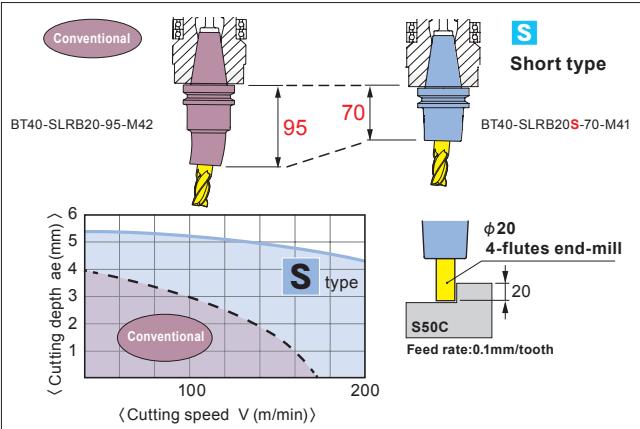


HYPER VERSION


S Short type




Machining efficiency **2 times**
(Compared to conventional holders.)



H Heavy type

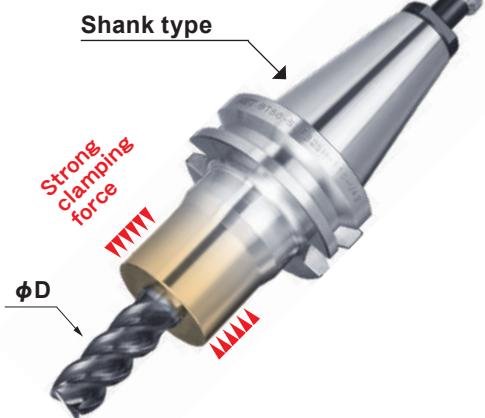

High gripping force **1.4 times**
(Compared to conventional holders.)



BT40 – SL RB 20 S – 60 – M42

Shank type

S Short type

BT30
BT40
A63


H Heavy type

BT40
BT50
A63
A100


● DIN and CAT. shank products are available upon request.

SLIMLINE ϕD HYPER VERSION L Effective length





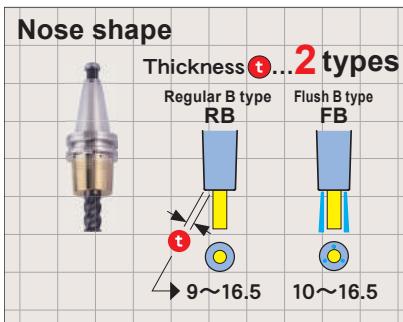
● Inch. size I.D is available upon request.



Coolant-through




Short type



BT40-SLRB20S-70-M41



■ Option	● Retention knob (BT) → P.244
■ Std. Access.	● Coolant duct (fixed type), (HSK-A63) → P.246
■ Note	● Swing type coolant ducts are available upon request(HSK-A63). → P.246
■ Caution	<ul style="list-style-type: none"> ● Retention knob · · · Use a retention knob with hole, or remove the retention knob and heat it.(BT) ● Setting cutters · · · Be sure to insert the tool beyond the Safety mark. ● As for MST SLIMLINE, please use HEAT ROBO DENJI 5000S (HRD-02S) or HEAT ROBO Baby 3000S (HRB-03S). ● For HEAT ROBO DENJI 5000 (HRD-02S), please prepare coil No.6 (HRD2-CL6). ● Remove the coolant duct before heating the holder when you use the hot air heater. (HSK-A)




CODE	Fig.	φD	φC	t	L	M	L1	φC1	φC2	H	h	Kg	N	S
BT30-SLRB10S-45 -SLRB12S-45 -SLRB16S-45	1	10	28	9	45	20	3	45	—	21	68	0.5	1.0	0.4
		12	32	10						22	61		1.2	0.3
		16	38	11						25	57		1.5	
BT40-SLRB12S-60-M28 -SLFB12S-60-M28 -SLRB16S-65-M33 -SLFB16S-65-M33 -SLRB20S-70-M41 -SLFB20S-70-M41 -SLRB25S-75-M30 -SLFB25S-75-M30	2	12	32	10	60	28	—	35	—	27	95	1.1	1.9	0.3
		16	38	11						30	85		2.8	
		20	45	12.5						36	100		4.1	0.2
		25	49	12									5.4	
A63 -SLRB12S-60-M29 -SLFB12S-60-M29 -SLRB16S-65-M34 -SLFB16S-65-M34 -SLRB20S-70-M42 -SLFB20S-70-M42 -SLRB25S-75-M30 -SLFB25S-75-M30	4	12	32	10	60	29	—	35.1	—	27	35	0.8	8.3	0.3
		16	38	11						30	40		9.2	
		20	45	12.5						36	45		10.4	0.2
		25	49	12						50	1.3		11.6	



Cutting tool insertion length

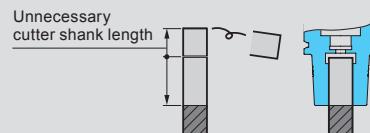Since the Short type has the shortest gauge length, the cutter insertion length (h) is not deep. Cut off the unnecessary portion of the tool shank and use a cutting tool with the optimal projection. Pay special attention for HSK-A63 shank products.



Recommended cutting tools

OSG	DIJET INDUSTRIAL	Tungaloy	MITSUBISHI MATERIALS	Mitsubishi Hitachi Tool Engineering
WX-PHSS General purpose	DV-OCSAR For difficult-to-machine materials	SEF4000 For difficult-to-machine materials	C-3SA For aluminum alloy	EPSMS-PN General purpose
UP-PHS General purpose	AL-SEESS For aluminum alloy	SEE4000-A For aluminum alloy	VF-6MHV For difficult-to-machine materials	EPPS For general steel

Heavy-duty type

BT50-SLRB20H-110-M42



Fig. 1


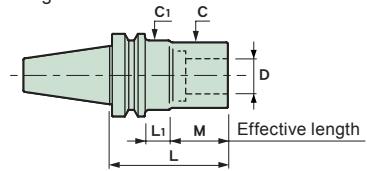


Fig. 2



An appropriate heating coil for HRD-02S

■ Option

- Retention knob (BT) → P.244

■ Std. Access.


- Coolant duct (fixed type), (HSK-A) → P.246

■ Note

- Swing type coolant ducts are available upon request. → p.246

■ Caution

- Retention knob → Use a retention knob with hole, or remove the retention knob and heat it. (BT)
- Setting cutters → Be sure to insert the tool beyond the safety mark.
- As for MST SLIMLINE, please use HEAT ROBO DENJI 5000S (HRD-02S) or HEAT ROBO Baby 3000S (HRB-03S).
- Refer to the table to choose an appropriate heating coil for Heat Robo Denji 5000 (HRD-02S).
- Remove the coolant duct before heating the holder when you use hot air heater (HSK-A).
- For HEAT ROBO Baby 3000 (HRB-03S), dia 70mm nozzle(HRB-NZL70) is required.



CODE	Fig.	ϕD	ϕC	t	L	M	L1	ϕC_1	H	h	$\frac{\text{kg}}{\text{kg}}$	N	S
BT40-SLRB12H- 80-M32	1	12	36	12	80	32	21	53	35	115	1.3	5.1	0.3
											1.4		
		16	42	13					37	90		5.4	
		20	50	15					47	100	1.6	6.3	
	2	25	51	13	95	42	26	50	105			7	
BT50-SLRB12H- 95-M32	1	12	36	12	95	32	25	53	35	150	3.8	8.8	0.3
											3.9	9	
		16	42	13					37				
		20	50	15					47	165	4	14.1	0.2
	2	25	58	16.5					52		4.2	14.4	
A63 -SLRB12H- 80-M32	2	12	36	12	80	32	22	53	35	55	1.1	11.3	0.3
											1.2	11.6	
		16	42	13					37				
		20	50	15					47	65	1.5	13.1	
	2	25	51	13					50	70		14.1	



	CODE	Fig.	ϕD	ϕC	t	L	M	L ₁	ϕC_1	H	h	Kg	N	S
MONO 3° MONO CURVE MONO series 2PIECE type UNO HYPER VERSION	A100-SLRB12H- 95-M32	2	12	36	12	95	32	34	53	35	63	2.7	26.9	0.3
	-SLFB12H- 95-M32		16	42	13					37			27.2	
	-SLRB16H- 95-M32		20	50	15		42	39		47		78	3.2	31.3
	-SLFB16H- 95-M32		25	58	16.5								3.4	31.8
	-SLRB20H-110-M42													0.2
	-SLFB20H-110-M42													
	-SLRB25H-110-M42													
	-SLFB25H-110-M42													



$\phi 70$ Nozzle (HRB-03S)

Required for shrinking the Heavy-duty type.

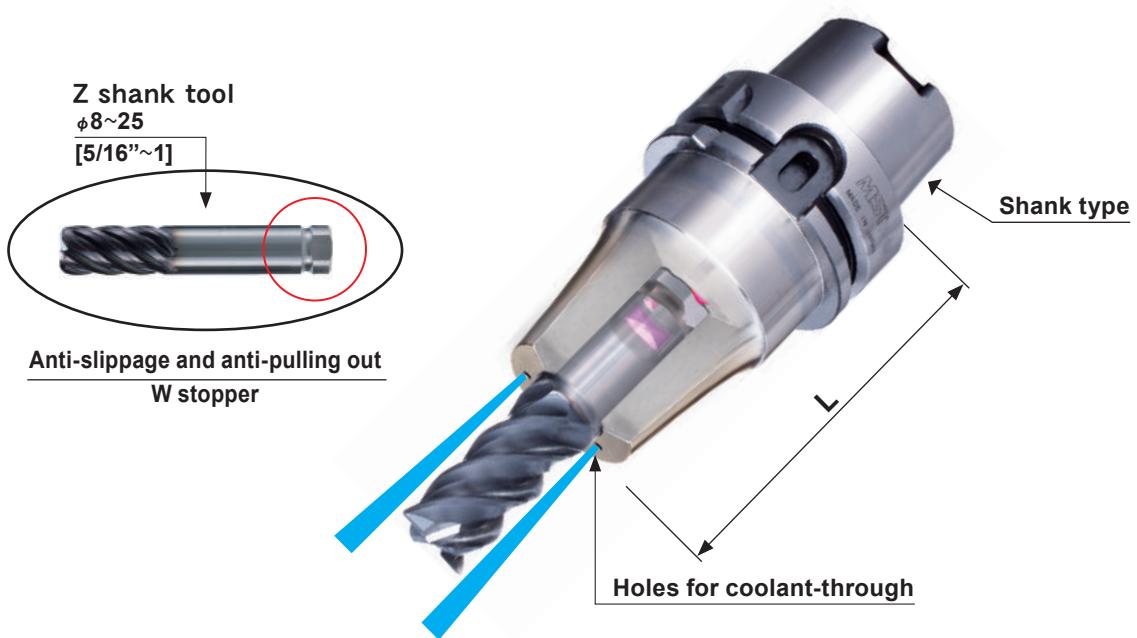
CODE
HRB-NZL70



HEAT ROBO Baby3000S

■ ANTI-SLIPPA GE, SHRINK-FIT HOLDER



SLIMLINE Z




BT40 – SL RB 16 Z – 90

Shank type SLIMLINE ϕD SLIMLINE Z L

	Inch
BT40	—
BT50	—
A63	○
A100	○
DN40	—
DN50	—
CT40	○
CT50	○

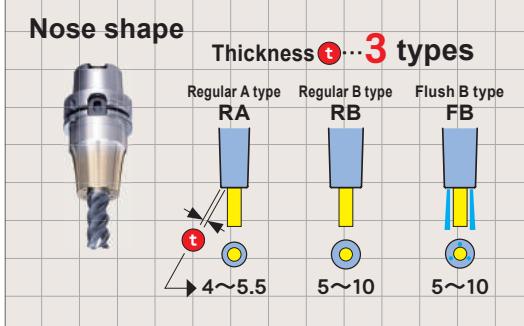


Machining examples

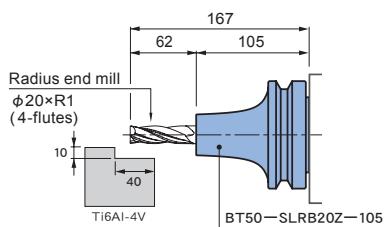

Rotation	2,100 min ⁻¹
Cutting speed	132 m/min
Feed	1,260 mm/min
Feed per tooth	0.15 mm/tooth

Chip evacuation: 504 cc/min

Z shank tool dimensions table



Metric


ϕd (h6)	W	ϕd_1	L	L1	L2	r
8	6.5	6.5	36	45	29	7
10	8.5	8.5	42	51	35	
12	10	10				
16	14	14	45	54	38	
20	17	17	53	62	46	
25	22	22	60	69	53	2.5

They can provide a tool for SLIMLINE Z



Inch

ϕd (h6)	W	ϕd_1	L	L1	L2	r
5/16	.25	.25	1.38	1.75	1.13	.25
3/8	.32	.32	1.63	2.00	1.38	
1/2	.42	.42				
5/8	.55	.55	1.75	2.13	1.50	
3/4	.63	.63	2.00	2.38	1.75	
1"	.88	.88	2.41	2.75	2.13	.28
						.1

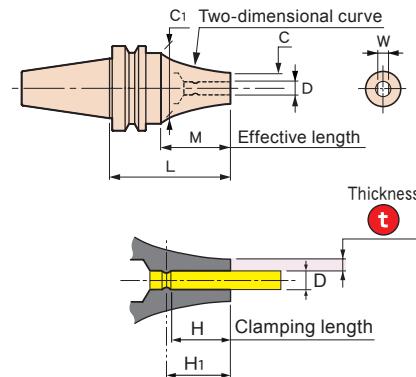

An appropriate heating coil for HRD-02S

- Option
 - Retention knob → P.244
 - The Z-shank (dedicated) tool is needed. → P.227

- Caution
 - Retention knob → Use a retention knob with a hole, or remove the retention knob and heat it.
 - Setting cutters → Be sure to insert the tool beyond the safety mark.
 - As for MST SLIMLINE, please use HEAT ROBO DENJI 5000S (HRD-02S) or HEAT ROBO Baby 3000S (HRB-03S).
 - Refer to the table to choose an appropriate heating coil for HEAT ROBO DENJI 5000 (HRD-02S).

	CODE	ϕD	ϕC	t	L	M	ϕC_1	H	H1	W	Kg	N	S	
2PIECE type	BT40-SLRB 8Z- 90	8	18	5	90	52	53	24	29	6.5	1.2	4.6	0.6	2
	-120										1.6	6.8	0.7	
	-150										2	8.9	0.8	
	-180										2.4	11	0.9	
	-SLFB 8Z- 90										1.2	4.6	0.6	
	-120										1.6	6.8	0.7	
	-150										2	8.9	0.8	
	-180										2.4	11	0.9	
	BT40-SLRB10Z- 90	10	22	6	90	52	53	30	35	8.5	1.3	4.8	0.5	3
	-120										1.7	6.9	0.6	
	-150										2	9	0.7	
	-180										2.4	11.1	0.8	
	-SLFB10Z- 90										1.3	4.8	0.5	
	-120										1.7	6.9	0.6	
	-150										2	9	0.7	
	-180										2.4	11.1	0.8	
	BT40-SLRB12Z- 90	12	26	7	90	52	53	30	35	10	1.3	5	0.4	
	-120										1.7	7.1	0.5	
	-150										2.1	9.2	0.6	
	-180										2.5	11.3	0.8	
	-SLFB12Z- 90										1.3	5	0.4	
	-120										1.7	7.1	0.5	
	-150										2.1	9.2	0.6	
	-180										2.5	11.3	0.8	
	BT40-SLRB16Z- 90	16	32	8	90	52	53	32	38	14	1.4	5.3	0.4	
	-120										1.7	7.5	0.5	
	-150										2.1	9.6	0.6	
	-SLFB16Z- 90										1.4	5.3	0.4	
	-120										1.7	7.5	0.5	
	-150										2.1	9.6	0.6	




CODE	φD	φC	t	L	M	φC1	H	H1	W	Kg	N	S	
BT40-SLRB20Z- 90	20	38	9	90	42	53	40	46	17	1.5	5.9	0.3	4
-120				120						1.9	8	0.4	
-150				150						2.3	10.1	0.6	
-SLFB20Z- 90	20	38	9	90	42	53	40	46	17	1.5	5.9	0.3	4
-120				120						1.9	8	0.4	
-150				150						2.3	10.1	0.5	
BT40-SLRB25Z- 95	25	45	10	95	42	53	45	53	22	1.6	6.7	0.3	4
-125				125						2	8.8	0.4	
-SLFB25Z- 95	25	45	10	95	42	53	45	53	22	1.6	6.7	0.3	4
-125				125						2	8.8	0.4	
BT50-SLRA12Z-105	12	22	5	105	67	85	30	35	10	3.9	13	0.5	2
-135				135						4.5	14.8	0.6	
-165				165						5.1	16.1	0.7	
-195				195						5.6	18	0.8	
-SLRB12Z-165	12	26	7	165	127	85	30	35	10	5.1	17.3	0.6	3
-195				195						5.4	18.9	0.7	
-SLFB12Z-165	12	26	7	165	127	85	30	35	10	5.1	17.3	0.6	3
-195				195						5.4	18.9	0.7	
BT50-SLRA16Z-105	16	27	5.5	105	67	85	32	38	14	3.9	13.3	0.4	3
-135				135						4.3	15.4	0.5	
-165				165						5	17.2	0.6	
-195				195						5.3	18.8	0.8	
-SLRB16Z-165	16	32	8	165	127	85	32	38	14	5.1	17.5	0.5	3
-195				195						5.8	20.3	0.6	
-SLFB16Z-165	16	32	8	165	127	85	32	38	14	5.1	17.5	0.5	3
-195				195						5.8	20.3	0.7	
BT50-SLRB20Z-105	20	38	9	105	67	85	40	46	17	4.1	13.8	0.3	4
-135				135						4.8	17.2		
-165				165						5.5	20.7	0.4	
-SLFB20Z-105	20	38	9	105	67	85	40	46	17	4.1	13.8	0.3	4
-135				135						4.8	17.2		
-165				165						5.5	20.7	0.4	
BT50-SLRB25Z-110	25	45	10	110	72	85	45	53	22	4.3	15	0.3	4
-140				140						4.8	17.7		
-SLFB25Z-110	25	45	10	110	72	85	45	53	22	4.3	15	0.3	4
-140				140						4.8	17.7		



	Feature
	Shrink-fit Heater
	MONO 3°
	MONO CURVE
	2PIECE type
	UNO
	HYPER VERSION
Z	
STRAIGHT arbor	
OTHERS	
PERIPHERALS	
Technical data	

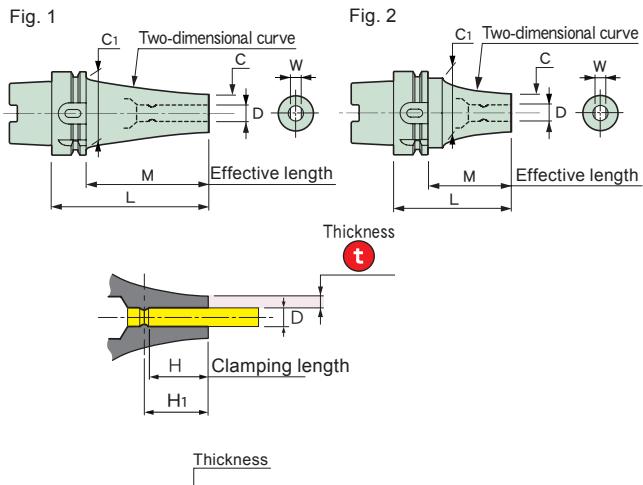HSK-A



An appropriate heating coil for HRD-02S

■ Std.Access.

- Coolant duct (fixed type) →P.246

■ Option

- The Z-shank (dedicated) tool is needed. →P.227

■ Note

- As for MST SLIMLINE, please use HEAT ROBO DENJI 5000S (HRD-02S) or HEAT ROBO Baby 3000S (HRB-03S).
- Refer to the table to choose an appropriate heating coil for HEAT ROBO DENJI 5000 (HRD-02S).
- Swing type coolant ducts are available upon request.

■ Caution

- Remove the coolant duct before heating the holder when you use hot air heater. →P.256

CODE	Fig.	φD	φC	t	L	M	φC1	H	H1	W	Kg lbs	N	S	
A63-SLRA8Z- 90	1	8	16	4	90	64	53	24	29	6.5	1	8.4	0.7	
											1.2	9.6	1	
											1.4	10.8	1.4	
-SLRB8Z- 90	2	8	18	5	90	52	53	24	29	6.5	1.1	10.9	0.6	
											1.4	14.1	0.8	
											1.8	17.2		
											2.2	20.4	0.9	
-SLFB8Z- 90	2	8	18	5	90	52	53	24	29	6.5	1.1	10.9	0.6	
											1.4	14.1	0.7	
											1.8	17.2		
											2.2	20.4	0.9	
A63-SLRA5/16Z- 90	1	5/16	.63	.16	3.54	2.52	2.09	.94	1.13	.25	2.2	8.4	0.7	
											2.6	9.6	1	
											3.1	10.8	1.4	
-SLRB5/16Z- 90	2	5/16	.71	.20	3.54	2.05	2.09	.94	1.13	.25	2.4	10.9	0.6	
											3.1	14.1	0.7	
											4	17.2		
											4.9	20.4	0.9	
-SLFB5/16Z- 90	2	5/16	.71	.20	3.54	2.05	2.09	.94	1.13	.25	2.4	10.9	0.6	
											3.1	14.1	0.7	
											4	17.2		
											4.9	20.4	0.9	
A63-SLRA10Z- 90	1	10	19	4.5	90	64	53	30	35	8.5	1	8.5	0.6	
											1.2	9.6	0.9	
											1.3	10.9	1.4	
-SLRB10Z- 90	2	10	22	6	90	52	53	30	35	8.5	1.1	11.1	0.5	
											1.5	14.3	0.7	
											1.6	17.4		
											2.3	20.6	0.8	
-SLFB10Z- 90	2	10	22	6	90	52	53	30	35	8.5	1.1	11.1	0.5	
											1.5	14.3	0.6	
											1.6	17.4		
											2.3	20.6	0.8	
A63-SLRA3/8Z- 90	1	3/8	.73	.18	3.54	2.52	2.09	1.18	1.38	.31	2.2	8.5	0.6	
											2.6	9.6	0.9	
											2.9	10.9	1.4	
-SLRB3/8Z- 90	2	3/8	.85	.24	3.54	2.05	2.09	1.18	1.38	.31	2.4	11.1	0.5	
											3.3	14.3	0.6	
											3.5	7.4		
											5.1	20.6	0.8	



CODE	Fig.	ϕD	ϕC	t	L	M	ϕC_1	H	H_1	W	Kg lbs	N	S
A63-SLFB3/8Z- 90	2	3/8	.85	.24	3.54	2.05	2.09	1.18	1.38	.31	2.4	11.1	0.5
-120					4.72						3.3	14.3	0.6
-150					5.91						3.5	17.4	
-180					7.09						5.1	20.6	0.8
A63-SLRA12Z- 90	1	12	22	5	90	64	53	30	35	10	1	8.5	0.6
-120					120						1.3	10.4	0.7
-150					150						1.5	11.7	1.1
-SLRB12Z- 90	2	12	26	7	90	52	53	30	35	10	1.1	11.4	0.4
-120					120						1.5	14.6	0.5
-150					150						1.6	17.7	0.6
-180					180						2.3	20.9	0.7
-SLFB12Z- 90	2	12	26	7	90	52	53	30	35	10	1.1	11.4	0.4
-120					120						1.5	14.6	0.5
-150					150						1.6	17.7	0.6
-180					180						2.3	20.9	0.7
A63-SLRA1/2Z- 90	1	1/2	.89	.20	3.54	2.52	2.09	1.18	1.38	.42	2.2	8.5	0.6
-120					4.72						2.9	10.4	0.7
-150					5.91						3.3	11.7	1.1
-SLRB1/2Z- 90	2	1/2	1.05	.28	3.54	2.05	2.09	1.18	1.38	.42	2.4	11.4	0.4
-120					4.72						3.3	14.6	0.5
-150					5.91						3.5	17.7	0.6
-180					7.09						5.1	20.9	0.7
-SLFB 1/2Z- 90	2	1/2	1.05	.28	3.54	2.05	2.09	1.18	1.38	.42	2.4	11.4	0.4
-120					4.72						3.3	14.6	0.5
-150					5.91						3.5	17.7	0.6
-180					7.09						5.1	20.9	0.7
A63-SLRA16Z- 90	2	16	27	5.5	90	52	53	32	38	14	1.1	11.6	0.4
-120					120						1.3	12.9	0.7
-SLRB16Z- 90	2	16	32	8	90	52	53	32	38	14	1.2	12	0.4
-120					120						1.6	15.1	
-150					150						2	18.3	0.6
-SLFB16Z- 90	2	16	32	8	90	52	53	32	38	14	1.2	12	0.4
-120					120						1.6	15.1	
-150					150						2	18.3	0.6
A63-SLRA5/8Z- 90	2	5/8	1.06	.22	3.54	2.05	2.09	1.26	1.5	.55	2.4	11.6	0.4
-120					4.72						2.9	12.9	0.7
-SLRB5/8Z- 90	2	5/8	1.25	.31	3.54	2.05	2.09	1.26	1.5	.55	2.6	12.0	0.4
-120					4.72						3.5	15.1	
-150					5.91						4.4	18.3	0.6
-SLFB5/8Z- 90	2	5/8	1.25	.31	3.54	2.05	2.09	1.26	1.5	.55	2.6	12.0	0.4
-120					4.72						3.5	15.1	
-150					5.91						4.4	18.3	0.6
A63-SLRB20Z- 90	2	20	38	9	90	42	53	40	46	17	1.3	12.7	0.3
-120					120						1.4	15.9	0.4
-150					150						2.1	19.1	0.5
-SLFB20Z- 90	2	20	38	9	90	42	53	40	46	17	1.3	12.7	0.3
-120					120						1.4	15.9	0.4
-150					150						2.1	19.1	0.5
A63-SLRB3/4Z- 90	2	3/4	1.46	.35	3.54	1.65	2.09	1.5	1.75	.63	2.9	12.7	0.3
-120					4.72						3.1	15.9	0.4
-150					5.91						4.6	19.1	0.5
-SLFB3/4Z- 90	2	3/4	1.46	.35	3.54	1.65	2.09	1.5	1.75	.63	2.9	12.7	0.3
-120					4.72						3.1	15.9	0.4
-150					5.91						4.6	19.1	0.5
A63-SLRB25Z- 95	2	25	45	10	95	42	53	45	53	22	1.4	13.9	0.3
-125					125						1.8	17.1	0.4
-SLFB25Z- 95	2	25	45	10	95	42	53	45	53	22	1.4	13.9	0.3
-125					125						1.8	17.1	0.4




	CODE	Fig.	ϕD	ϕC	t	L	M	ϕC_1	H	H_1	W	Kg lbs	N	S	Feature
	A 63 -SLRB1Z- 95	2	1"	1.79	.39	3.74	1.65	2.09	1.77	2.09	.88	3.1	13.9	0.3	
	-125					4.92						4	17.1	0.4	4
	A100-SLRA12Z-105	2	1"	1.79	.39	3.74	1.65	2.09	1.77	2.09	.88	3.1	13.9	0.3	
	-135					4.92						4	17.1	0.4	4
	-165														3
	-195														2
	A100-SLRA1/2Z-105	1	12	22	5	105	76	85	30	35	10	3	27.7	0.4	
	-135					135	106					3.3	29.9	0.6	3
	-165					165	136					3.7	31.3	0.8	
	-195					195	166					4.5	35.6		
	-SLRB12Z-165	1	12	26	7	165	136	85	30	35	10	4	34.3	0.6	
	-195					195	166					4.8	39.2		3
	-SLFB12Z-165	1	12	26	7	165	136	85	30	35	10	4	34.3	0.6	
	-195					195	166					4.8	39.2	0.7	3
	A100-SLRA1/2Z-105	1	1/2	.89	.20	4.13	2.99	3.35	1.18	1.38	.42	6.6	27.7	0.4	
	-135					5.31	4.17					7.3	29.9	0.5	3
	-165					6.50	5.35					8.2	31.3	0.8	
	-195					7.68	6.54					9.9	35.6		
	-SLRB1/2Z-165	1	1/2	1.05	.28	6.50	5.35	3.35	1.18	1.38	.42	8.8	34.3	0.6	
	-195					7.68	6.54					10.6	39.2	0.7	3
	-SLFB1/2Z-165	1	1/2	1.05	.28	6.50	5.35	3.35	1.18	1.38	.42	8.8	34.3	0.6	
	-195					7.68	6.54					10.6	39.2	0.7	3
	A100-SLRA16Z-105	1	16	27	5.5	105	76	85	32	38	14	3	28.1	0.4	
	-135					135	106					3.4	30.5	0.5	3
	-165					165	136					4	34.2	0.6	
	-195					195	166					4.3	36.6	0.8	
	-SLRB16Z-165	1	16	32	8	165	136	85	32	38	14	4	34.4	0.5	
	-195					195	166					4.5	37.6	0.6	3
	-SLFB16Z-165	1	16	32	8	165	136	85	32	38	14	4	34.4	0.5	
	-195					195	166					4.5	37.6	0.7	3
	A100-SLRA5/8Z-105	1	5/8	1.06	.22	4.13	2.99	3.35	1.26	1.50	.55	6.6	28.1	0.4	
	-135					5.31	4.17					7.5	30.5	0.5	3
	-165					6.50	5.35					8.8	34.2	0.6	
	-195					7.68	6.54					9.5	36.6		
	-SLRB5/8Z-165	1	5/8	1.25	.31	6.50	5.35	3.35	1.26	1.50	.55	8.8	34.4	0.5	
	-195					7.68	6.54					9.9	37.6	0.7	3
	-SLFB5/8Z-165	1	5/8	1.25	.31	6.50	5.35	3.35	1.26	1.50	.55	8.8	34.4	0.5	
	-195					7.68	6.54					9.9	37.6	0.7	3
	A100-SLRB20Z-105	1	20	38	9	105	76	85	40	46	17	3.1	28.7	0.3	
	-135					135	106					3.8	33.4		4
	-165					165	136					4.6	38.9	0.6	
	-SLFB20Z-105	1	20	38	9	105	76	85	40	46	17	3.1	28.7	0.3	
	-135					135	106					3.8	33.4		4
	-165					165	136					4.6	38.9	0.4	
	A100-SLRB3/4Z-105	1	3/4	1.46	.35	4.13	2.99	3.35	1.50	1.75	.63	6.8	28.7	0.3	
	-135					5.31	4.17					8.4	33.4		4
	-165					6.50	5.35					10.1	38.9	0.4	
	-SLFB3/4Z-105	1	3/4	1.46	.35	4.13	2.99	3.35	1.50	1.75	.63	6.8	28.7	0.3	
	-135					5.31	4.17					8.4	33.4		4
	-165					6.50	5.35					10.1	38.9	0.4	
	A100-SLRB25Z-110	1	25	45	10	110	81	85	45	53	22	3.1	29.7	0.3	
	-140					140	111					3.8	34.4		4
	-SLFB25Z-110	1	25	45	10	110	81	85	45	53	22	3.1	29.7	0.3	
	-140					140	111					3.8	34.4		4
	A100-SLRB 1Z-110	1	1"	1.79	.39	4.33	3.19	3.35	1.77	2.13	.88	6.8	29.7	0.3	
	-140					5.51	4.37					8.4	34.4		4
	-SLFB 1Z-110	1	1"	1.79	.39	4.33	3.19	3.35	1.77	2.13	.88	6.8	29.7	0.3	
	-140					5.51	4.37					8.4	34.4		4





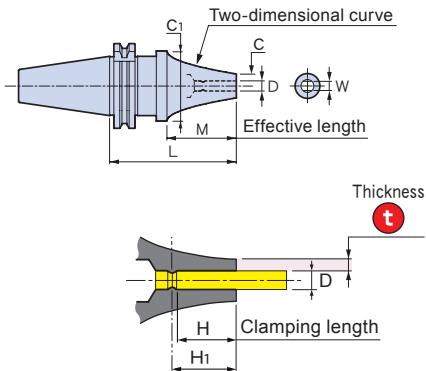DN40AD-SLRB16Z-90



An appropriate heating coil for HRD-02S

■ Option

- Retention knob → P.244

■ Note

- The Z-shank (dedicated) tool is needed. → P.227

■ Caution

- Retention knob → Use a retention knob with a hole, or remove the retention knob and heat it.
- Setting cutters → Be sure to insert the tool beyond the safety mark.
- As for MST SLIMLINE, please use HEAT ROBO DENJI 5000S (HRD-02S) or HEAT ROBO Baby 3000S (HRB-03S).
- Refer to the table to choose an appropriate heating coil for HEAT ROBO DENJI 5000 (HRD-02S).


CODE	φD	φC	t	L	M	φC1	H	H1	W	Kg	N	S	
DN40AD-SLRB 8Z- 90	8	18	5	90	52	50	24	29	6.5	1.1	7.8	0.6	
-120				120						53	1.5	10.9	0.7
-150				150							1.9	14.1	0.8
-180				180							2.3	17.3	0.9
-SLFB 8Z- 90	8	18	5	90	52	50	24	29	6.5	1.1	7.8	0.6	
-120				120						53	1.5	10.9	0.7
-150				150							1.9	14.1	0.8
-180				180							2.3	17.3	0.9
DN40AD-SLRB10Z- 90	10	22	6	90	52	50	30	35	8.5	1.2	8	0.5	
-120				120						53	1.6	11.2	0.6
-150				150							2	14.3	0.7
-180				180							2.3	17.5	0.9
-SLFB10Z- 90	10	22	6	90	52	50	30	35	8.5	1.2	8	0.5	
-120				120						53	1.6	11.2	0.6
-150				150							2	14.3	0.7
-180				180							2.3	17.5	0.8
DN40AD-SLRB12Z- 90	12	26	7	90	52	50	30	35	10	1.2	8.3	0.5	
-120				120						53	1.6	11.5	0.5
-150				150							2	14.6	0.6
-180				180							2.4	17.8	0.8
-SLFB12Z- 90	12	26	7	90	52	50	30	35	10	1.2	8.3	0.4	
-120				120						53	1.6	11.5	0.5
-150				150							2	14.6	0.6
-180				180							2.4	17.8	0.8
DN40AD-SLRB16Z- 90	16	32	8	90	52	50	32	38	14	1.3	8.8	0.4	
-120				120						53	1.7	12	0.5
-150				150							2.1	15.2	0.6
-SLFB16Z- 90	16	32	8	90	52	50	32	38	14	1.3	8.8	0.4	
-120				120						53	1.7	12	0.5
-150				150							2.1	15.2	0.6
DN40AD-SLRB20Z- 90	20	38	9	90	42	50	40	46	17	1.4	9.6	0.3	
-120				120						53	1.8	12.8	0.4
-150				150							2.2	16	0.6
-SLFB20Z- 90	20	38	9	90	42	50	40	46	17	1.4	9.6	0.3	
-120				120						53	1.8	12.8	0.4
-150				150							2.2	16	0.6



	CODE	ΦD	ΦC	t	L	M	ΦC1	H	H1	W	Kg	N	S	
	DN50AD-SLRA12Z-105	12	22	5	105	70	70	30	35	10	3.5	16.7	0.4	
	-135				135	100					3.9	18.4	0.6	
	-165				165	130					4.4	19.4	0.8	
	-195				195	160					4.5	20.6	1.2	
	-SLRB12Z-165	12	26	7	165	130	70	30	35	10	4.5	22.1	0.6	
	-195				195	160					4.8	24.4	0.8	
	-SLFB12Z-165	12	26	7	165	130	70	30	35	10	4.5	22.1	0.6	
	-195				195	160					4.8	24.4	0.8	
MONO 3°	DN50AD-SLRA16Z-105	16	27	5.5	105	70	70	32	38	14	3.5	17	0.4	
	-135				135	100					3.9	18.4	0.5	
	-165				165	130					4.5	22.1	0.7	
	-195				195	160					4.8	24.4	0.8	
	-SLRB16Z-165	16	32	8	165	130	70	32	38	14	4.4	21.8	0.6	
	-195				195	160					5.0	25.5	0.7	
	-SLFB16Z-165	16	32	8	165	130	70	32	38	14	4.4	21.8	0.6	
	-195				195	160					5.0	25.5	0.7	
MONO series	DN50AD-SLRB20Z-105	20	38	9	105	70	70	40	46	17	3.6	17.6	0.3	
	-135				135	100					4.0	21.0	0.4	
	-165				165	130					4.7	25.4	0.5	
	-SLFB20Z-105				105	70					3.6	17.6	0.3	
	-135	20	38	9	135	100	70	40	46	17	4.0	21	0.4	
	-165				165	130					4.7	25.4	0.5	
2PIECE type	DN50AD-SLRB25Z-110	25	45	10	110	75	70	45	53	22	3.7	18.8	0.3	
	-140				140	90					4.4	23.4	0.3	
UNO	-SLFB25Z-110	25	45	10	110	75	70	45	53	22	3.7	18.8	0.3	
	-140				140	90					4.4	23.4	0.4	



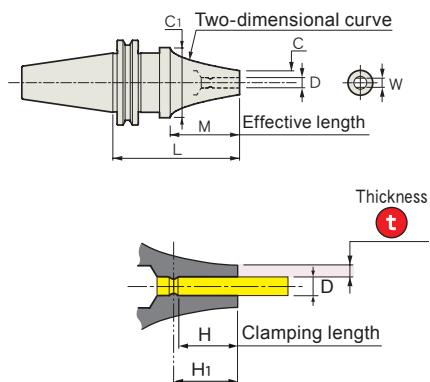CAT.



An appropriate heating coil for HRD-02S

■ Option

● Retention knob → P.244

■ Note

● The Z-shank (dedicated) tool is needed. → P.227

■ Caution

- Retention knob → Use a retention knob with a hole, or remove the retention knob and heat it.
- Setting cutters → Be sure to insert the tool beyond the safety mark.
- As for MST SLIMLINE, please use HEAT ROBO DENJI 5000S (HRD-02S) or HEAT ROBO Baby 3000S (HRB-03S).
- Refer to the table to choose an appropriate heating coil for HEAT ROBO DENJI 5000 (HRD-02S).

CODE	φD	φC	t	L	M	φC1	H	H1	W	lbs	N	S	
CT40-SLRB5/16Z- 95	5/16	.71	.20	3.74	2.05	2.09	.94	1.13	.25	2.6	7.6	0.7	2
-120				4.72						3.3	10.2		
-150				5.91						4.2	13.4	0.8	
-180				7.09						5.1	16.6	1	
-SLFB 5/16Z- 95	5/16	.71	.20	3.74	2.05	2.09	.94	1.13	.25	2.6	7.6	0.7	2
-120				4.72						3.3	10.2		
-150				5.91						4.2	13.4	0.8	
-180				7.09						5.1	16.6	1	
CT40-SLRB 3/8Z- 95	3/8	.85	.24	3.74	2.05	2.09	1.18	1.38	.31	2.6	7.7	0.6	3
-120				4.72						3.3	10.5		
-150				5.91						4.2	13.6	0.8	
-180				7.09						5.1	16.8	0.9	
-SLFB 3/8Z- 95	3/8	.85	.24	3.74	2.05	2.09	1.18	1.38	.31	2.6	7.7	0.6	3
-120				4.72						3.3	10.5		
-150				5.91						4.2	13.6	0.8	
-180				7.09						5.1	16.8	0.9	
CT40-SLRB 1/2Z- 95	1/2	1.05	.28	3.74	2.05	2.09	1.18	1.38	.42	2.9	8.1	0.5	3
-120				4.72						3.5	10.8	0.6	
-150				5.91						4.4	14	0.7	
-180				7.09						5.3	17.1	0.9	
-SLFB 1/2Z- 95	1/2	1.05	.28	3.74	2.05	2.09	1.18	1.38	.42	2.9	8.1	0.5	3
-120				4.72						3.5	10.8	0.6	
-150				5.91						4.4	14	0.7	
-180				7.09						5.3	17.1	0.9	
CT40-SLRB 5/8Z- 95	5/8	1.25	.31	3.74	2.05	2.09	1.26	1.5	.55	2.9	8.6	0.4	3
-120				4.72						3.5	11.3	0.5	
-150				5.91						4.4	14.5	0.7	
-SLFB 5/8Z- 95	5/8	1.25	.31	3.74	2.05	2.09	1.26	1.5	.55	2.9	8.6	0.4	3
-120				4.72						3.5	11.3	0.5	
-150				5.91						4.4	14.5	0.7	
CT40-SLRB 3/4Z- 95	3/4	1.46	.35	3.74	1.65	2.09	1.5	1.75	.63	3.3	9.2	0.4	4
-120				4.72						4	12	0.5	
-150				5.91						4.9	15.1	0.7	
-SLFB 3/4Z- 95	3/4	1.46	.35	3.74	1.65	2.09	1.5	1.75	.63	3.3	9.2	0.4	4
-120				4.72						4	12	0.5	
-150				5.91						4.9	15.1	0.7	



	CODE	ϕD	ϕC	t	L	M	ϕC_1	H	H_1	W			
Shrink-fit Heater	CT50-SLRA1/2Z-105	1/2	.89	.20	4.13	2.76	2.76	1.18	1.38	.42	7.7	16.3	0.4
	-135				5.31	3.94					8.6	18	0.6
	-165				6.50	5.12					9.5	18.9	0.8
	-195				7.68	6.30					10.6	22.1	
MONO 3° MONO CURVE	-SLRB1/2Z-165	1/2	1.05	.28	6.50	5.12	2.76	1.18	1.38	.42	9.9	21.7	0.6
	-195				7.68	6.30					10.6	24	0.8
	-SLFB1/2Z-165	1/2	1.05	.28	6.50	5.12	2.76	1.18	1.38	.42	9.9	21.7	0.6
	-195				7.68	6.30					10.6	24	0.8
MONO series	CT50-SLRA5/8Z-105	5/8	1.06	.22	4.13	2.76	2.76	1.26	1.50	.55	7.7	16.6	0.4
	-135				5.31	3.94					7.9	18.1	0.5
	-165				6.50	5.12					9.7	21.7	0.7
	-195				7.68	6.30					10.4	24	0.8
2PIECE type	-SLRB5/8Z-165	5/8	1.25	.31	6.50	5.12	2.76	1.26	1.50	.55	9.7	21.4	0.6
	-195				7.68	6.30					10.8	25.1	0.7
	-SLFB5/8Z-165	5/8	1.25	.31	6.50	5.12	2.76	1.26	1.50	.55	9.7	21.4	0.6
	-195				7.68	6.30					10.8	25.1	0.7
UNO	CT50-SLRB3/4Z-105	3/4	1.46	.35	4.13	2.76	2.76	1.50	1.75	.63	7.9	17.2	0.3
	-135				5.31	3.94					8.8	20.5	0.4
	-165				6.50	5.12					10.4	24.9	0.5
	-SLFB3/4Z-105				4.13	2.76					7.9	17.2	0.3
	-135				5.31	3.94					8.8	20.5	0.4
	-165				6.50	5.12					10.4	24.9	0.5
	CT50-SLRB 1Z-110	1"	1.79	.39	4.33	2.95	2.76	1.77	2.13	.88	8.2	18.4	0.3
	-140				5.51	3.94					9.5	22.7	0.4
	-SLFB 1Z-110	1"	1.79	.39	4.33	2.95	2.76	1.77	2.13	.88	8.2	18.4	0.3
	-140				5.51	3.94					9.5	22.7	0.4



Feature

Shrink-fit Heater

MONO 3°
MONO CURVE

MONO series

HYPER
VERSIONSTRAIGHT
arbor

OTHERS

PERIPHERALS

Technical
data

236

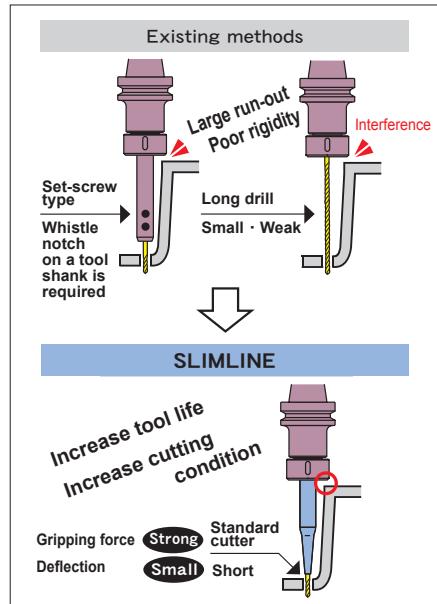
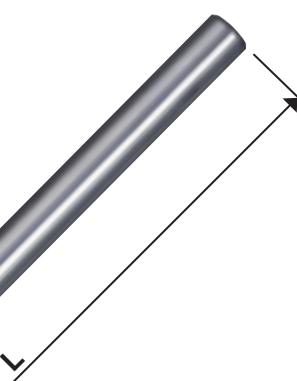
STRAIGHT ARBOR



Steel shank

Carbide shank

•Slimer •Longer •Stronger



ST 10 C - SL SA 3 - 110 - M42

Carbide shank

SLIMLINE

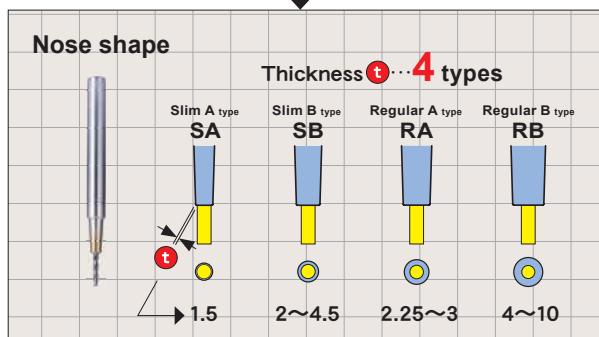
ϕD

L

Effective length

METRIC
10
12
16
20
25
32
42

INCH
19.05
25.4






	Feature
	Shrink-fit Heater
	MONO 3° MONO CURVE
	MONO series
	2PIECE type
	UNO
	HYPER VERSION
	Z
STRAIGHT arbor	OTHERS
PERIPHERALS	
Technical data	

Standard type




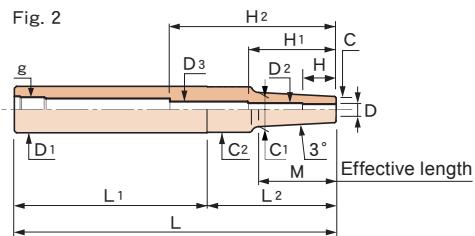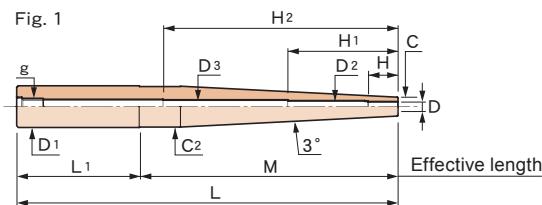ST25-SLSA10-255



■Caution

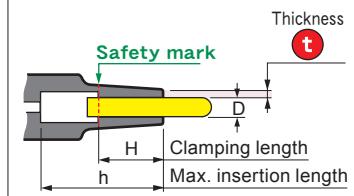- Setting cutters · Be sure to insert the tool beyond the safety mark.



CODE	Fig.	φD	φC	t	L	M	D1	H	L1	L2	φC1	φC2	g	h	Kg lbs	φD2	φD3	H1	H2		
ST10-SLSA3- 80-M 35	1	3	6	1.5	80	35	10	9	45	—	—	9.3	M 6	64	0.03	4	—	49.6	—		
ST16-SLRA3- 90-M 22	2	7.5	2.25	90	22	16		60	30	9.8	15.5	M10	62	0.09			33.7				
-SLSA3-115-M 42		6	1.5	115	42			55	10.4				87		0.1		53.7				
-SLRA3-115-M 42		7.5	2.25					65	50	11.9											
-SLSA3-140-M 67		6	1.5	140	67			60	80	13				112			6	54.4	84.3		
-SLRA3-140-M 67		7.5	2.25					65	75	14.5											
ST20-SLRA3-175-M 97				175	97	20		70	105	17.7	19.5		147					53.4	109.3		
-SLSA3-200-M 97		6	1.5	200				90	110	16.2				172	0.3			54.4	104.3		
ST25-SLSA3-245-M 97				245		25		120	125		24.5		217	0.6			5	49.7	105.3		
-SLRA3-245-M 97		7.5	2.25							17.7								47.5	99.5		
-SLSA3-315-M195	1		6	1.5	315	195				—	—							49.7	112.1		
-SLRA3-315-M 67	2		7.5	2.25		67			220	95	14.5				287	0.9			75.3		
ST10-SLSA3.175-80-M35	1	3.175	6.175	1.5	80	35	10	10	45	—	—	9.3	M 6	64	0.03	4	—	49.6	—		
ST19.05-SLS1/8-200	2	1/8	.24	.059	7.87	3.82	.750	.38	3.54	4.33	.64	.728	M10	7.20	0.62	.16	.24	2.16	4.13		
ST10-SLSA4- 80-M 35	1	4	7	1.5	80	35	10	12	45	—	—	9.5	M 6	64	0.03	5	—	50	—		
ST16-SLRA4- 90-M 22	2		10	3	90	22	16		60	30	12.3	15.5	M10	62	0.09			34			
-SLSA4-115-M 42		7	1.5	115	42			55	11.4				87		0.1			64			
-SLRA4-115-M 42		10	3					65	50	14.4								54			
-140-M 60	1			140	60			80	—	—				112					64		
ST16-SLSA4-140-M 67	2		7	1.5		67			60	80	14						6	64.7	84.3		
ST20-SLRA4-175-M 95	1		10	3	175	95	20		80	—	—	19.5						53.7	99.3		
-SLSA4-200-M 97	2		7	1.5	200	97			90	110	17.2				147	0.3			7	39.4	104.5
ST25-SLSA4-245-M 97				245		25		120	125		24.5			172					6	49.7	105.6
-SLRA4-245-M 97			10	3							20.2				217	0.6				50.5	100.5
-315-M 67				315	67			220	95	17										70.5	
-SLSA4-315-M195	1				7	1.5			120	—	—								49.7	112.4	
ST19.05-SLS3/16-200	1	3/16	.31	.059	7.87	4.33	.750	.59	3.54			.728	M10	7.20	0.55	.24	—	2.76	—		
ST10-SLSA5- 80-M 35	5	8	1.5		80	35	10	15	45			9.5	M 6	70	0.03			—			
ST20-SLSA5-200-M110					200	110	20		90			19.2	M10	182	0.3	6			69.3		
ST25-SLSA5-290-M 97	2				290	97	25		180	110	18.2	24.5					272	0.8			
																	7	69.7	114.5		


CODE	Fig.	ϕD	ϕC	t	L	M	D ₁	H	L ₁	L ₂	ϕC_1	ϕC_2	g	h	Kg lbs	ϕD_2	ϕD_3	H ₁	H ₂	Feature	
ST12-SLSA6- 80-M 35	1	6	9	1.5	80	35	12	18	45	—	—	11.5	M 8	52	0.04	—	—	—	—	O	
ST16-SLSA6-115-M 42	2																			84.5	
-SLSB6-115-M 42			10	2	115	42	16	65	50	14.4	15.5	M10	87	0.1	—	7	—	—	54.5		
ST20-SLRB6-120-M 42			14	4																	
ST16-SLSB6-140-M 60	1	10	2	1.5	140	60	16	70	18.4	19.5	15.5	M10	92	0.2	—	—	—	—	64.5		
-SLSA6-140-M 70																			74.5		
ST20-SLSA6-175-M105																			109.5		
-SLSB6-175-M 95																			99.5		
-SLRB6-175-M 60																			64.5		
ST25-SLSB6-205-M127	2	10	2	1.5	205	127	25	70	135	23.3	24.5	M10	112	0.1	—	—	—	—	—	104.5	
-SLSA6-230-M 97																				94.5	
-SLRB6-240-M 42																				11 50.8 160	
ST32-SLSB6-255-M157		10	2	255	157	32		70	185	26.5	31.5	M16	227	0.8		8	49.7	107.4			
ST25-SLSA6-305-M185	1	9	1.5	305	185	25		120	110	19.2		M10	277					91.7	166.1		
ST32-SLRB6-345-M 67	2	14	4	345	67	32	250	95	21	31.5	M16	317	1.6	—	—	—	—	—	—	50.5 73.5	
-SLSB6-375-M157																				49.7 107.4	
ST19.05-SLS1/4-200	2	1/4	.37	.059	7.87	3.94	.750	.71	3.94	3.94	—	.728	M10	7.20	0.55	.28	—	2.76	—	O	
ST25-SLSA7-230-M 97	2	7	10	1.5	230	97	25	20	120	110	20.2	24.5	M10	212	0.5	8	—	69.8	—	O	
-320-M 97																				302 0.9 7.5 44.7	
ST20-SLRB8-100-M 30	1	8	18	5	100	30	20	24	70	—	—	19.5	M10	72	0.2	—	—	—	—	O	
ST16-SLSA8-115-M 50																				87 0.1	
ST20-SLSB8-145-M 70																				117 0.2	
ST25-SLRB8-160-M 42	2	18	5	160	42	25		110	50	22.4	24.5			132	0.5						
ST20-SLSA8-175-M 85	1	11	1.5	175	85	20		90	—	—	19.5			147	0.3						
ST25-SLSB8-175-M 97	2	13	2.5		97	25		70	105	23.2	24.5			0.4		—	—	—	—		
-SLRB8-210-M 90																				182 0.6 9 11 71.4 150	
-SLSA8-230-M 97	2	11	1.5	230	97				110	21.2										202 — — — —	
-SLSB8-260-M140	1	13	2.5	260	140															232 0.7 9 11 121.4 200	
-SLSA8-280-M160		11	1.5	280	160															252 141.4 220	
ST32-SLRB8-285-M67	2	18	5	285	67	32		190	95	25	31.5	M16	257	1.3		—	—	—	—	Z	
-SLSB8-375-M157																				185 14 75.8 14.1 94.1 166.4	
ST25-SLSA9-230-M 97	2	9	12	1.5	230	97	25	30	120	110	22.2	24.5	M10	60	0.6	9.6	—	61	—	O	
-320-M 97																					
ST25.4-SLS3/8-230	2	3/8	.49	.059	9.06	3.82	1	11.18	4.72	4.33	.89	.965	M10	2.36	1.43	.40	—	2.40	—	O	
ST25-SLRB10-120-M 35	1	10	22	6	120	35	25	30	85	—	—	24.5	M10	60	0.4	10.6	—	61	—	O	
ST20-SLSB10-120-M 50																				0.2	
ST25-SLSB10-145-M 67	2																			0.4	
ST20-SLSA10-145-M 70	1	13	1.5			70	20		75	23	24.5									0.2	
ST25-SLSB10-175-M105		16	3	175	105	25		70	—	—	24.5			154	0.5	11	155				
-SLRB10-210-M 90		22	6	210	90			120	—	—	149	0.7								150	
ST32-SLSB10-240-M170		16	3	240	170	32		70	—	—	31.5	M16	212	0.9						14 151.1 200	
ST25-SLSA10-255-M135		13	1.5	255	135	25		120	—	—	24.5	M10	194	0.7						— 195 —	
-SLSB10-275-M105		16	3	275	105			170	—	—	—	—								0.8	
ST32-SLRB10-285-M 67	2	22	6	285	67	32		190	95	29	31.5	M16	257	1.4						14 76.1 185	
-SLSA10-340-M210	1	13	1.5	340	210			130	—	—				312	1.3					191.1 270	
-SLSB10-360-M170		16	3	360	170			190	—	—	332	1.5								151.1 260	
ST42-SLSB10-445-M157	2				445	157	42		260	185	32.5	41.5	M24	417	2.7					97.1 165	
ST25-SLSA11-230-M110	1	11	14	1.5	230	110	25	30	120	—	—	24.5	M10	60	0.6	11.6	—	61	—	O	
-320-M110						320			210	—	—	—	—								

CODE		Fig.	φD	φC	t	L	M	D ₁	H	L ₁	L ₂	φC ₁	φC ₂	g	h	Kg lbs	φD ₂	φD ₃	H ₁	H ₂	Feature
ST25-SLSB12-120-M 42	2	12	19	3.5	120	42	25	30	70	50	23.4	24.5	M10	60	0.3	12.6	—	61	—	○	
ST20-SLSA12-120-M 50	1	15	1.5		50	20				—	—	19.5			0.2					X	
ST32-SLRB12-140-M 60		26	7	140	60	32		80				31.5	M16	112	0.7	13		109.5		○	
ST25-SLSB12-150-M 80		19	3.5	150	80	25		70				24.5	M10	60	0.4				11 61 130		
ST32-SLSB12-220-M150				220	150	32						31.5	M16	192	0.9				14 131.7 180		
ST25-SLSA12-230-M110		15	1.5	230	110	25		120				24.5	M10	60	0.6	12.6	11	61	—		
-SLSB12-250-M 80		19	3.5	250	80			170							0.8	13			170		
ST32-SLRB12-260-M 70		26	7	260	70	32		190				31.5	M16	232	1.3				14 51.7 160	X	
-SLSA12-315-M185		15	1.5	315	185			130						287	1.2				166.7 245	○	
-SLSB12-340-M150		19	3.5	340	150			190						312	1.5				131.7 240		
ST42-SLSB12-445-M157	2			445	157	42		260	185	35.5	41.5	M24	417	2.8	12.6			59.5 162.5	X		
ST25.4-SLS1/2-230	1	1/2	.62	.059	9.06	4.33	1	1.18	4.72	4.33	—	.965	M10	2.36	1.33	.52	—	2.40	—		
ST32-SLRB16-175-M 45	1	16	32	8	175	45	32	32	130	—	—	—	M16	80	0.8	16.6	—	81	—		
ST25-SLSB16-175-M 50		24	4		50	25		125					M10		0.5						
ST32-SLSB16-290-M100				290	100	32		190				31.5	M16		1.4	17	14		190		
ST42-SLRB16-355-M 67	2	32	8	355	67	42		260	95	39	41.5	M24	327	2.7		21	73.5	—			
-SLSB16-445-M157	1	24	4	445	157				—	40.5				417	3				165.8 424.5		
ST42-SLRB20-170-M 70	1	20	38	9	170	70	42	40	100	—	—	41.5	M24	142	1.3	21	21	109.5	154		
ST32-SLSB20-175-M 50		29	4.5	175	50	32			125			31.5	M16	80	0.8		—	81	—		
ST42-SLSB20-255-M155				255	155	42		100				41.5	M24	227	1.7			22	194.5		
-SLRB20-330-M 70		38	9	330	70			260						302	2.6			22.6	189.5 314		
-SLSB20-415-M155		29	4.5	415	155									387	2.9	21.6	22	69.5	135		
ST42-SLRB25-170-M 42	2	25	45	10	170	42	42	45	100	70	49.6	53	M24	120	1.5	26	22.6	121	154		
-250-M 42					250				180		49.4	50			80	2.1	25.6	22	81	—	






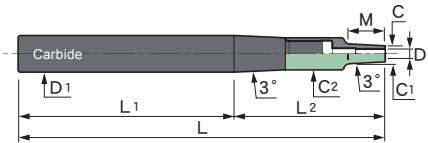Carbide type




Thickness

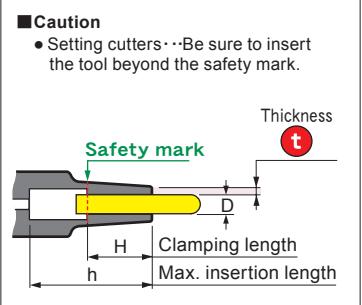

CODE	ϕD	ϕC	t	L	M	D ₁	H	L ₁	L ₂	ϕC_1	ϕC_2	h	Kg	ϕD_2	ϕD_3	H ₁
ST10C-SLSA 3-160	3	6	1.5	160	12	10	9	120	40	7.3	10	19	0.2	4	—	17
ST16C-SLSA 3-280																
ST10C-SLSA 4-160	4	7	1.5	160	12	10	12	120	40	8.3	10	19	0.2	5	—	17
ST16C-SLSA 4-280																
ST12C-SLSB 6-175	6	10	2	175	19.1	12	18	125	50	—	12	27	0.3	7	—	25
ST16C-SLSB 6-225																
ST20C-SLSB 6-320																
ST25C-SLSB 6-360																
ST16C-SLSB 8-225	8	13	2.5	225	22	16	24	165	60	15.3	16	32	0.6	9	—	28
ST20C-SLSB 8-270																
ST25C-SLSB 8-360																
ST20C-SLSB10-270	10	16	3	270	22	20	30	200	70	18.3	20	38	1.1	11	—	33
ST25C-SLSB10-360																

The Parts Code List for Carbide Straight Arbor

SET-CODE	CARBIDE SHANK	HEAD
ST10C-SLSA 3-160	ST10C- 7 -120	SH 7 -SLSA 3-40
-SLSA 4-160		-SLSA 4-40
ST12C-SLSB 6-175	ST12C- 9 -125	SH 9 -SLSB 6-50
ST16C-SLSA 3-280	ST16C- 7 -240	SH 7 -SLSA 3-40
-SLSA 4-280		-SLSA 4-40
-SLSB 6-225		SH12.5 -SLSB 6-60
-SLSB 8-225		SH12.5 -SLSB 8-60
ST20C-SLSB 6-320	ST20C-12.5-260	SH12.5 -SLSB 6-60
-SLSB 8-270		SH16 -SLSB 8-70
-SLSB10-270		SH16 -SLSB10-70
ST25C-SLSB 6-360	ST25C-16 -290	SH16 -SLSB 6-70
-SLSB 8-360		-SLSB 8-70
-SLSB10-360		-SLSB10-70

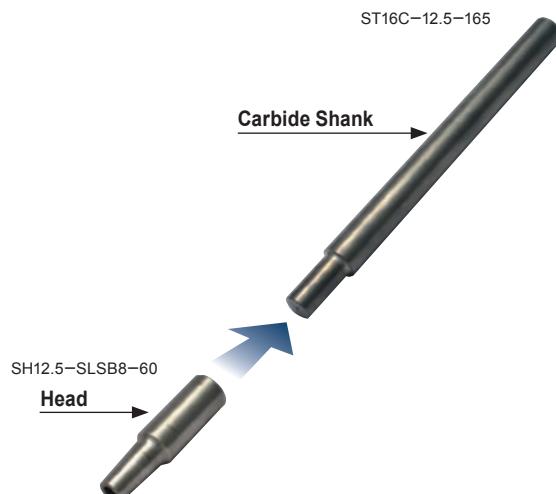

Feature
Shrink-fit Heater
MONO 3°
MONO CURVE

MONO Series
2PIECE type
UNO

HYPER VERSION
Z
STRAIGHT arbor

OTHERS
PERIPHERALS
Technical data



The other holders

COLLET HOLDER (CTH/CTS)




E32-CTH10-55

E32-CTS10-50




Spring collet



CODE Precision Collet	ϕD	L	ϕD_1	H	Holder type
C10-D-P	2.6 ~ 5.8 (0.2mm steps)	26	17.2	18	CTH10
	6 ~ 10 (0.2mm steps)			20	
C20-D-P	6 ~ 9.8 (0.2mm steps)	50	29.5	29	CTH20
	10 ~ 15.8 (0.2mm steps)			33	
	16 ~ 20 (0.2mm steps)			40	


Spanner / Wrench



CODE	Fig.	Shank type	R	L
FC-32	1	E32 - CTH10 E40 - CTH10	16	120
-36		F63 - CTH10	18	208
-50		- CTH20	25	281
RC-26	2	E32 - CTS10	—	240

Accuracy

Runout accuracy	Nominal shank size
Precision Collet	5 μm



※ Accuracy of collet alone

D	L
~ 10	4 \times D
10.2 ~ 20	40


CODE	Fig.	ϕD	L	ϕC	L1	Kg
E32-CTH10-55	1	2.4 ~ 10	55	32	35	0.2
-CTS10-50 (※)	2		50	26	30	
E40-CTH10-55	1		55	32	35	0.4
E50-CTH10-60			60	36	34	0.7
-90			90		64	0.9
-CTH20-75		5.8 ~ 20	75	50	49	
F63-CTH10-60		2.4 ~ 10	60	36	34	0.9
-90			90		64	1.1
-CTH20-75		5.8 ~ 20	75	50	49	

■ Option • Spring collet • Spanner

■ Caution •※ It cannot use collapsibility of a collet.

The holding diameter applies only to the reference diameter of collet.

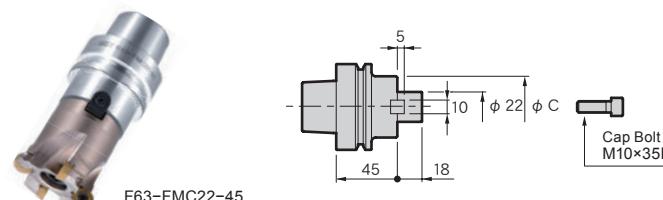Face Mill Arbor (FMC)






CODE	Cutter dia	ϕC	Kg
E50-FMC22-45	50 , 63	42	0.7
F63-FMC22-45		45	1.0

■ Std. Access. • Cap Bolt • Stopper Key

■ Note • The cap bolt may differ depending upon the shape of the cutter.

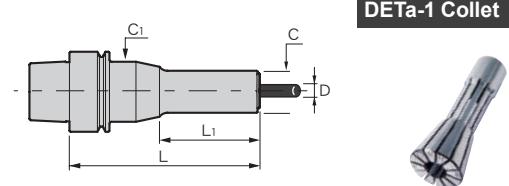DETa-1 Collet Holder (DTA / DTB)



CODE	ϕD	L	ϕC	L1	Kg	N
E25 -DTB 3- 58	0.5 ~ 3.175	58	10	27	0.1	0.4
E32 -DTA 3- 75	0.5 ~ 3.175	75	10	27	0.2	1.8
		65			0.2	0.6
-DTB 3- 65						
-DTB 7- 65K*	1 ~ 7		21	33		0.9
E40 -DTA 3- 75	0.5 ~ 3.175	75	10	27	0.2	1.7
-DTB 3- 70	0.5 ~ 3.175	70			0.3	0.9
-DTB 7- 95	1 ~ 7	95	21	50	0.4	1.6
DTB12-110	2.5 ~ 13	110	30	90	0.5	2.8
E50 -DTA 3- 80	0.5 ~ 3.175	80	10	27	0.5	2.1
		75				1.7
-DTB 3- 75						
-DTB 7-100	1 ~ 7	100	21	50	0.6	3.2
-DTB12-115	2.5 ~ 13	115	30	89	0.8	4.2
F63 -DTA 3- 90	0.5 ~ 3.175	90	10	27	0.8	2.3
		120			0.9	2.7
-120		75			0.7	2.1
		105			0.8	2.5
-DTB 3- 75						
-105						
-105L						
F63M-DTB 7-100	1 ~ 7	100	21	50	0.9	3.3
-DTB12-120	2.5 ~ 13	120	30	70	1.1	4.8

CODE	ϕD	Collap-sibility	$\phi D1$	L	H1	H2	Holder type
Precision Collet	D 3- 0.6-P	0.1	7	40	36	6.9	DTA 3 DTB 3
	- 0.8-P	0.2					
	- 1 -P	0.8 ~ 1.0					
	- 1.5-P	1.0 ~ 1.5					
	- 2 -P	1.5 ~ 2.0					
	- 2.5-P	2.0 ~ 2.5					
	- 3 -P	2.5 ~ 3.0					
	- 3.175-P	2.7 ~ 3.175					
	D 7- 1.5-P	0.5	17	50	36	7	DTA 7 DTB 7
	- 2 -P	1.5 ~ 2					
	- 2.5-P	2 ~ 2.5					
	- 3 -P	2.5 ~ 3					
	- 4 -P	3 ~ 4					
	- 5 -P	4 ~ 5					
	- 6 -P	5 ~ 6					
	- 7 -P	6 ~ 7					
D12- 4 -P	2.5 ~ 4	1.5	26	70	50	16	DTB12
	- 6 -P	4 ~ 6					
	- 8 -P	6 ~ 8					
	- 10 -P	8 ~ 10					
	- 12 -P	10 ~ 12					
	- 13 -P	11 ~ 13					

■Option *DETa-1 Collet • Wrench

■Std.Access. •Rod(DTA3)


■Caution *※=It cannot use collapsibility of a collet. The holding diameter applies only to the reference diameter of collet.

*HSK-E and F shank don't come with a coolant duct and cannot be attached. Consult us if you need it.

Accuracy

Runout accuracy	D3	D7-D12
Precision Collet	3 (6) μm	5 (10) μm

※Accuracy of collet alone,
() means collapsibility usable.




Spanner · Wrench

Fig.1	
Fig.2	
Fig.3	
Fig.4	
Fig.5	
CODE	Shank type
F -22	DTA 3
DW-2.5-110	DTB 3
TW-4	E32 - DTB 7
-5	- DTB 7
-6	DTB12
W -135DR	E40 - DTB12
	F63M - DTB 7 - DTB12
Clamping torque (kgf)	
0.2 ~ 0.3	

Cleaning Tool (DTA3 / DTB3)


Please use to clean the inside of the holder.




CODE	Q'ty
PCT01-10	10
-25	25

Rod (DTA3 type)

The rod is required to a collet when attaching to the DTA 3 type holder.



CODE	Shank type	Q'ty
PR-DTA3	DTA3	2

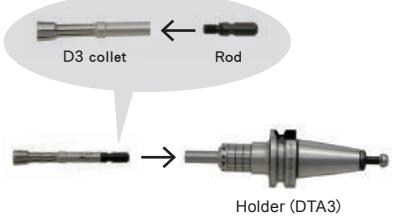

Feature

Shrink-fit Heater
MONO 3°
MONO CURVE

MONO Series
2PIECE type
UNO

HYPER VERSION
Z
STRAIGHT arbor

OTHERS
PERIPHERALS
Technical
Information

243

Retention knob

Feature
Shrink-fit Heater
MONO 3°
MONO CURVE

MONO series

2PIECE type

UNO

HYPER VERSION

Z

STRAIGHT arbor

OTHERS

PERIPHERALS

Technical data




■ Caution


- Retention knobs in this catalog are typical models for various machine tool companies. Confirm the correct retention knob design using the machine specifications sheet.
- We manufacture other kinds of retention knobs. Please consult us for the detail.
- When heating Mono Series shrink-fit holders, use a retention knob with a through-hole or remove the retention knob before heating. If you use a retention knob without a through-hole for the Mono Series shrink-fit holders, a cutter cannot be inserted into the holder because the air in the holder is not released. We can provide you with a retention knob with an air drain hole.

Compatible manufacturers	Standard type						For through spindle coolant type		
	BT30		BT40		BT50		BT30	BT40	BT50
	Standard type	Standard type with a through hole	Standard type	Standard type with a through hole	Standard type	Standard type with a through hole			
OKUMA	—		P40T-2 (MB series)	P-339	P50T-2	P-419	—	P-499	P-419
OKK	—		P40T-1 (MILLAC series)	P-297			—	—	—
OHTORI	—		P40T-1	—	P-143	—	—	—	—
KITAMURA	P30T-1 P-399 (Mycenter-1Xi)	P-445	P-348	P-323-1	P-400		—	P-323-1	P-400
KIRA	P30T-1	P-445	P40T-1	P-297	—		—	P-323-1	—
KIWA	P30T-1	P-445	P-348	P-323-1	P-400		—	P-323-1	P-400
KURASHIKI	—		P40T-1	P-297	P50T-1	P-299	—	—	—
KOMATSU NTC	P30T-1	P-445	P40T-1	P-297	P50T-1	P-299	P-522	P-505	P-384
JTEKT	—		P40T-1	P-297	P50T-1	P-299	—	P-297	P-299
SHIZUOKA	P30T-1	P-445	P-141	P-498	P-143	P-402	—	—	—
SNK	—		P40T-2	P-339	P50T-2	P-419	—	—	—
SUGINO	P30T-2	P-497	—	—	—	—	—	—	—
DMG MORI	P30T-1	P-445	P-141	—	P-143	—	—	P-435	P-513
TOSHIBA MACHINE	—		—	—	P50T-1	P-299	—	—	—
NIIGATA MACHINE TECHNO	—		—	—	P50T-2	P-419	—	—	—
FANUC	P30T-1	P-522	—	—	—	—	P-522	—	—
BROTHER	P30T-2	P-511	—	—	—	—	P-511	—	—
HOWA	P30T-1	P-445	P40T-1 (V series)	P-297	P50T-1	P-299	—	—	—
MAKINO	—		P-348	P-323-1 (aseries, Dseries)	P-400 (aseries, aseries)	—	—	P-323-1	P-299
MATSUURA	P30T-2	P-511	P-348	P-323-1	P50T-2	P-419	—	P-323-1	—
—	P-399	—	—	—	—	—	—	—	—
MITSUI SEIKI	—		P-007	—	P-008	P-250	—	—	—
MITSUBISHI	—		P40T-1	—	P50T-2	—	—	—	—
YASDA	—		P-348	P-438	P50T-1	P-299	—	P-509	P-459
YAMAZAKI GIKEN	—		P40T-1	P-297	—	P-400 (YBM1218V)	—	—	P-288-1 (YBM1218V)
MAZAK	—		—	P-227	P50T-2	P-419	—	—	—
				P-227	—	P-514	—	P-227	P-514

■ BT30






CODE	ϕD	ϕd	θ	NOTE
P30T-1	7	—	45	MAS-1
P-445		3		P30T-1 through hole
P30T-2		—	60	MAS-2
P-497		2		P30T-2 through hole
-522	8	4	45	FANUC center-through
-511	7.5	2.5	60	BROTHER center-through



CODE	NOTE
P-399	JIS30P


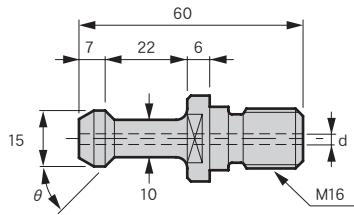
■ BT40



CODE	ϕd	θ	NOTE
P40T-1	—	45	MAS-1
P-297	4		P40T-1 through hole
P40T-2	—	60	MAS-2
P-339	4		P40T-2 through hole
P-141	—	90	—
-498	4		P-141 through hole
-505	3	45	KOMATSU NTC center-through

CODE	ϕd	NOTE
P-348	—	JIS40P
-323-1	7	P-348 through hole
-499	4	OKUMA center-through
-438	7	YASDA through hole
-509		YASDA center-through




CODE	NOTE
P-007	MITSUI SEIKI



CODE	NOTE
P-227	MAZAK

CODE	NOTE
P-435	DMG MORI center-through

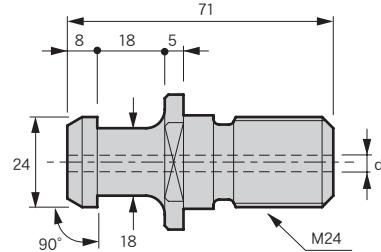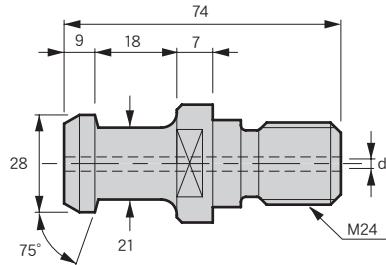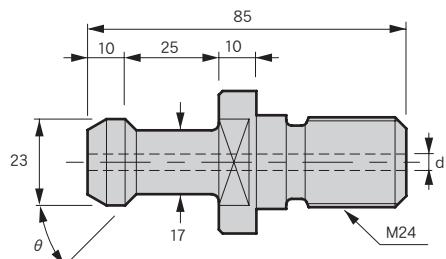
■ BT50



CODE	ϕd	θ	NOTE
P50T-1	—	45	MAS-1
P-299	6		P50T-1 through hole
P50T-2	—	60	MAS-2
P-419	6		P50T-2 through hole
P-143	—	90	—
-402	7		P-143 through hole
P-459	7	45	YASDA center-through
-513	8	90	DMG MORI center-through
-384	5.5	45	KOMATSU NTC center-through

CODE	ϕd	NOTE
P-400	10	JIS50P
-288-1	6	P-400 through hole

CODE	ϕd	NOTE
P-008	—	MITSUI SEIKI
-250	8	P-008 through hole

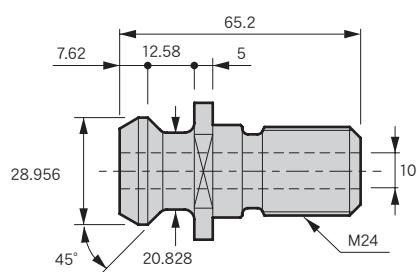

CODE	NOTE
P-514	MAZAK

SLIMLINE collet installation

You can install a SLIMLINE collet without removing the retention knob if the center hole dia. is more than 6mm.



Feature
Shrink-fit Heater

MONO 3°
MONO CURVE

MONO Series
2PIECE type

UNO

HYPER VERSION

Z

STRAIGHT
arbor

OTHERS


PERIPHERALS
Technical

Coolant duct(HSK-A)

Coolant duct (fixed type)


A coolant duct comes with below shank holders as a standard accessory.

CODE	Fig.	ϕC	L	ϕD	W	G	
CD 40-01	1	8	29.5	4	4	M12X1	HSK-A40
-03	3						
-04							
CD 50-01	1	10	33	5	5	M16X1	HSK-A50
-03	3						
-04							
CD 63-01	1	12	36.5	6	6	M18X1	HSK-A63
-02	2						
-03	3						
-04							
CD100-01	1	16	44	8	8	M24X1.5	HSK-A100
-02	2						

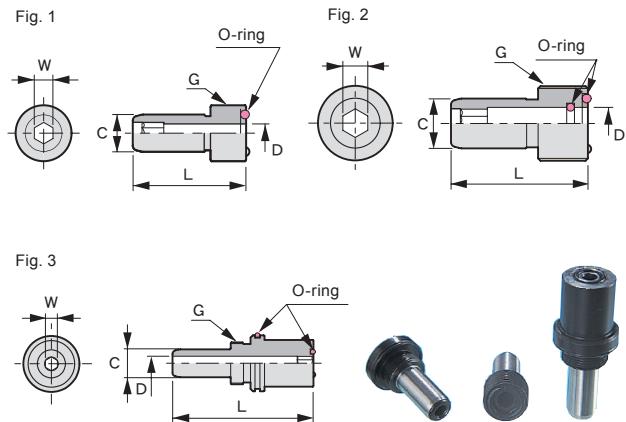


Dummy duct

CODE	ϕC	L	W	G	
CD 40-A1	8	29.5	4	M12X1	HSK-A40
CD 50-A1	10	33	5	M16X1	-A50
CD 63-A1	12	36.5	6	M18X1	-A63
CD100-A1	16	44	8	M24X1.5	-A100

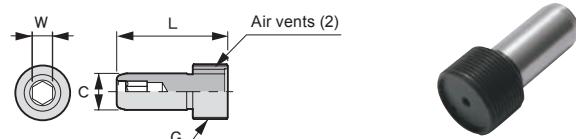

⚠ Cautions for shrinking operation.


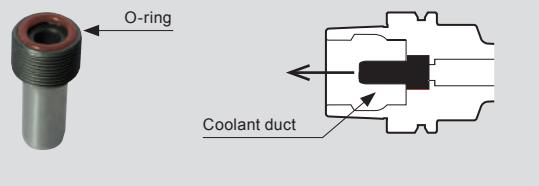
Remove the coolant duct when using the hot air heater.
If not, the O-ring will be damaged by the heat.
(Removal is not necessary with the induction heater.)
Use the dummy duct when the spindle coolant capability is not in use.
The dummy duct does not need to be removed when heated.



Coolant duct (Swing type)

Some machine tool companies recommend using a swing type coolant duct.
We can exchange our standard fixed type coolant duct with a swing type at your request.

CODE	Fig.	ϕC	L	ϕD	G	
CD 63-01F	1	12	36.5	7	M18X1	HSK-A63
-03F	2					
CD100-01F	1	16	44	10	M24X1.5	-A100



TOOL SET UP STATION

For details, please see our website!
<http://www.mst-corp.co.jp>

Work table

6S DESK

- Helps in the rapid implementation of the 5 S's in your factory.
- Ensures safe tool settings.
- Easy-to-assemble, simple, compact, prefabricated type.

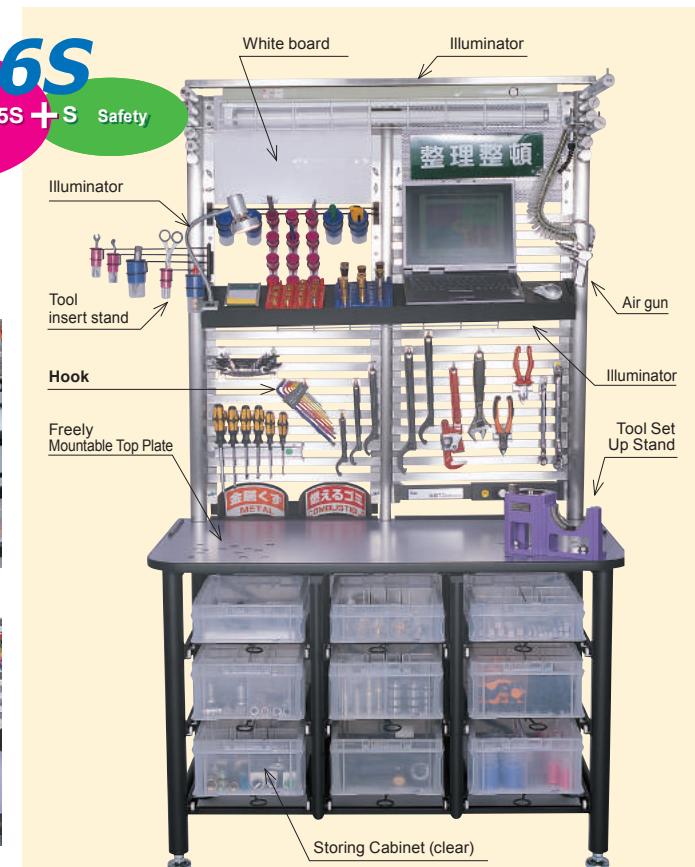


CODE
6SD-01

Sorting
Systematizing
Sweeping
Sanitizing
Self-discipline

6S

5S + S Safety



*This image includes the options.

Tool washing machine

CLEAN BOX

CODE
CBX-01

- Tools including cutters and jigs are washable with no need to breaking them down.
- Compact type with built-in sink.
- No plumbing required.
- Safe cleaning system using water.
- Comes with a washing water heater for ensuring comfortable working conditions even in winter.



Wash Tool holder/Collet/Nut/Cutting tools thoroughly to maintain their high accuracy.



*This image includes the options.

TOOL CAP TCC type

Cutting tool cover

Cutting tool cover that keeps the cutting tool visible, will not slip off or break, and is user-friendly



The tool is visible

φ 5.4~60

Protects the cutting tool and is user-friendly.


The cutting tool cover protects the user from injury at the time of work while protecting breakage of the cutting edge.



Not slip off



CODE	φ D	h1	H	Q'ty
TCD03-50	3	—	25	50
TCD04-50	4	—	32	50
TCC0607- 50	5.4~ 6.7	35	40	50
-100				100
-500				500
TCC0709- 50	6.8~ 8.9	35	40	50
-100				100
-500				500
TCC0911- 50	8.9~10.9	65	70	50
-100				100
-500				500
TCC1113- 50	10.9~13.4	65	70	50
-100				100
-500				500
TCC1418- 25	13.8~17.8	100	110	25
- 50				50
-250				250
TCC1822- 25	17.8~22.4	100	110	25
- 50				50
-250				250
TCC2228- 25	22.3~28	135	150	25
- 50				50
-250				250
TCC2836- 10	28 ~36	130	150	10
- 20				20
- 50				50
-200				200
TCC3646- 10	36.2~47	165	190	10
- 20				20
- 50				50
-200				200
TCC4760- 10	46 ~60	160	190	10
- 20				20
- 50				50
-200				200

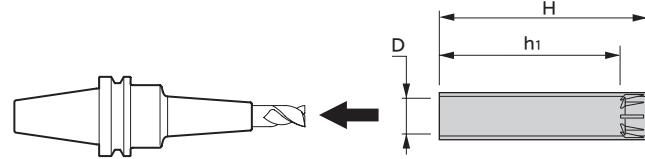


Variety Set

Each size comes in a set of two.

CODE	Q' ty
TCC-F	2 pieces per cutting tool over size for TCC0607 to 4760 (total of 20 pieces per set)

Usage

- 1 Hold the mouth of the tool cap vertically, and then press it so that its oval shape becomes round.
- 2 Once the mouth of the tool cap becomes round, push it into the cutting tool or tool.



TCA type— The TCA-type cutting tool cover is used by attaching it to the tip of a tool holder.

TCB type— This cutting tool cover is attached to the cutting tool.



General catalog for further reference...

TOOL SET UP STAND

Tool clamping fixture

**The setup time can be shortened.
Not only can you mount cutting tools simply and quickly without
using other tools, but also clamping collets and retention knobs!**

Petit Ball 40

BT40



Freely set vertically or horizontally

MyCUBE 50

BT50

MyCUBE 100

HSK-A100



HF SERIES

BT30/BT40/BT50
HSK-A40/A50/A63/A100
E32/E40/E50/F63



Petit Ball / MY CUBE


CODE	Shank type	Kg
PETIT BALL40	BT40 / CAT.40 / DIN40	6.1
MY CUBE 50	BT50 / CAT.50 / DIN50	9.7
MY CUBE100	HSK-A100	9.6

■ Option

- Adapter (Petit Ball, MY CUBE 50)


■ Std. Access.

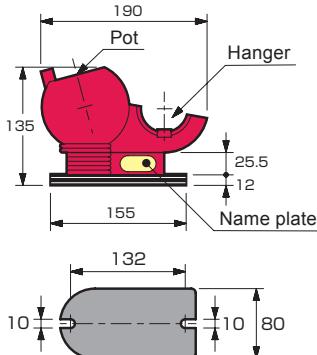- Name plate




■ Caution

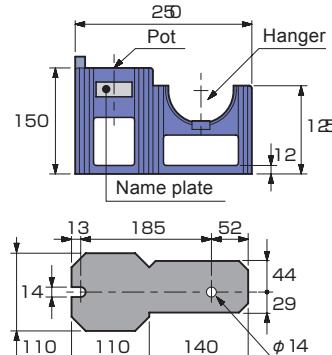- Prepare 2 bolts for installation.
(Petit Ball : M8, MY CUBE : M12×2).



CODE	Model	Adapter	Shank type
AP40-T30V	Petit Ball 40	For pot	BT30
-T30H		For hanger	BT30
AP50-T30V	MY CUBE 50	For pot	BT30
-T40V		BT40 / CT40 / DN40	BT40
-A63V		HSK-A63, T63	HSK-F63
AP50-T30H	For hanger	BT30	BT30
-T40H		BT40	BT40
-A63H		HSK-A63, T63	HSK-F63
-F63H			

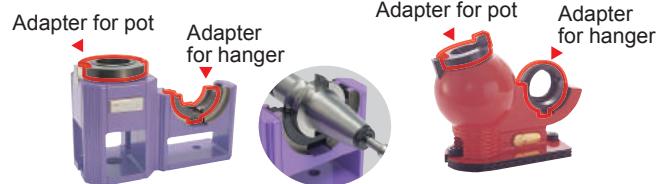

At your request,
your company name
will be engraved.
(Petit Ball, MY CUBE)



HF series

CODE	Fig.	Shank type	H	W	A	t	Kg
HF-BT30	1	BT30	77	70	50	30	0.8
		BT40	90	90	60	37	1.2
	2	BT50	—	—	—	—	2.2
-A40	1	HSK-A40, T40	72	60	35	30	0.8
		-A50, T50	88	70	50	37	1.0
		-A63, T63	87	90			1.2
-A100	2	-A100, T100	—	—	—	—	2.1
-E32	3	-E32	98	64	35	24	1.0
		-E40	100	70			1.1
		-E50	106	80	50	26	1.3
-F63		-F63	120	90	60		1.6

Fig. 1




Fig. 2





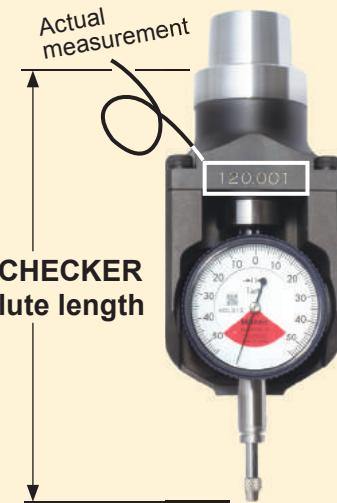


Fig. 3



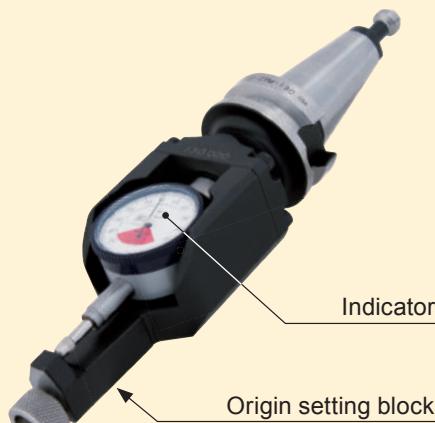Shareable Z-axis origin for multiple machining centers. Easy work-piece origin setting. Precise work-piece flatness and step measurement possible!





Easy Z-axis origin setting

Easy measurement for Z-axis origin to work-piece datum surface.

(Ex.)
Distance from Z-axis origin to work-piece datum surface.

$$200.345 + 120.001 = 320.346$$

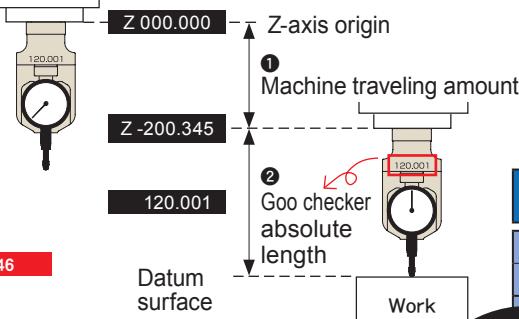① Machine traveling amount ② Goo checker absolute length




CODE	L	Kg
BT30-ZPM-130	130	1.0
-165	165	1.2
BT40-ZPM-150	150	1.3
-210	210	1.5
BT50-ZPM-180	180	2.9
-240	240	4.1
A 63-ZPM-150	150	1.2
-210	210	1.5
A100-ZPM-180	180	2.5
-240	240	3.8
E 32-ZPM-120	120	0.7
-165	165	1.0
E 40-ZPM-120	120	0.8
-180	180	1.1
E 50-ZPM-150	150	1.0
-195	195	1.3
F 63-ZPM-150	150	1.1
-210	210	1.3
F80PD-ZPM-180	150	1.1
-240	210	1.3
DN40-ZPM-150	150	1.3
DN50-ZPM-180	180	2.9
CT40-ZPM-150	150	1.3
CT50-ZPM-240	240	4.1


- Option
 - Retention knob(BT/ CT/ DIN)
- Std. Access.
 - Origin setting block • Indicator, 1/1000 reading
- Caution
 - A.T.C is not available. (except for BT30)

Sharable Z-axis origin for several machining centers

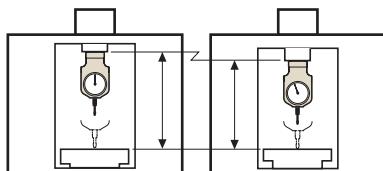After measuring the distance from the Z-axis origin to the table surface of each machining center and correcting any variations, multiple machining centers can share Z-axis origin.




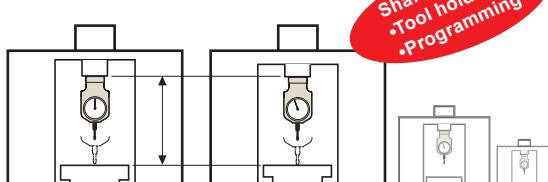Correcting actual measurement variations




Work-piece position measuring

Precise measurement for flatness



Step distance measurement

Measurement for steps on the work-piece



Ideal for checking machine spindle run-out accuracy easily.

Managing spindle accuracy will maximize tool holder performance and increase productivity.

- ▷ Light-weight, hollow design makes it easy to use.
- ▷ Ideal for setting Z axis origin.
- ▷ Reasonable price.



You can recognize the exact run-out accuracy and the highest run-out of the spindle.


The actual measurement values are marked on the body.



It can be installed into the spindle in every phase.

Drive-key less design allows you to install the test bar in every phase, making the run-out check easier than ever.

HSK





NT

No drive key ways.

The name ring and scale ring protect it from scratches and dents.

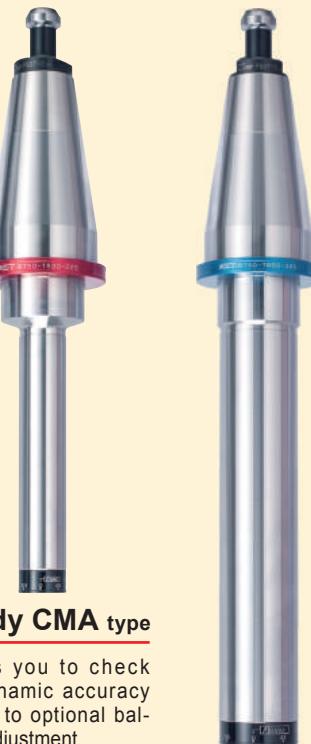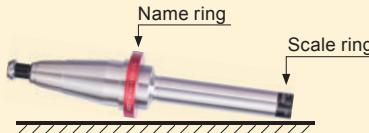The taper area and straight area do not touch the table surface even if they are placed horizontally.



Handy CMA type

Allows you to check the dynamic accuracy thanks to optional balance adjustment.

Full-fledged CMB type

Z-axis deflection and spindle travel accuracy can be measured.

	CODE	Fig.	ϕD	ϕD_1	L	L_1	L_2	L_3	Kg
BT / DIN / CAT	NT30-CMA20-125	1	20	32	125	45	65	15	0.7
	NT40-CMA25-175	2	25	42	175	50	110		1.3
	NT50-CMA30-225	30	53	225	65	145			3.5
HSK-A / -E	NT30-CMB30-175	1	30	32	175	45	115	15	1.0
	NT40-CMB40-325	2	40	42	325		265		2.8
	NT50-CMB50-325	50	53			60	250		5.7
HSK-F	HSK32-CMA20-125	3	20	26	125	35	75	15	0.4
	HSK40-CMA20-125			32		45	65		0.5
	HSK50-CMA25-175		25	42	175	50	110		1.0
	HSK63-CMA25-175								1.2
	HSK80-CMA30-225		30	53	225	65	145		2.2
	HSK100-CMA30-225								3.0
	HSK125-CMA30-225								4.1
	HSK32-CMB25-175	3	25	26	175	35	125		0.7
	HSK40-CMB30-175		30	32		40	120		0.9
	HSK50-CMB40-225		40	42	225	45	165		1.8
	HSK63-CMB40-325						265		2.7
	HSK80-CMB50-325		50	53		60	250		4.4
	HSK100-CMB50-325								5.2
	HSK125-CMB50-325								6.3
HSK-F	HSK63F-CMA25-175	3	25	42	175	50	110	15	1.2
	HSK80F-CMA30-225		30	53	225	65	145		2.3
	HSK63F-CMB40-325		40	42	325	45	265		2.7
	HSK80F-CMB50-325		50	53		60	250		4.5

Std. Access.

- Accuracy inspection sheet

Option

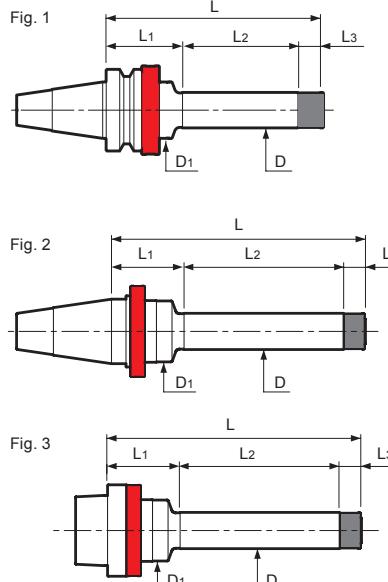
- Coolant duct(HSK-A) •Retention knob(BT)
- Special retention knob(CAT. / DIN)
- Balance adjustment (only for CMA type) less than G2.5 /30000min-1
*Please order by adding "BL" to the end of the code.
(Ex. : HSK63-CMA25-175 BL)

Note

- NT type is available for BT/CAT. and DIN spindle by changing the retention knob.
- HSK type is available for both HSK-A and HSK-E spindles.
- A special design retention knob is required for CAT./DIN spindle. A market standard retention knob for ANSI/DIN/ISO is not available. Contact us for detail.

Caution

- Use a market standard retention knob for the BT spindle.
- NT30 type can be installed into a spindle at 0°and 180°.
- A.T.C is not available. (except for NT30)



Exclusive retention knob

CODE	Shank
P-576	CAT.40
-575	CAT.50
-578	DIN40
-577	DIN50

Feature

Shrink-fit Heater
MONO 3°
MONO CURVE

MONO Series
2PIECE type

UNO
HYPER VERSION

Z
STRAIGHT arbor

OTHERS
PERIPHERALS

Technical

251

TOOL HOLDER STORING CABINET

Feature
Shrink-fit Heater
MONO 3°
MONO CURVE
MONO series
2PIECE type
UNO
HYPER VERSION
Z
STRAIGHT arbor
OTHERS
PERIPHERALS
Technical data

Compact Storage Box for anti-rust treatment of tool holders.

Orderly storing with name plate

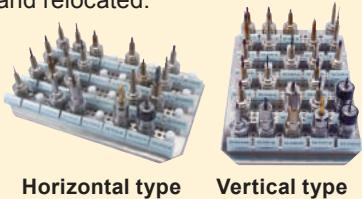


Transparent case!!



Arrangeable


A multi-hole base plate is employed.
Supports a variety of holder specifications
using pins that can be freely changed
and relocated.



Horizontal type

Vertical type

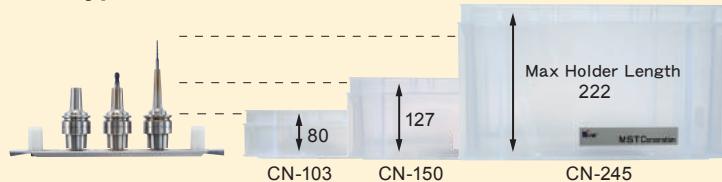Holders with different lengths can be stored using three types of container boxes.



Standard Set

CODE	max. Q'ty	Container box	Pin	Number of pins supplied	Shank type
HBX-A40	24	CN-150	HBX-PNE40	18	HSK-A40
-A50	15	-245	-PNE50	15	-A50
-E25	40	-150	-PNE25	32	-E25
-E32			-PNE32		-E32
-E40	24	-245	-PNE40	18	-E40
-E50	15		-PNE50	15	-E50
-F63	10	-150	-PN15T	16	-F63
-15T	40		-PN20T		
-20T					15T(BROTHER) RS20/20T(SUGINO)

Contents of set

- Base plate
- Container box
- Pin


Option

- Rail
- Name Plate
- Lid for Container Box
- Eyenu


Note

- Knock-down type. A wrench (5mm) is required.

Base plate




Container box

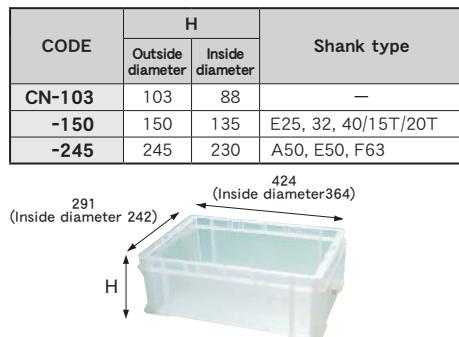

Pin

CODE	Q'ty	Size
HBX-PNE25	10	φ13.5×H20
-PNE32		φ16.5×H25
-PNE40	5	φ20.5×H29
-PNE50		φ25.5×H36
-PN15T		φ26.5×H54
-PN20T		φ30.5×H62

■ Std. Access. •Mounting bolt (M5)



Pin

Name plate

CODE	Q'ty
HBX-NP01	40

Attaches easily to the rail.


Eyenu



Rail (for name plate)

CODE	Q'ty	L	Note
HBX-R210	6	210	Vertical type
-R330	4	330	Horizontal type

■ Std. Access.
•Mounting bolt M5
Required for attaching name plate.




Lid for container box

CODE
CN-FT



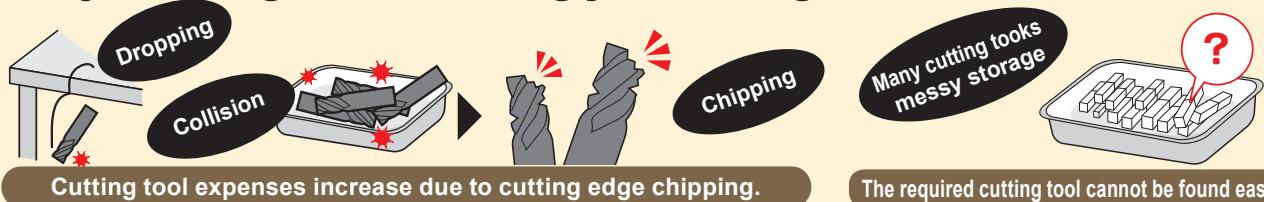Are you having trouble storing your cutting tools?



Cutting tool expenses increase due to cutting edge chipping.

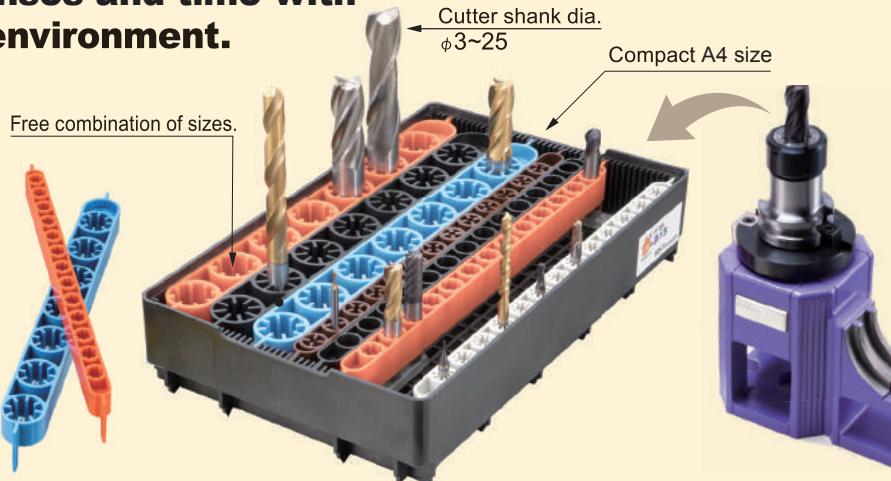
The required cutting tool cannot be found easily.

Save cutting tool expenses and time with the optimum working environment.

Cutting tool life is extended because the cutting edge is not dulled from striking other cutters. You can find the required cutting tool immediately.



刃物保護 BOX
Cutter protection box



Value set

This is a convenient value set that can be immediately used and handles tool shank diameters of 3 mm to 12 mm. (Stores 156 cutting tools)

Stand		Base	
Cutter dia	Q'ty	Q'ty	Stand
$\phi 3$	1		
$\phi 4$	2	1	Stand
$\phi 6$	3		
$\phi 8$	2		
$\phi 10$	2		
$\phi 12$	2		

TOOL CAP	
Cutter dia	Q'ty
$\phi 3$	50
$\phi 4$	50
$\phi 6$	50
$\phi 8$	50
$\phi 10$	50
$\phi 12$	50


TOOL CAP storage box	
Q'ty	
1	

$\phi 3:13$ pcs. $\phi 4:26$ pcs. $\phi 6:39$ pcs.
 $\phi 8:26$ pcs. $\phi 10:26$ pcs. $\phi 12:26$ pcs.

CODE
EMO-SET-01

Stand

Parts for storing and securing cutting tools. It is possible to identify the cutting tool size by color, and the cutting tool you need can be found at a glance. Use this stand inserting it into the base.



CODE	ϕd	Q'ty	Color	max. Q'ty	W
EMO-STD 3-2	3	2	Black		
-5		5			
-STD 4-2	4	2	Brown		
-5		5			
-STD 6-2	6	2	Gray		
-5		5			
-STD 8-2	8	2	Yellow		
-5		5			
-STD10-2	10	2	Orange		
-5		5			
-STD12-2	12	2	Black		
-5		5			
-STD16-2	16	2	Blue		
-5		5			
-STD20-2	20	2	Orange		
-5		5			
-STD25-2	25	2	Gray		
-5		5			

Base

Container for holding the stands. Stands can be arranged by changing the combination of stands freely.

CODE	Q'ty
EMO-BAS-1	1
-3	3

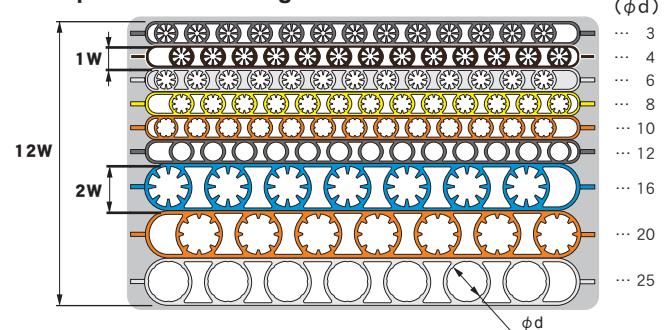
Note

• 12 rows for the stands of 3mm to 12mm diameter or 6 rows for the stands of 16mm to 25mm diameter.

• The left-right orientation of the stands can be set.



Example of stand arrangement



Technical support

At MST, we provide long-term support of your safe use and maintaining high accuracy of our products for your machining.

1 Pre-sales

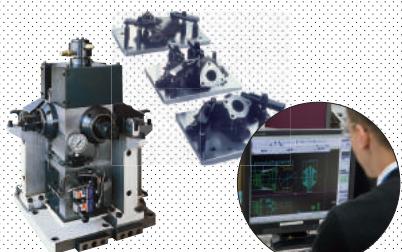
Provide wide-ranging technical support.



Tool selection



Interference check with 3D drawings



Designing jig fixtures

2 On delivery

You will receive instructions.



Instructions for a heater



Maintenance instruction

3 Post-sales

Our Tool Clinic experts can visit your factory to demonstrate the correct usage, maintenance and seminar.



Seminar



Evaluation



Consulting

Substantial peripheral equipment

Work table 6S DESK P. 247	Holder, Tool washing machine CLEAN BOX P. 247	Tool protection cover TOOL CAP P. 248	Tool holder storage cabinet ENDMILL HOUSE P. 252	Cutter protection box ENDMILL HOUSE P. 253

Instructions for use !

To ensure optimum, trouble-free performance, please read this instructions carefully before using products.
Please contact us if your holder is damaged. We are ready to help you.

Instructions for using SLIMLINE

Pay attention to scratches and dust.

Before using, be sure to remove anti-rust oil on the holder. Scratches and dust can reduce performance and accuracy.
Please keep your holders clean with rags. Our CLEAN BOX is available for your cleaning needs.

CLEAN BOX
P.247



Tool holder shank

If you insert holder shanks with scratches and dust into machine spindles, the accuracy of the spindle is reduced and the spindle can be damaged. For shank maintenance, use an oil grinding stone or sandpaper to remove scratches and rust. We can not re-grind shanks since it changes the position of gauge line, so we recommend you to purchase new holders.



Storage

Please use tool protection covers if you store holders with cutters. Cutting edges may be damaged by coming in contact with each other, and you may get injured by sharp cutting edges.



TOOL CAP
P.248



Daily maintenance.

Why does rust form?

- Water in air adheres to SLIMLINE holders. This water reacts with the metal and then rust forms. Since the SLIMLINE is heated, the oil on its surface is liable to evaporate and this makes rusting more likely to occur.
- Rust formed on the metal surface gradually corrodes deeper over time.


Coolant-through-spindle

In particular, when coolant is passed through a holder or a collet in the spindle-through system, it remains deep inside the holder and induces rusting.




Flush type

Special care must be taken for the flush type SLIMLINE, because coolant is more likely to remain in its small holes.




What happens after rusting?

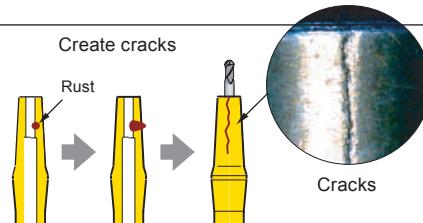- If a tool is chucked in this state, the tool cannot be inserted into the holder. If the tool is forced, then the stress resulting from the shrink-fit will focus on the corroded part and it causes the holder to crack.
- The clamping force is reduced, resulting in cutter slippage and loss of accuracy.



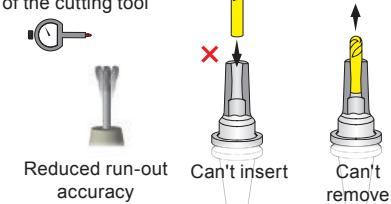
Internal bore distortion of the cutting tool



What should be done to prevent rusting?


Iron rusting occurs if there are water content and air (oxygen). It can be prevented by removing water content by rustproofing or by ensuring that the metal is not directly exposed to air (oxygen).

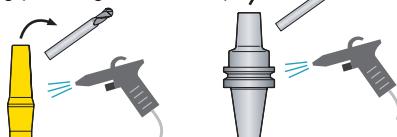1 Cleaning (removing water content)



- After use, blow off any clinging water content with compressed air. Sufficiently blow air, in particular, into the deep ends of holes, small holes in the flush-type SLIMLINE, etc. After SLIMLINE has been cleaned with cleaning oil or a washing machine, blowing the holder with compressed air is effective.

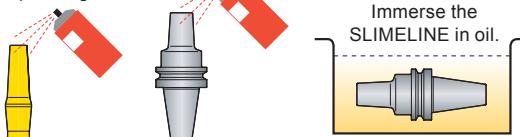2 Rust proofing



- After cleaning, spray with rustproofing oil or immerse your SLIMLINE in rustproofing oil.
- Prior to shrink-fitting, sufficiently remove the rustproofing oil remaining on the SLIMLINE. To remove the oil, a cleaner spray or solvent is useful.

If it's getting hard to insert the cutting tool ?

If oxidation has occurred, or grease or dust has burned onto the internal bores, remove with "cleaning tool rubber grinding stone".



Cleaning tool
Rubber grinding
stone type
P.14

Precautions for shrink-fitting

Cleaning before shrink-fitting


You must clean the cutter shank and internal bore of holder before you shrink-fit it. Please use our brush-type cleaning tool to clean out dust and dirt inside before you shrink-fit.



Cleaning tool
Brush type ➔ P. 14


Usable tools

- Please use only carbide cutters. No shrink release is possible for any tool using high-speed steel.
- A tool exceeding its tolerance can cause breakage or slippage.
- Sometimes melted particles such as tiny cutting chips on cutter shanks get stuck in clamping holes, and cutters can't be removed. DO NOT remove or insert the cutting tool forcedly, when you cannot remove it, please reheat again.




Retention knob with hole (BT)

Use a retention knob that has a through hole, or remove the retention knob and heat it. The typical retention knob has no vent to release air which prevents tools from being inserted.



Max. insertion length

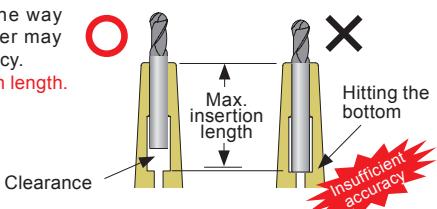
Inserting the cutter all the way to the bottom of the holder may result in insufficient accuracy. Please ensure the insertion length.



Coolant Duct (HSK-A)

Coolant Duct (HSK-A)


When you use hot air heater, remove the coolant duct before heating the holder. If you heat the holder with the coolant duct attached, the O-ring will be damaged. A dummy duct is available. If you don't use the coolant-through feature and don't want to remove the duct every time.



Dummy duct ➔ P. 246

Min. holding length

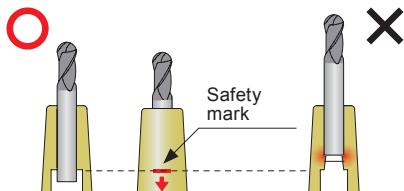A short insertion length may cause the holder to be damaged when the cutter is inserted. Always insert the cutter shank beyond the safety mark.



Precautions for water-cooling

Water-cooling immediately after shrink fitting may result in burns due to the large quantity of steam generated.

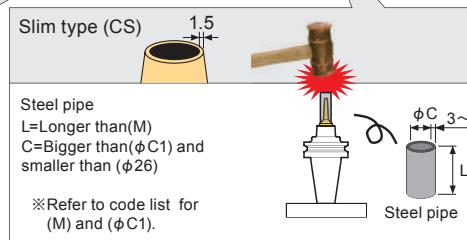
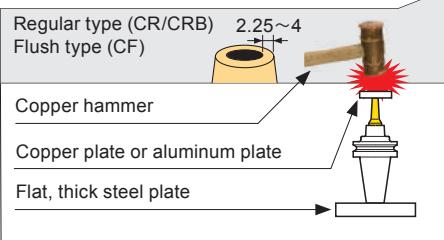
Be sure to set the shrink-fitting heater setting to COOL and cool the holder for at least one minute before water-cooling. Moisture left on the holder may lead to rust formation and damage to the holder, so be sure to completely remove all moisture.



2 PIECE type : When the SLIMLINE collet can't be removed from the master holder.

Tap the collet. You can remove the collet after loosening the stuck screw.

- 1 Remove the tool using a shrink-fit heating device.
- 2 Apply force once using the dedicated wrench in the eject direction.
- 3 Tap it.
- 4 Eject.
- 5 Apply oil to the thread.



The reason it cannot be loosened.

In most cases, there is not adequate lubrication on the thread.




Please contact MST if you cannot remove a collet using the method above.

Cautions when using the HEAT ROBO DENJI! (HRD-01S, HRD-02S)

Only for use with SLIMLINE holders

Use of the following items will lead to damage to the heater from excessive current.

- Other brand's shrink-fit holder
- Foreign matter made of metal
- Heating without a shrink-fit holder (blank heating)




Changing coils...

Be sure to turn off the power



Use the appropriate coil size



When you attach a coil, tighten the threaded connector all the way.

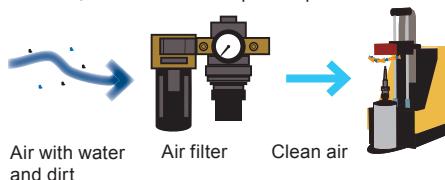


Clearance

Clearance


Attaching an air filter

For air-cooling, use filtered air. Air with a lot of water, or hot air, can break air component parts.




Do not use steel hand tools

Wear heat-resistant gloves and use a cutter stopper.



Do not repeat heating

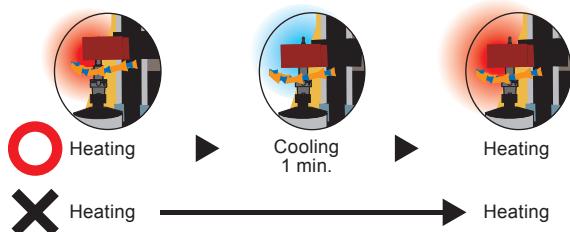Always conduct a cooling operation for at least one minute after a heating operation, as continuous heating may damage the unit.



Heating



Do not turn OFF the power.

Do not move the coil & holder.


The HEAT ROBO DENJI 1200S (HRD-01S) is unable to shrink certain holders

For the MONO series and STRAIGHT ARBOR, please check for compatibility on item code table before using your holders.
For those marked with [▲] on the table, please follow the procedure to the right.

Compatibility table for HRD-01S		
[] Available	[X] Not available	
[▲] Usable by raising the heating unit. → P.257		
(N)	G grade	S
3.3	6.9	4.8
11	12.1	14.6
Code list		


BT shank

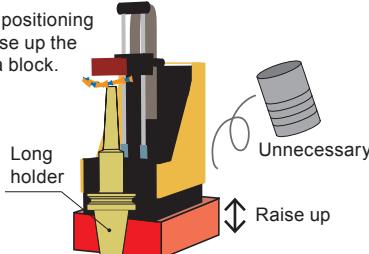Remove the positioning plate and raise up the heater with a block.






HSK shank

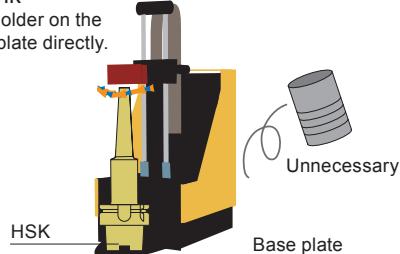Set up the holder on the positioning plate directly.



User customization (Additional processing)

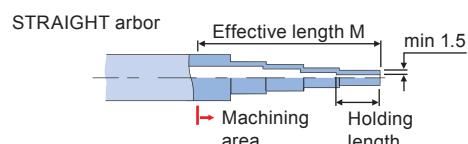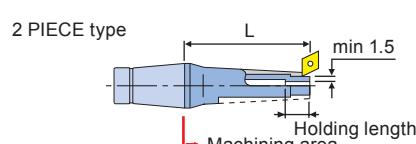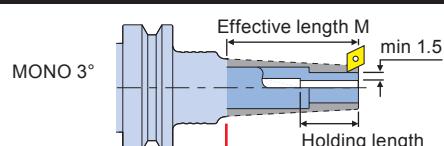- Do not change the overall length (tool clamping length).
- Ensure that a thickness of at least 1.5mm is maintained.
- The custom machining area must be above the ↑ mark. Please check details on the code tables.
- You can not do custom machining with the STRAIGHT ARBOR Carbide Shank type.
- When customizing flush-type (CF, SLFA and SLFB) holders, pay particular attention to the coolant-through holes.
- On request, we also supply drawings as CAD data (DXF format), which are useful for additional processing. These drawings may also be used to carry out interference checks with the work-piece and fixtures.
- The rigidity of the holder decreases after custom-machining. Reduce cutting conditions when using it.



About custom-machining (turning)

- Perform light cutting using a shallow cutting depth (0.1 to 0.2mm).
- During cutting, use water-soluble coolant and do not allow the temperature of the object being cut to rise.
- Use a stainless-use tool or positive tip tool.
- The following machining conditions are recommended:
 - Cutting speed ... 30~50m/min
 - Feed rate ... 0.1~0.2mm/rev
 - Cutting depth ... 0.1~0.2mm

Rigidity of SLIMLINE

Relationship between SLIMLINE rigidity $\downarrow S$ and L/D

SLIMLINE has a very slim design. Your cutting results may vary significantly, depending on the holder design and the cutting tool projection length.

Rigidity Value $\downarrow S$ in the dimension tables can be used as a reference mark when selecting holders. Please refer to the example below to learn more about this.



The table shows the relationship between holder height h (mm), weight N (kg), and Rigidity Value S ($\mu\text{m}/\text{kgf}$). An orange circle highlights the S column.

h	Kg	N	S
20	4.8	14.6	9.4
50	5.6	17.6	
5.8	18.5	1.8	


(Code table)

Rigidity Value $\downarrow S$ is the deflection amount of a holder with a 3D cutter projection length.

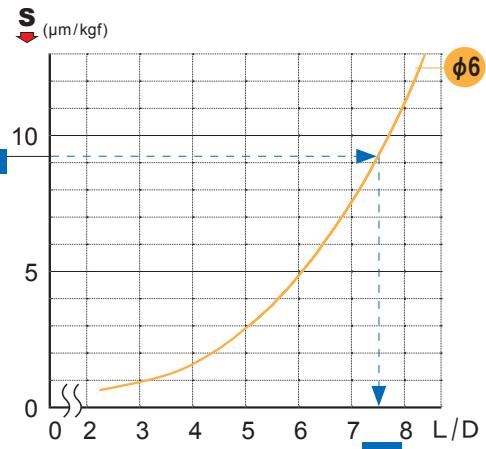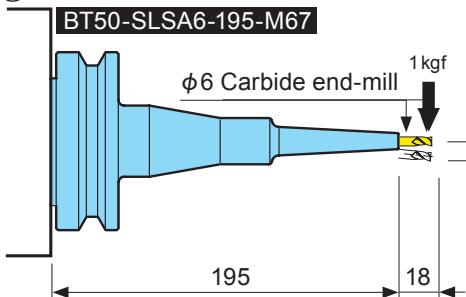① SLIMLINE MONO 3°



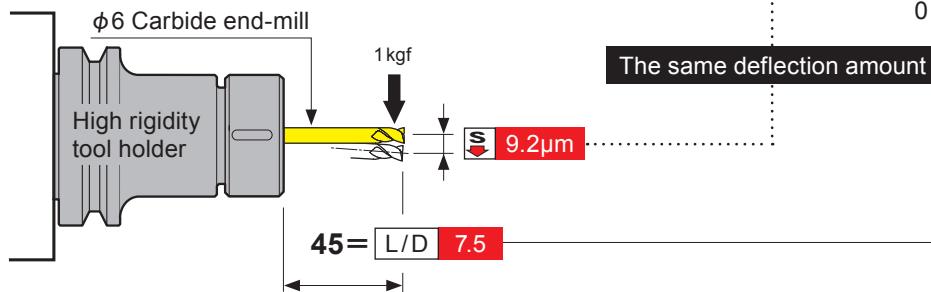
② Convert the S value to the carbide projection length to L/D, which is the cutting parameter criterion.



The rigidity value $S = 9.2\mu\text{m}$ for BT50-SLSA6-195-M67 (18mm cutter projection) is equivalent to $L/D = 7.5 = 45\text{mm}$ of carbide cutter projection.

③ Even if the holder lengths are the same, the rigidity can vary greatly due to differences in the holder design.

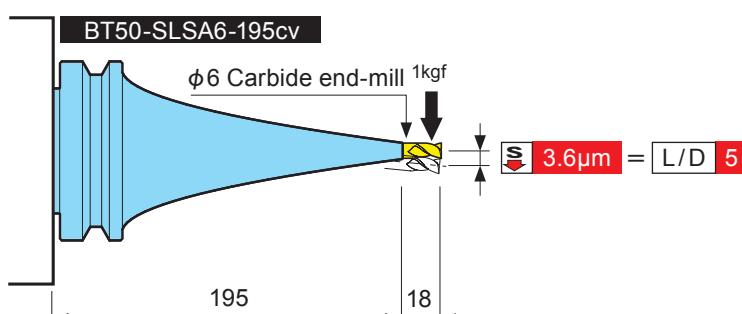Selecting the same length MONO Curve BT50-SLSA6-195cv holder will give a rigidity value of $S = 3.6\mu\text{m}$, $L/D = 5$, enabling more stable machining.



SLIMLINE rigidity calculation software



Please use our SLIMLINE rigidity calculation software for different cutter lengths (excluding 3D) and stepped/tapered cutters. It will calculate the rigidity according to your machining conditions.

P. 260



The graph of relationship between rigidity \downarrow and L/D

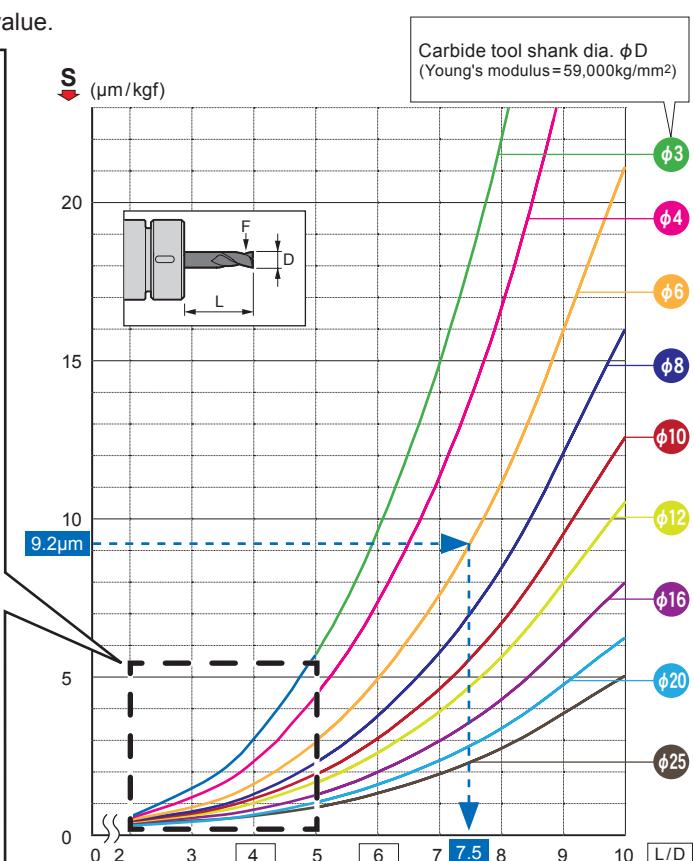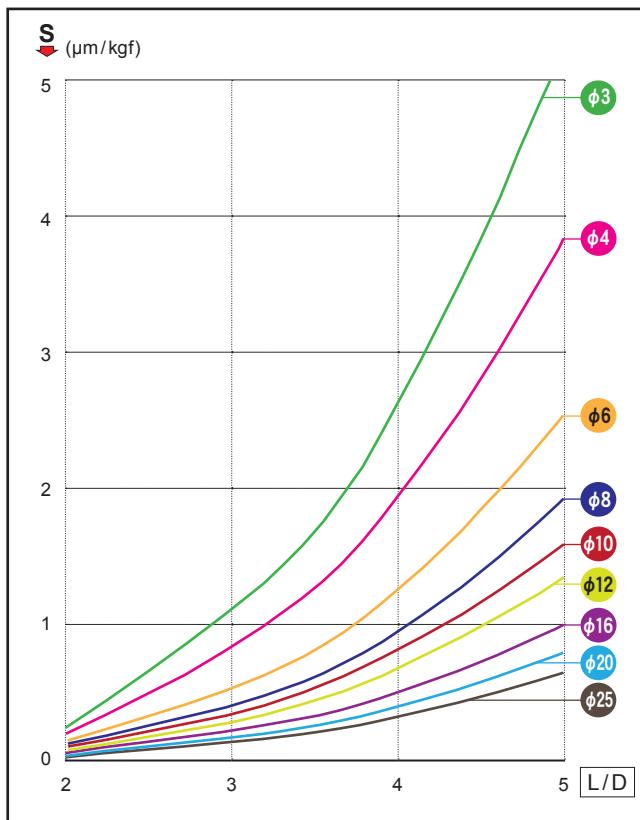The values of L/D can be determined based on the rigidity \downarrow value.




The formula to determine rigidity \downarrow (deflection)

$$S = \frac{6.8 \times F \times L^3}{E \times D^4}$$

D : Tool shank dia.
L : Overhang length of cutter
F : Load
E : Young's modulus


Cutting condition indication

	Cutting condition	
	Standard	Need to consider
Square end-mill Corner radius end-mill	$L/D=4$ Less than	$L/D=4$ Over
Ball end-mill	$L/D=6$ Less than	$L/D=6$ Over

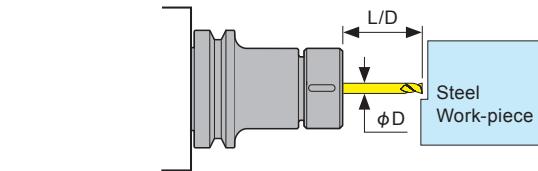


Tool life, surface finishing quality, and productivity comparison by different carbide cutter lengths (L/D)

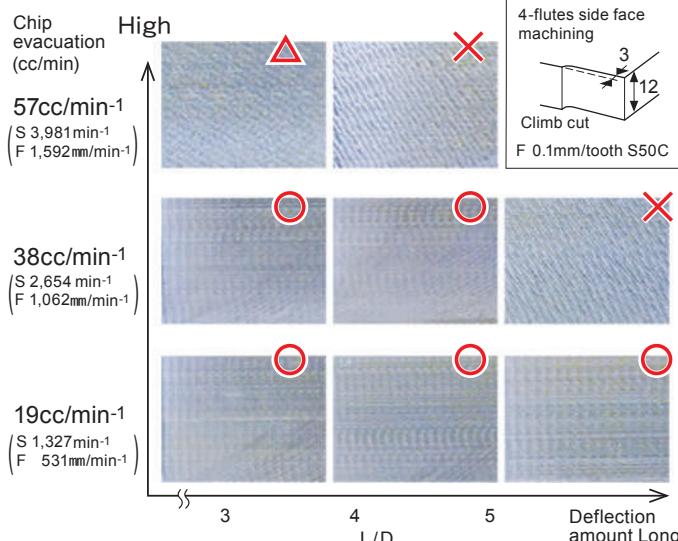Machinability



Finishing surface

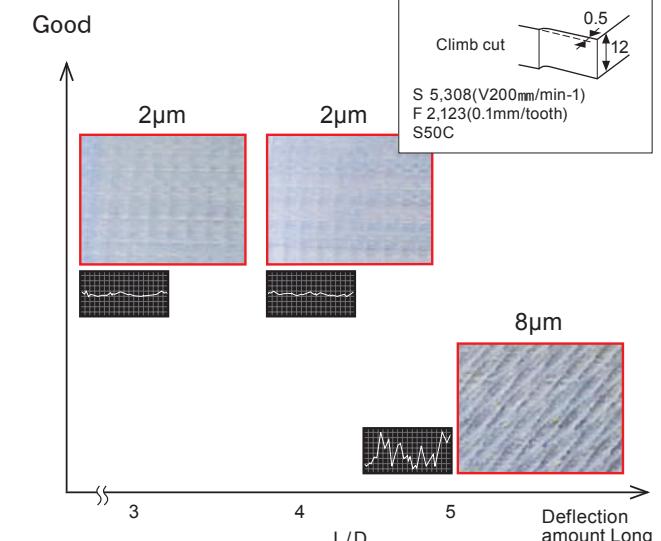

SLIMLINE

Rigidity calculation software

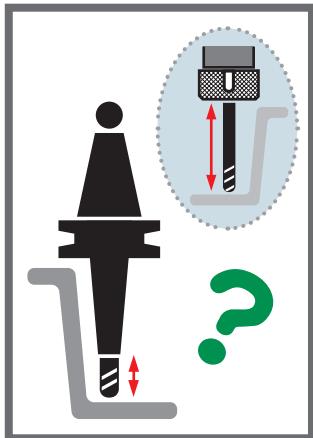


Free of charge

Indispensable
for CAM operators!

PAT.


Do you have similar problems?




How much more rigidity is there in SLIMLINE compared to conventional holders?



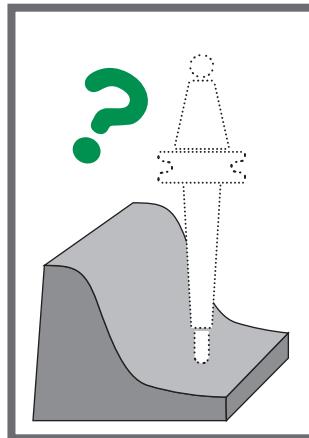We are looking for SLIM-LINE products (4,000 Variations) that can be used at even higher cutting conditions.



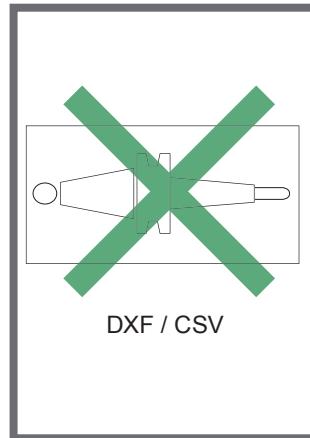We want a holder that perfectly matches our cutting conditions and the shape of our workpiece.



There is no drawing data, which makes it troublesome for us to carry out an interference check using CAM.

Solution



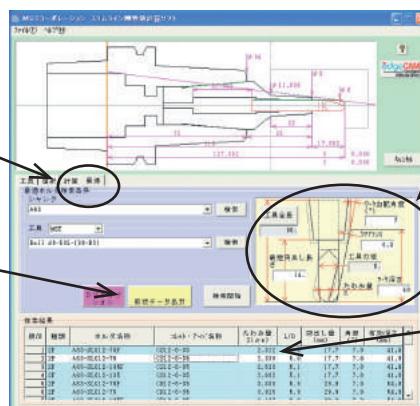
Use SLIMLINE Rigidity Calculation Software to easily check SLIMLINE rigidity with cutter and work-piece interference. You can select the optimum holder with stronger rigidity and less interference.




You can readily improve your machining efficiency and quality.

- The most suitable SLIMLINE
- +
- Cutter
- +
- Cutter projection

- ④ Displaying the main dimensions
- ③ The most suitable SLIMLINE holder with the highest rigidity for the shape of the work piece is automatically selected.
- ⑤ "Selected SLIMLINE holder" with optimized "projection" of "cutter" can be output in DXF/CSV.
- ② Holders are listed in order of rigidity.



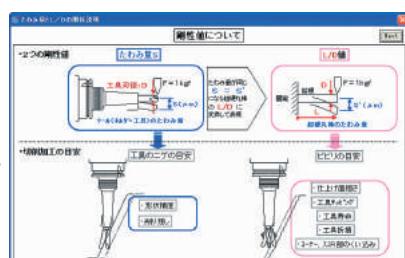- ① Input a work-piece geometry. Input clearance information (between a work-piece and tool/holder), and tool overhang limitation (min. value).



- The CAM simulators listed below come with SLIMLINE configured data as a standard.


CAM-TOOL	edgecam	worknc	hyperMILL® 5AXIS	CAD/CAM Solution Company JBM	GENETEC	SIEMENS
CAM-TOOL	EDGECAM	WORK NC	HYPER MILL	JBM	GENETEC	Siemens PLM Software
FF/cam	TEBIS	PowerMill	CADmeister®	VISI	VERICUT®	

CAUTION : *Each set of geometry data is handled differently, so please ask each CAM manufacturer for help.

For high-speed spindle rotation

■ Imbalance value of a machine tool spindle and a tool holder

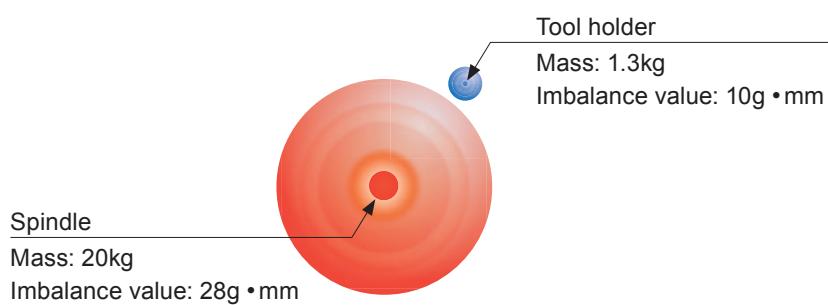A tool holder imbalance value (G grade) focuses at high-speed spindle rotation of a machining center. However, it is important to consider the entire rotation body, including the spindle, holder and cutter to determine the high-speed spindle rotation. This is because the holder and cutter weight is much lighter than the spindle weight (less than approx. 1/20th), and thus the effect of a tool holder on the spindle rotating equipment (spindle, tool holder and cutter) becomes significantly smaller.




Points to keep in mind at high-speed rotation.

- Minimal length of a tool holder and cutting tool as short as possible.
- Using high accuracy and compact design tool holders.
- Optimizing cutting condition(rpm, feed and depth of cut).

Spending time and money on balance corrections to the holder alone will not result in significant improvement.


■ PRE-BALANCED DESIGN

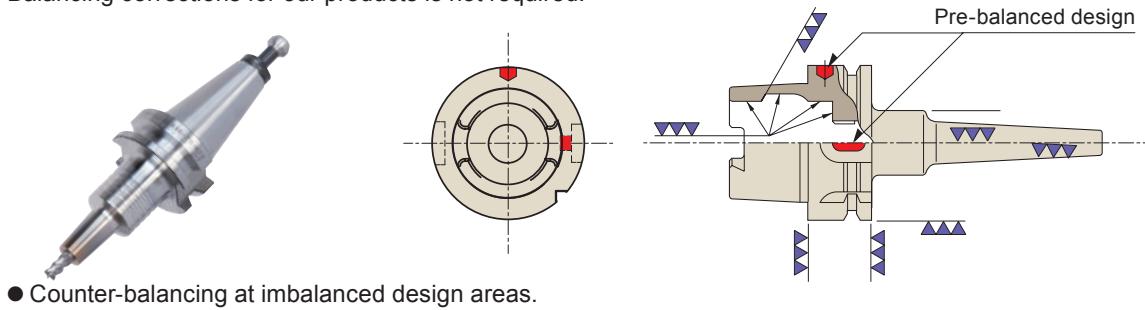MST has applied our original pre-balancing to make our tool holders applicable for high-speed spindle rotation. Balancing corrections for our products is not required.



- Counter-balancing at imbalanced design areas.
- O.D finish grinding after heat treatment

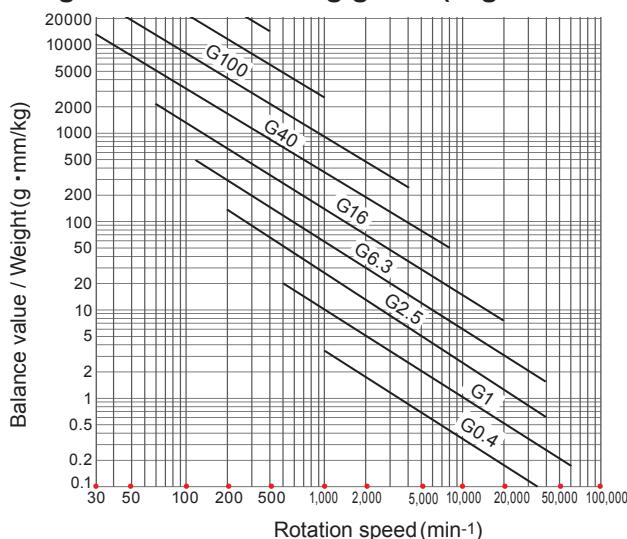■ Unbalancing in terms of tolerable residual ratio against the balancing grade (G grade value)




Application examples using SLIMLINE

Feature
Shrink-fit Heater
MONO 3°
MONO CURVE
MONO series
2PIECE type
UNO
HYPER VERSION
Z
STRAIGHT arbor
OTHERS
PERIPHERALS
Technical data

The shrink fit quill for an internal grinder

A SLIMLINE holder has a slim design. It minimizes interference with grinding wheel. It holds the shorter portion of the tool for grinding. Grinding can be performed with high accuracy and high rigidity. It reduces tool costs and contributes to cost reduction.

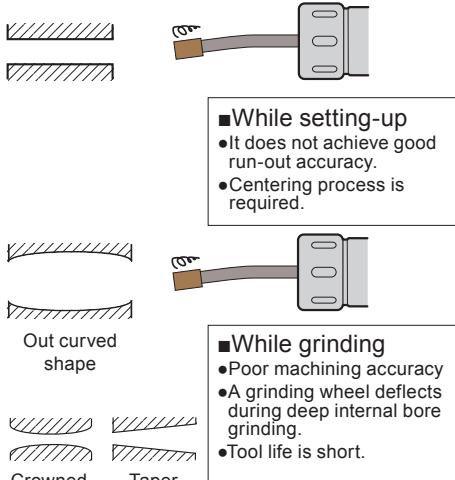Current method of chucking with a collet



Ideal for internal grinding.



Problem resolution

Comparison data


Measurements	SLIMLINE	COLLET HOLDER
Roundness	0.3 μm	0.6 μm
Surface roughness(R_y)	1.38 μm	2.7 μm





Tool grinding applications

The chucking accuracy of a grinding wheel largely influences grinding accuracy (roundness and surface roughness, etc.). A shrink-fit quill SLIMLINE holder further enhances processing accuracy.

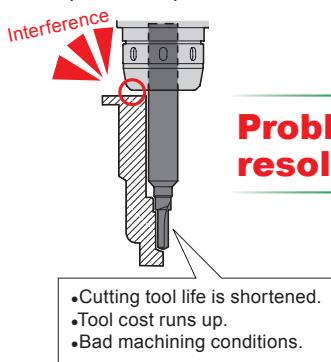Examples of improvements




Problem resolution

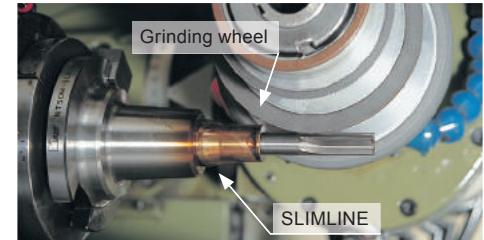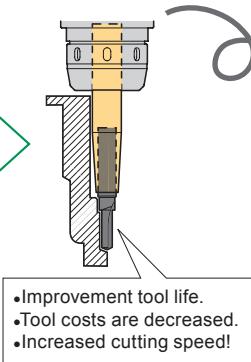

Short-overall length carbide endmill for shrink-fit holders.

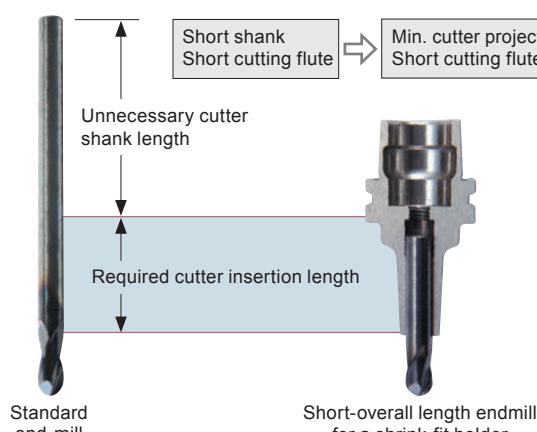With a SLIMLINE, the maximum insertion length is short, so a normal length tool is not necessary.



 DIJET Super short ball end mill DZ-SSB	 MITSUBISHI MATERIALS Impact miracle ball end mill VF-2SSB	 MOLDINO Shrink master ball FSHB-TH
 NS TOOL Short shank ball end mill MSB230SF	 CS TOOL Short over all length type WXL end mill WXL-HS-EBD WXL-HS-LN-EBD	 UNION TOOL High-efficiency short shank ball HFB-S

Cutting data

	Feature	MONO 3° MONO CURVE	MONO Series	2PIECE type	HYPER VERSION	Z	STRAIGHT arbor	OTHERS	PERIPHERALS	Technical data
BT40-SLK12-45 CF12-3-55		BT40-SLK12-45 CR12-6-55		BT50-SLK12-75 CS12-10-55						
A63-SLK12-75 CF12-6-55		A63-SLK12-75 CS12-6-80		A63-SLK12-75 CF12-10-55						
A63-SLK12-75 CR12-10-55		A100-SLK12-105 CR12-4-55		BT40-SLSA6-95-M42						
BT50-SLRB20-110-M42		BT40-SLSB12-180-M127		BT50-SLSB16-225-M127						
E40-SLRA6-50		F63-SLSA4-75-M22		A100-CTH25-195 ST25-SLSA6-320						

User's voice

Cutter life was extended almost double, because chucking accuracy was improved. Finishing surface of work-piece was improved.

Cutter life was extended almost double against a collet holder. Scratch on the cutting surface with up-cut operation has been disappeared due to increasing rigidity of a cutting tool, because of reducing cutter projection when using SLIMLINE.

We achieved sufficient cutting surface. Cutter life was extended about 3 times against using a collet holder.

Cutter life was extended about 3 times due to superior chucking accuracy. SLIMLINE provides us great cutting surface, therefore, we could reduce hand-polishing time.

No necessity long time for checking interference. Spindle rotation and feed rate were increased 1.5 times. Cutter life was extended due to superior chucking accuracy.

SLIMLINE achieves noise less running at high speed spindle rotation. No required long projection of cutting tool, because SLIMLINE compact design provides us superior approach to cutting point without interference against work clamping devices.

Cutter life was extended 2 times against a conventional collet holder due to superior chucking accuracy.

Cutting surface and holding accuracy improved.

We doubled the z feeding compared to conventional holder, but this holder still has enough rigidity.

During the cutting process the vibration reduced, and the cutting surface was improved.

Holding accuracy was stabilized. Cutting surface and cutter life improved 2-3 times.

With conventional holder we could not have good surface finish. However with SLIMLINE we could have great surface finish.

The cutter life extended because of great accuracy.

HSK Shank

Feature

Shrink-fit Heater

MONO 3°
MONO CURVE

MONO series

2PIECE type

UNO

HYPER VERSION

Z

STRAIGHT arbor

OTHERS

Technical PERIPHERALS data

MST uses DIN-HSK standard shanks, which are widely used in Japan and other countries as “2-face contact tooling” for high-speed, high-efficiency machining.

- The close contact of the end faces (2-face contact) of the HSK shank results in high rigidity for transverse feed, which minimizes vibrations during machining and improves the operating life of the cutting tool and the finishing surface.
- Even if the spindle expands during high-speed rotations, the tapered hollow portion comes up with that expansion, thereby maintaining high precision.

**A type**

The most common type in use today.

**E type**

This type has no drive keyway and is suitable for high-speed machining.

**F type**

This type uses a combination of different sizes of tapers and flanges.

**T type**

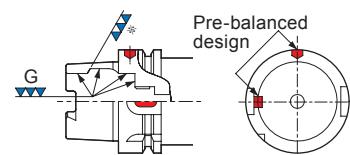
This type is for turning with turning-mill machines.

PRE-BALANCED DESIGN

The HSK-A-type shank is unbalanced in its standard form, but at MST we have applied our original pre-balancing to make our tool holders applicable for high-speed machining.

In the DIN standard, only the area marked with an asterisk (*) is finished in the hallow. In order to further improve the balance, MST has carried out finish machining after heat treatment.


	MST	DIN standard
A 63	15 g·mm	75 g·mm
A100	28 g·mm	170 g·mm



Three times stronger clamping force

HSK uses a clamping mechanism, which utilizes the wedge effect, to provide a tool gripping power 2.5 to 3.0 times greater than in the pull-stud system (BT40 and BT50), thereby increasing rigidity.

	Tensile strength of draw bar	Tool clamping force
BT40	10~15 kN	10~15 kN
A63	5.8 kN	18.4 kN
BT50	20~25 kN	20~25 kN
A100	14.5 kN	45.9 kN

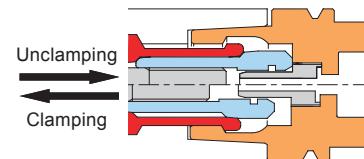

RIGIDITY COMPARISON WITH BT SHANK

The HSK shank is effective when longer overhang or higher transverse feed rigidity is required. The higher rigidity greatly contributes to improving the operating life of the cutting tool and the smoothness of the finished surface



TAPER GAUGE

MST establishes the optimal value within the tolerance in accordance with the DIN standard and manufacturers master gauges for tool shanks and those for spindle tapers accordingly.



1/10 taper ring gauge




1/10 taper plug gauge



Detection gauge for end face position

COOLANT DUCT

This is a coolant feed part exclusively for the HSK-A type. MST's HSK-A type holder comes standard with each coolant duct.



For some machines, the use of a coolant duct (Adjustable) is recommended. The existing coolant duct is replaced with an adjustable one at your request only when you have placed an order for the holder. For more information on replacement coolant ducts. → P.246

TOOLING SYSTEMS for HSK-T


Collaborative development with 17 Japanese makers has resulted in an interface for mill-turning machines based on the HSK-A type. With its 2008 ISO accreditation it has become popular standard around the world.



HSK-A Rotating tools



HSK-T Turning tools




Turning mill machine

Technical data

The shank dimensions


HSK-A (Extracts from DIN 69893-1;1993-07)

Shank	A40	A50	A63	A100	A125
b₁ (H10)	8	10.5	12.5	20	25
b₂ (H10)	9	12	16	20	25
b₃ (H10)	11	14	18	22	28
d₁ (h10)	40	50	63	100	125
d₂	30	38	48	75	95
	+0.007	+0.009	+0.011	+0.015	+0.018
	+0.005	+0.006	+0.007	+0.009	+0.011
d₃	29.05	36.9	46.53	72.6	91.95
	+0.005	+0.006	+0.007	+0.009	+0.011
	+0.003	+0.003	+0.003	+0.003	+0.004
d₄ (max.)	34	42	53	85	105
d₈ (H10)	21	26	34	53	67
d₉ (H11)	25.5	32	40	63	80
d₁₀	23	29	37	58	73
d₁₁	M12 × 1	M16 × 1	M18 × 1	M24 × 1.5	M30 × 1.5
d₁₄ (max.)	5	6.8	8.4	12	14
e₁	10.88	13.797	17.862	27.329	35.324
f₁ (- ^{0.1})	20	26	26	29	29
f₂ (min.)	35	42	42	45	45
f₃ (± 0.1)	16	18	18	20	20
f₄ ($^{+0.15}$)	2	3.75	3.75	3.75	3.75
h₁ (- ^{0.2})	17	21	26.5	44	55.5
h₂ (- ^{0.3})	12	15.5	20	31.5	39.5
l₁ (- ^{0.2})	20	25	32	50	63
l₂	4	5	6.3	10	12.5
l₃	9.5	11	14.7	24	30.5
l₄ ($^{+0.2}$)	6	7.5	10	15	19
l₅ ($^{+0.2}$)	3.5	4.5	6	10	12
l₆ (JS10)	11.42	14.13	18.13	28.56	36.27
l₇ (- ^{0.1})	8	10	10	12.5	16
l₈ (- ^{0.3})	8	10	12	16	18
l₁₂	12	19	21	24	24
r₃ ($^{+0.05}$)	1.88	2.38	2.88	4.88	5.88
r₈	4.5	6	8	10	5

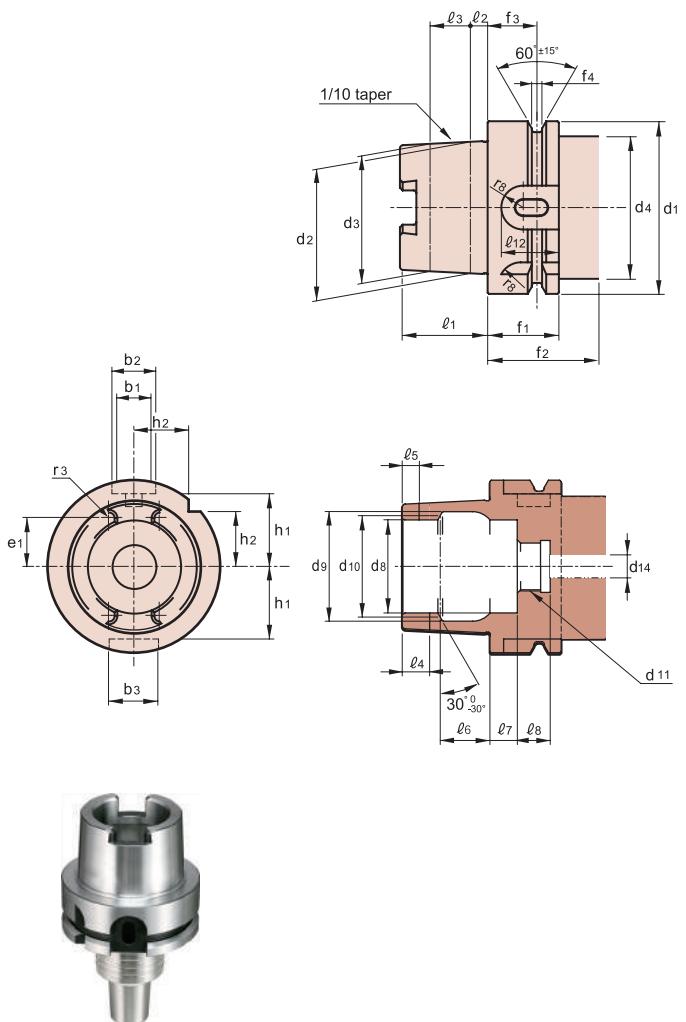



HSK-E (Extracts from DIN V 69893-5;1996-01)

Shank	E25	E32	E40	E50
d₁ (h10)	25	32	40	50
	19	24	30	38
d₂	+0.006	+0.007	+0.007	+0.009
	+0.004	+0.005	+0.005	+0.006
d₃	18.15	23.27	29.05	36.90
	+0.004	+0.005	+0.005	+0.006
	+0.002	+0.003	+0.003	+0.003
d₄ (max.)	20	26	34	42
d₈ (H10)	14	17	21	26
d₉ (H11)	16.4	21	25.5	32
d₁₀	15	19	23	29
d₁₁ (max.)	3	4.2	5	6.8
l₁ (- ^{0.2})	13	16	20	25
l₂	2.5	3.2	4	5
l₃	8.5	7.3	9.5	11
l₄ (JS10)	7.21	8.92	11.42	14.13
l₅ (- ^{0.1})	6	8	8	10
f₁ (- ^{0.1})	10	20	20	26
f₂ (min.)	20	35	35	42
f₃ (± 0.1)	4.5	16	16	18
f₄ ($^{+0.15}$)	2	2	2	3.75

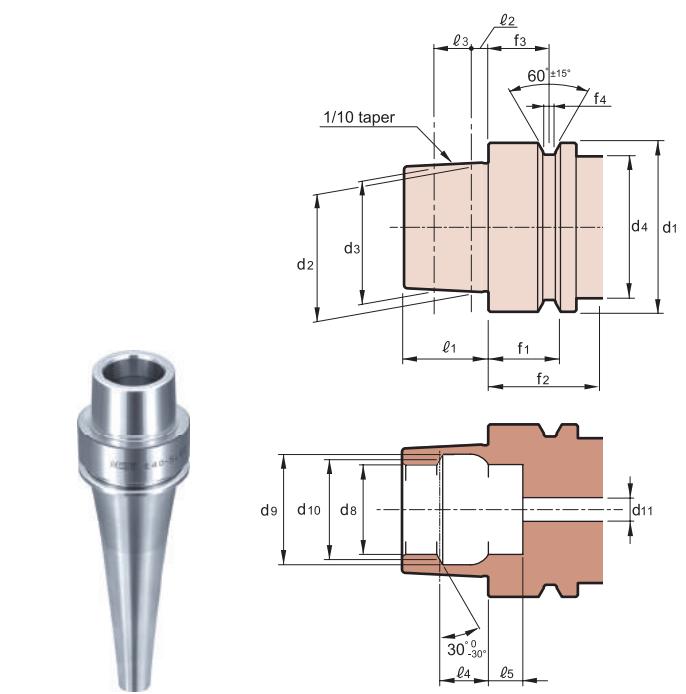



HSK-F (Extracts from DIN V 69893-6;1996-01)

Shank	F63	F80
d₁ (h10)	63	80
	38	48
d₂	+0.009 +0.006	+0.011 +0.007
d₃	36.9	46.53
d₄ (max.)	53	67
d₈ (H10)	26	34
d₉ (H11)	32	40
d₁₀	29	37
f₁ (- ^{0.1})	26	26
f₂ (min.)	42	42
f₃ (± 0.1)	18	18
f₄ ($^{+0.15}_{-0.1}$)	3.75	3.75
ℓ₁ (- ^{0.2})	25	32
ℓ₂	5	6.3
ℓ₃	11	14.7
ℓ₄ (JS10)	14.13	18.13
ℓ₅ (- ^{0.1})	10	10
f₁ (- ^{0.1})	26	26
f₂ (min.)	42	42
f₃ (± 0.1)	18	18
f₄ ($^{+0.15}_{-0.1}$)	3.75	3.75

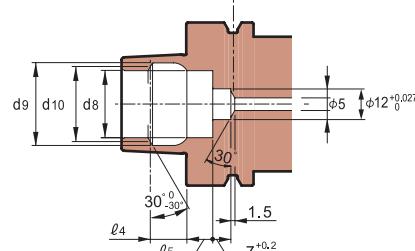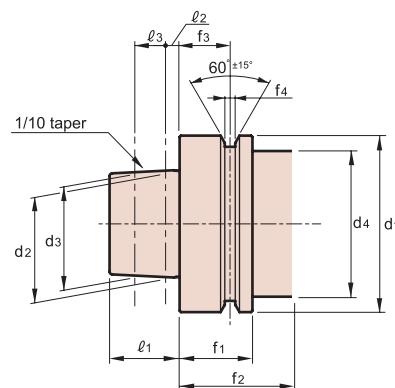


HSK-T (Extracts from ISO 12164-3;2008) For turning with turning mill machines

Shank	T40	T50	T63	T100	T125
b₁ (+ ^{0.04} _{-0.04})	8.05	10.54	12.54	20.02	25.02
b₂ (H10)	9	12	16	20	25
b₃ (H10)	11	14	18	22	28
b₅	7.932 +0.03 0	10.425 +0.035 0	12.425 +0.04 0	19.91	24.915
d₁ (h10)	40	50	63	100	125
d₂	30.007	38.009	48.010	75.013	95.016
d₃ (H10)	21	26	34	53	67
d₄ (H11)	25.5	32	40	63	80
d₅	23	29	37	58	73
d₆ (max.)	5	6.8	8.4	12	14
d₉ (max.)	39	49	62	99	124
d₁₅	M12 × 1	M16 × 1	M18 × 1	M24 × 1.5	M30 × 1.5
e₁	11	13.88	17.99	27.37	35.37
f₁ (- ^{0.1})	20	26	26	29	29
f₂ (min.)	23	30	30	34	34
f₃ (± 0.1)	16	18	18	20	20
f₄ ($^{+0.15}_{-0.1}$)	2	3.75	3.75	3.75	3.75
h₁ (- ^{0.2})	17	21	26.5	44	55.5
h₂ (- ^{0.1})	12	15.5	20	31.5	39.5
ℓ₁ (- ^{0.2})	20	25	32	50	63
ℓ₂	4	5	6.3	10	12.5
ℓ₃ (JS)	6	7.5	10	15	19
ℓ₄ (- ^{0.2})	3.5	4.5	6	10	12
ℓ₅ (JS10)	11.42	14.13	18.13	28.56	36.27
ℓ₆ (- ^{0.1})	8	10	10	12.5	16
ℓ₉ (- ^{0.1})	8	10	12	16	18
ℓ₁₂	12	19	21	24	24
r₃ ($^{+0.05}_{-0.05}$)	1.88	2.38	2.88	4.88	5.88
r₉	4.5	6	8	10	5

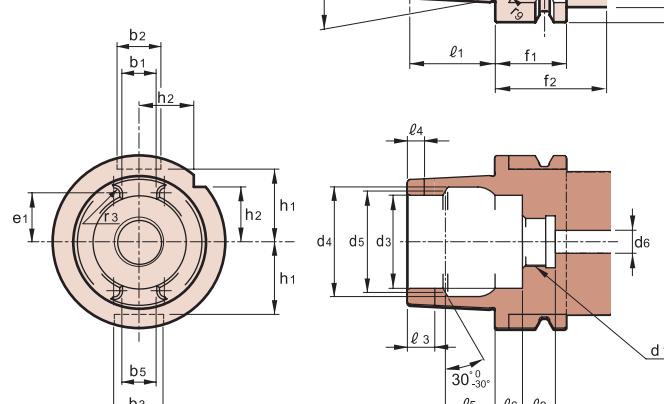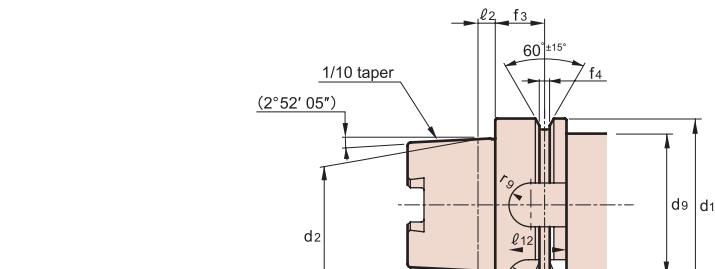


BT (Extracts from MAS 403)

Shank	BT30	BT40	BT50
D ₁	31.75	44.45	69.85
ℓ ₁ (± 0.15)	48.4	65.4	101.8
d ₂ (H8)	12.5	17	25
g (6H)	M12	M16	M24
ℓ ₂ (min.)	24	30	45
ℓ ₃ (min.)	34	43	62
ℓ ₄	7	9	13
b (H12)	16.1	16.1	25.7
ℓ ₅ (min.)	17	21	31
t (${}^{\circ} {}_{\circ}$)	16.3	22.6	35.4
D ₅ (h8)	46	63	100
f	20	25	35
v (± 0.1)	13.6	16.6	23.2
y (± 0.4)	2	2	3

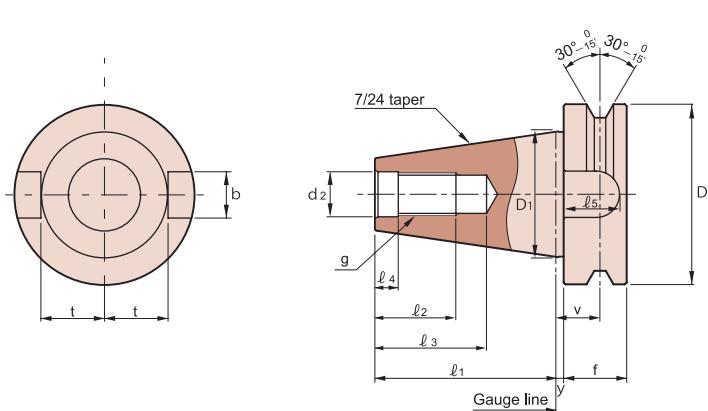


DIN (DIN69871-1)

Shank	DN40	DN50
D ₁	44.45	69.85
D ₂	63.55	97.5
D ₃	56.25	91.25
D ₄	50	80
L ₁	68.4	101.75
L ₃	3.75	6.495
b ₁	16.1	25.7
d ₁	17	25
t ₁	22.8	35.5
t ₂	25	37.7
t ₃	18.5	30

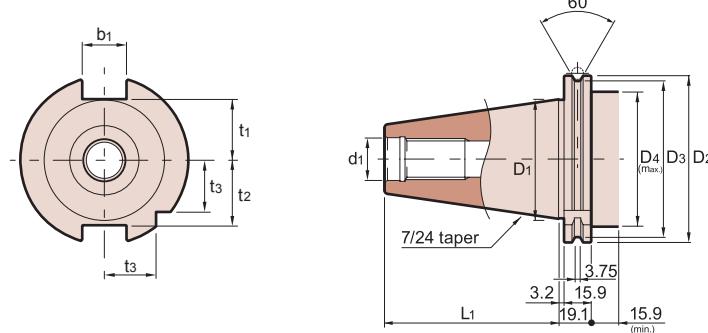

CAT.

Shank	CT40	CT50
D ₁	1.75"	2.75"
D ₂	2.5"	3.88"
D ₃	2.22"	3.59"
D ₄	1.75"	2.75"
L ₁	2.69"	4"
b ₁	.65"	1.06"
d ₁	.64"	1.03"
t ₁	.99"	1.49"
t ₂	.84"	1.39"

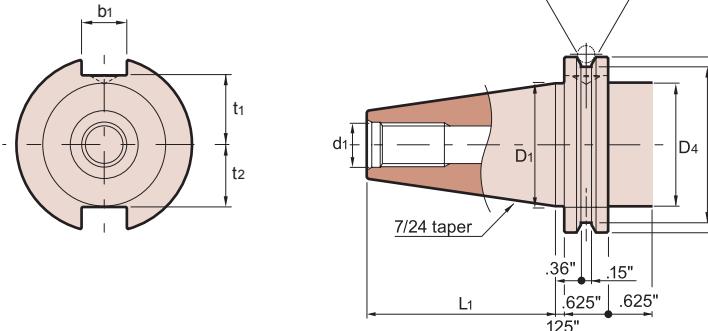

Dimensional tolerance of typically used mating

The class of dimension(mm)		The tolerance of the hole dimension(μm)						The tolerance of the shaft dimension(μm)					
More than	Less than	H4	H5	H6	H7	H8	H9	h4	h5	h6	h7	h8	h9
-	3	+3 0	+4 0	+6 0	+10 0	+14 0	+25 0	0 -3	0 -4	0 -6	0 -10	0 -14	0 -25
3	6	+4 0	+5 0	+8 0	+12 0	+18 0	+30 0	0 -4	0 -5	0 -8	0 -12	0 -18	0 -30
6	10	+4 0	+6 0	+9 0	+15 0	+22 0	+36 0	0 -4	0 -6	0 -9	0 -15	0 -22	0 -36
10	18	+5 0	+8 0	+11 0	+18 0	+27 0	+43 0	0 -5	0 -8	0 -11	0 -18	0 -27	0 -43
18	30	+6 0	+9 0	+13 0	+21 0	+33 0	+52 0	0 -6	0 -9	0 -13	0 -21	0 -33	0 -52
30	50	+7 0	+11 0	+16 0	+25 0	+39 0	+62 0	0 -7	0 -11	0 -16	0 -25	0 -39	0 -62

Conversion table for International System of Units

Force

N	kgf
1	1.01972-1
9.80665	1

Pressure

Pa	kgf/cm ²
1	1.0197 × 10 ⁻⁵
9.80665 × 10 ⁴	1

Stress

Pa	kgf/mm ²
1	1.0197 × 10 ⁻⁷
9.80665 × 10 ⁶	1

OVERSEAS NETWORK

Logistic center (J-COMPO) • USA/Chicago • Germany/Nuremberg • China/Hong Kong • Thailand



1709

<Europe>

BELGIUM 2 distributors

DIATOOL BVBA

TURNHOUT

MR. GELDHOF

TEL 32-14401830

info@diatool.be

FAX 32-14438880

MachinImmo BVBA

LOKEREN

MR. MANU COPPENS

TEL 32-93288811

mc@machinimmo.com

FINLAND 1 distributor

OY FMS TOOLS AB

HELSINKI

info@fmstools.fi

TEL 358-98190950

FAX 358-981909550

CZECH REPUBLIC 2 distributor

Creative Tools s.r.o.

SKALKA

MR. PETR CHYTIL

TEL 420-725588988

info@creative-tools.cz

FAX 420-582384485

Precision Tools Service Czech s.r.o.

PRAHA

office@ptscz.cz

TEL 420-225020413

FAX 420-225020444

GERMANY 4 distributors

Aura Frästechnik GMBH

BREIDENBACH

MR. MAIK BRADO

TEL 49-646591119414

kontakt@aura-tools.de

FAX 49-646591119429

DENMARK 2 distributors

Balling Maskiner ApS

KOLDING

MR. MICHAEL BALLING PETERSEN TEL 45-24790300

mbp@balling-maskiner.dk

OSG SCANDINAVIA A/S

ROSKILDE

osg@osg-scandinavia.com TEL 45-46756555

FAX 45-46756700

HSC TECHNIK

SCHNELLDORF

MR. LANGOHR

TEL 49-79502132

langohr.hermann@t-online.de

FAX 49-79501302

MAKINO GMBH

TEL 49-7021503201

OSG GMBH

GÖPPINGEN

info@osg-germany.de

TEL 49-716160640

FAX 49-7161606444

ITALY 6 distributors

FEBAMETAL S.p.A.

TORINO

febametal@tin.it

TEL 39-0117701412

FAX 39-0117701524

MAKINO ITALIA S.R.L.

Cavenago di Brianza

TEL 39-0295948290

FAX 39-0295948240

MMC ITALIA SRL

MILANO

info@mmc-italia.it

TEL 39-029377031

FAX 39-0293589093

MMC EMILIA ROMAGNA SRL

MODENA

MR. GIOVANNI FACCHINI TEL 39-0536946687

facchini@mcmcilia.it

FAX 39-0536946695

OSG ITALIA SRL

TORINO

MR. VINCENZO RAGO

TEL 39-0117705211

vincenzo.rago@osg-italia.it

FAX 39-0117071402

TECNOR MACCHINE SPA

MILANO

info@tecnormacchine.it

TEL 39-028242851

FAX 39-028255408

NETHERLANDS 2 distributors

PRODUTEC BV

MEERKERK

MR. ANDRE VERBURG

TEL 31-183600560

info@produtec.nl

FAX 31-183600647

SVM

VALKENSWAARD

MR. HANS SMITS

TEL 31-402040923

info@svmfreestechniek.nl

FAX 31-402047968

NORWAY 1 distributor

AS NOR-SWISS

OSLO

MR. JAN EGE

TEL 47-23241020

POLAND 3 distributors

Aura Frästechnik GMBH

WROCŁAW

MR. KRZYSZTOF KOSLA TEL 48-666011225

k.kosla@aura-tools.de

FAX 49-646591119429

MB Michał Rzepka

OBORNICKI

MR. BARTOSZ RZEPKA TEL 48-504647666

mb@mb-frezy.pl

FAX 48-616222339

MMC HARDMETAL POLAND Sp. z o.o.

WROCŁAW

MR. BOGUMIŁ ŁOZOWICKI

TEL 48-655467284

PORTUGAL 2 distributors

AMTOOLS

MARINHA GRANDE

geral@amtools.pt

TEL 351-244560456

FAX 351-244560668

SIMPLEFER-COMERCIO DE FERRAMENTAS, LDA.

MARINHA GRANDE

MR. CARLOS ALVES

TEL 351-244575350

carlos.alves@simplefer.pt

FAX 351-244575359

ROMANIA 1 distributor

MAZAROM IMPEX SRL

BUCHAREST

MR. ADRIAN OTU

TEL 40-212328001

RUSSIA 2 distributors

SodicoM-Center

MOSCOW

info@sodick.ru

TEL 7-4957870970

SOLDREAM SPB

SAINT-PETERSBURG

soldream-spb@soldream-spb.com TEL 7-8123737456

SWITZERLAND 1 distributor

STREULI TECHNOLOGIES AG

BIRMFENDORF

MR. STREULI

TEL 41-17394070

SLOVAKIA 2 distributors

MAKINO S.R.O.

BRATISLAVA

TEL 421-249612100

FAX 421-249612400

OSG

BRATISLAVA

MR. KENSUKE HIKOSAKA TEL 421-911775678

khikosaka@osgeurope.com FAX 421-249612400

SWEDEN 2 distributor

OSG SCANDINAVIA A/S

ROSKILDE

osg@osg-scandinavia.com

TEL 45-46756555

FAX 45-46756700

SLOVENIA 2 distributors

BTS COMPANY d.o.o.

LJUBLJANA

MR. BORIS POZAR

TEL 386-15841400

boris.pozar@bts-company.si

FAX 386-15249224

MJM Maruša Brinovec s.p.

Litija

MR. METOD PETRIC

TEL 386-31335760

metod.petric@siol.net

RAVEMA AB

VARNAMO

MR. ROGER HOGLUND

TEL 46-37048800

SPAIN 3 distributors**DELFIN COMPONENTES S.L.**

VIZCAYA

MR. JON AZCUE TEL 34-944105544
 delfincomponentes@delfincomponentes.com FAX 34-944105544

JANA TOOLS SL

SONDIKA

MR. JUAN JOSE JORDE TEL 34-944538224
 info@jana-tools.com FAX 34-944538225

UTILTALL S.A.

BARCELONA

comercial@utiltall.es TEL 34-934984465
 FAX 34-933086993

TURKEY 3 distributors**FORM TEKNIK**

ISTANBUL

MR. ISMAIL CINAR TEL 90-2122973397
 info@form-teknik.com FAX 90-2122566215

TANDEM TAKIM TEZGAHLARI

ISTANBUL

MR. TANKUT KOCAK TEL 90-2163131413
 tankut.kocak@tandem.com.tr FAX 90-2163131411

TEKNIKA HIRDAVAT SANAVI VE TICARET LTD. STL.

ISTANBUL

MR. MEHMET AKKAYA TEL 90-2126742864
 info@teknikatools.com FAX 90-2126742863

UK 4 distributors**MATSUURA MACHINERY LTD**

LEICESTERSHIRE

MR. DAVID SPENCER TEL 44-1530511400
 dspencer@matsuura.co.uk FAX 44-1530511442

MMC HARDMETAL U.K. LTD

TAMWORTH

MR. ADRIAN BARNACLE TEL 44-1827312312
 abarnacle@mitsubishicarbide.co.uk FAX 44-1827312314

OSG UK LTD.

ESSEX

sales@osg-uk.com TEL 44-8453051066
 FAX 44-8453051067

KYOCERA SG5 PRECISION TOOLS EUROPE LTD.

BERKSHIRE

SalesEU@kyocera-sgtool.com TEL 44-1189795200
 FAX 44-1189795295

<North America>

U.S.A 9 distributors**MITSUBISHI MATERIALS USA CORP.**

ILLINOIS

TECHNICAL SERVICE TEL 1-800-486-2341
 marketingservices@mmus.com FAX 1-847-519-1732

ON TARGET TOOLING LLC

WISCONSIN

MR. SCOTT SHIPPELL TEL 1-847-628-9942
 Scott@cimtekllc.com FAX 1-847-628-1987

OSG TAP & DIE, INC.

ILLINOIS

MR. DAN VOLPE TEL 1-630-790-5141
 dan.volpe@osgtool.com FAX 1-630-800-837-3334

SINGLE SOURCE TECHNOLOGIES, INC.

MICHIGAN

MR. RICK GRABAREK TEL 1-248-232-6268
 rgrabarek@singlesourcetech.com FAX 1-248-232-6261

ILLINOIS

MR. VICTOR ROVEDO TEL 1-847-340-3781
 franz.stark@singlesourcetech.com FAX 1-847-468-1271

WISCONSIN

MR. STEVE KLUG TEL 1-262-212-3825
 Steve.Klug@singlesourcetech.com FAX 1-262-574-7551

SOUTH CAROLINA

MS. CARA KELSO TEL 1-704-896-6000
 cara.kelso@singlesourcetech.com FAX 1-704-896-6002

ALABAMA

MR. BOB ASH TEL 1-256-301-0040
 bob.ash@singlesourcetech.com FAX 1-256-301-0059

PRECISION TOOLS SERVICE INC.

INDIANA

MR. PAUL SCHNEPP TEL 1-812-342-1234
 pschnepp@ptservice.com FAX 1-812-342-1235

TECNARA TOOLING SYSTEMS, INC.

LOS ANGELES

MR. DAVID TAKAHASHI TEL 1-562-941-2000
 la@tecnaratools.com FAX 1-562-946-0506

EAST COAST

MR. MATT GENOVESE TEL 1-203-912-8906
 la@tecnaratools.com FAX 1-562-946-0506

YAMAZEN INC. INC.

ILLINOIS

MR. RYAN JACOBSON TEL 1-800-228-2969
 ryan.jacobson@yamazen.com FAX 1-847-882-9056

LOS ANGELES

MR. MARK O'DONNELL TEL 1-800-882-8558
 markodonnell@yamazen.com FAX 1-714-692-2961

INDIANA

BOBBY WHITE TEL 1-800-882-8558
 bobbywhite@yamazen.com FAX 1-317-773-4945

CONNECTICUT

MR. JON MORASUTTI TEL 1-800-882-8558
 jonmorasutti@yamazen.com FAX 1-860-829-2205

MICHIGAN

MR. ALBERTO SAENZ TEL 1-800-882-8558
 albertosaenz@yamazen.com FAX 1-248-347-3624

TOMITA USA INC.

OHIO

TEL 1-614-873-6509
 FAX 1-614-873-6806

VEGA TOOL CORP..

ILLINOIS

MR. TADASHI KURASHIMA TEL 1-800-228-2969
 tadashirashima@vega-tool.com FAX 1-847-882-9056

CANADA 2 distributors**OSG CANADA LTD.**

ONTARIO, Burlington

MR. ROB ADKINS TEL 1-905-632-8032
 rob.adkins@osgcanada.com FAX 1-905-632-8466

SINGLE SOURCE TECHNOLOGIES, INC.

ONTARIO, Windsor

MR. SHAWN LESPERANCE TEL 1-519-737-8999
 slesperance@singlesourcetech.com FAX 1-519-737-8939

ONTARIO, Mississauga

MR. ROBERT KMIECIK TEL 1-905-565-6886
 Robert.Kmiecik@singlesourcetech.com FAX 1-905-565-6866

MEXICO 5 distributors**AHNSA TOOLS s.a.**

MONTERREY

MR. HORACIO CAMPOS TEL 52-81-8126-1000
 hcamps@ahnsa.com FAX 52-81-8126-1001

MMC METAL DE MEXICO S.A. DE C.V.

QUERETARO

MR. GUILLERMO ORTIZ TEL 52-442 192 6800
 lortiz@mmcmex.com FAX 52-442 221 6134

OSG /ROYCO, S.A. DE C.V.

MEXICO CITY

MR. TOSHITAKA YOSHIZAKI TEL 52-55-51-19-3363
 toshi@osgroyco.com.mx FAX 52-55-51-19-3370

SINGLE SOURCE TECHNOLOGIES, de R.L.de C.V.

QUERETARO

MR. MANUEL RUIZ TEL 52-442-1016000
 manuel.ruiz@singlesourcetech.com FAX 52-442-2531355

MONTERREY

MS. JUTZILL MANON TEL 52-442-101-6000
 Jutzill.Manon@singlesourcetech.com

YAMZEN MEXICANA SA DE CV

LEON

MR. GERARDO PLASCENCIA TEL 52-477-3910280
 gerardo.perez@yamazen.com.mx FAX 52-477-3910278

<South America>

BRAZIL 1 distributor**OSG FERRAMENTAS DE PRECISAQ LTDA.**

SAN PAULO

MR. YUJI KONDA TEL 55-11-6190-0900
 osgsp@nethall.com.br FAX 55-11-6190-0901

<Oceania>

New Zealand 2 distributors**HeadlandMT Ltd**

Auckland

TEL 64-2152265

TOTAL CNC PRODUCTS

AUCKLAND

MS. MARGARET WILLIAMS TEL 64-92745890
 admin@totalcnc.co.nz FAX 64-92745867

<East Asia>

CHINA 21distributors

AUTOFAC MACHINERY LTD.

亞動機械有限公司

DONGGUAN 東莞

■ MS. LILY GUAN 关 星 TEL 86-769-81157228
✉ lily@autofact.com.hk FAX 86-769-81157229

DIJET INDUSTRIAL CO.,LTD.

黛傑工業株式會社

SHANGHAI 上海

■ MR. GAO YONGMING 高 永明 TEL 86-21-5058-1698
✉ dijetsh@yahoo.com.cn FAX 86-21-5058-1699

Fineness Corporation

匯穎國際貿易(上海)有限公司

SHANGHAI 上海

■ MR. STEVE HU 胡上千/MR. ROY LU 呂旺勳 TEL 86-21-64282885
✉ steve@fct-tools.com FAX 86-21-64391906

TIANJIN 天津

■ MR. YANG JIAN 楊 建 TEL 86-22-87395825
✉ isabat_yang@fct-tools.com FAX 86-22-87395827

JECO PRECISION LTD.

捷高精機有限公司

HONGKONG 香港

■ MS. CATHY WONG 黃 玉珍 TEL 852-2428-8328
✉ cathy@jeco.hk FAX 852-2428-3683

KUNSHAN KUNQIAO TRADING CO.,LTD.

坤僑貿易有限公司

KUNSHAN 昆山

■ MR. CHOU TING SHENG 周 莹升 TEL 86-512-57507151
✉ kjcorp@ms56.hinet.net FAX 86-512-57507153

PRO-TECHNIC MACHINERY LTD.

寶力機械有限公司

HONG KONG 香港

■ MR. ALDO, S.K. CHEUNG 張 四継 TEL 852-2428-2727
✉ aldocheung@protechnic.com.hk FAX 852-2480-4764

SONDER TOOLS & MACHINERY(HK)LTD.

晨達(香港)有限公司

HONG KONG 香港

■ MR. JOHNNY NG 吳 偉良 TEL 852-2-964-0233
✉ johnnyng@sondertools.com FAX 852-2-964-0604

SHANGHAI 上海

■ MR. VICTOR LAU 劉 晓炎 TEL 86-21-5109-6048
✉ sonderbj@sonder.com.cn FAX 86-21-5111-3216

TOJU MACHINE-ELECTRICITY CO.,LTD

上海東住機電科技有限公司

SHANGHAI 上海

■ MR. TIAN JUN 田 军 TEL 86-21-6413-8038
✉ sh_toju@163.com FAX 86-21-5230-8016

YAMAZEN CORPORATION

山善(上海)貿易有限公司

SHANGHAI 上海

■ MR. KOZAWA 小澤 TEL 86-21-5445-2266
✉ kozawa@yamazensh.com. FAX 86-21-5445-2066

DALIAN 大連

■ MR. ZHUANG ZHEN 庄 震 TEL 86-411-8762-6323
✉ zhuangzhen@yamazensh.com FAX 86-411-8762-6332

GUANGZHOU 广州

■ MR. YAMASHITA 山下 TEL 86-20-8732-1601
✉ yamashita@yamazen.com.cn FAX 86-20-8732-1232

BBPC co., LTD

上海阪商機床刀具有限公司

SHANGHAI 上海

■ MR. AMAYAMA 天山 TEL 86-21-6253-1219
✉ osaka@bbpc.biz FAX 86-21-6256-3539

Dongguan Integrity Precision Machinery Co.,Ltd.

■ 莞市■普精密機械有限公司

DONGGUAN 東莞

■ MR. YANG YABIN 楊 亞兵 TEL 86-769-82288607
✉ frank1_yang@126.com FAX 86-769-82288609

BEIJIN 北京

■ MS. CHANG YAOHUA 常 耀华 TEL 86-10-6348-5150
✉ osaka@bbpc.biz FAX 86-10-6348-5152

DONGGUAN YAJIYA Precision machinery Co., Ltd

東莞八字屋精密機械有限公司

DONGGUAN 東莞

■ MR. Jason lee 李 忠信 TEL 86-769-8530-7420
✉ yajiyasales@163.com FAX 86-769-8530-7470

DONGLI MACHINE CO.,LTD.

東立機械有限公司

DALIAN 大連

■ MS. ZHOU PING 周 萍 TEL 86-411-87324719
✉ zhoup@dl-dongli.com.cn FAX 86-411-87324721

GALAXY PRECISION MACHINERY LTD

佳力精密機械有限公司

HONGKONG 香港

■ MR. KENNETH NG 吳 志良 TEL 852-31505889
✉ gp610@galaxy-mt.com FAX 852-23729093

JIANZE MACHINERY TECHNOLOGY CO.,LTD

上海建澤機械技術有限公司

SHANGHAI 上海

■ MR. XUE JIANMING 薛 建明 TEL 86-21-51557657
✉ xuejianming@jianze.net FAX 86-21-51557668

MAKINO CHINA CO.,LTD.

牧野機床(中國)有限公司

KUNSHAN 昆山

■ MR. LI HAORAN 劉 浩然 TEL 86-512-5777-8000
✉ info@makino.com.cn FAX 86-512-5777-9900

OSG SHANGHAI

歐士機(上海)精密工具有限公司

SHANGHAI 上海

■ MS. JI MIN 崔 敏 TEL 86-21-5888-6600
✉ jimin@chinaosg.com FAX 86-21-5888-3300

SHANGHAI HERLY INTERNATIONAL TRADING CO.,LTD.

上海賀立國際貿易有限公司

SHANGHAI 上海

■ MR. YOU JUNHA 由 俊哈 TEL 86-21-3921-5609
✉ import@herly.com FAX 86-21-3921-5606

SHANGHAI REBAR CUTTINGTOOLS CO., LTD

上海銳霸切削工具有限公司

SHANGHAI 上海

■ MR. CUI YANJUN 崔 岩軍 TEL 86-21-5108-5980
✉ steven_rb@126.com FAX 86-21-5763-2329

SICHENG Electromechanical Technology Co., Ltd

思誠機電科技有限公司

DONGGUAN 東莞

■ MR. Fly ZHONG 鐘 飛泰 TEL 86-769-22186189
✉ customercare@ec-sourcing.com FAX 86-769-22186191

ZHE JIANG RI JIN CNC TOOLS CO., LTD.

浙江日進數控刀具有限公司

ZHEJIANG 浙江

■ MS. YE LI HONG 叶 丽红 TEL 86-576-84232178
✉ cnrjin15@126.com FAX 86-576-84115612

TAIWAN 3distributors

KUNJUNG CORPORATION

坤嶺企業有限公司

TAIPEI 台北

■ MR.CHUNG-WEI,HUANG 黃 崇維 TEL 886-2-22902500
✉ kjcorp@ms56.hinet.net FAX 886-2-22902515

KAOSHUNG 高雄

■ MR. TSUNG-LIEH, HO 何 宗烈 TEL 886-7-7231101

✉ chdhor@pchome.com.tw FAX 886-7-7236088

TAICHUNG 台中

■ MR. MING-CHIEH,YEN 顏 朋傑 TEL 886-4-27026477

✉ kj.com@msa.hinet.net FAX 886-4-24520439

CENTURY TRADING CORPORATION

世紀貿易股份有限公司

TAIPEI 台北

■ MR. YAN YUNGTA 顏 永達 TEL 886-2-2298-8336
✉ ytyan@centra.com.tw FAX 886-2-2298-8338

TAIHO TOOL MFG. CO.,LTD.

大寶精密工具股份有限公司

KAOSHUNG 高雄

✉ yung-fengji@mail.taihotool.co.tw TEL 886-7-621-6136

✉ FAX 886-7-621-6140

KOREA 9 distributors

KUK SUNG INTERNATIONAL CO.,LTD. 국성인터내셔널주식회사 DAEGU 대구 ■ MR. CHOI BYUNG HOON 최병훈 TEL 82-53-604-0521 ✉ kuksung1@unitel.co.kr FAX 82-53-604-0525
--

DOO REE TRADING CO.,LTD. (유)두리무역 CHANGWON 창원 ■ MR. J.K. CHO 조재관 TEL 82-55-286-5310 ✉ dooree0909@naver.com FAX 82-55-284-5313
--

IGPNET CO.,LTD. 주식회사 아이지피넷 SEOUL 서울 ■ MR. KIM MOON KI 김문기 TEL 82-2-2026-5100 ✉ mk-kim@igpnet.co.kr FAX 82-2-2026-5101

KAMI CO.,LTD. SEOUL 서울 ■ MR. YOUNG L. , KIM, PH. D. 김영립 TEL 82-2-6670-4114 ✉ info@kami.biz FAX 82-2-6670-4110
--

MIRAE TECHNO 미래테크노 GWANGMYEONG 광명 ■ MR. PARK HO SUNG 박호성 TEL 82-31-479-5301 ✉ miraetechno@hanmail.net FAX 82-31-479-5302
--

NS KOREA 앤에스코리아 ANYANG 안양 ■ MR. BAI JAMES 배성진 TEL 82-31-479-1207 ✉ jamesbai@ns-korea.com FAX 82-31-479-1208

OSG KOREA CORPORATION 한국OSG주식회사 DAEGU 대구 ■ MR. JANG JUN YOUNG 장준영 TEL 82-53-589-2054 ✉ jjjang1@osg.co.kr FAX 82-53-583-5553

SEJONG M.T 세종엠티 BUSAN 부산 ■ MR. KANG YOUNG JIN 강영진 TEL 82-51-313-1148 ✉ sj0989@naver.com FAX 82-51-317-1148
--

YAMAZEN (KOREA) LTD. (주)야마젠코리아 SEOUL 서울 ■ MR. KIM SUNG JONG 김성종 TEL 82-2-864-1755 ✉ sj-kim@yamazenkorea.co.kr FAX 82-2-864-1755

<South Asia>

INDIA 7 distributors

MAKINO INDIA PVT LTD. BANGALORE ■ MR. B.V. SRIDHAR TEL 91-8067419500 ✉ sridhar@makino.co.in FAX 91-8067419523	Delhi ■ MR. SHASHANK TOMAR TEL 91-1244652200 ✉ shashankt@makino.co.in FAX 91-1244365217	Pune ■ info@makino.co.in TEL 91-2138673600 FAX 91-2138673623
--	--	---

ASSOCIATED ENGINEERING SERVICES CO.,LTD. CHENNAI ■ MR. N MURALI TEL 91-4423821581 ✉ murali@associatedengg.com FAX 91-4423821584	MMC HARDMETAL INDIA PVT. LTD. BANGALORE ■ mmcindia@mmc.co.jp TEL 91-802308-3400	Orion Innotech Pvt. Limited GURGAON ■ MR. VISHAL VERMA TEL 91-1244225210 ✉ vishal@oriongroup.in FAX 91-1244225211
--	---	--

OSG (INDIA) PVT. LTD. GURGAON TEL 91-1244009737 FAX 91-1244207761	VALIANT INDIA PUNE ■ MR. VIRENDRA MAYNALE TEL 91-9371672785 ✉ sales@valiantindia.in	Yamazen Machinery & Tools India Pvt. Ltd. Bangalore / Chennai / Gurgaon / Pune ■ tooling@yamazen.in TEL 91-1244605900 FAX 91-1244605921
--	--	--

INDONESIA 4 distributors

PT. JAVATEC TRIMITRA UTAMA JAKARTA ■ MR. STEFANUS DIBYO TEL 62-21-458-77288 ✉ tools@javatec.co.id FAX 62-21-458-77289	PT. JAVATEC TRIMITRA MACHINERY JAKARTA ■ MR. JONATAN ARIF SANTOSO TEL 62-21-4584-9988 ✉ jonatan@javatec-machinery.com FAX 62-21-4584-8899	YAMAZEN MACHINERY & TOOLS PHILIPPINES, INC. LAGUNA ■ MR. SHIN ISHIDA TEL 63-49-543-1958 ✉ s.ishida@yamazen.com.ph FAX 63-49-508-0893
--	--	---

PT. RUKUN SEJAHTERA TEKNIK JAKARTA ■ MR. HERI RISWANTO TEL 62-21-628-1615 ✉ marketing@abrasive-tools.com FAX 62-21-626-5559	PT. YAMAZEN INDONESIA JAKARTA ■ MR. MASASHI HAGIHARA TEL 62-21-451-3345 ✉ hagihara@yamazen.co.id FAX 62-21-451-3346	KAMOGAWA LAGUNA PHILIPPINES, INC. LAGUNA ■ MR. TAKAHIRO FUNAKUBO TEL 63-49-576-4931 ✉ t.funakubo@kamog.co.jp FAX 63-49-508-3199
--	--	--

SINGAPORE 5 distributors

A-TECH MARKETING PTE LTD ■ MR. IAN SOH TEL 65-6773-3148 ✉ iansoh@a-tech.com.sg FAX 65-6234-4826	MAKINO ASIA PTE LTD. ■ MR. V.M KUMAR TEL 65-6861-5722 ✉ kumar@makino.com.sg FAX 65-6861-1600	NOBELTECH PTE LTD ■ MR. ERIC CHAN TEL 65-6749-3636 ✉ eric@nbel.com.sg FAX 65-6749-0303
--	---	---

OSG ASIA PTE LTD. ■ MR. KAZUMASA KOIKE TEL 65-6844-4350 ✉ osgkk@osgasia.com.sg FAX 65-6844-4351	YAMAZEN (SINGAPORE)PTE LTD. ■ MR. TAKURO MATSUI TEL 65-6276-9488 ✉ matsui@yamazen.com.sg FAX 65-6276-9688
--	--

THAILAND 5 distributors

FACTORY MAX co.,LTD. BANGKOK ■ MR. S. TANGTARATORN TEL 66-2-759-9100 ✉ surapong@factorymax.co.th FAX 66-2-759-9009	MAKINO (THAILAND) CO.,LTD. BANGKOK ■ MR. JUNYA YOSHIMURA TEL 66-2-971-5750 ✉ junya.yoshimura@makino.co.th FAX 66-2-971-5751	OSG (THAILAND) CO.,LTD. BANGKOK ■ MR. MASAKAZU SEIKE TEL 66-3-898-9035 ✉ mseike@osg.co.th FAX 66-3-898-9042
---	--	--


PRECISION TOOLS SERVICE (THAILAND) CO.,LTD. BANGKOK ■ MR. YOSHIAKI KATO TEL 66-2-308-2470 ✉ sales@pstthai.com FAX 66-2-308-2471	YAMAZEN (THAILAND) CO.,LTD. BANGKOK ■ MR. KENICHI YASUNO TEL 66-2-374-5522 ✉ yasuno@yamazen.co.th FAX 66-2-374-3192	MALAYSIA 2 distributors
--	--	--------------------------------

VIETNAM 2 distributors

KAMOGAWA VIETNAM CO.,LTD Hanoi ■ MR. TOMOHIRO YAMAMOTO TEL 84-24-378-550-22/23 ✉ yamamoto@kamog.co.jp FAX 84-24-378-550-23	Ho Chi Minh ■ MR. SHINJI KUSUMOTO TEL 84-28-391-054/77/78/79 ✉ kusumoto@kamog.co.jp FAX 84-28-3910-5480	YAMAZEN (MALAYSIA) SDN.BHD. KUALA LUMPUR ■ MR. AKIRA KATO TEL 60-3-5569-5099 ✉ kato@yamazen.com.my FAX 60-3-5569-5011
--	--	--

YAMAZEN VIETNAM CO.,LTD Hanoi ■ MR. DAISUKE TOCHIGI TEL 84-4-3728 6292 ✉ tochigi@yamazenvn.com FAX 84-4-3766-4137	Ho Chi Minh ■ MR. TAKEHITO NAKAJIMA TEL 84-8-54179 229 ✉ tn790717@yamazenvn.com FAX 84-8-3820-2784	PENANG ■ MR. CHENG TEL 60-4-399-4021 ✉ mecheng@yamazen.com.my FAX 60-4-399-3025
---	---	--



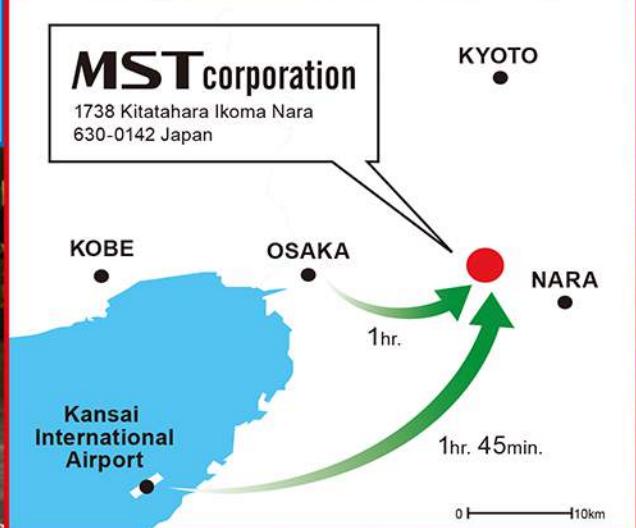



HEAD OFFICE & FACTORY

1738 Kita-tahara, Ikoma,
Nara 630-0142 Japan
Tel : +81 743 78 1931
Fax : +81 743 78 3854
✉ : info@mst-corp.co.jp

MST corporation
<http://www.mst-corp.co.jp>