




TOOLING SYSTEM

General Catalog

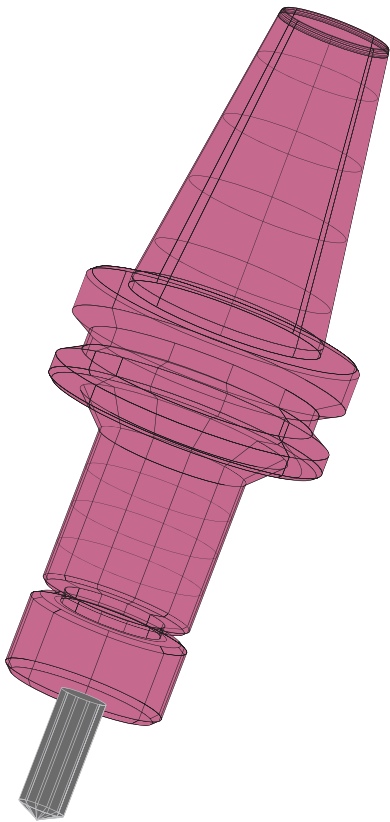

MST corporation

Vol. 4 
1901

Individuality and creation

Since its inauguration in 1937, MST has been developing new products with forward-looking creativity. We have a basic philosophy of "Personality and Creation", and we pursue of originality and try to improve brand value as we strive to meet the needs of our customers.



■ Fusing humans and machines


By fusing the automated machining processes and by-hand processes at a high level, we are aiming to produce even higher quality products.




A new challenge

By making the most of our accumulated knowledge and experience, we are developing new processing technologies and providing new service.

■ Graphite Machining



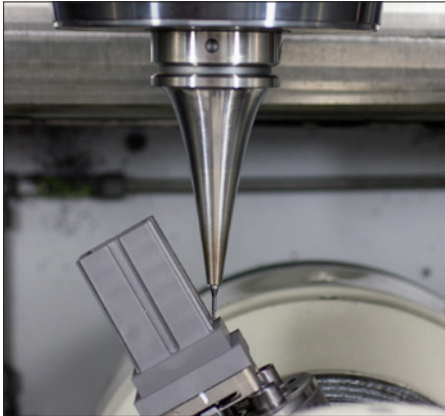


Thailand factory




We make graphite electrodes to your specifications. State-of-the-art facilities and production systems offer our customers quick delivery and large-volume order fulfillment.

■ Micromachining

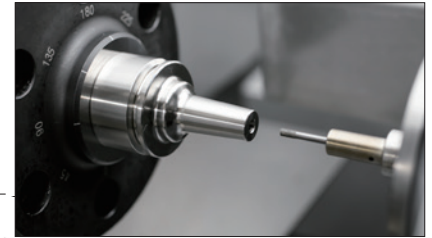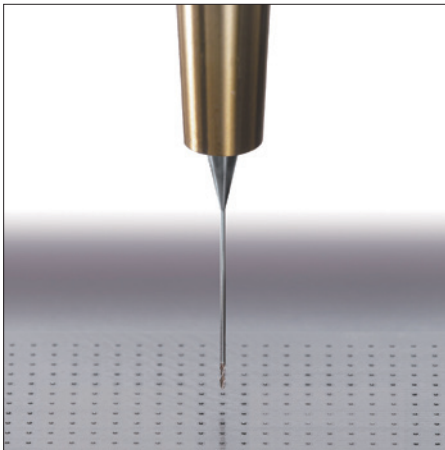

Slimline UNO finishing process



We meet our customers' needs using micron-precision process technology which have been cultivated throughout history.





RELIABLE TOOLING

MST's tooling is subject to its own MST's 4 accuracy standards: taper contact, roundness, surface roughness and heat treatment. These are more precise than JIS or MAS standards. We provide trustworthy products under strict quality control.





● MST's 4 accuracy standards.

| | | |
|----------------------------|------------------|--------------|
| 1 Taper contact | % | 90 |
| 2 Roundness | μm | 0.8 |
| 3 Surface roughness (Rmax) | μm | 0.6 |
| 4 Heat treatment | Material | SCM415 |
| | Carburized depth | mm 0.8 ~ 1.0 |
| | Hardness | HRC 55° ± 2° |

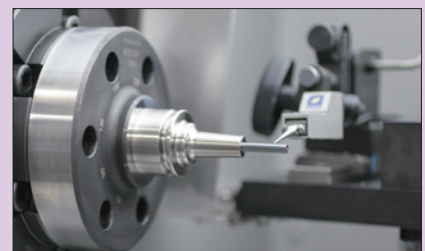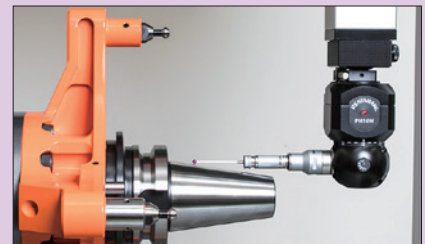

SHRINK-FIT HOLDER SLIMLINE

SLIMLINE contributes to the improvement of machining accuracy and cost reduction in 5-axis machining, micro-precision machining, and heavy duty applications.



The SLIMLINE shrink-fit holder provides the perfect solution.


A simple chucking mechanism without any parts.

Stable gripping force.
No gaps.
No parts.
A cutter does not fall off even if vibrated.



Super-slim shape

Allows the holder to enter a workpiece. Can be used with a standard tool.












High accuracy

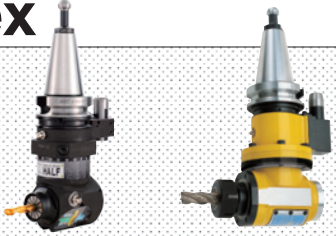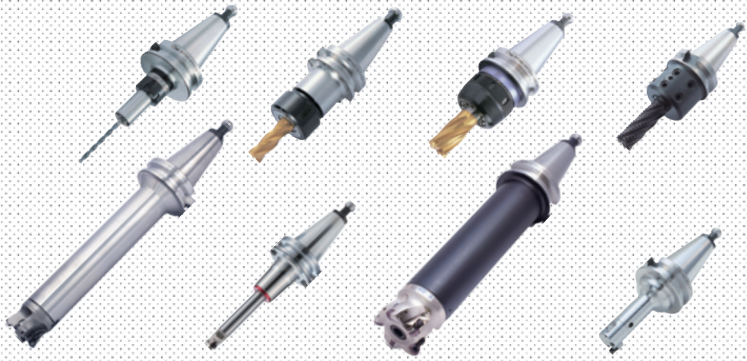Twice the tool life.
Slim tools are also no problem.
Anyone can use them...

| | |
|---|--|
| <p>✗ Short cutter life.</p> | <p>✗ Small tools break soon!</p> |
| <p>✗ Cutter run-out adjustment is troublesome!</p> | <p>✗ The end mill slips or falls off!</p> <p>The workpiece is ruined.</p> |
| <p>✗ The applicable tools are special!</p> | <p>✗ The coolant leaks.</p> |

Master Index

| | | | | | |
|--|---|--|---|--|------------|
| ANGLE HEAD |  | HALF | 6 | | |
| | | STANDARD type | 14 | | |
| M/C Tool |  | DETa-1 Collet Holder | 22 | | |
| | | COLLET HOLDER | 32 | | |
| | | HI-ART MILLING CHUCK | 40 | | |
| | | SUMMIT | 43 | | |
| | | FMH RIGID type | 46 | | |
| | | RED SCREW arbor | 48 | | |
| | | Cutter arbor with spindle-through coolant | 53 | | |
| | | MICRO HEAD | 55 | | |
| | | Retention knob | 64 | | |
| | | HSK - T Tooling Systems for Turning Mill |  | Set screw holders for Round shank | 69 |
| Insert holders for Square-shank | 70 | | | | |
| General Purpose Tool |  | Universal Facing Boring Head | 73 | | |
| | | SMART GRIP | 75 | | |
| JIG |  | GOO checker | 82 | | |
| | | Centering bar | 84 | | |
| Measuring Equipment |  | 6S DESK | 86 | | |
| | | CLEAN BOX | 88 | | |
| | | TEST BAR CHECKMATE | 90 | | |
| | | TOOL CAP | 91 | | |
| | | Tool set up stand | 94 | | |
| | | PALETTE | 96 | | |
| | | ENDMILL HOUSE | 97 | | |
| | | TOOL HOLDER STORING CABINET | 98 | | |
| | | Maintenance Tool |  | MIDDLE VISE | 99 |
| | | | | Wire Cut Unit | 101 |
| Wire EDM fixture |  | PARTS | 103 | | |
| | | ANGLE HEAD HALF PARTS LIST | 105 | | |
| | | Technical support | 114 | | |
| | | Instructions for use | 115 | | |
| | | For high-speed spindle rotation | 118 | | |
| Technical Information |  | HSK SHANK | 119 | | |
| | | Technical data | 120 | | |
| | | OVERSEAS NETWORK | 128 | | |

For High-accuracy, and High-efficiency machining

5 Points




End-mill



Small size drill


1 The shortest

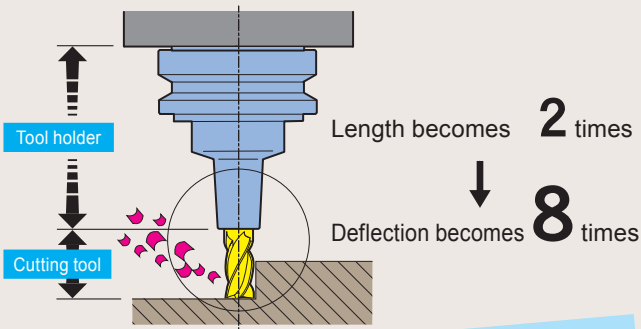

Use shrink-fit holders with a slim-tip!

As short as possible
Deflection amount is proportional to projection length³.

2 Selection




Stronger than collet holders
Clamping force **3** times
Run-out accuracy within **3** microns

Use shrink-fit holders with strong clamping force and high accuracy!


Choose a tool holder that can clamp a cutting tool securely and with high accuracy.

3 Quality



Do not use worn cutting tools.

4 Cleanliness




Cutting chips and oil are **your main enemies.**

Use a tool holder washing machine,
CLEAN BOX!

Clean your tool holders and cutting tools.

5 Accuracy



Check

the spindle condition

Use a test bar for dedicated machine spindle maintenance,

CHECKMATE!

Machine spindle run-out accuracy should be within 10 microns (.0004").

The shrink fit holder with the slim design, superior gripping force and run-out accuracy.

SHRINK-FIT HOLDER
SLIMLINE



If you would like more detailed information, please contact MST and ask for a SLIMLINE catalog.

Thickness **1.5mm (.06")**
3 μm (.0001")

Tool holder washing machine



CLEAN BOX

Washes tool holders, collets, nuts and cutting tools thoroughly to maintain their high accuracy

➔ P.88

TEST BAR

CHECKMATE



Ideal for easy machine spindle run-out accuracy checks.

➔ P.90







ANGLE HEAD

You can carry out 5-surface machining, such as side face and inside surface, without needing to change the positioning of the work-piece.







Voluminous variety


■ New concept Angle head **HALF** for drilling and tapping applications **Affordable • Lightweight • Short delivery!**

| Type | Angle | MODEL | Application | Chuckling range (φD) |  | MAX. (min ⁻¹) [Main spindle : Angle shaft] | ATC |  Kg | |
|---|-----------------|-------|------------------|----------------------|--|--|-----|--|-----|
| 90° type ↪ P. 8  mini type ↪ P. 10 | 90° | HFC6 | Drill Endmill | φ3, 4, 6 | FCS6 | 5600:5000 [1 : 0.88] | ○ | 1.8 | |
| | | HFD 7 | | φ1 ~ 7 | D 7 | 6000:6000 [1(CCW):1(CW)] | | | |
| | | HFD12 | | φ2.5 ~ 13 | D12 | 4000:4000 [1(CCW):1(CW)] | | | |
| | | HFA10 | Tap | φ2.4 ~ 10 | C10 | 6000:6000 [1(CCW):1(CW)] | | 1.8 | |
| | | HFA20 | | φ5.8 ~ 20 | C20 | 6000:5000 [1(CCW):0.83(CW)] | | | 4.4 |
| | | HFC6 | | M4, 5, 6 | FCS6 | 5600:5000 [1 : 0.88] | | | |
| | | HFT 4 | Tap | M2 ~ 8 | TA4 | 6000:6000 [1(CCW):1(CW)] | | 2.3 | |
| | | HFT 6 | | M3 ~ 12 | TA6 | 4000:4000 [1(CCW):1(CW)] | | 2.9 | |
| | | HFT12 | | M3 ~ 16 | TA6/12 | 6000:5000 [1(CCW):0.83(CW)] | | 4.4 | |
| UNIVERSAL type (Free setting of cutting directions) ↪ P. 11  | 0° ∩ 120° | HUD 7 | Drill Endmill | φ1 ~ 7 | D 7 | 6250:3000(BT30:7200:4000) [1(CCW):0.48(CW)] [BT30:1(CCW):0.56(CW)] | ○ | 1.8 | |
| | | HUA10 | | φ2.4 ~ 10 | C10 | 6300:3000 [1(CW):0.48(CW)] | | 3.9 | |
| | | HUA20 | | φ5.8 ~ 20 | C20 | | | 4.8 | |
| | | HUT 4 | Tap | M2 ~ 8 | TA4 | 6250:3000 (BT30:7200:4000) [1(CCW):0.48(CW)] [BT30:1(CCW):0.56(CW)] | | 3.8 | |
| | | HUT 6 | | M3 ~ 12 | TA6 | 6300:4000 [1(CW):0.48(CW)] | | 4.8 | |

■ High-rigidity **STANDARD** type

(※Use the BT30 tooling system with the Quick Change system.)

| | | | | | | | | |
|--|-----|-------|------------------|-------------------|-------|--------------------------------|---|------|
| MODULAR type (Recombination type) ↪ P. 15  | 90° | AHB 5 | Drill Endmill | φ0.5 ~ 5 | ER8 | 6000:6000 [1(CCW):1(CW)] | ○ | 5.5 |
| | | AHB 7 | | φ0.5 ~ 7 | ESX12 | | | 5.3 |
| | | AHB10 | | φ2.4 ~ 10 | C10 | | | 6.2 |
| SOLID type ↪ P. 16  | 90° | AHA20 | Drill Endmill | φ5.8 ~ 20 | C20 | 3000:2430 [1(CCW):0.81(CW)] | ○ | 7.3 |
| | | AHA25 | | φ5.8 ~ 25 | C25 | 2500:2400 [1(CCW):0.96(CW)] | | 13.6 |
| | | AHD30 | | BT30 [※] | BT30 | 14.7 | | |
| FLANGE type (Mounting directly on machine spindle) ↪ P. 17  | 90° | AHA20 | Drill Endmill | φ5.8 ~ 20 | C20 | 3000:2430 [1(CCW):0.81(CW)] | × | 18.0 |
| | | AHA25 | | φ5.8 ~ 25 | C25 | 2500:2400 [1(CCW):0.96(CW)] | | 18.5 |
| | | AHD30 | | BT30 [※] | BT30 | 19.6 | | |
| UNIVERSAL type (Free setting of cutting directions) ↪ P. 18  | 0° | AHU10 | Drill Endmill | φ2.4 ~ 10 | C10 | 3000:4500 [1(CW):1.5(CW)] | ○ | 9.6 |
| | 90° | AHU20 | | φ5.8 ~ 20 | C20 | 3000:3000 [1(CW):1(CW)] | | 15.8 |

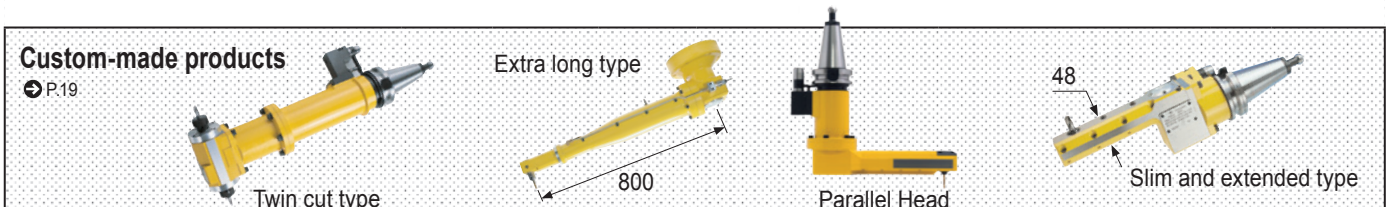

ANGLE HEAD HALF

PAT.

- Affordable**
2,300USD~
- Speedy**
Shorter delivery
- Lightweight**
1.8kg~
- Compact**
φ36~
- Repair it yourself**

Drilling and tapping account for 80% of angle head operation.

The Angle Head HALF was redesigned to achieve the necessary rigidity and accuracy, it allows;

- AFFORDABLE** (Price : 1/2)
- QUICK DELIVERY** (Lead Time : 1/2)
- LIGHTWEIGHT** (Weight : 1/2)

NEW CONCEPT



M/C Tool

HSK-T Tooling Systems for Turning Mill

General Purpose Tool

JIG

Measuring Equipment

Maintenance Tool

Wire EDM fixture

Technical Information



90° type

BT30/40/50
HSK-A63
DIN40/50,
CAT.40/50

HFD/HFA
φ1~20mm

HFT
M2~16

mini type

Extra-compact head

BT30/40/50
DIN40/50
CAT.40/50

HFCS
φ3,4,6mm
M4,5,6

15.5 31.5 φ36

UNIVERSAL type

Angle can be set arbitrarily


BT30/40/50
DIN40/50
CAT.40/50

HUD/HUA
φ1~20mm

HUT
M2~12

120° 120°

Compact design



| Type | MODEL | Q | A | B |
|-----------|-------|-----|------|----|
| 90° type | HFD 7 | 72 | 68 | 38 |
| | HFD12 | 98 | 93 | 58 |
| | HFT 4 | 75 | 73 | 38 |
| | HFT 6 | 97 | 92 | 58 |
| | HFA10 | 90 | 87 | 38 |
| | HFA20 | 119 | 111 | 64 |
| | HFT12 | 97 | 96 | 64 |
| mini type | HFCS6 | 36 | 31.5 | 31 |


Auto Tool Changer (A.T.C) is available on BT30 machine.



BT30
1.8kg

Easy installation

The positioning pin allows an in-use positioning block to be used is now a standard feature. Can be used with a variety of machining centers.

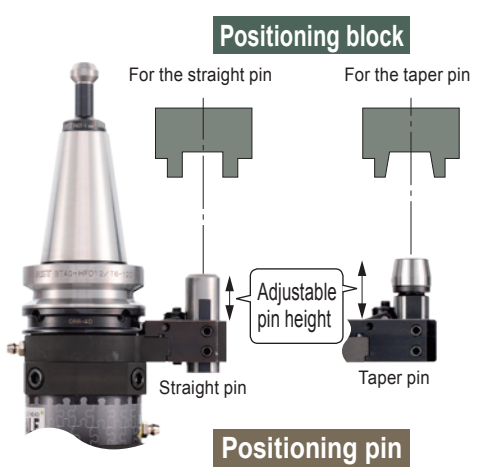


Easy disassembly and assembly

- The number of parts (22 pcs.) is half that of conventional angle heads.
- No need for fine matching and adjustment.
- Makes use of commercial items such as bearings. Affordable and readily available.
- An informative video and an instruction manual for disassembly and reassembly are provided.




Running cost is reduced by 90% as a result of reduced repair costs and machine down time.

Easy to reassemble

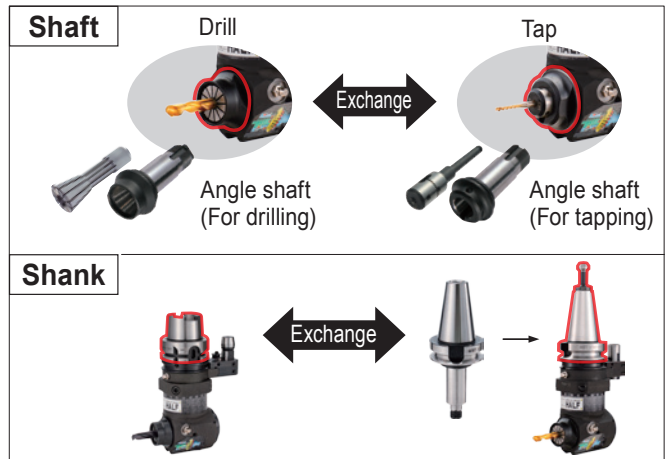

Positioning block and positioning pin

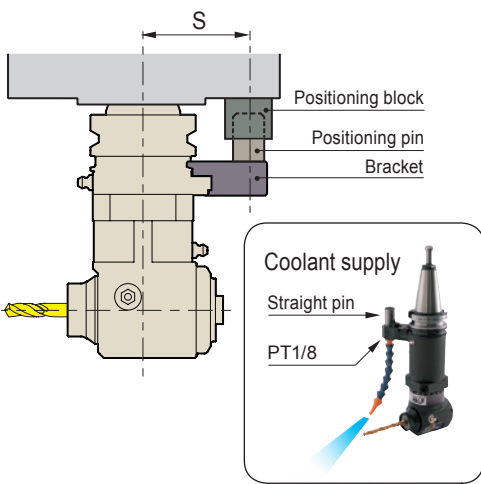


Positioning block


Positioning pin

Bracket

- S dimension can be changed by reassembling the bracket.
- The positioning pin can be easily adjusted in length and replaced.

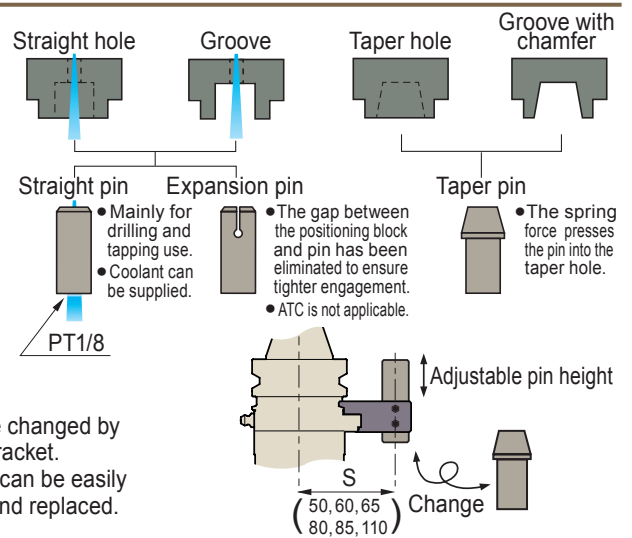

Semi-finished positioning block



- Note**
- Please confirm with the machine tool manufacturer about the dimensions of the positioning block.
 - We have a semi-finished positioning block with a taper hole available. (→P.19)

Positioning block for machines

• FANUC ROBODRILL α-DiB series



• MAZAK SUPER VELOCITY CENTER 2000L/120-II 2000L/200-II



• Available from Yamazaki Mazak Corp.

• BROTHER SPEEDIO Compact machining center



Caution

- TC-S2A※ (Tapping center), The user needs to confirm whether the positioning block can be mounted on the machine (spindle surface) or not. Please contact us.
- TC-R2B※ (Tapping center) machining area is limited to some extent due to interference between the positioning block and the internal part cover of the machine. For more information, please contact us.

A product code example when ordering Angle Head HALF.

- FANUC BT30-HFD7-122-S65
- BROTHER BT30-HFD7L-120-S50C

| CODE | NOTE |
|--------|------------------------------------|
| ABF213 | S300X1 /X2, S500X1 /X2, S700X1 /X2 |
| ABF259 | S1000X1 |
| ABF176 | TC-S2, S2A※, S2B, S2C, S2D, R2B※ |

Kit Package





- Learning Kit to understand gear and bearing mechanism.
- There are only 22 parts and anyone can assemble them in about 10 min.
- Spare/consumable parts and assembly tools are included.






| Contents of kit | CODE | |
|---------------------------|---|---------------------------|
| | BT40-HF12-LK | BT50-HF12-LK |
| Complete unit | BT40-HFD12-180-S65 (1pc.) | BT50-HFD12-195-S80 (1pc.) |
| Angle shaft (For tapping) | FR-T6 (1pc.) | |
| Tap sleeve | TA6-3, 4, 5, 6, 8 (each 1pc.) | |
| DETa-1 Collet | D12-4, 6, 8, 10, 12, 13 (each 1pc.) | |
| Positioning pin | HP-50T(1pc.) | HP-62T(1pc.) |
| Spare bearing | 7005ADB (1set), 6805 (1pc.), 51106 (1pc.) | |

HALF 90° type

Drill · Endmill

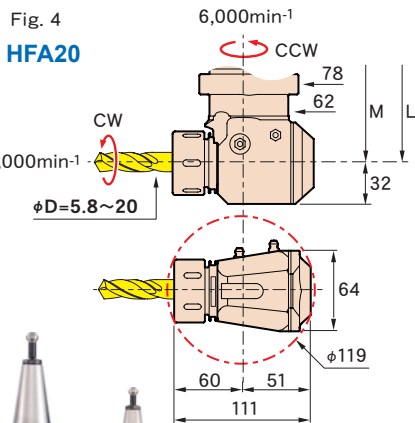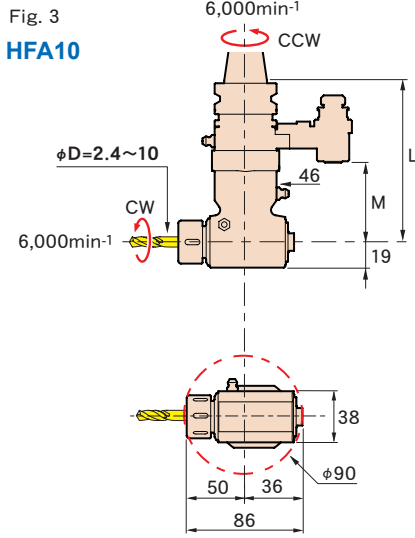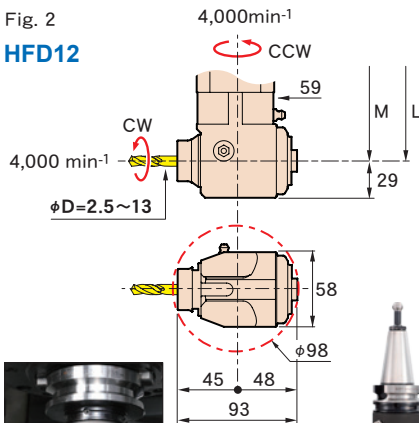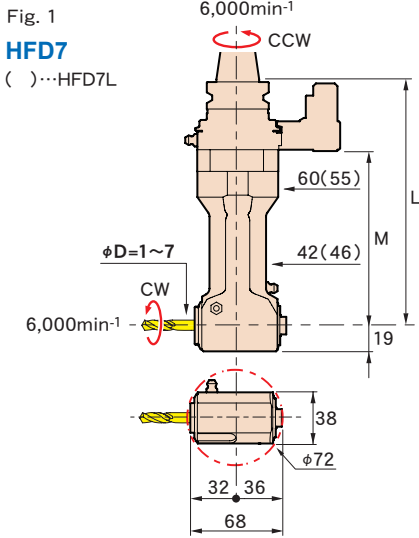

Tap

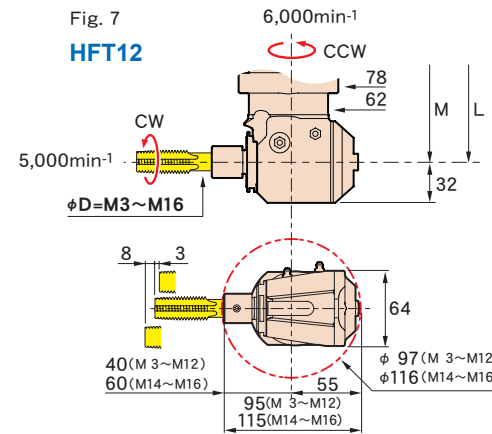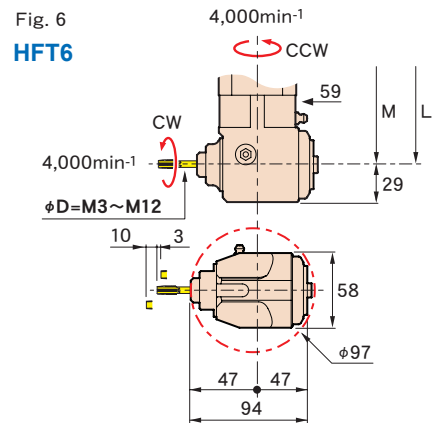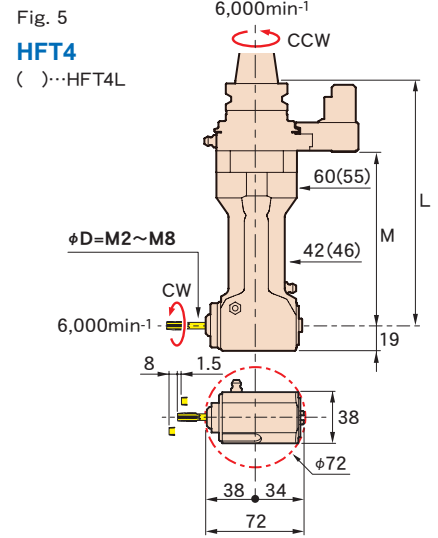


BT40-HFA20-135

BT40-HFD12-120


BT30-HFD7-122

DETa-1 Collet (HFD,HUD)

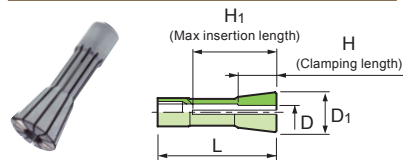

| CODE | φD | φD ₁ | L | H | H ₁ | Holder type |
|----------|---------|-----------------|----|----|----------------|-------------|
| D 7- 1.5 | 1 ~ 1.5 | 17 | 50 | 7 | 36 | HFD 7 |
| - 2 | 1.5 ~ 2 | | | 10 | | HUD 7 |
| - 2.5 | 2 ~ 2.5 | | | 12 | | |
| - 3 | 2.5 ~ 3 | | | 14 | | |
| - 4 | 3 ~ 4 | | | 16 | | |
| - 5 | 4 ~ 5 | | | | | |
| - 6 | 5 ~ 6 | | | | | |
| - 7 | 6 ~ 7 | | | | | |
| D12- 4 | 2.5 ~ 4 | 26 | 70 | 16 | 50 | HFD12 |
| - 6 | 4 ~ 6 | | | 20 | | |
| - 8 | 6 ~ 8 | | | 22 | | |
| -10 | 8 ~ 10 | | | | | |
| -12 | 10 ~ 12 | | | | | |
| -13 | 11 ~ 13 | | | | | |


Tap sleeve (HFT,HUT)

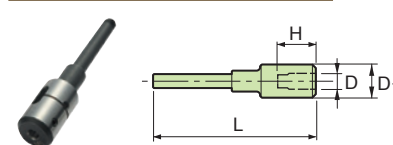

| CODE | φD | L | φD ₁ | H | Holder type |
|----------|-----|-------|-----------------|----|-------------|
| TA 4-M 2 | M 2 | 67.5 | 16 | 19 | HFT 4 |
| -M 3 | M 3 | | | 20 | HUT 4 |
| -M 4 | M 4 | | | 21 | |
| -M 5 | M 5 | | | | |
| -M 6 | M 6 | | | | |
| -M 8 | M 8 | | | | |
| TA 6-M 3 | M 3 | 92 | 19 | 21 | HFT 6 |
| -M 4 | M 4 | | | 22 | HUT 6 |
| -M 5 | M 5 | | | | HFT12 |
| -M 6 | M 6 | | | | |
| -M 8 | M 8 | | | 23 | |
| -M10 | M10 | | | 24 | |
| -M12 | M12 | | | 33 | |
| TA12-M14 | M14 | 111.5 | 25 | 33 | HFT12 |
| -M16 | M16 | | | 35 | |

■ Note
 ● Above products meet JIS standards. We can produce other standard Tap sleeves, such as ANSI, ISO, DIN and others. For more information, please contact us.

Spring collet (HFA,HUA)



| CODE | φD | φD ₁ | L | H | Holder type |
|-------|---|-----------------|----|---|----------------|
| C10-D | 2.6 2.8 3 ... (0.2Steps) ... 9.6 9.8 10 | 17.2 | 26 | 16 (φD=2.6~5) Except for 18 ※3, 4 (φD=3, 4, 20 5.2~5.8) (φD= 6~10) | HFA10 HUA10 |
| C20-D | 6 6.2 6.4 ... (0.2Steps) ... 19.8 20 | 29.5 | 50 | 32 (φD= 6~9.8) 35 (φD=10~15.8) 40 (φD=16~20) | HFA10 HUA10 |


Ex. φD C10-6

| CODE (Master holder) | Fig. | φD | L | M | Kg |
|------------------------|------|---------|-----|-----|-----|
| BT30-HFD 7 -122 | 1 | 1 ~ 7 | 122 | 70 | 2.3 |
| | | | 182 | 130 | 3.0 |
| | | | 120 | 57 | 1.8 |
| -HFD 7L-120 | | | | | |
| -HFD12 -122 | 2 | 2.5~ 13 | 122 | 70 | 2.9 |
| -HFA10 -120 | 3 | 2.4~ 10 | 120 | 65 | 1.8 |
| -HFT 4 -122 | 5 | M2~M 8 | 122 | 70 | 2.3 |
| | | | 182 | 130 | 3.0 |
| | | | 120 | 57 | 1.8 |
| -HFT 4L-120 | | | | | |
| -HFT 6 -122 | 6 | M3~M12 | 122 | 70 | 2.9 |
| BT40-HFD 7 -120 | 1 | 1 ~ 7 | 120 | 70 | 3.0 |
| | | | 180 | 130 | 3.3 |
| | | | 120 | 70 | 3.6 |
| -HFD12 -120 | 2 | 2.5~ 13 | 120 | 70 | 3.6 |
| -180 | | | 180 | 130 | 4.9 |
| -HFA20 -135 | 4 | 5.8~ 20 | 135 | 77 | 4.4 |
| -195 | | | 195 | 137 | 5.6 |
| -HFT 4 -120 | 5 | M2~M 8 | 120 | 70 | 3.0 |
| | | | 180 | 130 | 3.3 |
| -HFT 6 -120 | 6 | M3~M12 | 120 | 70 | 3.6 |
| | | | 180 | 130 | 4.9 |
| -HFT12 -135 | 7 | M3~M16 | 135 | 77 | 4.4 |
| | | | 195 | 137 | 5.6 |
| | | | 195 | 137 | 5.6 |
| BT50-HFD 7 -195 | 1 | 1 ~ 7 | 195 | 130 | 6.4 |
| | | | 255 | 190 | 6.8 |
| | | | 135 | 70 | 6.3 |
| -HFD12 -135 | 2 | 2.5~ 13 | 135 | 70 | 6.3 |
| -195 | | | 195 | 130 | 7.6 |
| -255 | | | 255 | 190 | 8.9 |
| -HFA20 -150 | 4 | 5.8~ 20 | 150 | 77 | 7.1 |
| | | | 210 | 137 | 8.3 |
| | | | 270 | 197 | 9.4 |
| -HFT 4 -195 | 5 | M2~M 8 | 195 | 130 | 6.4 |
| | | | 255 | 190 | 6.8 |
| | | | 135 | 70 | 6.3 |
| -HFT 6 -135 | 6 | M3~M12 | 135 | 70 | 6.3 |
| | | | 195 | 130 | 7.6 |
| | | | 255 | 190 | 8.9 |
| -HFT12 -150 | 7 | M3~M16 | 150 | 77 | 7.1 |
| | | | 210 | 137 | 8.3 |
| | | | 270 | 197 | 9.4 |
| | | | 270 | 197 | 9.4 |
| A63 -HFD 7 -183 | 1 | 1 ~ 7 | 183 | 130 | 3.5 |
| | | | 243 | 190 | 3.9 |
| | | | 123 | 70 | 3.3 |
| -HFD12 -123 | 2 | 2.5~ 13 | 123 | 70 | 3.3 |
| -183 | | | 183 | 130 | 4.7 |
| -243 | | | 243 | 190 | 6.0 |
| -HFA20 -198 | 4 | 5.8~ 20 | 198 | 137 | 5.4 |
| | | | 258 | 197 | 6.5 |
| -HFT 4 -183 | 5 | M2~M 8 | 183 | 130 | 3.5 |
| | | | 243 | 190 | 3.9 |
| -HFT 6 -123 | 6 | M3~M12 | 123 | 70 | 3.3 |
| | | | 183 | 130 | 4.7 |
| | | | 243 | 190 | 6.0 |
| -HFT12 -198 | 7 | M3~M16 | 198 | 137 | 5.4 |
| | | | 258 | 197 | 6.5 |
| | | | 258 | 197 | 6.5 |

| CODE (Master holder) | Fig. | φD | L | M | Kg |
|------------------------|------|----------|-------|------|------|
| DN40A-HFD 7-135 | 1 | 1 ~ 7 | 135 | 70 | 3.1 |
| | | | 195 | 130 | 3.4 |
| | | | 135 | 70 | 3.7 |
| -HFD12-135 | 2 | 2.5~ 13 | 135 | 70 | 3.7 |
| -195 | | | 195 | 130 | 5.0 |
| -HFA20-150 | 4 | 5.8~ 20 | 150 | 77 | 4.7 |
| | | | 210 | 137 | 5.8 |
| -HFT 4-135 | 5 | M2~M 8 | 135 | 70 | 3.1 |
| | | | 195 | 130 | 3.4 |
| -195 | | | 135 | 70 | 3.7 |
| -HFT 6-135 | 6 | M3~M12 | 135 | 70 | 3.7 |
| -195 | | | 195 | 130 | 5.0 |
| -HFT12-150 | 7 | M3~M16 | 150 | 77 | 4.7 |
| | | | 210 | 137 | 5.8 |
| DN50A-HFD 7-195 | 1 | 1 ~ 7 | 195 | 130 | 5.9 |
| | | | 255 | 190 | 6.3 |
| | | | 135 | 70 | 5.8 |
| -HFD12-135 | 2 | 2.5~ 13 | 135 | 70 | 5.8 |
| -195 | | | 195 | 130 | 7.1 |
| -255 | | | 255 | 190 | 8.4 |
| -HFA20-150 | 4 | 5.8~ 20 | 150 | 77 | 6.6 |
| | | | 210 | 137 | 7.8 |
| -210 | | | 270 | 197 | 8.9 |
| | | | 195 | 130 | 5.9 |
| -HFT 4-195 | 5 | M2~M 8 | 195 | 130 | 5.9 |
| | | | 255 | 190 | 6.3 |
| -HFT 6-135 | 6 | M3~M12 | 135 | 70 | 5.8 |
| | | | 195 | 130 | 7.1 |
| | | | 255 | 190 | 8.4 |
| -HFT12-150 | 7 | M3~M16 | 150 | 77 | 6.6 |
| | | | 210 | 137 | 7.8 |
| | | | 270 | 197 | 8.9 |
| | | | 270 | 197 | 8.9 |
| CT40 -HFD 7-135 | 1 | 0.4~.28 | 5.31 | 2.75 | 6.8 |
| | | | 7.68 | 5.11 | 7.5 |
| | | | 5.31 | 2.75 | 8.2 |
| -HFD12-135 | 2 | 2.5~ 13 | 5.31 | 2.75 | 8.2 |
| -195 | | | 7.68 | 5.11 | 11.0 |
| -HFA20-150 | 4 | .23~ .79 | 5.91 | 3.03 | 10.4 |
| | | | 8.27 | 5.39 | 12.9 |
| -210 | | | 5.31 | 2.75 | 6.8 |
| | | | 7.68 | 5.11 | 7.5 |
| -HFT 4-135 | 5 | M2~M 8 | 5.31 | 2.75 | 6.8 |
| | | | 7.68 | 5.11 | 7.5 |
| -HFT 6-135 | 6 | M3~M12 | 5.31 | 2.75 | 8.2 |
| | | | 7.68 | 5.11 | 11.0 |
| -HFT12-150 | 7 | #4 ~ 5/8 | 5.91 | 3.03 | 10.4 |
| | | | 8.27 | 5.39 | 12.9 |
| | | | 8.27 | 5.39 | 12.9 |
| CT50 -HFD 7-195 | 1 | 0.4~.28 | 7.68 | 5.11 | 13.0 |
| | | | 10.04 | 7.47 | 13.8 |
| | | | 5.31 | 2.75 | 12.8 |
| -HFD12-135 | 2 | .10~ .51 | 5.31 | 2.75 | 12.8 |
| -195 | | | 7.68 | 5.11 | 15.6 |
| -255 | | | 10.04 | 7.47 | 18.5 |
| -HFA20-150 | 4 | .23~ .79 | 5.91 | 3.03 | 14.7 |
| | | | 8.27 | 5.39 | 17.3 |
| | | | 10.63 | 7.76 | 19.8 |
| -210 | | | 7.68 | 5.11 | 13.0 |
| | | | 10.04 | 7.47 | 13.8 |
| -HFT 4-195 | 5 | M2~M 8 | 7.68 | 5.11 | 13.0 |
| | | | 10.04 | 7.47 | 13.8 |
| -255 | | | 5.31 | 2.75 | 12.8 |
| | | | 7.68 | 5.39 | 15.6 |
| | | | 10.04 | 7.47 | 18.5 |
| -HFT 6-135 | 6 | M3~M12 | 5.31 | 2.75 | 12.8 |
| | | | 7.68 | 5.39 | 15.6 |
| -255 | | | 5.91 | 3.03 | 14.7 |
| | | | 8.27 | 5.39 | 17.3 |
| | | | 10.63 | 7.76 | 19.8 |

■ A product code example when ordering.

BT40-HFD7-120 - S 65

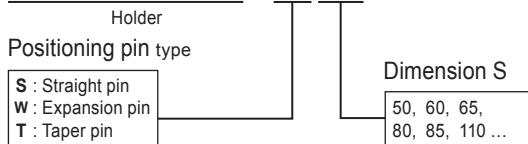

■ Option

- DETa-1 Collet (HFD) • Spring collet (HFA) • Tap sleeve (HFT)
- Retention knob→P.64 • Tools for assembly

■ Std. Access.

- Coolant duct (HSK-A) • Fixing spanner(Except for HFA10/HFT4L)
- Hexagonal wrench set • Spanner(HFA)
- Single-ended wrench(HFD7L/HFA10) • Spanner(HFA) • Low head bolt

■ Note

- Other shanks are also available upon request.




Cutting data
P.13

Parts list
P.105

HALF mini type




BT40-HFCS6-160

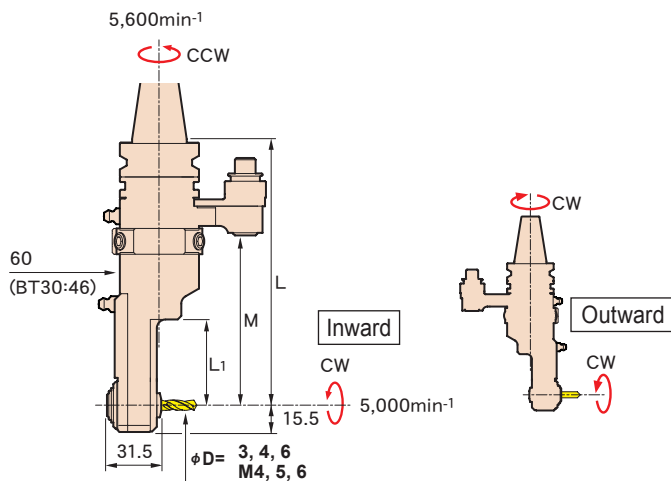

Cutter mounts in two directions

A cutting tool can be mounted both ways, inward or outward, by reassembling the angle shaft.

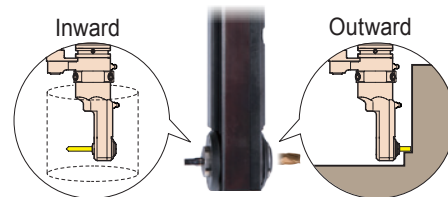


Allows maximum tool holder diameter limitation even when using a long cutting tool.

Minimal interference with face of workpiece.

Collet exchange system

Shaft exchange system for Shrink-fit collet for carbide cutter (end-mill, drill) or Tap collet for Tap.



Option

- Shrink-fit collet • Tap collet
- Retention knob → P.64 • Tools for assembly

Std. Access.

- Fixing spanner • Hexagonal wrench set • Low head bolt

Note


- When shipping, the head direction is inward. The tool for assembly (pliers for retaining ring) is required to reassemble the collet to allow for outward positioning of the cutting tool.
- Other shanks such as HSK are also available upon request.

Caution

- The angle axis rotating direction is different due to its mounting direction, inward and outward.

| CODE (Master holder) | φD | L | L ₁ | M | KG (lbs) |
|------------------------|---------------------------|------|----------------|------|----------|
| BT30 -HFCS6-155 | Drill·Endmill φ3, 4, 6 | 155 | 50 | 100 | 1.8 |
| BT40 -HFCS6-160 | | 160 | 50 | 110 | 2.8 |
| -205 | | 205 | 95 | 155 | 3.0 |
| BT50 -HFCS6-175 | Tap M4, 5, 6 | 175 | 50 | 110 | 5.6 |
| -220 | | 220 | 95 | 155 | 5.8 |
| DN40A-HFCS6-175 | Drill·Endmill φ3, 4, 6 | 175 | 50 | 110 | 3.0 |
| -220 | | 220 | 95 | 155 | 3.2 |
| DN50A-HFCS6-175 | Tap M4, 5, 6 | 175 | 50 | 110 | 5.1 |
| -220 | | 220 | 95 | 155 | 5.3 |
| CT40 -HFCS6-175 | Drill·Endmill φ3, 4, 6 | 6.89 | 1.97 | 4.33 | 6.61 |
| -220 | | 8.66 | 3.74 | 6.10 | 7.28 |
| CT50 -HFCS6-175 | Tap M4, 5, 6 | 6.89 | 1.97 | 4.33 | 11.24 |
| -220 | | 8.66 | 3.74 | 6.10 | 11.68 |

Shrink-Fit Collet




| CODE | φD | Holding length |
|----------------|----|----------------|
| FCS6- 3 | 3 | 11~13 |
| - 4 | 4 | |
| - 6 | 6 | 12~13 |

Caution

- The dedicated shrink-fit collet for the Angle Head Half Mini.
- A shrink-fit heating device is required to insert and remove cutting tools.

Tap collet




| CODE | φD | Holding length |
|----------------|----|----------------|
| FCS6-M4 | M4 | 16 |
| -M5 | M5 | |
| -M6 | M6 | |

Note


- Tap collets meet JIS standards. We can produce ANSI standard tap collet. For more information, please contact us.

■ A product code example when ordering.

BT30-HFCS6-155 - S 65

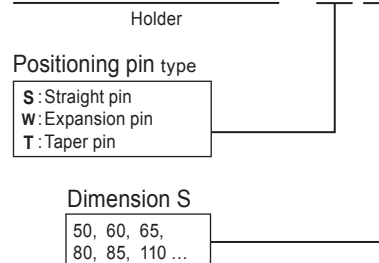

Procedure of cutter insertion to shrink-fit collet

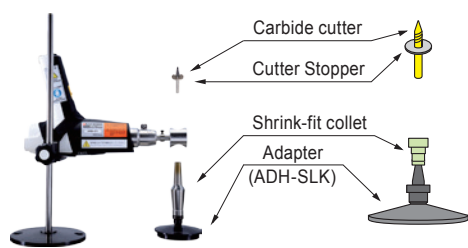

Shrink-fit Heater (HRB-01)

1. Attach the shrink-fit collet to the adapter (ADH-SLK).
2. Heat the shrink-fit collet with the shrink-fit heater.
3. Attach a stopper to the carbide cutter. After finishing heating, insert the cutter to the shrink-fit collet.
4. Cool the shrink-fit collet with the shrink-fit heater.

| CODE | Power |
|---------------|-------|
| HRB-01 | 100V |

Cutting data
→ P.13

Parts list
→ P.105



HALF UNIVERSAL type

Drill · Endmill

Fig. 1

HUD7

()...BT30

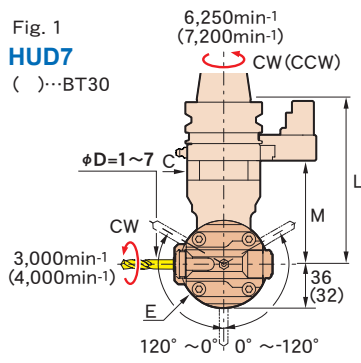

BT40-HUA20-135

Fig. 2

HUA10







Fig. 3

HUA20

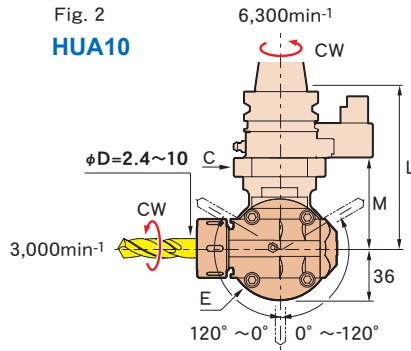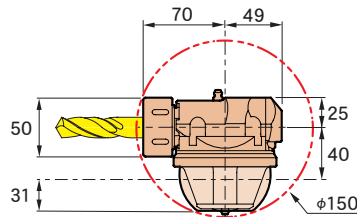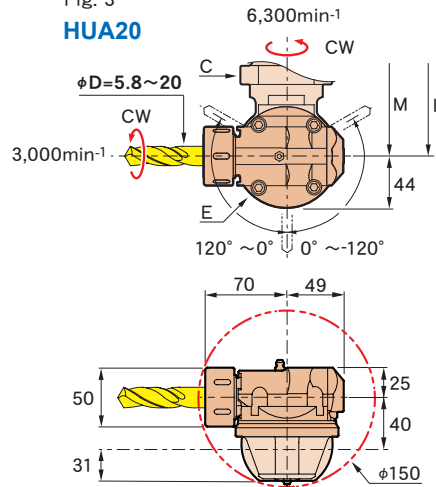

Tap

Fig. 4

HUT4

()...BT30




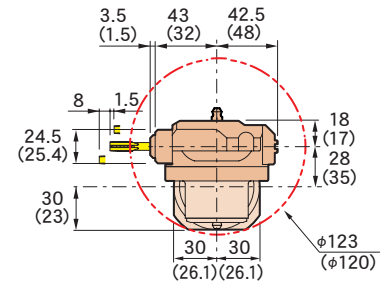



Fig. 5

HUT6

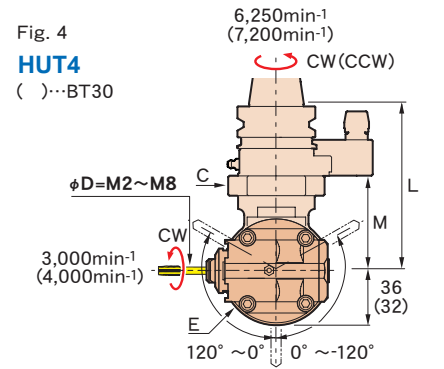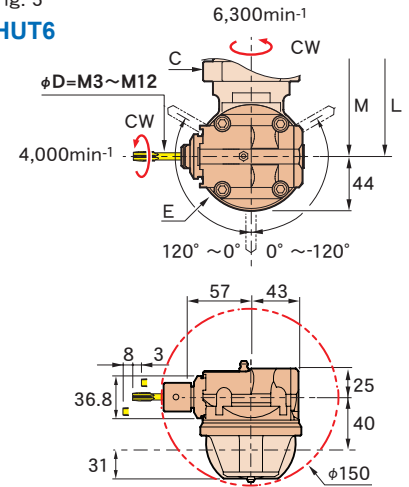

| CODE (Master holder) | Fig. | φD | L | M | φC | φE |  Kg (lbs) | Moment kgf·mm |
|-------------------------|------|-----------|------|-----|-----|-----|--|---------------|
| BT30 -HUD 7-102 | 1 | 1 ~ 7 | 102 | 39 | 46 | 64 | 1.8 | 116 |
| | 4 | M2 ~ M 8 | | | | | | |
| BT40 -HUD 7-135 | 1 | 1 ~ 7 | 135 | 85 | 60 | 72 | 3.8 | 251 |
| | 2 | 2.4 ~ 10 | | | | | | |
| | 3 | 5.8 ~ 20 | | | | | | |
| | 4 | M2 ~ M 8 | | | | | | |
| | 5 | M3 ~ M12 | | | | | | |
| | 77 | 78 ~ 88 | | | | | | |
| BT50 -HUD 7-150 | 1 | 1 ~ 7 | 150 | 85 | 60 | 72 | 6.6 | 277 |
| | 2 | 2.4 ~ 10 | | | | | | |
| | 3 | 5.8 ~ 20 | | | | | | |
| | 4 | M2 ~ M 8 | | | | | | |
| | 5 | M3 ~ M12 | | | | | | |
| | 77 | 78 ~ 88 | | | | | | |
| DN40A -HUD 7-150 | 1 | 1 ~ 7 | 150 | 85 | 60 | 72 | 3.8 | 251 |
| | 2 | 2.4 ~ 10 | | | | | | |
| | 3 | 5.8 ~ 20 | | | | | | |
| | 4 | M2 ~ M 8 | | | | | | |
| | 5 | M3 ~ M12 | | | | | | |
| | 77 | 78 ~ 88 | | | | | | |
| DN50A -HUD 7-150 | 1 | 1 ~ 7 | 150 | 85 | 60 | 72 | 6.6 | 277 |
| | 2 | 2.4 ~ 10 | | | | | | |
| | 3 | 5.8 ~ 20 | | | | | | |
| | 4 | M2 ~ M 8 | | | | | | |
| | 5 | M3 ~ M12 | | | | | | |
| | 77 | 78 ~ 88 | | | | | | |
| CT40 -HUD 7-150 | 1 | .04 ~ .28 | 5.91 | 3.3 | 2.4 | 2.8 | 8.4 | 251 |
| | 2 | .09 ~ .39 | | | | | | |
| | 3 | .23 ~ .79 | | | | | | |
| | 4 | M2 ~ M 8 | | | | | | |
| | 5 | #4 ~ 1/2 | | | | | | |
| CT50 -HUD 7-150 | 1 | .04 ~ .28 | 5.91 | 3.3 | 2.4 | 2.8 | 14.6 | 277 |
| | 2 | .09 ~ .39 | | | | | | |
| | 3 | .23 ~ .79 | | | | | | |
| | 4 | M2 ~ M 8 | | | | | | |
| | 5 | #4 ~ 1/2 | | | | | | |


※Distance from a gage line to center of gravity × weight (kg · mm)

- **Option**
 - DETa-1 Collet (HUD)→P.8 • Spring collet (HUA)→P.8
 - Tap sleeve (HUT)→P.8 • Retention knob→P.64 • Tools for assembly
- **Std. Access.**
 - Fixing spanner • Hexagonal wrench set • Spanner (HUA) • Low head bolt
- **Note**
 - Other shanks such as HSK are also available upon request.

Cutting data
➡ P. 13

Parts list
➡ P. 105

■ A product code example when ordering.

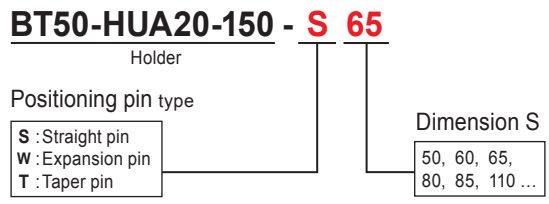

Cutting data

90° type

| | | | | |
|--|--|--|---|---|
| <p>S55C $\phi 12$ Drill</p> <p>n 670 min⁻¹ Vf 80 mm/min Vc 25.5 m/min f 0.12 mm/rev</p> <p>BT40-HFD12-120</p> | <p>S55C M12 Tap</p> <p>n 184 min⁻¹ Vf 322 mm/min Vc 7 m/min</p> <p>BT40-HFT6-120</p> | <p>S50C M16 Tap</p> <p>n 60 min⁻¹ Vf 120 mm/min Vc 3 m/min</p> <p>BT40-HFT12-135</p> | <p>S55C $\phi 10$ Endmill 2-flutes</p> <p>n 350 min⁻¹ Vf 50 mm/min Vc 11 m/min fz 0.07 mm/t</p> <p>BT40-HFD12-120</p> | <p>S50C $\phi 20$ Endmill 2-flutes</p> <p>n 158 min⁻¹ Vf 32 mm/min Vc 10 m/min fz 0.10 mm/t</p> <p>BT40-HFA20-135</p> |
|--|--|--|---|---|

mini type

| | | |
|---|--|---|
| <p>S50C $\phi 6$ Carbide drill</p> <p>n 5000 min⁻¹ Vf 250 mm/min Vc 94 m/min f 0.05 mm/rev</p> <p>BT30-HFCS6-155</p> | <p>S50C $\phi 6$ Carbide endmill 2-flutes</p> <p>n 3500 min⁻¹ Vf 210 mm/min Vc 66 m/min fz 0.03 mm/t</p> <p>BT40-HFCS6-205</p> | <p>A7075 $\phi 6$ Carbide endmill 2-flutes</p> <p>n 5000 min⁻¹ Vf 300 mm/min Vc 94 m/min fz 0.03 mm/t</p> <p>BT30-HFCS6-155</p> |
|---|--|---|

UNIVERSAL type


| | | | | |
|--|---|--|---|--|
| <p>S50C $\phi 10$ Endmill 2-flutes</p> <p>n 900 min⁻¹ Vf 100 mm/min Vc 28 m/min fz 0.06 mm/t</p> <p>BT50-HUA10-150</p> | <p>S50C M8 Tap</p> <p>n 250 min⁻¹ Vf 312 mm/min Vc 6.3 m/min</p> <p>BT40-HUT4-135</p> | <p>S50C M12 Tap</p> <p>n 184 min⁻¹ Vf 322 mm/min Vc 7 m/min</p> <p>BT40-HUT6-135</p> | <p>SUS304 $\phi 10$ Drill</p> <p>n 314 min⁻¹ Vf 16 mm/min Vc 9.9 m/min f 0.05 mm/rev</p> <p>BT50-HUA10-150</p> | <p>S50C $\phi 16$ Endmill 2-flutes</p> <p>n 140 min⁻¹ Vf 40 mm/min Vc 7 m/min fz 0.14 mm/t</p> <p>BT40-HUA20-135</p> |
|--|---|--|---|--|

ANGLE HEAD STANDARD type

High-rigidity standard type for end-milling applications


MODULAR type

Shank and head can be combined freely to match the application.

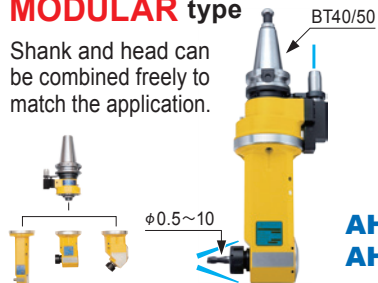


SOLID type

The popular type that can chuck small-to large-diameter cutters.




FLANGE type

Heavy-duty type that mounts directly on the machine spindle surface.




UNIVERSAL type

Cutting angle can be adjusted arbitrarily.




Use of collet holder

To chuck a cutting tool, the collet chuck system is used, which has a long history of good performance. This product is applicable to all the types of machining, including drilling and milling.

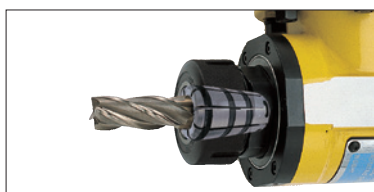

Compact design

Ideal for internal machining.



| Type | Model | Q | A | B |
|---------------------------|-------|-----|-------|------|
| MODULAR type | AHB 5 | 62 | 57 | 46 |
| | AHB 7 | 76 | 72 | 56 |
| | AHB10 | 96 | 88 | 62 |
| SOLID type FLANGE type | AHA20 | 171 | 160 | 88 |
| | AHA25 | 193 | 180 | 90 |
| UNIVERSAL type | AHU10 | 156 | 154 | 27.5 |
| | AHU20 | 192 | 188.5 | 35 |

Body-through coolant

Coolant can be feed from a closer position to the cutting edge. Prevents heat generation inside the body to achieve high-speed rotation. (MODULAR type, UNIVERSAL type)



MST's Quick Change system(AHD type)


By adopting the BT30 Quick Change mechanism at the angle axis, a large variety of machining applications are made possible.




Highest Guaranteed Accuracies

All standard type angle heads have passed an accuracy test and rotation test.

Squareness

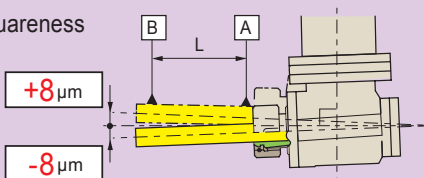

Runout accuracy



| Type | Model | L |
|----------------|----------------------------------|-------------------------|
| MODULAR type | AHB 5 AHB 7 AHB10 AHC10 | 40 |
| | UNIVERSAL type | AHU10 |
| | SOLID type FLANGE type | AHA20 AHA25 AHD30 |
| UNIVERSAL type | | AHU20 |

M/C Tool

HSK-T Tooling Systems for Turning Mill

General Purpose Tool

JIG

Measuring Equipment

Maintenance Tool


Wire EDM fixture

Technical Information



STANDARD type MODULAR type

Shank and head can be combined freely to match the application.

▷ Various types of shanks and heads are freely combined to meet your machining needs.

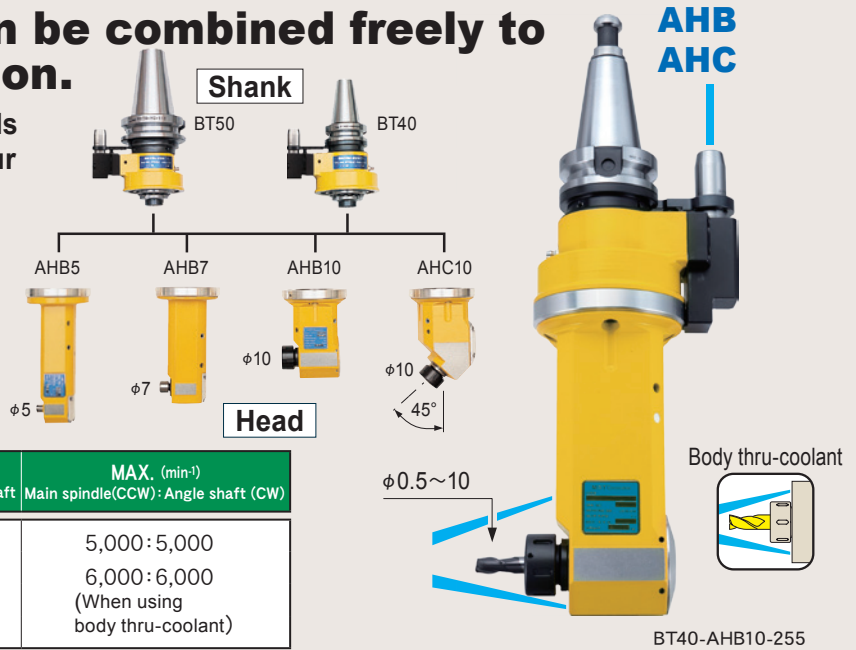

| MODEL | Chucking range | Gear ratio Main spindle:Angle shaft | MAX. (min ⁻¹) |
|-------|----------------|--|-------------------------------------|
| | | | Main spindle(CCW): Angle shaft (CW) |
| AHB 5 | φ0.5~ 5 | 1:1 | 5,000:5,000 |
| AHB 7 | φ0.5~ 7 | | 6,000:6,000 |
| AHB10 | φ2.4~10 | | (When using body thru-coolant) |
| AHC10 | | | |

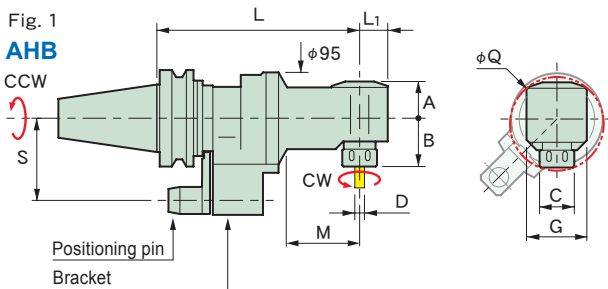

| CODE | Fig. | φD | L | φC | L1 | M | A | B | G | φQ | Kg | |
|-----------------------|------|--------|-----|----|----|-----|----|------|----|----|-----|-------|
| BT40-AHB 5-210 | 1 | 0.5~ 5 | 210 | 12 | 20 | 85 | 25 | 32 | 46 | 62 | 5.5 | ER8 |
| | | | 270 | | | 145 | | | | | | |
| | | 0.5~ 7 | 180 | 19 | 22 | 60 | 29 | 43 | 56 | 76 | 5.3 | ESX12 |
| | | | 240 | | | 120 | | | | | | |
| -AHB 7-180 | | 0.5~ 7 | 180 | 19 | 22 | 60 | 29 | 43 | 56 | 76 | 5.3 | ESX12 |
| | | | 240 | | | 120 | | | | | | |
| | | | 240 | | | 120 | | | | | | |
| -AHB10-195 | | 2.4~10 | 195 | 36 | 29 | 80 | 38 | 50 | 62 | 96 | 6.2 | C10 |
| | | | 255 | | | 140 | | | | | | |
| -AHC10-230 | 2 | | 230 | | — | 110 | 45 | 32.5 | 65 | — | 6.2 | |
| BT50-AHB 5-225 | 1 | 0.5~ 5 | 225 | 12 | 20 | 85 | 25 | 32 | 46 | 62 | 8.8 | ER8 |
| | | | 285 | | | 145 | | | | | | |
| | | 0.5~ 7 | 195 | 19 | 22 | 60 | 29 | 43 | 56 | 76 | 8.6 | ESX12 |
| | | | 255 | | | 120 | | | | | | |
| -AHB10-210 | | 2.4~10 | 210 | 36 | 29 | 80 | 38 | 50 | 62 | 96 | 9.5 | C10 |
| | | | 270 | | | 140 | | | | | | |

Available for
DIN / CAT.

Cutting data
P.20


- Option
 - Spring collet→P.19
 - Retention knob →P.64
 - Semi-finished positioning block→P.19
- Std. Access.
 - A complete set of spanners and wrenches.
- Note
 - The phase of the drive key and the positioning pin is set freely.
 - Standard specifications:
S = 60 mm, 65 mm (BT40), 80 mm, 85 mm, and 110 mm (BT50).
 - Other shanks such as HSK are also available upon request.
- Caution
 - For the shape and mounting position of the positioning block, contact the machine manufacturer or MST.
 - The height of the positioning pin depends on the shape of the positioning block.
 - The machine spindle and angle shaft should rotate in reverse directions, so make sure the spindle rotates in the reverse direction.
 - For precautions and maintenance, refer to page 115.

Shank / Head reference list

| CODE | Shank | Head |
|-----------------------|-------------|----------|
| BT40-AHB 5-210 | BT40-MS- 98 | MB 5-112 |
| -270 | | -172 |
| -AHB 7-180 | | MB 7- 82 |
| -240 | | -142 |
| -AHB10-195 | BT50-MS-113 | MB10- 97 |
| -255 | | -157 |
| -AHC10-230 | | MC10-132 |
| BT50-AHB 5-225 | | MB 5-112 |
| -285 | -172 | |
| -AHB 7-195 | MB 7- 82 | |
| -255 | -142 | |
| -AHB10-210 | MB10- 97 | |
| -270 | -157 | |
| -AHC10-245 | MC10-132 | |

STANDARD type **SOLID** type

The popular type that can chuck small- to large-diameter cutters.

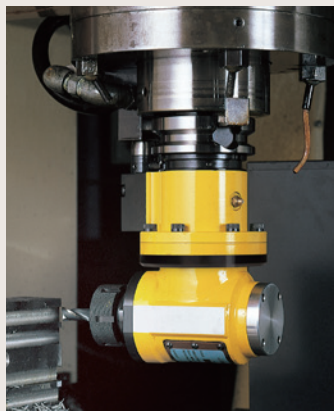

BT50-AHA25-195

| MODEL | Chucking range | Gear ratio | | MAX. (min ⁻¹) |
|-------|----------------|----------------------------|-----------------------------------|---------------------------|
| | | Main spindle : Angle shaft | Main spindle(CCW):Angle shaft(CW) | |
| AHA20 | φ 5.8~20 | 1 : 0.81 | | 3000 : 2430 |
| AHA25 | φ 5.8~25 | 1 : 0.96 | | 2500 : 2400 |
| AHD30 | BT30 tools | | | |

Fig. 1
AHA


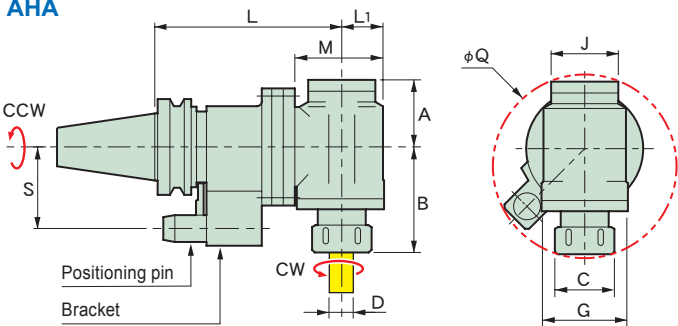


Fig. 2
AHD



| CODE | Fig. | φD | L | L ₁ | M | A | B | G | φC | J | φQ | Kg | |
|-----------------------|------|--------|-----|----------------|----|----|-------|----|----|----|-----|------|-----|
| BT40-AHA20-160 | 1 | 5.8~20 | 160 | 40 | 86 | 65 | 95 | 88 | 50 | 65 | 171 | 7.3 | C20 |
| BT50-AHA20-195 | 1 | 5.8~20 | 195 | 40 | 92 | 65 | 95 | 88 | 50 | 65 | 171 | 13.1 | C20 |
| -250 | | | 249 | | | | | | | | | 14.8 | |
| -AHA25-195 | | 5.8~25 | 195 | 44 | 97 | 70 | 110 | 90 | 62 | 70 | 193 | 13.6 | C25 |
| -250 | | | 249 | | | | | | | | | 15.3 | |
| -AHD30-195 | 2 | — | 195 | 44 | 97 | 70 | 112.6 | 90 | 66 | 70 | 193 | 14.7 | — |

■ **Option**

- Spring collet → P.19
- Retention knob → P.64
- Semi-finished positioning block → P.19

■ **Std. Access.**

- A complete set of spanners and wrenches

■ **Note**

- The phase of the drive key and the positioning pin is set freely.
- Standard specifications: S = 60 mm, 65 mm (BT40), 80 mm, 85 mm, and 110 mm (BT50).
- Other shanks such as HSK are also available upon request.

■ **Caution**

- For the shape and mounting position of the positioning block, contact the machine manufacturer or MST.
- The height of the positioning pin depends on the shape of the positioning block.
- The machine spindle and angle shaft should rotate in reverse directions, so make sure the spindle rotates in the reverse direction.
- For precautions and maintenance, refer to page 115.

Available for
DIN / CAT.

Cutting data
→ P.20

M/C Tool

HSK-T Tooling Systems for Turning Mill

General Purpose Tool

JIG

Measuring Equipment


Maintenance Tool

Wire EDM fixture

Technical Information

STANDARD type **FLANGE** type

Ideal for heavy cutting by mounting the angle head flange type directly on the machine spindle surface.



| MODEL | Chucking range | Gear ratio | | MAX. (min ⁻¹) |
|-------|----------------|---------------------------|-----------------------------------|---------------------------|
| | | Main spindle: Angle shaft | Main spindle(CCW):Angle shaft(CW) | |
| AHA20 | φ5.8~20 | 1:0.81 | | 3000:2430 |
| AHA25 | φ5.8~25 | 1:0.96 | | 2500:2400 |
| AHD30 | BT30 tools | 1:0.96 | | |



Fig. 1

AHA


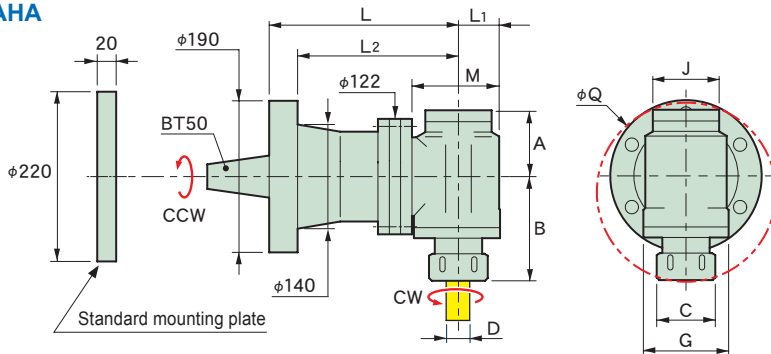


Fig. 2

AHD



| CODE | Fig. | φD | L | L ₁ | L ₂ | M | A | B | G | φC | J | φQ | kg | |
|-----------------------|------|--------|-----|----------------|----------------|----|----|-----|----|----|----|-----|------|-----|
| F190-AHA20-200 | 1 | 5.8~20 | 200 | 40 | 160 | 92 | 65 | 95 | 88 | 50 | 65 | 171 | 18 | C20 |
| -350 | | | 350 | | 310 | | | | | | | | 28 | |
| -AHA25-200 | | 5.8~25 | 200 | 44 | 160 | 97 | 70 | 110 | 90 | 62 | 70 | 193 | 18.5 | C25 |
| -350 | | | 350 | | 310 | | | | | | | | 28.5 | |
| -AHD30-200 | 2 | — | 200 | | 160 | | | | | 66 | | | 19.6 | — |
| -350 | | | 350 | | 310 | | | | | | | | 29.8 | |

■Option

- Spring collet→P.19
- Retention knob →P.64

■Std. Access.

- A complete set of spanners and wrenches
- Standard mounting plate(No mounting holes are provided.)
- Mounting bolts for ANGLE HEAD

■Note

- NT50U shank is also available.

■Caution




- For mounting plate shapes and mounting bolt location, contact the machine manufacturer or MST.
- The machine spindle and angle shaft should rotate in reverse directions, so make sure the spindle rotates in the reverse direction.
- For precautions and maintenance, refer to page 115.

STANDARD type UNIVERSAL type


Machining at every angle is possible with just this one unit.

Splash coolant-through body

Whatever machining angle is set, coolant is properly supplied to the cutting edge.

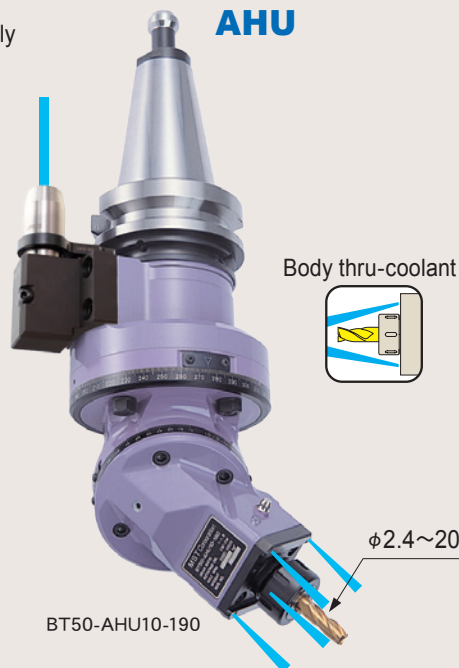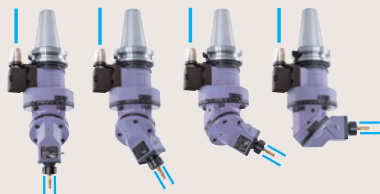

| MODEL | Chucking range | Gear ratio | | MAX. (min ⁻¹) |
|-------|----------------|----------------------------|----------------------------------|---------------------------|
| | | Main spindle : Angle shaft | Main spindle(CW):Angle shaft(CW) | |
| AHU10 | φ2.4~10 | 1 : 1.5 | | 3000 : 4500 |
| AHU20 | φ5.8~20 | 1 : 1 | | 3000 : 3000 |

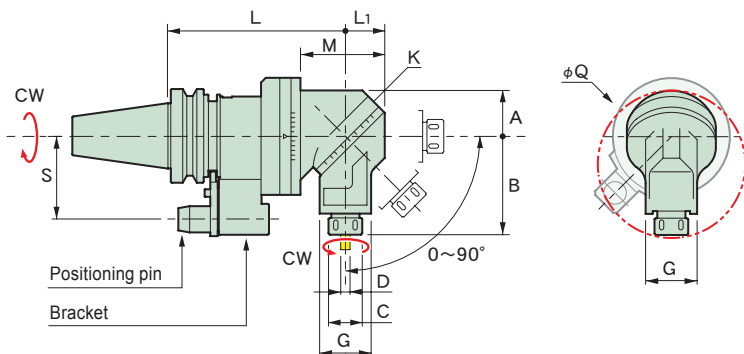

| CODE | φD | L | L ₁ | M | A | B | K | G | φC | φQ | Kg | Icon |
|----------------|--------|-----|----------------|-----|------|-----|-----|----|----|-----|------|------|
| BT40-AHU10-175 | 2.4~10 | 175 | 42 | 96 | 49 | 105 | 95 | 55 | 32 | 156 | 9.6 | C10 |
| BT50-AHU10-190 | 2.4~10 | 190 | 42 | 90 | 49 | 105 | 95 | 55 | 32 | 192 | 13.9 | C10 |
| -AHU20-200 | 5.8~20 | 200 | 54 | 112 | 58.5 | 130 | 120 | 70 | 50 | | 15.8 | C20 |

- Option
 • Spring collet →P.19 • Retention knob →P.64 • Semi-finished positioning block →P.19 • Test bar

- Std. Access.
 • A complete set of spanners and wrenches

- Note
 • The phase of the drive key and the positioning pin is set freely.
 • Standard specifications: S = 60 mm, 65 mm (BT40), 80 mm, 85 mm, and 110 mm (BT50).
 • Products other than BT shanks can be manufactured upon request.

- Caution
 • For the shape and mounting position of the positioning block, contact the machine manufacturer or MST.
 • The machine spindle and angle shaft should rotate in reverse directions, so make sure the spindle rotates in the reverse direction.
 • The machine spindle and angle shaft should rotate in forward directions, so make sure the spindle rotates in the forward direction.
 • For precautions and maintenance, refer to page 115.

Test bar

Use for super accurate angle adjustment.

| CODE | Holder type |
|-------|-------------|
| TBU10 | AHU10 |
| TBU20 | AHU20 |



Available for
DIN / CAT.

Cutting data
→ P.20

M/C Tool

HSK-T Tooling Systems for Turning Mill

General Purpose Tool

JIG


Measuring Equipment

Maintenance Tool

Wire EDM fixture

Technical Information

SPRING COLLET

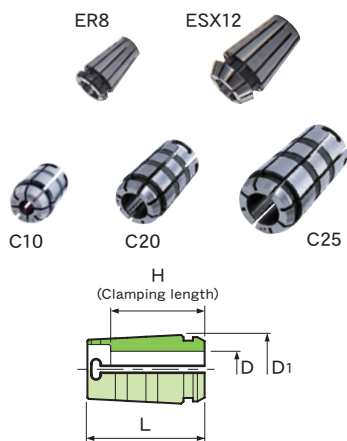


| CODE | ϕD | ϕD_1 | L | H | Holder type |
|---------|-----------------------|------------|------|----|----------------|
| ER8-D | 1 ~ 5 (0.5 Steps) | 8.5 | 13.5 | - | AHB 5 |
| ESX12-D | 1 ~ 3 (0.5 Steps) | 12 | 19.5 | - | AHB 7 |
| | 4 ~ 7 (1.0 Steps) | | | | |
| C10-D | 2.6 ~ 5.8 (0.2 Steps) | 17.2 | 26 | 18 | AHB10 |
| | 6 ~ 10 (0.2 Steps) | | | 20 | AHC10 AHU10 |
| C20-D | 6 ~ 9.8 (0.2 Steps) | 29.5 | 50 | 29 | AHA20 |
| | 10 ~ 15.8 (0.2 Steps) | | | 33 | AHU20 |
| | 16 ~ 20 (0.2 Steps) | | | 40 | |
| C25-D | 6, 8 | 36.5 | 68 | 35 | AHA25 |
| | 10 ~ 15 (0.5 Steps) | | | 46 | |
| | 15.5 ~ 20 (0.5 Steps) | | | 54 | |
| | 20.5 ~ 25 (0.5 Steps) | | | 57 | |

■ Option
 ● Collet remover (C10, C20) → P.38

Semi-finished positioning block

The semi-finished positioning block must be modified to the appropriate shape by the customer after delivery. Determine the shape and dimensions as follows, and then modify the positioning block as necessary.

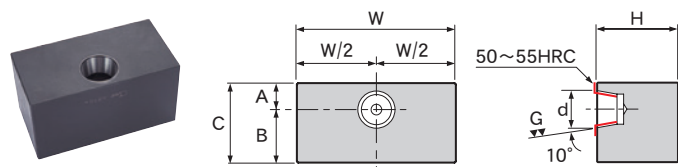

| CODE | A | B | C | W | H | d | Spindle | Material |
|-------|----|----|----|-----|----|----|---------|----------|
| AB-15 | 15 | 43 | 58 | 92 | 58 | 20 | BT40 | S50C |
| -12 | 20 | | 63 | 120 | 63 | 28 | BT50 | |

- Obtain the machine manufacturer's drawing for the positioning block and modify the positioning block in accordance with that drawing.
- Determine the dimensions as shown in the instruction and then modify.
 - This block may not be applicable for dimensional reasons. Carefully check to see whether the positioning block is applicable.
 - The positioning block exclusively for your machine may also be available on request.
 - For further information, please contact MST.

Custom-made products

We are proud of our over 35 years of experience custom making products for our customers. We can produce the best product for you depending on your applications such as O.D and I.D machining thanks to our accumulated know-how.

35
years

Manufacturing history

1
unit

Production starting from just 1 unit

2~4
months

Delivery


19,300
units

Custom : 1,300 units
Design
Standard : 18,000 units

ANGLE HEAD CUSTOM DESIGN



For more information, please contact us.

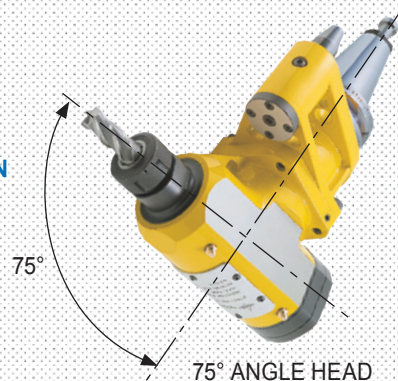

| | |
|---|---|
| <h3>Dual side machining ANGLE HEAD</h3> <div style="display: flex; flex-direction: column; align-items: center;"> <div style="background-color: red; color: white; padding: 2px;">Medical equipment</div> <div style="background-color: gray; color: white; padding: 2px;">AL</div> <div style="background-color: green; color: white; padding: 2px;">MAX 1500min⁻¹</div> <div style="background-color: pink; color: white; padding: 2px;">BT50</div> </div> | <h3>Side face machining ANGLE HEAD</h3> <div style="display: flex; flex-direction: column; align-items: center;"> <div style="background-color: red; color: white; padding: 2px;">MAX 0.57</div> <div style="background-color: green; color: white; padding: 2px;">MAX 400min⁻¹</div> <div style="background-color: pink; color: white; padding: 2px;">Direct mount</div> </div> |
| <h3>Internal bore surface machining ANGLE HEAD</h3> <div style="display: flex; flex-direction: column; align-items: center;"> <div style="background-color: red; color: white; padding: 2px;">AL</div> <div style="background-color: green; color: white; padding: 2px;">MAX 2650min⁻¹</div> <div style="background-color: pink; color: white; padding: 2px;">BT50</div> </div> | <h3>Internal bore surface machining ANGLE HEAD</h3> <div style="display: flex; flex-direction: column; align-items: center;"> <div style="background-color: red; color: white; padding: 2px;">MAX 3</div> <div style="background-color: green; color: white; padding: 2px;">MAX 4500min⁻¹</div> <div style="background-color: pink; color: white; padding: 2px;">Direct mount</div> </div> |

Cutting data

MODULAR type

| | | |
|---|---|---|
| <p>SUS304 $\phi 10$</p> <p>n 640 min⁻¹ Endmill Vf 60 mm/min 2 flutes Vc 20 m/min fz 0.05 mm/t</p> <p>BT40-AHB10-195</p> | <p>A2017 $\phi 10$</p> <p>n 4000 min⁻¹ Carbide Vf 400 mm/min endmill Vc 126 m/min 2 flutes fz 0.05 mm/t</p> <p>BT40-AHB10-195</p> | <p>S50C $\phi 10$</p> <p>n 640 min⁻¹ Endmill Vf 60 mm/min 2 flutes Vc 20 m/min fz 0.05 mm/t</p> <p>BT50-AHB10-210</p> |
|---|---|---|

SOLID type

| | | | | |
|--|---|---|--|--|
| <p>A2017 $\phi 16$</p> <p>n 1800 min⁻¹ Endmill Vf 130 mm/min 2 flutes Vc 90 m/min fz 0.04 mm/t</p> <p>BT50-AHA25-195</p> | <p>SUS304 $\phi 12$</p> <p>n 527 min⁻¹ Endmill Vf 20 mm/min 2 flutes Vc 60 m/min fz 0.06 mm/t</p> <p>BT40-AHA20-160</p> | <p>SUS304 $\phi 16$</p> <p>n 570 min⁻¹ Endmill Vf 40 mm/min 2 flutes Vc 29 m/min fz 0.04 mm/t</p> <p>BT50-AHA25-195</p> | <p>S55C $\phi 12$</p> <p>n 527 min⁻¹ Drill Vf 39 mm/min 2 flutes Vc 20 m/min f 0.07 mm/rev</p> <p>BT40-AHA20-160</p> | <p>FC30 $\phi 12$</p> <p>n 816 min⁻¹ Endmill Vf 60 mm/min 2 flutes Vc 31 m/min fz 0.04 mm/t</p> <p>BT50-AHD30-195 BT30-CTA20-45</p> |
| <p>S50C $\phi 16$</p> <p>n 630 min⁻¹ Endmill Vf 80 mm/min 2 flutes Vc 32 m/min fz 0.06 mm/t</p> <p>BT50-AHA25-195</p> | | | | |

UNIVERSAL type

| | |
|---|---|
| <p>A2017 $\phi 10$</p> <p>n 2000 min⁻¹ Endmill Vf 200 mm/min 2 flutes Vc 63 m/min fz 0.07 mm/t</p> <p>BT50-AHU10-190(45°)</p> | <p>S50C $\phi 20$</p> <p>n 350 min⁻¹ Carbide Vf 70 mm/min endmill Vc 22 m/min 2 flutes fz 0.1 mm/t</p> <p>BT50-AHU20-200(45°)</p> |
|---|---|

M/C Tool

HSK-T Tooling Systems for Turning Mill

General Purpose Tool

JIG

Measuring Equipment

Maintenance Tool

Wire EDM fixture

Technical Information

M/C Tool

Pull collet type collet chuck
DETa-1
Collet Holder




DTA
DTB
DTE

➔ P. 22

Retension knob

➔ P. 64


Taper collet chuck
COLLET HOLDER



CTH
CTA

➔ P. 32

Needle-roller type chuck
Hi-ART
MILLING CHUCK



ART

➔ P. 40

End-mill holder for ultra-heavy duty application
SUMMIT



SLZ

➔ P. 43

The face mill arbor for through-spindle coolant
FMH RIGID type



FMH-H

Carbide core

➔ P. 46

The arbor for screw-in End Mill
RED SCREW arbor



RSG

Carbide integral type

➔ P. 48

Cutter arbor with spindle-through coolant
FMH



FMH

➔ P. 53

Fine adjustment boring holder
MICRO HEAD



MFA
MBH
MBJ

➔ P. 55

DETa-1 Collet Holder

Pull collet type collet chuck

2mm collapsibility with just one collet !!


- ▷ Just 6 collets is all it takes to chuck 106 sizes of drills.
- ▷ Slim design due to no tightening nut at the tip of holder.
- ▷ Compatible with synchronized tapping. Provides simple tooling lay-out.



▶ **DETa-1**




Pull collet design

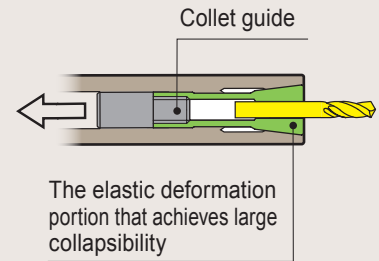

DTA

Nut-tightening type of easy operation

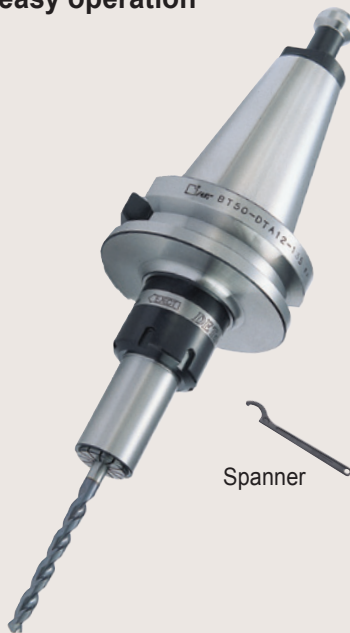



DTB

For high-speed cutting, High cost performance




DTE

Fully applicable for coolant-through

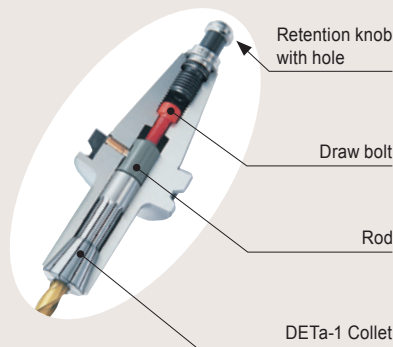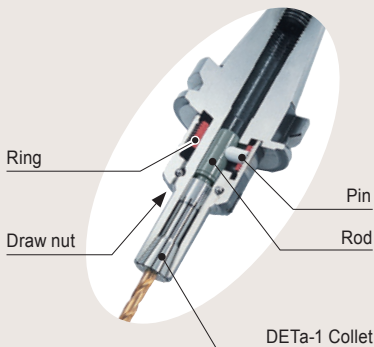

| | ϕD |
|-------|----------|
| DTE 7 | 29 |
| DTE12 | 40 |



DETa-1 Collet


Using a high-precision collet will increase the life of your tools.
 → P. 117

Highest guaranteed accuracies throughout entire chucking range (100% inspection).

Both large collapsibility and precise chucking achieved by the pull collet design.

| Collet | Run-out accuracy (μm) | |
|------------------|-----------------------|---------|
| | D3 | D7/D12 |
| Precision Collet | 3 (6) | 5 (10) |
| Standard Collet | 5 (10) | 10 (15) |


※Accuracy of collet alone, () means collapsibility usable.



| D | L |
|-------|-----|
| ~10 | 4×D |
| 10~13 | 40 |




Slim and compact without the nut at the tip.

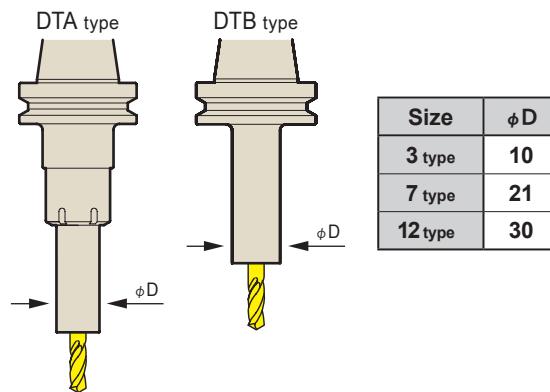


Pre-balanced design (DTE type)

The collet holder is pre-balanced by previously designing the holder to be as axisymmetrical as possible. When used with the precision collet, it enables stable machining during high-speed machining.

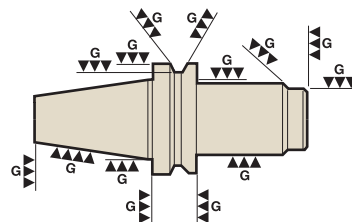

Reduces the number of conventional collets needed by 90% (in-house comparison)

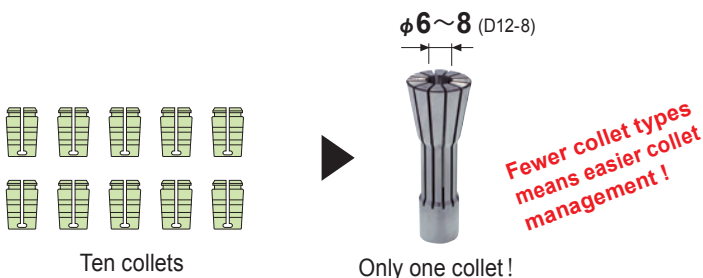

Longer cutter life using through-spindle capability
 → P. 117

Coolant-through system

Pressure **7 Mpa**

Multiple coolant supply systems. The best methods can be chosen from three options.

D3 Collet

DTA3
DTB3


Uses a maraging steel. Initial accuracy lasts for a long period of time.



φ0.5~3.175 **8 pcs.**

D7 Collet

DTA7
DTB7
DTE7



φ1~7 **8 pcs.**

D12 Collet

DTA12
DTB12
DTE12




φ2.5~13 **6 pcs.**



Coolant-through cutter

For a cutting tool with oil holes. The shank of the cutting tool is sealed with an O-ring, enabling reliable coolant supply. Compatible with small-diameter cutting tools starting from 3 mm.

DTE type



“SUKIMA-through” coolant-around tool

High-pressure coolant performance can be obtained even when using a cutting tool without oil holes.

DTE type










Coolant-through collet

Coolant is supplied through the slits in the collet. No dedicated optional parts are required.

DTB type
DTE type

DETA-1 Collet Holder A type (DTA)

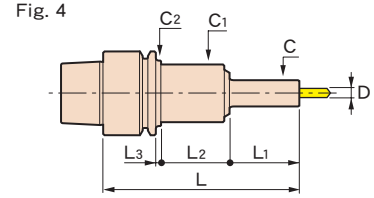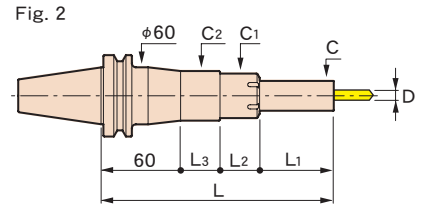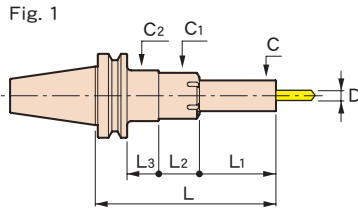

| CODE | Fig. | φD | L | φC | L1 | L2 | L3 | φC1 | φC2 | φD1 | kg | N |
|-----------------------|------|-------------|-----|------|------|-----|-----|-----|-----|-----|-----|------|
| BT30-DTA 3- 90 | 1 | 0.5 ~ 3.175 | 90 | 10 | 27 | 26 | 15 | 22 | 25 | — | 0.5 | 2.4 |
| -DTA 7- 90 | | 1 ~ 7 | | 21 | 30 | 37 | 1 | 38 | 42 | — | 0.7 | 6.7 |
| -120 | | | 120 | | 60 | | | | | | 0.8 | 7.9 |
| -DTA12-120 | | 2.5 ~ 13 | 30 | 52.5 | 42 | 3.5 | 45 | 45 | | | 1.0 | 10.4 |
| BT40-DTA 3- 95 | 1 | 0.5 ~ 3.175 | 95 | 10 | 27 | 26 | 15 | 22 | 25 | — | 1.1 | 3.9 |
| -125 | | | 125 | | | | 45 | | | | 1.2 | 4.3 |
| -DTA 7-105 | | 1 ~ 7 | 105 | 21 | 38 | 37 | 3 | 38 | 60 | | 1.3 | 8.5 |
| -135 | | | 135 | | 60 | | 11 | | 43 | | 1.4 | 9.5 |
| -165 | | | 165 | | | | 41 | | | | 1.7 | 10.8 |
| -195 | | | 195 | | | | 71 | | | | 2.1 | 12.1 |
| -DTA12-120 | | 2.5 ~ 13 | 120 | 30 | 52.5 | 40 | 0.5 | 45 | 58 | | 1.5 | 11.6 |
| -150 | | | 150 | | 75 | | 8 | | 50 | | 1.7 | 13.8 |
| -180 | | | 180 | | | | 38 | | | | 2.1 | 15.5 |
| -210 | | | 210 | | | | 68 | | | | 2.6 | 17.1 |
| BT50-DTA 7-105 | 1 | 1 ~ 7 | 105 | 21 | 30 | 37 | — | 38 | — | — | 3.8 | 15.5 |
| -135 | | | 135 | | 60 | | | | | | 3.9 | 16.6 |
| -165 | | | 165 | | | | 30 | | 43 | | 4.0 | 18.0 |
| -195 | | | 195 | | | | 60 | | | | 4.4 | 19.5 |
| -255 | | | 255 | | | | 120 | | | | 5.0 | 18.2 |
| -315 | | | 315 | | | | | | | | 5.9 | 19.1 |
| -DTA12-135 | 1 | 2.5 ~ 13 | 135 | 30 | 52.5 | 40 | 4.5 | 45 | 50 | | 4.1 | 19.4 |
| -165 | | | 165 | | 75 | | 12 | | | | 4.3 | 21.6 |
| -195 | | | 195 | | | | 42 | | | | 4.7 | 23.4 |
| -255 | | | 255 | | | | 102 | | | | 5.5 | 22.3 |
| -315 | | | 315 | | | | | | | | 6.6 | 23.3 |
| A63 -DTA 3- 90 | 3 | 0.5 ~ 3.175 | 90 | 10 | 27 | 26 | 11 | 22 | 25 | — | 0.8 | 3.0 |
| -120 | | | 120 | | | | 41 | | | | 1.0 | 3.4 |
| -DTA 7-105 | | 1 ~ 7 | 105 | 21 | 30 | 37 | 12 | 38 | 50 | | 1.1 | 17.3 |
| -120 | | | 120 | | 38 | | 19 | | | | 1.3 | 18.3 |
| -150 | | | 150 | | 60 | | 27 | | | | 1.7 | 20.3 |
| -DTA12-120 | | 2.5 ~ 13 | 120 | 30 | 52.5 | 40 | 1.5 | 45 | | | 1.2 | 21.9 |
| -150 | | | 150 | | 75 | | 9 | | | | 1.4 | 25.2 |
| -180 | | | 180 | | | | 39 | | | | 1.8 | 27.7 |

| CODE | Fig. | φD | L | φC | L1 | L2 | L3 | φC1 | φC2 | φD1 | Kg (lbs) | N | |
|-------------------------|------|------------|------|------|------|------|------|------|------|------|-------------|------|------|
| A100 -DTA 7-135 | 3 | 1 ~ 7 | 135 | 21 | 30 | 37 | 39 | 38 | 50 | — | 2.7 | 33.8 | |
| -165 | | | 165 | | 60 | | | | | | 2.8 | 35.5 | |
| -225 | | | 225 | | 99 | | | | | | 3.7 | 33.6 | |
| -DTA12-135 | | 2.5~13 | 135 | 30 | 52.5 | 40 | 13.5 | 45 | 2.7 | | 37.1 | | |
| -165 | | | 165 | | 75 | | 21 | | 2.9 | | 40.4 | | |
| -225 | | | 225 | | 81 | | 81 | | 3.8 | | 39.7 | | |
| E32 -DTA 3- 75 | 4 | 0.5~ 3.175 | 75 | 10 | 27 | 26 | 2 | 22 | 25 | — | 0.2 | 1.8 | |
| E40 -DTA 3- 75 | 4 | 0.5~ 3.175 | 75 | 10 | 27 | 26 | 2 | 22 | 25 | — | 0.3 | 1.7 | |
| E50 -DTA 3- 80 | 4 | 0.5~ 3.175 | 80 | 10 | 27 | 26 | 1 | 22 | 25 | — | 0.5 | 2.1 | |
| F63 -DTA 3- 90 | 4 | 0.5~ 3.175 | 90 | 10 | 27 | 26 | 11 | 22 | 25 | — | 0.8 | 2.3 | |
| -120 | | | 120 | | | | 41 | | | | 27 | 26 | 0.9 |
| DN40A -DTA 3- 95 | 1 | 0.5~ 3.175 | 95 | 10 | 27 | 26 | 10.8 | 22 | 25 | — | 1.1 | 4.6 | |
| -125 | | | 125 | | | | 40.8 | | | | 1.2 | 5.0 | |
| DIN -DTA 7-105 | | 1 ~ 7 | 105 | 21 | 30 | 43.8 | 12.1 | 38 | 45 | | 1.2 | 11.9 | |
| -135 | | | 135 | | 60 | | 37 | | | | 18.9 | 1.3 | 14.4 |
| -DTA12-130 | | 2.5~13 | 130 | 30 | 52.5 | 56.9 | — | 45 | — | | 1.5 | 18.0 | |
| -160 | | | 160 | | 75 | | 66.4 | | | | 1.7 | 20.0 | |
| DN50A -DTA 7-135 | 1 | 1 ~ 7 | 135 | 21 | 60 | 37 | 3 | 38 | 50 | — | 3.4 | 20.1 | |
| -165 | | | 165 | | | | 33 | | | | 43 | 3.6 | 20.0 |
| -195 | | | 195 | | | | 63 | | | | 3.9 | 20.6 | |
| -DTA12-135 | | 2.5~13 | 135 | 30 | 52.5 | 40 | 7.5 | 45 | 50 | | 3.6 | 21.5 | |
| -165 | | | 165 | | 75 | | 15 | | | | 3.8 | 25.8 | |
| -195 | | | 195 | | 45 | | 4.2 | | | | 26.4 | | |
| CT40 -DTA 3- 95 | 1 | .02~.13 | 3.74 | 0.39 | 1.06 | 1.02 | .28 | .87 | .98 | — | 2.4 | 4.4 | |
| -125 | | | 4.92 | | | | 1.46 | | | | 2.7 | 4.8 | |
| -DTA 7-102 | | .04~.28 | 4.01 | 0.83 | 1.18 | 1.46 | .63 | 1.49 | 1.75 | | 2.8 | 8.1 | |
| -132 | | | 5.19 | | 2.36 | | 2.9 | | | | 9.3 | | |
| -DTA12-130 | | .10~.51 | 5.11 | 1.18 | 2.08 | 1.57 | — | 1.77 | 3.3 | | 11.7 | | |
| -152 | | | 5.98 | | 2.95 | | .61 | | 3.8 | | 13.5 | | |
| CT50 -DTA 7-102 | 1 | .04~.28 | 4.01 | 0.83 | 1.18 | 1.46 | .63 | 1.49 | 2.75 | — | 7.1 | 11.8 | |
| -132 | | | 5.19 | | | | 2.36 | | | | 7.3 | 13.0 | |
| -152 | | | 5.98 | | | | — | | | | .71 | 1.69 | 7.7 |
| -203 | | 7.87 | 2.71 | 8.6 | 14.0 | | | | | | | | |
| -DTA12-130 | | .10~.51 | 5.11 | 1.18 | 2.08 | 1.57 | .73 | 1.77 | — | | 7.7 | 15.6 | |
| -152 | | | 5.98 | | 2.95 | | .71 | | | | 7.9 | 17.5 | |
| -203 | 7.87 | | 2.09 | | 1.97 | | 9.3 | | | 18.3 | | | |
| ST16 -DTA 3 | 5 | 0.5~ 3.175 | 60 | 10 | 27 | 60 | — | 22 | 25 | 16 | — | — | |
| ST20 -DTA 3 | 5 | 0.5~ 3.175 | 60 | 10 | 27 | 60 | — | 22 | — | 20 | — | — | |
| ST32T -DTA 7- 75 | 6 | 1 ~ 7 | 75 | 21 | 31.5 | 100 | — | 38 | — | 32 | — | — | |
| -105 | | | 105 | | 61.5 | | | | | | | | |
| -DTA12-105 | | 2.5~13 | — | 30 | 52.5 | 45 | | | | | | | |
| -135 | | | 135 | | 75 | | | | | | | | |
| S32 -DTA 7- 75 | 6 | 1 ~ 7 | 75 | 21 | 31.5 | 70 | — | 38 | — | 32 | — | — | |
| -DTA12-100 | | 2.5~13 | 100 | | 30 | | | 52.5 | | | | | 45 |

- Option
 ●DETA-1 collet→P.31 ●Spanner→P.31 ●Retention knob (BT)→P.64
 ●Cleaning tool→P.31



- Std. Access.
 ●Coolant duct(Fixed)(HSK-A)→P.104 ●Rod(DTA3)

- Note
 ●Swing type coolant ducts are available upon request(HSK-A).
 For details, please contact us.

- Caution
 ●HSK-E and F shank don't come with a coolant duct and cannot be attached.
 ●ATC may not be possible for some machining centers with BT30-DTA12-120.
 ●For precautions and maintenance, refer to page 115.

Rod (DTA3 type)








These are necessary when attaching a collet to the holder (DTA3).



| CODE | Holder type | Q'ty |
|---------|-------------|-------|
| PR-DTA3 | DTA3 | 2pcs. |



DETa-1 Collet Holder B type (DTB)

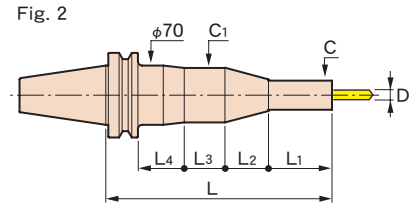


| CODE | Fig. | φD | L | φC | L1 | L2 | L3 | L4 | φC1 | φD1 | kg | (N) | | |
|-----------------------|------|-------------|----------|-------------|------|------|------|------|------|-----|-----|-----|------|------|
| BT30-DTB 3- 90 | 1 | 0.5 ~ 3.175 | 90 | 10 | 27 | 13 | 28 | — | 25 | — | 0.6 | 1.7 | | |
| -DTB 7- 75 | | 1 ~ 7 | 75 | 21 | 53 | — | — | — | — | — | 0.5 | 2.4 | | |
| -105 | | | 105 | | 83 | | | | | | | | 3.4 | |
| -DTB12- 75 | | 2.5 ~ 13 | 75 | 30 | 53 | | | | | | | | | |
| -105 | | | 105 | | 83 | | | | | | | 0.7 | 5.6 | |
| BT40-DTB 3- 80 | 1 | 0.5 ~ 3.175 | 80 | 10 | 27 | 13 | 13 | — | 25 | — | 1.3 | 2.8 | | |
| -110 | | | 110 | | | | 43 | | | | | 1.4 | 3.2 | |
| -110L | | | | 57 | | 13 | | | | | | 1.3 | 2.8 | |
| -DTB 7- 60 | | 1 ~ 7 | 60 | 21 | 33 | — | — | — | — | — | — | 1.0 | 3.7 | |
| -105 | | | 105 | | 78 | | | | | | | 1.1 | 4.8 | |
| -135 | | | 135 | | 75 | 11.8 | 21.2 | | | 30 | | 1.3 | 5.2 | |
| -165 | | | 165 | | 75.5 | 35.3 | 27.2 | | | 40 | | 1.6 | 5.4 | |
| -195 | | | 195 | | | | 57.2 | | | | | 1.9 | 5.6 | |
| -DTB12- 90 | | | 2.5 ~ 13 | 90 | 30 | 63 | — | — | — | — | — | — | 1.2 | 5.3 |
| -120 | | | | 120 | | 93 | | | | | | | 1.3 | 7.6 |
| -150 | | 150 | | | 105 | 11.8 | 6.2 | | | 40 | | 1.5 | 8.4 | |
| -180 | | 180 | | | | | 36.2 | | | | | 1.8 | 8.7 | |
| -210 | | | 210 | | | | | 66.2 | | | | 2.1 | 8.9 | |
| BT50-DTB 7- 75 | | 1 | 1 ~ 7 | 75 | 21 | 37 | — | — | — | — | — | — | 3.5 | 11.7 |
| -105 | 105 | | | | 67 | | | | | | | 3.7 | 12.3 | |
| -135 | 135 | | | | 75 | 11.8 | 10.2 | | | 30 | | 3.8 | 18.6 | |
| -195 | 195 | | | | | 58.8 | 23.2 | | | 50 | | 4.6 | 25.0 | |
| -255 | 255 | | | | 75.5 | 82.3 | 59.2 | | | 60 | | 6.1 | 27.6 | |
| -315 | 2 | | | 315 | | 75 | 58.8 | 43.7 | 99.5 | 50 | | 7.4 | 33.9 | |
| -DTB12- 75 | 1 | 2.5 ~ 13 | 75 | 30 | 37 | — | — | — | — | — | — | 3.7 | 12.5 | |
| -105 | | | 105 | | 67 | | | | | | | 3.9 | 14.8 | |
| -135 | | | 135 | | 97 | | | | | | | 4.0 | 15.3 | |
| -195 | | | 195 | | 105 | 35.3 | 16.7 | | | 50 | | 4.7 | 24.3 | |
| -255 | | | 255 | | | 58.8 | 53.2 | | | 60 | | 5.9 | 28.4 | |
| -315 | | | 2 | 315 | | | 50.2 | 63 | | | | 7.5 | 34.1 | |
| A63 -DTB 3- 75 | | | 3 | 0.5 ~ 3.175 | 75 | 10 | 27 | 13 | 4 | — | 25 | — | 0.8 | 6.9 |
| -105 | 105 | | | | | | 34 | | | | 0.9 | 7.5 | | |
| -105L | | 57 | | | | | 4 | | | | 0.8 | 7.0 | | |

| CODE | Fig. | φD | L | φC | L1 | L2 | L3 | L4 | φC1 | φD1 | Kg (lbs) | N | | |
|--------------------------|---------|------------|---------|------------|------|------|------|------|-------|------|-------------|------|------|----|
| E25 -DTB 3- 58 | 3 | 0.5~ 3.175 | 58 | 10 | 27 | 16 | 4.6 | — | 18 | — | 0.1 | 0.4 | | |
| E32 -DTB 3- 65 | 3 | 0.5~ 3.175 | 65 | 10 | 27 | 16 | 4.5 | — | 20 | — | 0.2 | 0.6 | | |
| -DTB 7- 65K | 4 | 1 ~ 7 | | 21 | 30 | 14.2 | 10.8 | | 26 | | 0.9 | | | |
| E40 -DTB 3- 70 | 3 | 0.5~ 3.175 | 70 | 10 | 27 | 13 | — | — | 20 | — | 0.3 | 0.9 | | |
| -DTB 7- 95 | 4 | 1 ~ 7 | 95 | 21 | 50 | 11.8 | 13.2 | | 30 | | 0.4 | 1.6 | | |
| -DTB12-110 | | 2.5~13 | 110 | 30 | 90 | — | — | | — | | 0.5 | 2.8 | | |
| E50 -DTB 3- 75 | 3 | 0.5~ 3.175 | 75 | 10 | 27 | 16 | 1.5 | — | 20 | — | 0.5 | 1.7 | | |
| -DTB 7-100 | 4 | 1 ~ 7 | 100 | 21 | 50 | 11.8 | 12.2 | | 30 | | 0.6 | 3.2 | | |
| -DTB12-115 | | 2.5~13 | 115 | 30 | 89 | — | — | | — | | 0.8 | 4.2 | | |
| F63 -DTB 3- 75 | 3 | 0.5~ 3.175 | 75 | 10 | 27 | 13 | 4 | — | 25 | — | 0.8 | 2.1 | | |
| -105 | | | 105 | | | | 34 | | | | 0.9 | 2.5 | | |
| -105L | | | 57 | | | | 4 | | | | 0.8 | 2.1 | | |
| F63M -DTB 7-100 | 4 | 1 ~ 7 | 100 | 21 | 50 | 11.8 | 12.2 | — | 30 | — | 0.9 | 3.3 | | |
| -DTB12-120 | | 2.5~13 | 120 | 30 | 70 | 40 | 1.1 | | 4.8 | | | | | |
| DN40AD -DTB 3- 80 | 1 | 0.5~ 3.175 | 80 | 10 | 27 | 13 | 18.8 | 25 | — | — | 1.2 | 3.5 | | |
| -110 | | | 110 | | | | 38.8 | | | | 1.3 | 3.6 | | |
| -110L | | | 57 | | | | 18.8 | | | | 1.2 | 3.9 | | |
| -DTB 7-105 | | 1 ~ 7 | 105 | 21 | 74 | — | 12.1 | — | 44.45 | 1.1 | 4.8 | | | |
| -135 | | | 135 | 75 | 11.8 | 17 | 30 | | 1.2 | 5.0 | | | | |
| -DTB12-105 | | 2.5~13 | 105 | 30 | 74 | — | 12.1 | — | 44.45 | 1.2 | 5.7 | | | |
| -135 | | | 135 | 104 | 1.3 | 8.0 | | | | | | | | |
| DN50AD -DTB 7-135 | | 1 | 1 ~ 7 | 135 | 21 | 75 | 11.8 | 13.2 | 15.9 | 30 | — | 3.3 | 14.9 | |
| -195 | | | | 195 | | | 58.8 | 26.2 | | 50 | | 4.1 | 21.5 | |
| -DTB12-135 | 2.5~13 | | 135 | 30 | 100 | — | — | — | | 3.5 | | 11.7 | | |
| -195 | | | 195 | 105 | 35.3 | 19.7 | 50 | 4.2 | | 20.8 | | | | |
| CT40 -DTB 3- 80 | 1 | .02~.13 | 3.15 | .39 | 1.06 | .51 | .20 | .98 | — | — | 2.4 | 3.3 | | |
| -110 | | | 4.33 | | | | 1.38 | | | | 2.7 | 3.7 | | |
| -110L | | | 2.24 | | | | .20 | | | | 2.4 | 3.3 | | |
| -DTB 7-105 | | .04~.28 | 4.13 | .83 | 2.76 | — | .63 | — | 1.75 | 2.4 | 4.6 | | | |
| -135 | | | 5.31 | 2.95 | .46 | .52 | 1.18 | | 2.9 | 5.2 | | | | |
| -DTB12-120 | | .10~.51 | 4.72 | 1.18 | 3.34 | — | .63 | — | 1.75 | 1.3 | 7.5 | | | |
| -150 | | | 5.91 | 3.66 | .88 | .62 | 3.5 | | 8.5 | | | | | |
| CT50 -DTB 7-135 | | 1 | .04~.28 | 5.31 | .83 | 2.91 | .46 | .52 | — | 1.18 | — | 7.3 | 14.8 | |
| -195 | 7.68 | | | 2.31 | | | 1.03 | 1.97 | | 9.0 | | 21.4 | | |
| -DTB12-135 | .10~.51 | | 5.31 | 1.18 | 3.94 | — | .63 | 2.75 | | 7.7 | | 11.6 | | |
| -195 | | | 7.68 | 4.13 | 1.39 | .78 | 1.97 | 9.0 | | 20.8 | | | | |
| ST12 -DTB 3 | | | 5 | 0.5~ 3.175 | 29 | 10 | 25 | 61 | | — | | — | — | 12 |
| ST16 -DTB 3 | 5 | 0.5~ 3.175 | 38.5 | 10 | 27 | 81.5 | — | — | — | 16 | — | | | |
| ST20 -DTB 3 | 5 | 0.5~ 3.175 | 48 | 10 | 27 | 102 | — | — | — | 20 | — | | | |
| ST25T -DTB 7- 15 | 6 | 1 ~ 7 | 15 | 21 | 110 | — | — | — | — | 25 | — | — | | |
| - 45 | | | 45 | | | | | | | | | | — | — |
| - 75 | | | 75 | | | | | | | | | | — | — |
| ST32T -DTB 7- 15 | 6 | 1 ~ 7 | 15 | 21 | 92 | — | — | — | — | 32 | — | — | | |
| - 45 | | | 45 | | | | | | | | | | — | — |
| - 75 | | | 75 | | | | | | | | | | — | — |
| -DTB12- 15 | | 2.5~13 | 15 | 30 | — | — | — | — | — | — | — | — | | |
| - 45 | | | 45 | | | | | | | | | | — | — |
| - 75 | | | 75 | | | | | | | | | | — | — |
| S32 -DTB 7- 15 | 6 | 1 ~ 7 | 15 | 21 | 70 | — | — | — | — | 32 | — | — | | |
| -DTB12- 40 | | 2.5~13 | 40 | | | | | | | | | | 30 | — |

- Option
•DETa-1 collet→P.31 •Wrench→P.31 •Retention knob (BT)→P.64
•Cleaning tool→P.31
- Std. Access.
•Coolant duct(Fixed)(HSK-A)→P.104
- Note
•Swing type coolant ducts are available upon request(HSK-A).
For details, please contact us.
•BT30-DTB12 requires the dedicated retention knob, which has the feature of draw bolt. Please choose P-538 or P-535.
- Caution
•For the E32-DTB7-65K, collet collapsibility is not available. The clamping diameter applies only to nominal end-mill shank size.
•HSK-E shank doesn't come with a coolant duct and cannot be attached.
•For precautions and maintenance, refer to page 115.

Retention knob for BT30-DTB12







| CODE | φD | φd | θ | Note |
|-------|-----|-----|----|--------------------------|
| P-538 | 8 | 4 | 45 | In accordance with MAS-1 |
| -535 | 7.5 | 2.5 | 60 | In accordance with MAS-2 |



DETa-1 Collet Holder E type (DTE)



Imbalance value(g·mm) **N**
 P.118

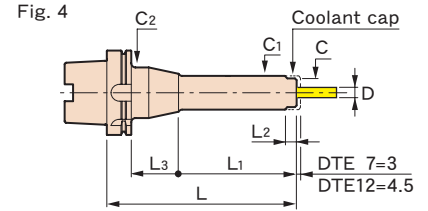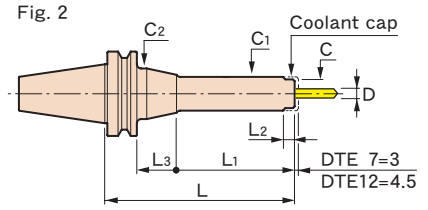

| CODE | Fig. | φD | L | φC | L1 | L2 | L3 | φC1 | φC2 | KG | N |
|----------------------------|------|---------|-------|---------|---------|------|---------|------|-----|------|------|
| BT30-DTE 7- 60-MAS1 | 1 | 1 ~ 7 | 60 | 24 | 38 | 11.5 | — | 29 | — | 0.6 | 3.2 |
| -MAS2 | | 2.5~ 13 | 75 | 34 | 53 | 14 | — | 40 | — | 0.9 | 4.9 |
| -DTE12- 75-MAS1 | | | | | | | | | | | |
| -MAS2 | | | | | | | | | | | |
| BT40-DTE 7- 90 | 1 | 1 ~ 7 | 90 | 24 | 63 | 11.5 | — | 29 | — | 1.3 | 4.9 |
| -120 | 2 | | 120 | | 70 | | 23 | | 40 | 1.5 | 6.2 |
| -150 | | | 150 | | 53 | | 50 | | 1.9 | 7.2 | |
| -180 | | | 180 | | 83 | | 50 | | 2.4 | 8.9 | |
| -210 | | | 210 | | 113 | | 50 | | 2.9 | 9.8 | |
| -DTE12- 90 | | | 1 | | 2.5~ 13 | | 90 | | 34 | 63 | 14 |
| -120 | 120 | 93 | | — | 1.8 | 7.4 | | | | | |
| -150 | 150 | 123 | | — | 2.1 | 9.4 | | | | | |
| -180 | 2 | 180 | | 140 | 13 | 50 | 2.5 | 9.6 | | | |
| -210 | | 210 | | 43 | 50 | 2.9 | 11.7 | | | | |
| BT50-DTE 7-105 | 1 | 1 ~ 7 | 105 | 24 | 67 | 11.5 | — | 29 | — | 3.9 | 15.6 |
| -135 | 2 | | 135 | | 70 | | 27 | | 40 | 4.2 | 16.5 |
| -165 | | | 165 | | 57 | | 50 | | 4.6 | 18.7 | |
| -225 | | | 225 | | 117 | | 60 | | 6.0 | 24.4 | |
| -285 | | | 285 | | 177 | | 60 | | 7.3 | 30.1 | |
| -DTE12-105 | | | 1 | | 2.5~ 13 | | 105 | | 34 | 67 | 14 |
| -135 | 135 | 97 | | — | 4.5 | 18.9 | | | | | |
| -165 | 165 | 127 | | — | 4.8 | 21.0 | | | | | |
| -225 | 2 | 225 | | 140 | 47 | 60 | 5.7 | 24.5 | | | |
| -285 | | 285 | | 107 | 70 | 7.6 | 27.1 | | | | |
| A40 -DTE 7- 95 | 3 | 1 ~ 7 | 95 | 24 | 75 | 11.5 | — | 29 | — | 0.6 | 4.4 |
| -DTE12-105 | | 2.5~ 13 | 105 | 34 | 85 | | 14 | | 40 | 0.9 | 14.4 |
| A50 -DTE 7-105 | 3 | 1 ~ 7 | 105 | 24 | 79 | 11.5 | — | 29 | — | 0.7 | 9.8 |
| -DTE12-120 | | 2.5~ 13 | 120 | 34 | 94 | | 14 | | 40 | 1.1 | 12.5 |
| A63 -DTE 7-105 | 4 | 1 ~ 7 | 105 | 24 | 70 | 11.5 | 9 | 29 | 40 | 1.1 | 12.3 |
| -120 | | | 24 | | | | — | | 1.2 | 12.8 | |
| -150 | | | 54 | | | | 50 | | 1.7 | 14.3 | |
| -180 | | | 84 | | | | 50 | | 2.1 | 15.7 | |
| -DTE12-120 | | | 3 | | | | 2.5~ 13 | | 120 | 34 | 94 |
| -150 | 150 | 124 | | — | 1.8 | 16.0 | | | | | |
| -180 | 4 | 180 | | 140 | 14 | 50 | 2.3 | 19.1 | | | |
| A100-DTE 7-135 | | 4 | 1 ~ 7 | 135 | 24 | 70 | 11.5 | 36 | 29 | 40 | 2.7 |
| -165 | 66 | | | 50 | | | | 3.2 | | 32.4 | |
| -225 | 126 | | | 60 | | | | 4.7 | | 35.7 | |
| -DTE12-135 | 3 | | | 2.5~ 13 | | | | 135 | | 34 | 106 |
| -165 | | 136 | — | 3.3 | 36.2 | | | | | | |
| -225 | | 4 | 225 | 140 | 56 | 60 | 4.4 | 40.3 | | | |

| CODE | Fig. | φD | L | φC | L1 | L2 | L3 | φC1 | φC2 | KG (lbs) | N |
|---|------|---------|------|------|-------|------|------|------|------|----------|------|
| DN40AD-DTE 7- 90 -120 -DTE12- 90 -150 | 2 | 1 ~ 7 | 90 | 24 | 58 | 11.5 | 12.9 | 29 | 45 | 1.2 | 5.4 |
| | | | 120 | | 70 | | 30.9 | | | | |
| | | 2.5~13 | 90 | 34 | 58.8 | 14 | 12.1 | 40 | 1.3 | 6.1 | |
| | | | 150 | | 118.8 | | 1.9 | | | | 9.3 |
| DN50AD-DTE 7-105 -165 -DTE12-105 -165 | 2 | 1 ~ 7 | 105 | 24 | 70 | 11.5 | 15.9 | 29 | 70 | 3.4 | 12.0 |
| | | | 165 | | 60 | | 50 | | 4.2 | | |
| | | 2.5~13 | 105 | 34 | 14 | 15.9 | 40 | 70 | 3.6 | 12.6 | |
| | | | 165 | | 130 | | 4.2 | | 17.0 | | |
| CT40-DTE 7- 90 -120 -DTE12- 90 -150 | 2 | .04~.28 | 3.54 | .94 | 2.17 | .45 | .63 | 1.14 | 1.75 | 2.7 | 5.2 |
| | | | 4.72 | | 2.75 | | 1.22 | | | | |
| | | .10~.51 | 3.54 | 1.34 | 2.17 | .55 | .63 | 1.57 | 1.75 | 3.1 | 6.1 |
| | | | 5.91 | | 4.53 | | 4.2 | | | | |
| CT50-DTE 7-105 -165 -DTE12-105 -165 | 2 | .04~.28 | 4.13 | .94 | 2.75 | .45 | .63 | 1.14 | 2.75 | 7.5 | 11.8 |
| | | | 6.5 | | 2.36 | | 1.97 | | 9.0 | | |
| | | .10~.51 | 4.13 | 1.34 | 5.12 | .55 | .63 | 1.57 | 2.75 | 7.9 | 12.9 |
| | | | 6.5 | | 9.3 | | 17.3 | | | | |

Option

- DETa-1 collet → P.31 • Wrench → P.31 • Retention knob (BT40/50) → P.64
- Tap rod (DTE12) → P.30 • Spacer • Coolant cap
- Spacer set • Coolant-through system

Std. Access.

- Coolant duct (Fixed) (HSK-A) → P.104 • Retention knob (BT30)

Note

- Swing type coolant ducts are available upon request (HSK-A). For details, please contact us.

Caution

- A dedicated retention knob is supplied with the BT30-DTE as a standard accessory. When ordering, specify whether a MAS-1 or MAS-2 retention knob is required. To replace the retention knob, please contact us.
- For precautions and maintenance, refer to page 115.

Cutting data

DTA type

| | | |
|--|--|---|
| <p>S50C</p> <p>φ3 Carbide drill 3 flutes</p> <p>n 9000 min⁻¹ Vf 900 mm/min Vc 85 m/min f 0.1 mm/rev</p> <p>E32-DTA3-75</p> | <p>S50C</p> <p>φ3 Carbide Square endmill 3 flutes</p> <p>n 6000 min⁻¹ Vf 150 mm/min Vc 60 m/min fz 0.013 mm/t</p> <p>E32-DTA3-75</p> | <p>Aluminum</p> <p>φ8.5 Carbide drill</p> <p>n 10000 min⁻¹ Vf 5000 mm/min Vc 267 m/min f 0.5 mm/rev</p> <p>BT40-DTA12-165</p> |
|--|--|---|

DTB type

| | | | |
|--|--|---|--|
| <p>A6061</p> <p>φ0.8 Straight drill</p> <p>n 6000 min⁻¹ Vf 60 mm/min Vc 15 m/min</p> <p>BT40-DTB3-110L</p> | <p>A5052</p> <p>φ0.8 Straight drill</p> <p>n 10000 min⁻¹ Vf 400 mm/min Vc 25 m/min</p> <p>※234 pcs.</p> <p>A63-DTB3-75</p> | <p>S50C</p> <p>R1.5 Carbide ball endmill</p> <p>n 12500 min⁻¹ Vf 1560 mm/min Vc 120 m/min f 0.125 mm/rev</p> <p>E32-DTB3-65</p> | <p>S50C</p> <p>φ3 Carbide Square endmill 2 flutes</p> <p>n 6000 min⁻¹ Vf 150 mm/min Vc 60 m/min fz 0.013 mm/t</p> <p>E32-DTB3-65</p> |
|--|--|---|--|


| | | | |
|---|--|--|---|
| <p>S50C</p> <p>R1.5 Carbide ball endmill</p> <p>n 12500 min⁻¹ Vf 1560 mm/min Vc 120 m/min f 0.125 mm/rev</p> <p>E32-DTB3-65</p> | <p>STAVAX(42HRC)</p> <p>φ0.6 Carbide straight drill</p> <p>n 3715 min⁻¹ Vf 30 mm/min Vc 7 m/min f 0.01 mm/rev</p> <p>F63-DTB3-75</p> | <p>SKD61(46HRC)</p> <p>R3 Carbide ball endmill 2 flutes</p> <p>n 5000 min⁻¹ Vf 1500 mm/min Vc 94 m/min fz 0.15 mm/t</p> <p>BT40-DTB7-105</p> | <p>SKD61(46HRC)</p> <p>φ10 Carbide endmill 2 flutes</p> <p>n 4500 min⁻¹ Vf 1500 mm/min Vc 141 m/min fz 0.17 mm/t</p> <p>BT40-DTB12-90</p> |
|---|--|--|---|

DTE type

| | |
|---|--|
| <p>S50C</p> <p>φ6 Carbide drill</p> <p>n 6369 min⁻¹ Vf 1592 mm/min Vc 120 m/min f 0.25 mm/rev</p> <p>A63-DTE7-105</p> | <p>SKD61(53HRC)</p> <p>R5 Carbide ball endmill 2 flutes</p> <p>n 20000 min⁻¹ Vf 6000 mm/min Vc 628 m/min fz 0.15 mm/t</p> <p>A63-DTE12-120</p> |
|---|--|

Tap rod (DTE12type)

To be used as a stopper for synchronized tapping.

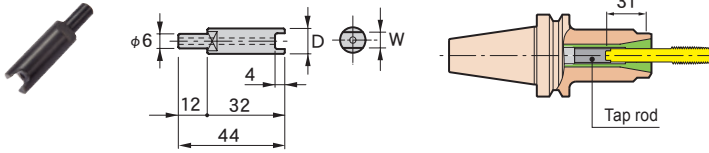


| CODE | Applicable taps | φD | W | Collet |
|------|-----------------|------|-----|--------|
| TR-5 | JIS M 8 | 10.5 | 5 | D12-12 |
| -5.5 | JIS M10 | | 5.5 | |
| -6 | OSG M 8 M10 | 12 | 6 | -13 |
| -6.5 | JIS M12 | | 6.5 | |
| -8 | OSG M12 | 12 | 8 | |


COOLANT-THROUGH SYSTEM (OPTION)

Spacer

EA type




EBM type (Groove-type)



| CODE | Holder type | φD | Q'ty |
|-------------|-------------|---------|-------|
| 7EA- 3.5-3 | DTE 7 | 3 ~ 3.5 | 3pcs. |
| - 4 -3 | | 3.5 ~ 4 | 1set |
| - 4.5-3 | | 4 ~ 4.5 | |
| - 5 -3 | | 4.5 ~ 5 | |
| - 5.5-3 | | 5 ~ 5.5 | |
| - 6 -3 | | 5.5 ~ 6 | |
| - 6.5-3 | | 6 ~ 6.5 | |
| - 7 -3 | | 6.5 ~ 7 | |
| 12EA- 3.5-3 | DTE12 | 3 ~ 3.5 | 3pcs. |
| - 4 -3 | | 3.5 ~ 4 | 1set |
| - 4.5-3 | | 4 ~ 4.5 | |
| - 5 -3 | | 4.5 ~ 5 | |
| - 5.5-3 | | 5 ~ 5.5 | |
| - 6 -3 | | 5.5 ~ 6 | |
| - 6.5-3 | | 6 ~ 6.5 | |
| - 7 -3 | | 6.5 ~ 7 | |
| - 8 -3 | | 7 ~ 8 | |
| - 9 -3 | | 8 ~ 9 | |
| -10 -3 | | 9 ~ 10 | |
| -11 -3 | | 10 ~ 11 | |
| -12 -3 | | 11 ~ 12 | |
| -13 -3 | 12 ~ 13 | | |

| CODE | Holder type | φD | Q'ty |
|------------|-------------|----|-------|
| 7EBM- 3-3 | DTE 7 | 3 | 3pcs. |
| - 4-3 | | 4 | 1set |
| - 6-3 | | 6 | |
| 12EBM- 3-3 | DTE12 | 3 | 3pcs. |
| - 4-3 | | 4 | 1set |
| - 6-3 | | 6 | |
| - 8-3 | | 8 | |
| -10-3 | | 10 | |
| -12-3 | | 12 | |

EBS type (Round-type)



| CODE | Holder type | φD | S | Q'ty |
|--------------|-------------|----|-----|-------|
| 7EBS- 3.6-3 | DTE 7 | 3 | 3.1 | 3pcs. |
| - 4.5-3 | | 4 | 3.3 | 1set |
| - 6.4-3 | | 6 | 3.9 | |
| 12EBS- 3.6-3 | DTE12 | 3 | 3.1 | 3pcs. |
| - 4.5-3 | | 4 | 3.3 | 1set |
| - 6.4-3 | | 6 | 3.9 | |
| - 8.4-3 | | 8 | 4.6 | |
| -10.3-3 | | 10 | 4.8 | |
| -12.3-3 | | 12 | | |

Spacer blank type

Depend on cutter or application, please modify.

| CODE | Holder type | Q'ty |
|------------|-------------|-------|
| 7EBF-BL-5 | DTE 7 | 5pcs. |
| 12EBF-BL-5 | DTE12 | 1set |


Spacer set

| CODE | Holder type | Contents of set | | |
|--------|-------------|--------------------|--------|-------------|
| | | Spacer | Q'ty | Coolant cap |
| 7ES-A | DTE 7 | 7EA -3.5~7 | (1ea.) | CLP- 7E |
| | | 7EBM-3, 4, 6 | total | |
| | | 7EBS-3.6, 4.5, 6.4 | 14pcs. | |
| 12ES-A | DTE12 | 12EA -3.5~13 | (1ea.) | CLP-12E |
| | | 12EBM-3~12 | total | |
| | | 12EBS-3.6~12.3 | 26pcs. | |




■ Std. Access.
● Collet driver


Coolant cap



| CODE | Holder type | φD | φC | H |
|---------|-------------|----|----|----|
| CLP- 7E | DTE 7 | 21 | 29 | 14 |
| -12E | DTE12 | 30 | 40 | 18 |

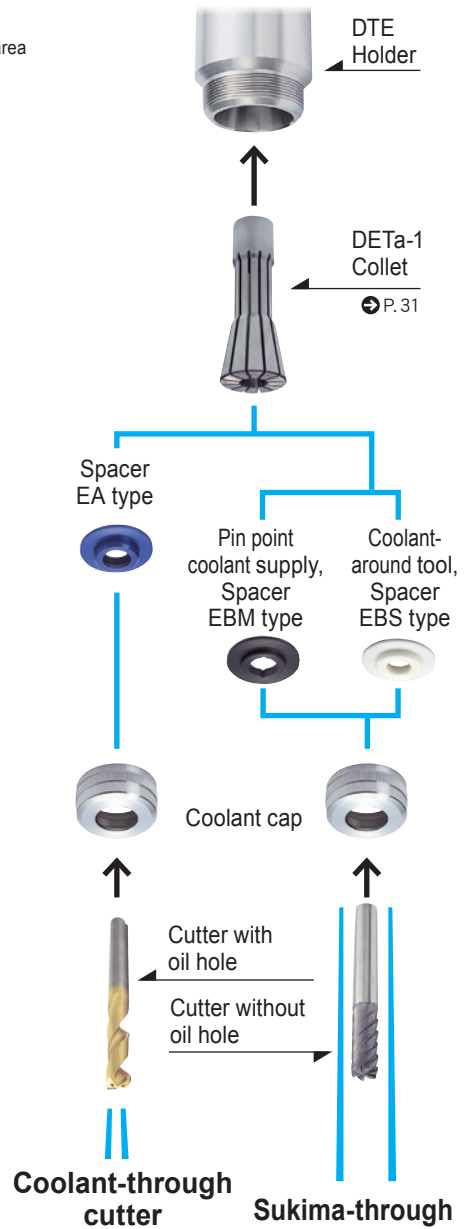

DETa-1 COLLET

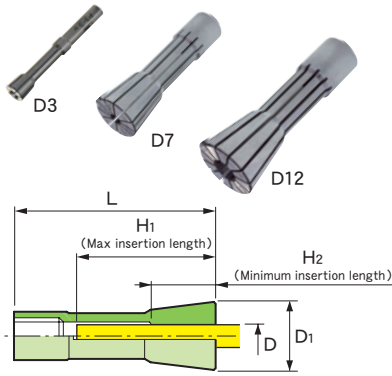


Highest guaranteed accuracies throughout entire chucking range(100% inspection)

| Collet | Run-out accuracy(μm) | |
|------------------|-----------------------------------|---------------------------------|
| | D ₃ | D ₇ /D ₁₂ |
| Precision Collet | 3 ⁽⁶⁾ | 5 ⁽¹⁰⁾ |
| Standard Collet | 5 ⁽¹⁰⁾ | 10 ⁽¹⁵⁾ |

※Accuracy of collet alone, () means collapsibility usable.

| D | L |
|-------|-----|
| ~10 | 4×D |
| 10~13 | 40 |




| CODE | | ϕD | Holder type | Collap-sibility | ϕD_1 | L | H ₁ | H ₂ | | | | | | |
|---|---|-------------|----------------|-----------------|------------|----|-------------------------|----------------|-------------------------|-----|----|----|----|---|
| Standard Collet | Precision Collet | | | | | | | | | | | | | |
| D 3- 0.6 - 0.8 - 1 - 1.5 - 2 - 2.5 - 3 - 3.175 | Add "-P" after the standard type item code. < Example > D12 - 6 - P | 0.5 ~ 0.6 | DTA 3 DTB 3 | 0.1 | 7 | 40 | 30 | 6.9 | | | | | | |
| | | 0.6 ~ 0.8 | | | | | | | | | | | | |
| | | 0.8 ~ 1 | | | | | | | | | | | | |
| | | 1 ~ 1.5 | | | | | | | | | | | | |
| | | 1.5 ~ 2 | | | | | | | | | | | | |
| | | 2 ~ 2.5 | | | | | | | | | | | | |
| | | 2.5 ~ 3 | | | | | | | | | | | | |
| | | 2.7 ~ 3.175 | | | | | | | | | | | | |
| | | 1 ~ 1.5 | | | | | | | DTA 7 DTB 7 DTE 7 | 0.5 | 17 | 50 | 36 | 7 |
| | | 1.5 ~ 2 | | | | | | | | | | | | |
| 2 ~ 2.5 | | | | | | | | | | | | | | |
| 2.5 ~ 3 | | | | | | | | | | | | | | |
| 3 ~ 4 | | | | | | | | | | | | | | |
| 4 ~ 5 | | | | | | | | | | | | | | |
| 5 ~ 6 | | | | | | | | | | | | | | |
| 6 ~ 7 | | | | | | | | | | | | | | |
| 2.5 ~ 4 | DTA12 DTB12 DTE12 | 1.5 | 26 | 70 | 50 | 16 | | | | | | | | |
| 4 ~ 6 | | | | | | | | | | | | | | |
| 6 ~ 8 | | | | | | | | | | | | | | |
| 8 ~ 10 | | | | | | | | | | | | | | |
| 10 ~ 12 | | | | | | | | | | | | | | |
| 11 ~ 13 | | | | | | | | | | | | | | |
| 1 ~ 1.5 | | | | | | | DTA 7 DTB 7 DTE 7 | 1 | 17 | 50 | 36 | 10 | | |
| 1.5 ~ 2 | | | | | | | | | | | | | | |
| 2 ~ 2.5 | | | | | | | | | | | | | | |
| 2.5 ~ 3 | | | | | | | | | | | | | | |
| 3 ~ 4 | | | | | | | | | | | | | | |
| 4 ~ 5 | | | | | | | | | | | | | | |
| 5 ~ 6 | | | | | | | | | | | | | | |
| 6 ~ 7 | | | | | | | | | | | | | | |
| 1.5 ~ 2 | DTA 7 DTB 7 DTE 7 | 1 | 17 | 50 | 36 | 12 | | | | | | | | |
| 2 ~ 2.5 | | | | | | | | | | | | | | |
| 2.5 ~ 3 | | | | | | | | | | | | | | |
| 3 ~ 4 | | | | | | | | | | | | | | |
| 4 ~ 5 | | | | | | | | | | | | | | |
| 5 ~ 6 | | | | | | | | | | | | | | |
| 6 ~ 7 | | | | | | | | | | | | | | |
| 1.5 ~ 2 | | | | | | | DTA 7 DTB 7 DTE 7 | 1 | 17 | 50 | 36 | 14 | | |
| 2 ~ 2.5 | | | | | | | | | | | | | | |
| 2.5 ~ 3 | | | | | | | | | | | | | | |
| 3 ~ 4 | | | | | | | | | | | | | | |
| 4 ~ 5 | | | | | | | | | | | | | | |
| 5 ~ 6 | | | | | | | | | | | | | | |
| 6 ~ 7 | | | | | | | | | | | | | | |
| 1.5 ~ 2 | DTA 7 DTB 7 DTE 7 | 1 | 17 | 50 | 36 | 16 | | | | | | | | |
| 2 ~ 2.5 | | | | | | | | | | | | | | |
| 2.5 ~ 3 | | | | | | | | | | | | | | |
| 3 ~ 4 | | | | | | | | | | | | | | |
| 4 ~ 5 | | | | | | | | | | | | | | |
| 5 ~ 6 | | | | | | | | | | | | | | |
| 6 ~ 7 | | | | | | | | | | | | | | |
| 1.5 ~ 2 | | | | | | | DTA 7 DTB 7 DTE 7 | 1 | 17 | 50 | 36 | 20 | | |
| 2 ~ 2.5 | | | | | | | | | | | | | | |
| 2.5 ~ 3 | | | | | | | | | | | | | | |
| 3 ~ 4 | | | | | | | | | | | | | | |
| 4 ~ 5 | | | | | | | | | | | | | | |
| 5 ~ 6 | | | | | | | | | | | | | | |
| 6 ~ 7 | | | | | | | | | | | | | | |
| 1.5 ~ 2 | DTA 7 DTB 7 DTE 7 | 1 | 17 | 50 | 36 | 22 | | | | | | | | |
| 2 ~ 2.5 | | | | | | | | | | | | | | |
| 2.5 ~ 3 | | | | | | | | | | | | | | |
| 3 ~ 4 | | | | | | | | | | | | | | |
| 4 ~ 5 | | | | | | | | | | | | | | |
| 5 ~ 6 | | | | | | | | | | | | | | |
| 6 ~ 7 | | | | | | | | | | | | | | |

Spanner · Wrench

| CODE | Holder type | Fig. | B | R | L | Tightening torque (N·m) |
|-------------|-------------|------|-----|------|-------|-------------------------|
| F- 22 | DTA 3 | 1 | - | 22 | 110 | 2~ 3 |
| DW-2.5-110 | DTB 3 | 2 | 2.5 | - | | |
| F- 38 | DTA 7 | 3 | - | 19 | 148.5 | 20~40 |
| - 45 | DTA12 | | | 22.5 | 225 | 70 |
| TW-4 | E32 - DTB 7 | 4 | 4 | - | 77 | 14 |
| -5 | DTB 7 | | | | 153 | |
| -6 | DTB12 | | | | 173 | 34 |
| | DTE12 | | | | 110 | 18 |
| W-135DR | DTE 7 | 5 | 5 | | 110 | 14 |
| | DTE12 | | | | | 18 |
| | E40 - DTB12 | | | | | |
| | E50 - DTB12 | | | | | |
| | F63 - DTB 7 | | | | | 14 |
| F63 - DTB12 | 18 | | | | | |

■Std. Access.

- Collet driver (F-38, F-45, TW-5, TW-6, W135-DR)

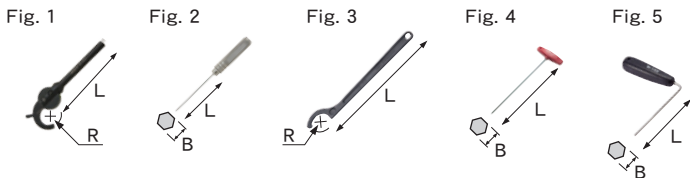

Adjustable torque wrench

The nut-tightening torque can be adjusted more properly.

| Spanner for torque wrench | Adjustable torque wrench | Holder type |
|---------------------------|--------------------------|-------------|
| F-38AW | AW-1 | DTA 7 |
| -45AW | | DTA12 |

Attaching a cutting tool (DTB, DTE)

If a retention knob with a hole is used, direct tightening of cutting tools is possible.

Required hole dia of retention knob


- DTB 3 : $\phi 4 \sim$
- DTB 7, DTE : $\phi 6 \sim$
- DTB12 : $\phi 7 \sim$



Collet driver

The DETA-1 collet can be attached/detached with ease.


| CODE | Q'ty |
|------|-------|
| DR-1 | 2pcs. |



Cleaning tool felt type

Apply this tool to clean the hard-to-clean inside portion of DTA3 and DTB3 holders. The initial accuracy of tool holders can be made to last a long time by keeping the internal bore clean.

| CODE | Q'ty |
|----------|---------|
| PCT01-10 | 10 pcs. |
| -25 | 25 pcs. |

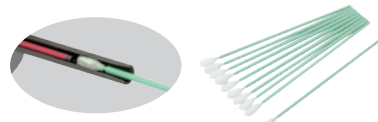

The optimum holder choices for a variety of applications!!



CTA



CTH
For high-speed


Coolant-through



Coolant-Through Cutter
"SUKIMA" Coolant Around Tool
Coolant-Through Collet

Precision spring collet

The increased number of slits ensures the uniform tightening and high accuracy of the collet.

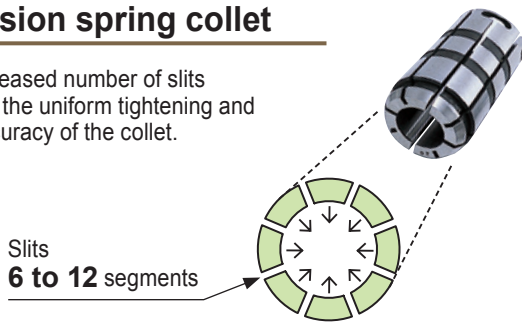


Slits
6 to 12 segments

Using a high-precision collet will increase the life of your tools. P. 117

Highest guaranteed accuracies throughout entire chucking range (100% inspection)

| Collet | Run-out accuracy(μm) |
|------------------|----------------------|
| Precision Collet | 5 |
| Standard Collet | 10 |

※Accuracy of collet alone




| D | L |
|---------|-----|
| ~10 | 4×D |
| 10 ~20 | 40 |
| 20.5~42 | 60 |

Ideal taper angle

Since the collet angle is smaller than that of typical collets, the collapsibility is also small. However, because the collet can be inserted deeper into the main body, the gripping area increases, it provides stable run-out accuracy and high gripping force and rigidity for end milling. This collet as a taper angle of 6°, the ideal angle for run-out accuracy, gripping force and rigidity.


MST

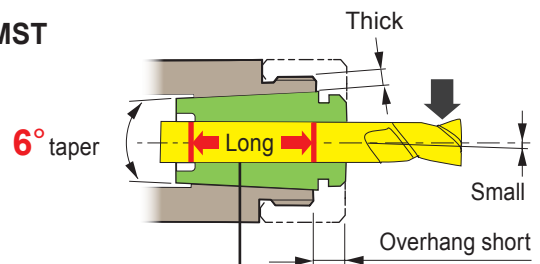

True clamping length

When the taper angle decreases, the collapsibility decreases; however, the true clamping length increases.

Others

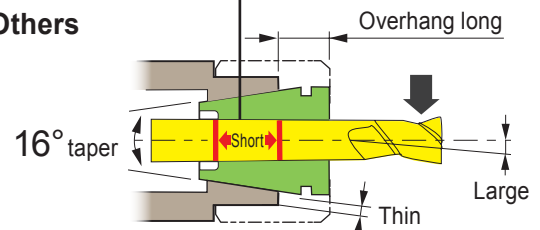


Thick and highly rigid body

- Thick body.
- The nut part is compact and has less interference.
- Short holder length.




Nut for high accuracy


- Because steel ball bearings are built into the nut, the collet does not get twisted when tightened.
- The threaded area and the ball bearing grooves for steel bearings are finished using the same process after heat treatment, thus providing high accuracy with no distortion.
- Stable tightening force and smoothly rotation achieve high accuracy.



Five main body types based on cutting tool size

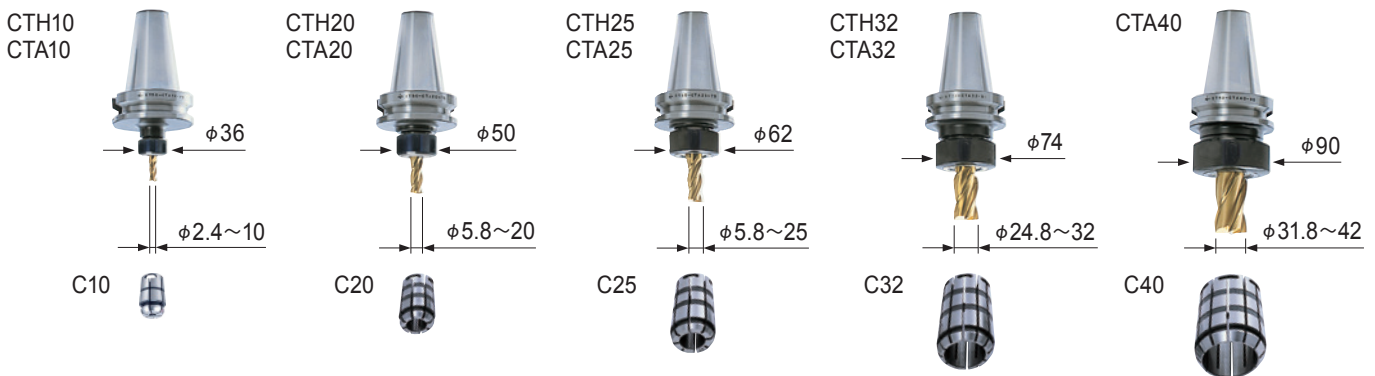


A variety of holder lengths 45L~315L

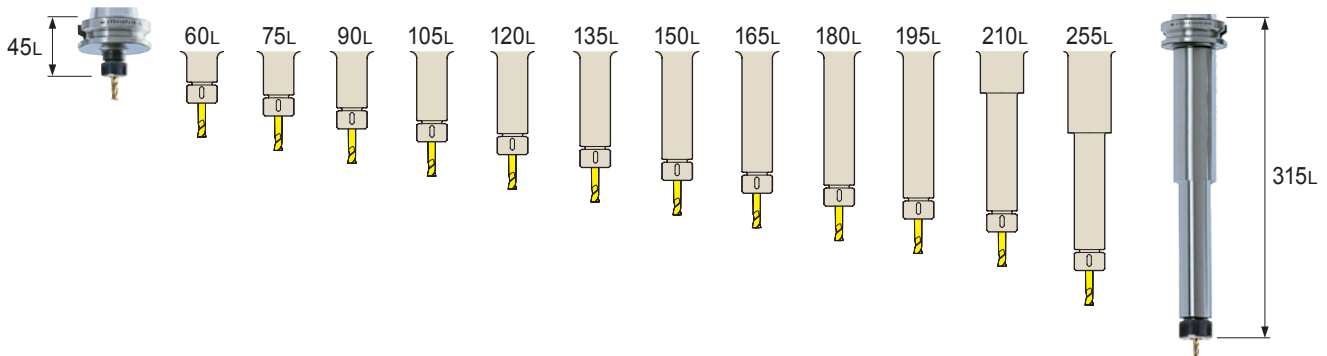

Pre-balanced by previously designing (CTH_{type})

The collet holder (CTH type) is pre-balanced by previously designing the holder to be as axisymmetrical as possible. When used with the precision collet, it enables stable machining during high-speed machining.



Comparison in imbalance value

| Holder code | Spring collet used | Cutter used | | Imbalance value (g·mm) |
|---------------|---------------------------|-------------|----------|------------------------|
| | | Diameter | Overhang | |
| BT30-CTH10-75 | Precision collet C10-10-P | φ10 | 40 | 3.3 |
| -CTA10-75 | Standard collet C10-10 | | | 13.1 |

Longer cutter life using through-spindle capability
➔ P. 117

Coolant-through system

The spindle-through feature can be used whether the cutting tool has oil holes or not. ➔ P. 39

Pressure
7 Mpa

Coolant-Through Cutter









“SUKIMA” Coolant Around Tool





Coolant-Through Collet

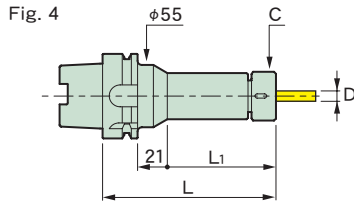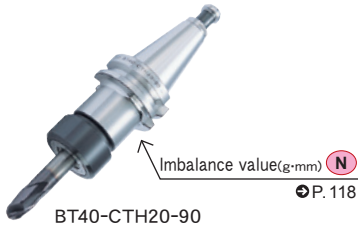

COLLET HOLDER for high-speed (CTH)



| CODE | Fig. | ϕD | L | ϕC | L ₁ | Kg | N |
|------------------------|--------|----------|--------|----------|----------------|-----|------|
| BT30-CTH10- 45 | 1 | 2.4~10 | 45 | 36 | 23 | 0.5 | 2.6 |
| - 75 | | | 75 | | 53 | 0.6 | 2.7 |
| -CTH20- 60 | | 5.8~20 | 60 | 50 | 38 | 0.9 | 4.3 |
| - 90 | | | 90 | | 68 | | 4.7 |
| BT40-CTH10- 60 | 1 | 2.4~10 | 60 | 36 | 33 | 1.1 | 3.8 |
| - 90 | | | 90 | | 63 | 1.3 | 4.0 |
| -120 | | | 120 | | 93 | 1.4 | 4.4 |
| -150 | | | 150 | | 123 | 1.6 | 4.6 |
| -CTH20- 60 | | 5.8~20 | 60 | 50 | 33 | 1.2 | 6.4 |
| - 90 | | | 90 | | 63 | 1.4 | 7.0 |
| -120 | | | 120 | | 93 | 1.7 | 7.3 |
| -150 | | | 150 | | 123 | 2.0 | 7.6 |
| -CTH25- 75 | | 5.8~25 | 75 | 62 | 48 | 1.5 | 8.9 |
| -105 | | | 105 | | 78 | 2.0 | 9.8 |
| BT50-CTH10-105 | 1 | 2.4~10 | 105 | 36 | 67 | 3.8 | 5.3 |
| -135 | | | 135 | | 97 | 4.0 | 5.7 |
| -165 | | | 165 | | 127 | 4.1 | 6.1 |
| -CTH20-105 | | 5.8~20 | 105 | 50 | 67 | 4.2 | 8.3 |
| -135 | | | 135 | | 97 | 4.6 | 9.0 |
| -165 | | | 165 | | 127 | 4.9 | 9.4 |
| -CTH25- 75 | | 5.8~25 | 75 | 62 | 37 | 3.8 | 10.3 |
| -105 | | | 105 | | 67 | 4.4 | 11.0 |
| -CTH32- 90 | | 24.8~32 | 90 | 74 | 52 | 4.1 | 14.4 |
| A40 -CTH10- 55 | | 3 | 2.4~10 | 55 | 32 | 35 | 0.4 |
| - 75 | 75 | | | 55 | | 0.5 | 3.9 |
| - 90 | 90 | | | 70 | | 0.6 | 4.0 |
| -CTH20- 75 | 5.8~20 | | 75 | 50 | 55 | 0.7 | 7.3 |
| - 90 | | | 90 | | 70 | 0.8 | 7.0 |
| -CTH25- 95 | 5.8~25 | | 95 | 55 | 75 | 0.9 | 10.7 |
| A50 -CTH10- 55 | 3 | 2.4~10 | 55 | 36 | 29 | 0.6 | 6.6 |
| - 75 | | | 75 | | 49 | 0.7 | 6.9 |
| A50M-CTH20- 80* | | 5.8~20 | 80 | 50 | 54 | 0.9 | 10.2 |
| -105* | | | 105 | | 79 | 1.2 | 11.1 |
| -CTH25-105* | | 5.8~25 | | 62 | | 1.3 | 14.7 |

| CODE | Fig. | φD | L | φC | L ₁ |  |  |
|-------------------------|--------|--------|-----|-----|----------------|---|---|
| A63 -CTH10- 75 | 3 | 2.4~10 | 75 | 36 | 49 | 0.9 | 10.2 |
| - 90 | | | 90 | | 64 | 1.0 | 10.4 |
| -120 | | | 120 | | 94 | 1.2 | 10.7 |
| -150 | | | 150 | | 124 | 1.4 | 11.0 |
| -CTH20- 90 | | 5.8~20 | 90 | 50 | 64 | 1.2 | 14.1 |
| -120 | | | 120 | | 94 | 1.5 | 14.0 |
| -150 | | | 150 | | 124 | 1.9 | 14.9 |
| -CTH25-105 | | 5.8~25 | 105 | 62 | 79 | 1.6 | 17.1 |
| A100-CTH10-135 | 3 | 2.4~10 | 135 | 36 | 106 | 2.7 | 25.1 |
| -165 | | | 165 | | 136 | 2.9 | 25.4 |
| -225 | | | 225 | | 175 | 3.4 | 26.0 |
| -CTH20-135 | 3 | 5.8~20 | 135 | 50 | 106 | 3.2 | 28.5 |
| -165 | | | 165 | | 136 | 3.6 | 29.5 |
| -225 | | | 225 | | 196 | 4.3 | 31.1 |
| -CTH25-135 | 5.8~25 | 135 | 62 | 106 | 3.7 | 31.4 | |
| -165 | | 165 | | 136 | 4.3 | 32.7 | |
| -195 | | 195 | | 166 | 4.8 | 34.1 | |
| E32 -CTH10- 55 | 5 | 2.4~10 | 55 | 32 | 35 | 0.2 | 1.2 |
| -CTS10- 50※ | 2 | | 50 | | | | 26 |
| E40 -CTH10- 55 | 5 | 2.4~10 | 55 | 32 | 34 | 0.4 | 1.4 |
| E50 -CTH10- 60 | 5 | 2.4~10 | 60 | 36 | 34 | 0.7 | 2.1 |
| - 90 | | | 90 | | 64 | 0.9 | 2.3 |
| -CTH20- 75 | | 5.8~20 | 75 | 50 | 49 | | 3.8 |
| F63 -CTH10- 60 | 5 | 2.4~10 | 60 | 36 | 34 | 0.9 | 2.2 |
| - 90 | | | 90 | | 64 | 1.1 | 2.4 |
| -CTH20- 75 | | 5.8~20 | 75 | 50 | 49 | | 3.9 |
| DN40AD-CTH20- 75 | 1 | 5.8~20 | 75 | 50 | 56 | 1.1 | 5.4 |
| -135 | | | 135 | | 116 | 1.7 | 5.9 |
| -CTH25- 75※ | | 5.8~25 | 75 | 62 | 56 | 1.4 | 7.2 |
| DN50AD-CTH20-105 | 1 | 5.8~20 | 105 | 50 | 70 | 3.6 | 9.1 |
| -165 | | | 165 | | 130 | 4.4 | 9.9 |
| -CTH25-105 | | 5.8~25 | 105 | 62 | 70 | 3.8 | 10.9 |

■ Option

- Spring collet(Precison collet)→P.38 • Spanner→P.38 • Adjust screw→P.37
- Retention knob (BT)→P.64 • Adjustable torque wrench→P.38
- Coolant screw→P.39 • Sukima nut→P.39 • Collet remover→P.38

■ Std. Access.

- Nut (NUA-CTH)→P.37 • Coolant duct(Fixed) (HSK-A)→P.104

■ Note

- Swing type coolant ducts are available upon request (HSK-A). For details, please contact us.
- Applicable for coolant-through methods →P.39
- Be sure to use precision-type spring collet.

■ Caution

- ※ The undercut area of the A50M and DN40AD-CTH25 are different from the standards. Please be careful to check for interference with the ATC arm.
- ※CTS10 = Collapsibility cannot be used. The collet can only chuck a tool of the reference diameter.
- HSK-E and F shank don't come with a coolant duct and cannot be attached.
- For precautions and maintenance, refer to page 116.

DIN

DIN





COLLET HOLDER(CTA)



BT50-CTA20-135



ST32T-CTA20-90

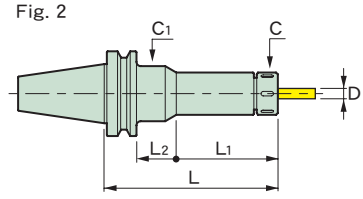


| CODE | Fig. | ϕD | L | ϕC | L ₁ | L ₂ | ϕC_1 | Kg |
|-----------------------|------|----------|--------|----------|----------------|----------------|------------|-----|
| BT30-CTA10- 45 | 1 | 2.4~10 | 45 | 36 | 23 | — | — | 0.5 |
| - 75 | | | 75 | | 53 | | | 0.7 |
| -105 | | | 105 | | 83 | | | 0.9 |
| -CTA20- 60 | | 1 | 5.8~20 | 60 | 50 | 38 | — | — |
| - 90 | 90 | | | 68 | | 0.9 | | |
| BT40-CTA10- 60 | 1 | 2.4~10 | 60 | 36 | 33 | — | — | 1.1 |
| - 90 | | | 90 | | 63 | | | 1.3 |
| -120 | | | 120 | | 93 | | | 1.5 |
| -150 | | | 150 | | 123 | | | 1.7 |
| -180 | | | 180 | | 153 | | | 1.9 |
| -210 | | | 210 | | 155 | | | 2.1 |
| -210 | | | 2 | | 210 | | | 155 |
| -CTA20- 60 | 1 | 5.8~20 | 60 | 50 | 33 | — | — | 1.1 |
| - 90 | | | 90 | | 63 | | | 1.4 |
| -120 | | | 120 | | 93 | | | 1.7 |
| -150 | | | 150 | | 123 | | | 2.1 |
| -180 | | | 180 | | 153 | | | 2.5 |
| -210 | | | 210 | | 183 | | | 2.9 |
| -210 | | | 2 | | 210 | | | 183 |
| -CTA25- 75 | 1 | 5.8~25 | 75 | 62 | 48 | — | — | 1.2 |
| -105 | | | 105 | | 78 | | | 1.6 |
| -135 | | | 135 | | 108 | | | 2.0 |
| -CTA32-105 | 1 | 24.8~32 | 105 | 74 | 78 | — | — | 1.8 |
| BT50-CTA10-105 | 1 | 2.4~10 | 105 | 36 | 67 | — | — | 3.8 |
| -135 | | | 135 | | 97 | | | 3.9 |
| -165 | | | 165 | | 127 | | | 4.0 |
| -195 | | | 195 | | 157 | | | 4.2 |
| -255 | | | 255 | | 155 | | | 4.9 |
| -315 | 2 | 315 | 155 | 62 | 55 | 4.9 | | |
| -315 | 1 | 315 | 155 | 122 | — | 5.8 | | |
| -CTA20-105 | 1 | 5.8~20 | 105 | 50 | 67 | — | — | 4.0 |
| -135 | | | 135 | | 97 | | | 4.4 |
| -165 | | | 165 | | 127 | | | 4.8 |
| -195 | | | 195 | | 157 | | | 5.2 |
| -255 | | | 255 | | 180 | | | 6.3 |
| -315 | 2 | 315 | 180 | 37 | 65 | 6.3 | | |
| -315 | 1 | 315 | 180 | 97 | — | 7.7 | | |
| -CTA25- 75 | 1 | 5.8~25 | 75 | 62 | 37 | — | — | 3.6 |
| -105 | | | 105 | | 67 | | | 4.2 |
| -135 | | | 135 | | 97 | | | 4.8 |
| -165 | | | 165 | | 127 | | | 5.4 |
| -195 | | | 195 | | 157 | | | 6.0 |
| -255 | | | 255 | | 217 | | | 7.2 |
| -315 | 2 | 315 | 225 | 52 | 70 | 8.7 | | |
| -CTA32- 90 | 1 | 24.8~32 | 90 | 74 | 52 | — | — | 4.0 |
| -120 | | | 120 | | 82 | | | 4.7 |
| -150 | | | 150 | | 112 | | | 5.4 |
| -180 | | | 180 | | 142 | | | 6.1 |
| -CTA40- 90 | 1 | 31.8~42 | 90 | 90 | 52 | — | — | 4.0 |
| -120 | | | 120 | | 82 | | | 5.0 |

| CODE | Fig. | φD | L | φC | L ₁ | φD ₁ | G | Kg (lbs) |
|-------------------------|------|---------|------|------|----------------|-----------------|---|-------------|
| DN40AD-CTA20- 75 | 1 | 5.8~20 | 75 | 50 | 56 | — | — | 1.1 |
| -135 | | | 135 | | 116 | | | 1.9 |
| -CTA25- 75 | | 5.8~25 | 75 | 62 | 56 | | | 1.7 |
| DN50AD-CTA20-105 | 2 | 5.8~20 | 105 | 50 | 70 | — | — | 2.3 |
| -165 | | | 165 | | 130 | | | 3.0 |
| -CTA25-105 | | 5.8~25 | 105 | 62 | 70 | | | 2.9 |
| CT40 -CTA20- 75 | 1 | .23~.79 | 2.95 | 1.97 | 2.20 | — | — | 2.65 |
| -135 | | | 5.31 | | 4.57 | | | 3.75 |
| -CTA25- 75 | | .23~.98 | 2.95 | 2.44 | 2.20 | | | 3.09 |
| CT50 -CTA20-105 | 1 | .23~.79 | 4.13 | 1.97 | 2.68 | — | — | 7.94 |
| -165 | | | 6.50 | | 5.12 | | | 9.70 |
| -CTA25-105 | | .23~.98 | 4.13 | 2.44 | 2.68 | | | 8.60 |
| ST20T-CTA10 | 3 | 2.4~10 | 35 | 36 | 110 | 20 | — | — |
| ST25T-CTA10 | 3 | 2.4~10 | 35 | 36 | 110 | 25 | — | — |
| -CTA20 | | | 60 | 50 | | | | |
| ST32T-CTA10- 30 | 3 | 2.4~10 | 30 | 36 | 100 | 32 | — | — |
| - 60 | | | 60 | | | | | |
| - 90 | | | 90 | | | | | |
| -120 | | | 120 | | | | | |
| -CTA20- 60 | | 5.8~20 | 60 | 50 | | | | |
| - 90 | | | 90 | | | | | |
| -120 | 120 | | | | | | | |
| ST42T-CTA25- 90 | 3 | 5.8~25 | 90 | 62 | 110 | 42 | — | — |
| -120 | | | 120 | | | | | |
| S 32 -CTA10 | 4 | 2.4~10 | 30 | 36 | 70 | 32 | — | — |
| -CTA20 | | 5.8~20 | 60 | 50 | | | | |
| S 42 -CTA10 | 4 | 2.4~10 | 30 | 36 | 80 | 42 | — | — |
| -CTA20 | | 5.8~20 | 35 | 50 | | | | |
| -CTA25 | | 5.8~25 | 80 | 62 | | | | |

- **Option**
- Spring collet→P.38
 - Spanner→P.38
 - Retention knob(BT)→P.64
 - Adjustable torque wrench→P.38
- **Std. Access.**
- Nut(NUA-CTA)



- **Note**
- Applicable for coolant-through methods. Please contact us for more information.
- **Caution**
- The undercut area of the DN40AD-CTA25 and CT40-CTA25 are different from the standard. Please be careful to check for interference with the ATC arm.
 - For precautions and maintenance, refer to page 116.

Nut

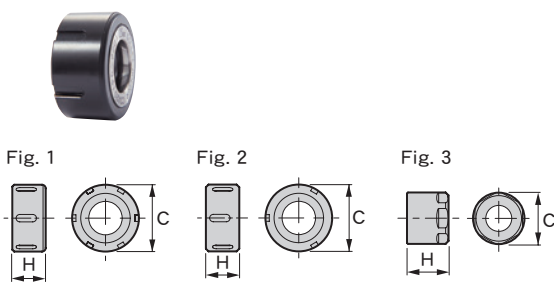

| CODE | Fig. | φC | H | Holder type |
|------------------|------|----|------|----------------------|
| NUA-CTA10 | 1 | 36 | 18 | CTA10 |
| -CTA20 | | 50 | 25 | CTA20 |
| -CTA25 | | 62 | 28.5 | CTA25 |
| -CTA32 | | 74 | 32 | CTA32 |
| -CTA40 | | 90 | 36 | CTA40 |
| -CTH10 | 2 | 36 | 18 | CTH10 |
| -CTH20 | | 50 | 25 | CTH20 |
| -CTH25 | | 62 | 28.5 | CTH25 |
| -CTH25-55 | | 55 | | CTH25(A40) |
| -CTH32 | | 74 | 32 | CTH32 |
| -CTH10-32 | 3 | 32 | 18 | CTH10(A40, E32, E40) |
| -CTS10 | | 26 | 21 | CTS10 |


Adjust screw

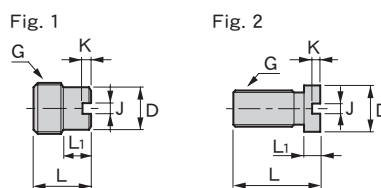

| CODE | Fig. | L | φD | L ₁ | J | K | G | Holder type |
|----------------|------|----|----|----------------|-----|---------|--------------|--------------------|
| AJC-M14 | 1 | 22 | 10 | 8 | 1.5 | 3 | M14×1.5 | CTA10 |
| ST25T-CTA20 | | | | | | | | |
| -M24 | | 27 | 20 | 13 | 5 | 4 | M24×1.5 | CTA20 (※1) |
| BT40-CTA25- 75 | | | | | | | | |
| -M28 | 24 | 15 | 8 | | | M18×1.5 | CTA25 (※2) | |
| -M18 | | | | | | | BT30-CTA20 , | |
| -M18L | 2 | 43 | 23 | | | | | BT50-CTA32 , CTA40 |

※1 : Except BT30, SE30M, ST25T and ST32T
 ※2 : Except BT40-CTA25-75

SPRING COLLET



| CODE | | φD | Holder type | Collapsibility | L | φD1 | H |
|-----------------|---|---|--------------------------|----------------|----|------|---|
| Standard Collet | Precision Collet | | | | | | |
| C10-D | Add "-P" after the standard type item code. (Example) C10 - 6 - P | 2.6 2.8 3 3.2 3.4 3.6 3.8 4 4.2 4.4 4.6 4.8 5 5.2 5.4 5.6 5.8 6 6.2 6.4 6.6 6.8 7 7.2 7.4 7.6 7.8 8 8.2 8.4 8.6 8.8 9 9.2 9.4 9.6 9.8 10 | CTH10 CTA10 CTS10* | 0.2 | 26 | 17.2 | D=2.6~5(Except 3,4) → 16 3, 4, 5.2 ~ 5.8 → 18 6 ~ 10 → 20 |
| C20-D | | 6 6.2 6.4 6.6 6.8 7 7.2 7.4 7.6 7.8 8 8.2 8.4 8.6 8.8 9 9.2 9.4 9.6 9.8 10 10.2 10.4 10.6 10.8 11 11.2 11.4 11.6 11.8 12 12.2 12.4 12.6 12.8 13 13.2 13.4 13.6 13.8 14 14.2 14.4 14.6 14.8 15 15.2 15.4 15.6 15.8 16 16.2 16.4 16.6 16.8 17 17.2 17.4 17.6 17.8 18 18.2 18.4 18.6 18.8 19 19.2 19.4 19.6 19.8 20 | CTH20 CTA20 | 0.2 | 50 | 29.5 | D= 6 ~ 9.8 → 32 10 ~ 15.8 → 35 16 ~ 20 → 40 |
| C25-D | | 6 8 10 10.5 11 11.5 12 12.5 13 13.5 14 14.5 15 15.5 16 16.5 17 17.5 18 18.5 19 19.5 20 20.5 21 21.5 22 22.5 23 23.5 24 24.5 25 | CTH25 CTA25 | 0.2 | 68 | 36.5 | D= 6 ~ 8 → 38 10 ~ 15 → 48 15.5~20 → 54 20.5~25 → 57 |
| C32-D | | 25 28 30 32 | CTH32 CTA32 | 0.2 | 80 | 46 | D=25 ~28 → 66 30 ~32 → 68 |
| C40-D | | 32 40 42 | CTA40 | 0.2 | 80 | 56 | D=32 ~40 → 65 42 → 70 |

| CODE | φD | Holder type | Collapsibility | L | φD1 | H |
|-----------------|--------------|-------------|----------------|------|------|------|
| Standard Collet | | | | | | |
| C20-D | 1/4 5/16 3/8 | CTA20 | .008 | 1.97 | 1.16 | 1.14 |
| | 7/16 1/2 | | | | | 1.30 |
| | 5/8 3/4 | | | | | 1.57 |
| C25-D | 1/4 5/16 3/8 | CTA25 | .008 | 2.67 | 1.44 | 1.38 |
| | 7/16 1/2 | | | | | 1.81 |
| | 5/8 3/4 | | | | | 2.12 |
| | 1IN | | | | | 2.24 |

Ex. C10 - 6 - P

- Option
 - Collet remover
- Note
 - Please contact us if you need a size that is not mentioned above, and we will manufacture it for you (standard accuracy collets only).
- Caution
 - *CTS10 = Collapsibility cannot be used. The collet can only chuck a tool of the reference diameter.

Spanner · Wrench



| CODE | Fig. | Holder type | R | L | Tightening torque(N·m) |
|-------|------|-----------------------|------|-----|------------------------|
| FC-32 | 1 | CTH10 (A40, E32, E40) | 16 | 120 | 40~60 |
| -36 | | CTA10, CTH10 | 18 | 208 | |
| -50 | | CTA20, CTH20 | 25 | 281 | 120 |
| -55 | | CTH25(A40) | 27.5 | 284 | 150 |
| -62 | | CTA25, CTH25 | 31 | 312 | |
| -74 | | CTA32, CTH32 | 37 | 364 | |
| -90 | 2 | CTA40 | 45 | | |
| RC-26 | | CTS10 | - | 240 | - |


Adjustable torque wrench

The nut-tightening torque can be adjusted more properly.

| Spanner for torque wrench | Adjustable torque wrench | Holder type |
|---------------------------|--------------------------|------------------------------|
| FC-36AW -50AW | AW-1 -2 | CTA10, CTH10 CTA20, CTH20 |

Highest guaranteed accuracies throughout entire chucking range(100% inspection)

| Collet | Run-out accuracy (μm) |
|------------------|-----------------------|
| Precision Collet | 5 |
| Standard Collet | 10 |

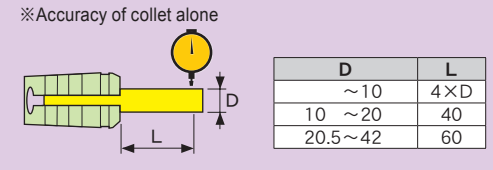

Spring collet standard set

C10-A set


| CODE | Collet inner diameter | Q'ty | Holder type |
|----------|--------------------------|--------------|-------------|
| C10-Aset | 3, 4, 5, 6, 8, 10 | 6pcs. (1ea.) | CTA10 |
| C20-Aset | 6, 8, 10, 12, 16, 20 | 7pcs. (1ea.) | CTA20 |
| C25-Aset | 6, 8, 10, 12, 16, 20, 25 | | CTA25 |

- Std. Access.
 - Collet remover (C10-A set)

Collet remover

The collet can be attached/detached with ease.

| CODE | Holder type |
|----------|-------------|
| C10-RM | C10 |
| C20-RM | C20 |
| CE-CTS10 | CTS10 |

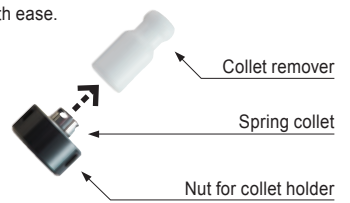


COOLANT-THROUGH SYSTEM


| CODE | Retention knob with hole |
|------------------|---|
| BT30 -CTH10- 45 | Model no. of retention knob depends on the machine model. |
| - 75 | |
| -CTH20- 60 | |
| - 90 | |
| BT40 -CTH10- 60 | |
| - 90 | |
| -120 | |
| -150 | |
| -CTH20- 60 | |
| - 90 | |
| -120 | |
| -150 | |
| -CTH25- 75 | |
| -105 | |
| BT50 -CTH10-105 | |
| -135 | |
| -165 | |
| -CTH20-105 | |
| -135 | |
| -165 | |
| -CTH25- 75 | |
| -105 | |
| -CTH32- 90 | |
| DN40AD-CTH20- 75 | |
| -135 | |
| -CTH25- 75 | |
| DN50AD-CTH20-105 | |
| -165 | |
| -CTH25-105 | |

Coolant-through cutter SUKIMA through

| Coolant screw | H | SUKIMA nut |
|---------------|--------|------------|
| CSA-M14 | 22~38 | NUB-CTH10 |
| | 22~68 | -CTH20 |
| ※1 | - | |
| CSA-M14 | 22~54 | NUB-CTH10 |
| | 22~67 | -CTH20 |
| -M24S | 44~54 | -CTH25 |
| -M24L | 36~46 | -CTH32 |
| -M24S | 44~79 | NUB-CTH20 |
| -M24L | 36~71 | -CTH25 |
| -M24S | 44~83 | -CTH20 |
| -M24L | 36~75 | -CTH25 |
| -M24S | 44~89 | -CTH20 |
| -M24L | 36~81 | -CTH25 |
| -M24S | 61~73 | -CTH20 |
| -M24L | 53~65 | -CTH25 |
| -M28 | 61~80 | -CTH20 |
| CSA-M14 | 22~49 | NUB-CTH10 |
| | 22~67 | -CTH20 |
| -M24S | 44~81 | -CTH25 |
| -M24L | 36~73 | -CTH32 |
| -M24S | 44~89 | NUB-CTH20 |
| -M24L | 36~81 | -CTH25 |
| -M24S | 44~89 | -CTH20 |
| -M24L | 36~81 | -CTH25 |
| -M24S | 61~79 | -CTH20 |
| -M24L | 61~89 | -CTH25 |
| ※1 | - | |
| CSA-M24S | 44~ 69 | NUB-CTH10 |
| -M24L | 36~ 61 | -CTH20 |
| -M24S | 44~ 89 | -CTH25 |
| -M24L | 36~ 81 | -CTH20 |
| -M24S | 61~ 73 | -CTH25 |
| -M24L | 53~ 65 | -CTH20 |
| CSA-M24S | 44~ 89 | NUB-CTH20 |
| -M24L | 36~ 81 | -CTH20 |
| -M24S | 44~ 89 | -CTH20 |
| -M24L | 36~ 81 | -CTH20 |
| -M28 | 61~ 90 | -CTH25 |

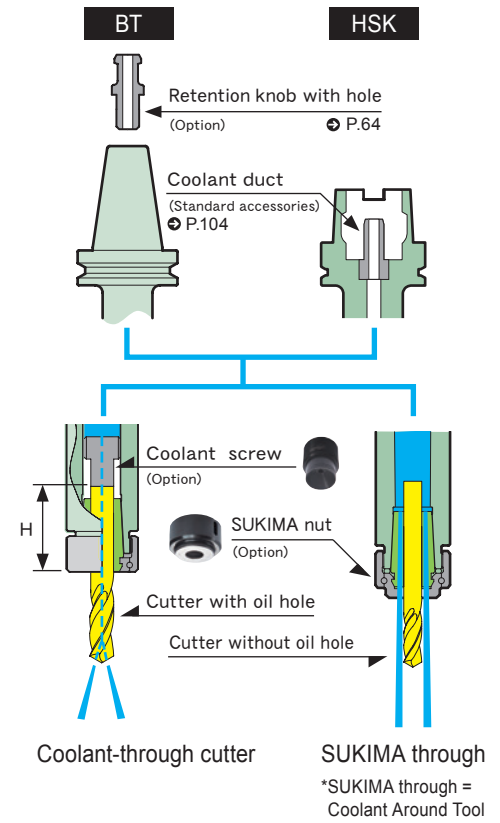


Coolant screw



| CODE | φD | φd | L | G | W |
|---------|-----|-------|----|---------|---|
| CSR-14 | 3 | 4~10 | 14 | - | - |
| CP -14M | | 7~10 | 53 | M14×1.5 | 3 |
| CSA-M14 | 2.4 | 4~10 | 26 | | 2 |
| -M24S | 7 | 10~20 | 30 | M24×1.5 | 6 |
| -M24L | 3.4 | 6~12 | 38 | | 3 |
| -M28 | 6 | 10~25 | 40 | M28×1.5 | 5 |

SUKIMA nut



| CODE | φC | L | φd | φd1 | S |
|----------------|----|------|----|------|-----|
| NUB-CTH10- 3.6 | 36 | 23 | 3 | 3.6 | 3.1 |
| - 4.5 | | | 4 | 4.5 | 3.3 |
| - 5.5 | | | 5 | 5.5 | 3.7 |
| - 6.4 | | | 6 | 6.4 | 3.9 |
| - 8.4 | | | 8 | 8.4 | 4.6 |
| -10.3 | | | 10 | 10.3 | 4.8 |
| -CTH20- 6.4 | 50 | 30 | 6 | 6.4 | 3.9 |
| - 8.4 | | | 8 | 8.4 | 4.6 |
| -10.3 | | | 10 | 10.3 | 4.8 |
| -12.3 | | | 12 | 12.3 | |
| -16.2 | | | 16 | 16.2 | 5.1 |
| -20.2 | | | 20 | 20.2 | 5.7 |
| -CTH25-20.2 | 62 | 34.5 | | | |
| -25.2 | | | 25 | 25.2 | 5.9 |
| -CTH32-25.2 | 74 | 38 | | | |
| -32.1 | | | 32 | 32.1 | 6.0 |

Note

- For information on the asterisked (※1) coolant screw for the coolant-through cutter capability, please contact MST.
- A coolant duct is built into every tooling holder. However, the coolant ducts marked with ※2 are optional.
- Applicable for CTA type too. Please contact us for more information.

Caution

- Only the reference cutter size can be used.

Hi-ART MILLING CHUCK

Needle-roller type chuck

The Hi-ART milling chuck achieves the accuracy, rigidity and torque required of a milling chuck. Ideal for use as the end-milling base holder!!



Shrinker

Thanks to the shrinker, the cutter shank is chucked evenly from the bottom to the top of the gripping range, ensuring high rigidity and gripping force.

coolant-through




Nozzle-through



Coolant-Through Cutter

The shortest holder length is 85mm (BT40).

The shorter holder length means increased rigidity. The rigidity of the tool holder is inversely proportional to the cube of the length, meaning the deflection of this holder is about half that of a 105mm holder.




Memory line clearly confirms tightness of the nut.

You can check the recommended degree of tightening at a glance. Also, it only takes about one and half turns for tightening operation.




Keeps chips and coolant out completely

Dust-proof cover keeps chips and coolant out completely.

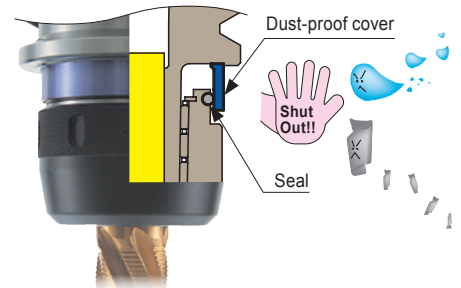


Applicable for coolant-through version

Nozzle-through

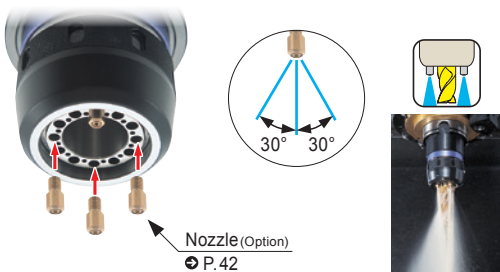


Coolant-Through Cutter







Longer cutter life using through-spindle capability → P.117

Applicable as a base holder for various applications

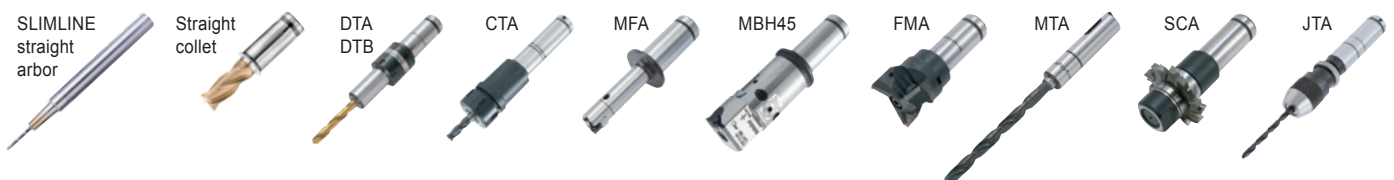

Hi-ART MILLING CHUCK (ART)



| CODE | Fig. | φD | L | φC | L ₁ | Cutter insertion length | Kg | MAX. min ⁻¹ |
|-----------------------|------|----|-----|----|----------------|-------------------------|-------|------------------------|
| BT40-ART32- 85 | 1 | 32 | 85 | 72 | 37 | 66~ 88 | 1.9 | 6,000 |
| - 95 | | | 95 | | 47 | | 2.1 | |
| -105 | | | 105 | | 57 | | 2.3 | |
| -135 | | | 135 | | 87 | | 3.0 | |
| BT50-ART32-105 | 2 | 32 | 105 | 82 | — | 66~ 98 | 5.1 | 5,000 |
| -135 | | | 135 | | | | 6.4 | |
| -165 | | | 165 | | | | 7.7 | |
| -180 | | | 180 | | | | 8.4 | |
| -ART42-105 | | 42 | 105 | 97 | 76~108 | 5.4 | 3,000 | |
| -135 | | | 135 | | | 7.1 | | |
| A50M-ART32-100 | 3 | 32 | 100 | 72 | 44 | 66~ 71 | 1.7 | 6,000 |
| A63 -ART32-100 | 3 | 32 | 100 | 72 | 44 | 66~ 71 | 2.0 | 6,000 |
| A100-ART32-135 | 4 | 32 | 135 | 82 | — | 66~ 98 | 5.3 | 5,000 |
| -ART42-135 | | | | | | | | |

Option

- Straight collet→P.42 • Nozzle→P.42 • Spanner with ejection hook→P.42
- Adjust screw→P.42 • Retention knob(BT)→P.64

Std. Access.

- Coolant duct(Fixed)(HSK-A)→P.104

Note


- To utilize the coolant-through nozzle capability, the retention knob with hole and nozzle are required.
- Swing type coolant ducts are available upon request(HSK-A). For details, please contact us.

Caution

- For BT40 type, the outer diameter of the nut is larger than that of the V-flange. Therefore, pay close attention to possible interference with the ATC arm.
- When using the straight arbor in BT40, use the S type (ex.S32-CTA10).
- For A50M and A63, the coolant-through system is not available for straight collets.
- Cutter-through coolant is not available for straight collets.
- For precautions and maintenance, refer to page 116.

Increased rigidity with the Face Lock system

For face milling applications, combining a holder and a face mill arbor, with backup screw (ST32B, ST42B-FMA), will achieve strong gripping (Face Lock) and improve the rigidity during transverse feed milling.

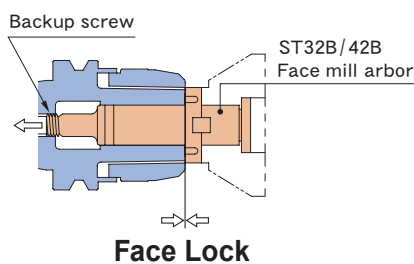


Straight collet

Standard type



F type

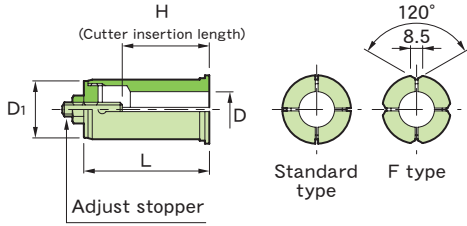

| CODE | | φD | L | φD1 | H | Holder type |
|---------------|---------|----|----|-----|-------|-------------|
| Standard type | F type | | | | | |
| S32- 6 | S32- 6F | 6 | 75 | 32 | 30~68 | ART32 |
| - 8 | - 8F | 8 | | | 40~68 | |
| -10 | -10F | 10 | | | 50~68 | |
| -12 | -12F | 12 | | | 55~68 | |
| -16 | -16F | 16 | | | | |
| -20 | -20F | 20 | | | | |
| -25 | -25F | 25 | | | | |
| S42- 6 | S42- 6F | 6 | 80 | 42 | 30~73 | ART42 |
| - 8 | - 8F | 8 | | | 45~73 | |
| -10 | -10F | 10 | | | 50~73 | |
| -12 | -12F | 12 | | | 55~73 | |
| -16 | -16F | 16 | | | 60~73 | |
| -20 | -20F | 20 | | | | |
| -25 | -25F | 25 | | | | |
| -32 | -32F | 32 | | | | |

Caution


- Remove the adjust stopper when using a straight collet with A50M/ A63.
- When a straight collet with nozzles is used, use the F type.

Std. Access.

- Adjust stopper


Spanner with ejection hook

This spanner can be used to both tighten a nut and remove a straight collet.



| CODE | R | L | Holder type | Clamping torque(N·m) |
|-------|------|-----|-------------------------|----------------------|
| FM-72 | 36 | 204 | ART32 (BT40, A50M, A63) | 60 |
| -82 | 41 | 234 | ART32 (BT50, A100) | 70 |
| -97 | 48.5 | 239 | ART42 (BT50, A100) | |

Nozzle





| CODE | L | G | W | φD | Holder type | Q'ty |
|-----------|-----|----|-----|-----|-----------------|--------|
| NOZ-M4-12 | 6.3 | M4 | 4.5 | 1.2 | BT40, A50M, A63 | 12pcs. |
| -60 | | | | | | 60pcs. |
| -M6-12 | 8.5 | M6 | 7 | 1.8 | BT50, A100 | 12pcs. |
| -60 | | | | | | 60pcs. |

Std. Access.

- Wrench for attachment

Adjust screw

The overhang of the cutting tool can be adjusted.



| CODE | L | Shank type | Q'ty |
|----------|----|------------|-------|
| AJN-M18L | 38 | BT40 | 5pcs. |
| -M18 | 63 | BT50 | |

Cutting data

S55C
φ32 roughing end mill 4 flutes

n 350 min⁻¹
Vf 154 mm/min
Vc 35 m/min
fz 0.11 mm/t

BT40-ART32-85

S55C
φ32 roughing end mill 4 flutes

n 350 min⁻¹
Vf 181 mm/min
Vc 35 m/min
fz 0.13 mm/t

BT50-ART32-105


The ace for heavy-duty cutting!! The set screw holder that doesn't need a whistle notch.

- ▷ Accuracy → Less than $20\mu\text{m} / 100\text{L}$
- ▷ Gripping force → $4000\text{N} \cdot \text{m} (\phi 42)$




Adjustable projection of cutting tool

Our original tightening pad system allows a round shank, as well as a whistle notch shank end mill, to be used. The projection of the cutting tool, which is critical for heavy-duty cutting, can be made as short as possible.

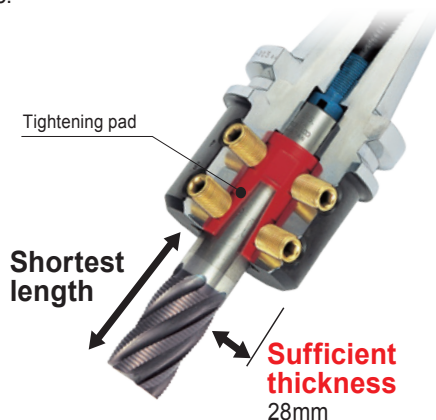


Applicable for coolant-through version (A100)

Nozzle-through

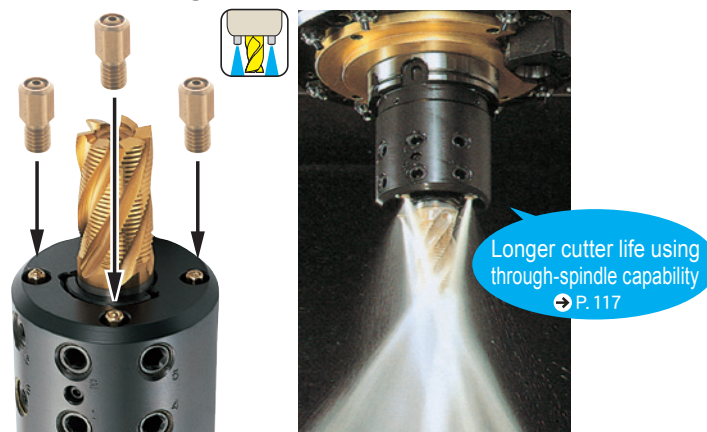


Applicable to high-speed cutting

Pre-balanced design

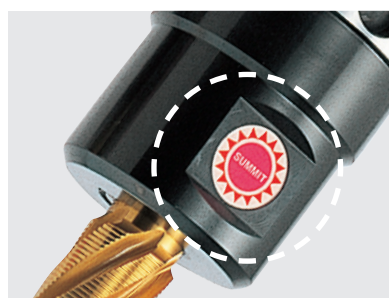

High accuracy thanks to its eccentric bore design

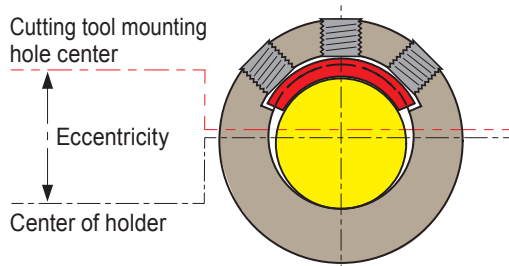




SUMMIT (SLZ)



BT50-SLZ32-105



A100-SLZ32-135




| CODE | Fig. | φD | L | L ₁ | φC | φC ₁ | H | H ₁ | G | Kg |
|------------------------|------|----|-----|----------------|----|-----------------|----|----------------|-------|-----|
| BT50-SLZ25- 90 | 1 | 25 | 90 | — | 66 | — | 45 | 70 | 4-M12 | 4.6 |
| -120 | | | 120 | 45 | | | | | | 5.6 |
| -150 | | | 150 | — | | | | | | 6.5 |
| -SLZ32-105 | 1 | 32 | 105 | — | 88 | — | 65 | 100 | 6-M16 | 5.9 |
| -135 | | | 135 | 62 | | | | | | 7.5 |
| -165 | | | 165 | — | | | | | | 9.1 |
| -SLZ42-105 | 1 | 42 | 105 | — | 98 | — | 70 | 110 | — | 6.1 |
| -135 | | | 135 | — | | | | | | 7.8 |
| -165 | | | 165 | — | | | | | | 9.5 |
| A 100-SLZ25-135 | 2 | 25 | 135 | 66 | 66 | 75 | 45 | 70 | 4-M12 | 4.9 |
| -SLZ32-135 | 3 | 32 | | 88 | 88 | — | 65 | 100 | 6-M16 | 6.1 |
| -SLZ42-135 | 3 | 42 | | 98 | 98 | — | 70 | — | — | 6.6 |

- Option**
 • Wrench • Adjust screw (BT50) • Nozzle (HSK-A100) • Retention knob(BT50)→P.64
- Std. Access.**
 • Coolant duct(Fixed) (HSK-A100)→P.104
- Note**
 • Swing type coolant ducts are available upon request(HSK-A). For details, please contact us.


- Caution**
 • If the dedicated wrench is not used, use a wrench with a minimum handle length of 30 cm for the M16 or 20 cm for the M12.
 • For precautions and maintenance, refer to page 117.

Wrench



| CODE | Holder type | B | L | Tightening torque(N·m) |
|--------------|----------------|---|-----|------------------------|
| W-206 | SLZ25 | 6 | 200 | 40 |
| -308 | SLZ32 SLZ42 | 8 | 300 | 100 |

Nozzle




| CODE | Q'ty |
|------------------|--------|
| NOZ-M6-12 | 12pcs. |
| -60 | 60pcs. |

- Std. Access.**
 • Wrench for attachment


Adjust screw

The overhang of the cutting tool can be adjusted.



| CODE | Shank type | Q'ty |
|-----------------|------------|-------|
| AJC-M18L | BT50 | 5pcs. |

The overhang of the cutting tool can be adjusted.



Cutting data

A2017

φ38 end mill
4 flutes

n 5000 min⁻¹
 Vf 5000 mm/min
 Vc 597 m/min
 fz 0.25 mm/t

55
4

BT50-SLZ32-105

S50C

φ40 roughing end mill 6 flutes

n 280 min⁻¹
 Vf 168 mm/min
 Vc 35 m/min
 fz 0.1 mm/t

50
40

BT50-SLZ32-105

S50C

φ45 roughing end mill 6 flutes

n 190 min⁻¹
 Vf 114 mm/min
 Vc 25 m/min
 fz 0.1 mm/t

55
45

BT50-SLZ42-105

The solution for high-efficient machining of deep cavity application.

1


Roughing

With a solid carbide core

PAT

FMH RIGID type P.46

Ideal for heavy duty roughing application at shallow and deep machining using a face milling arbor with a large size solid carbide core.

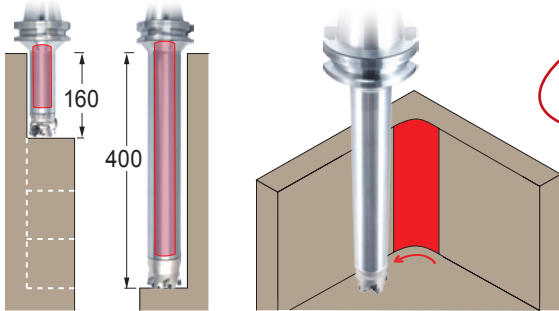

2



Semi-finishing

For screw-in end-mills

PAT

RED SCREW ARBOR P.48

Less vibration at a corner and pocket machining thanks to a solid design using a carbide shaft.

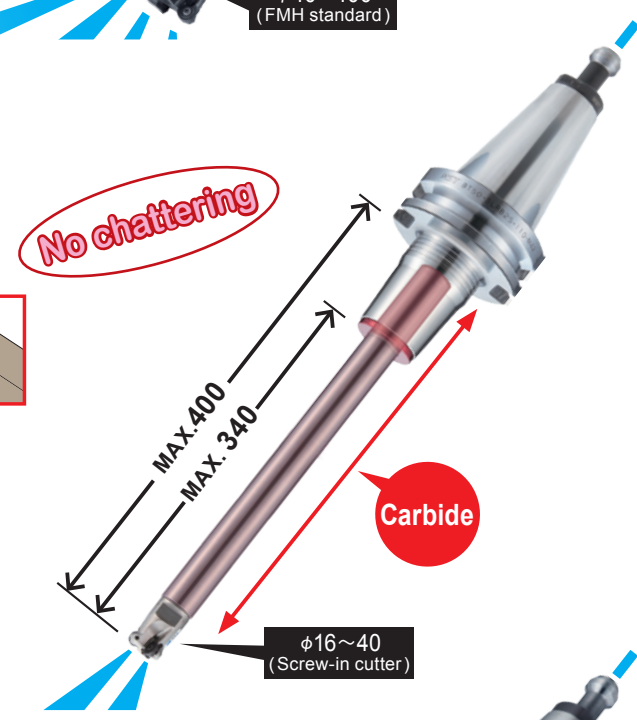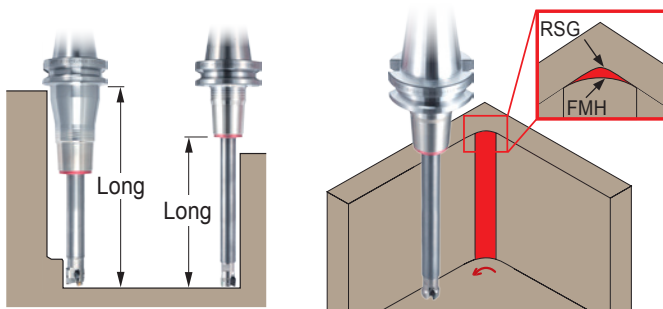

3


Finishing

SHRINK-FIT HOLDER

PAT

SLIMLINE MONO CURVE

Superior Accessibility.
Slim tip design of Curve minimizes cutter projection.

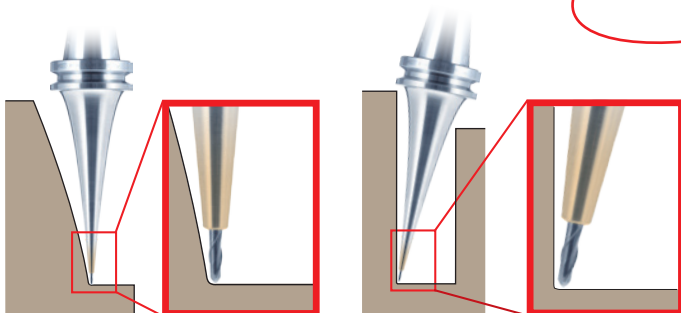


If you would like more detailed information, please contact MST and ask for a SLIMLINE catalog.


Achieves higher efficiency during long gauge length machining. Achieves stable machining during long, continuous operation.

FMH-H

▷ **Machining efficiency 2 times**
(Compared to conventional holders)




coolant-through

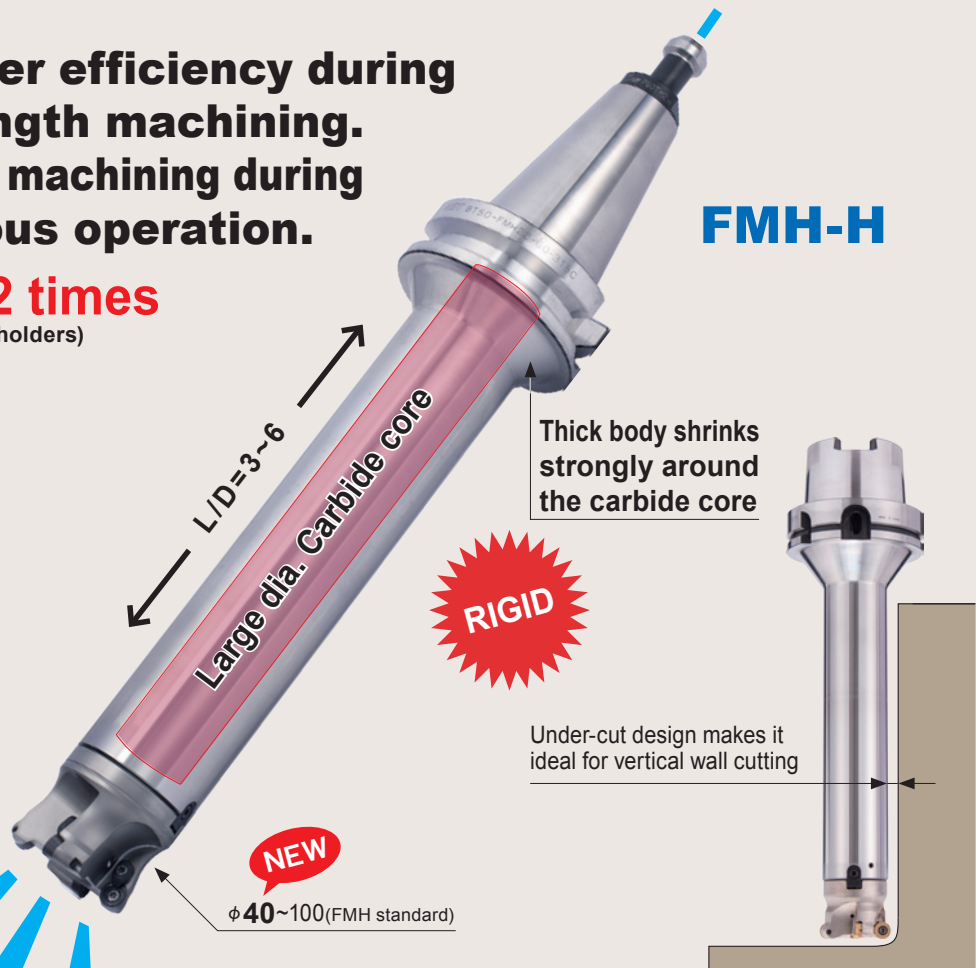

Large dia. Carbide core

The large-diameter carbide core is integrated into the thick body by shrink-fitting. Achieves less deflection and higher efficiency during long-gauge machining. Vibration-free machining leads to longer insert life and achieves stable machining during long and continuous operation.

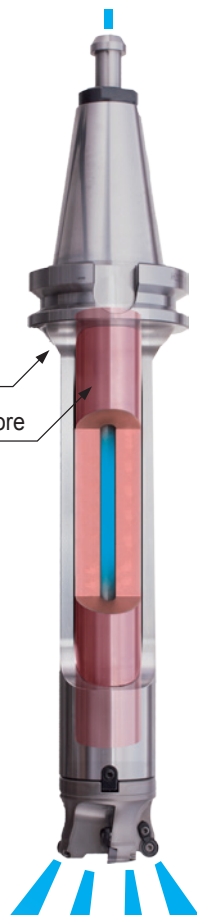

FMH standard


Available for FMH standard cutting tools that supplies coolant to the cutting edge properly.

Works with these manufacturers' cutting tools

OSG KYOCERA DIJET INDUSTRIAL Tungaloy
MITSUBISHI MATERIALS Mitsubishi Hitachi Tool Engineering

Even greater efficiency!


Effective length of our line up is from 110mm to 360mm and cutter dia of our line up is from φ40 to φ100. Shorter and longer gauge length models added to our current line up. Ideal for deep cavity mold applications. Makes more efficient roughing possible.




Comparison test

| Cutting depth a_p (mm) | 0.5 | 1.0 | 1.5 | 2.0 |
|---|-----|-----------------|-----|-----|
| FMH RIGID type BT50-FMH22-60-315H | ○ | ○ | ○ | ○ |
| Conventional BT50-FMH22-60-300 | ○ | ✗ Chattering | | |

- Application: Shouldering
- Material: S50C (Mild steel)
- Cutting speed: 220 m/min ($S1,112 \text{ min}^{-1}$)
- Feed rate: 1,112 mm/min




Cutter dia. φ63
4-flutes
Round insert



Double the Machining efficiency

FMH RIGID type with a solid carbide core (FMH-H)

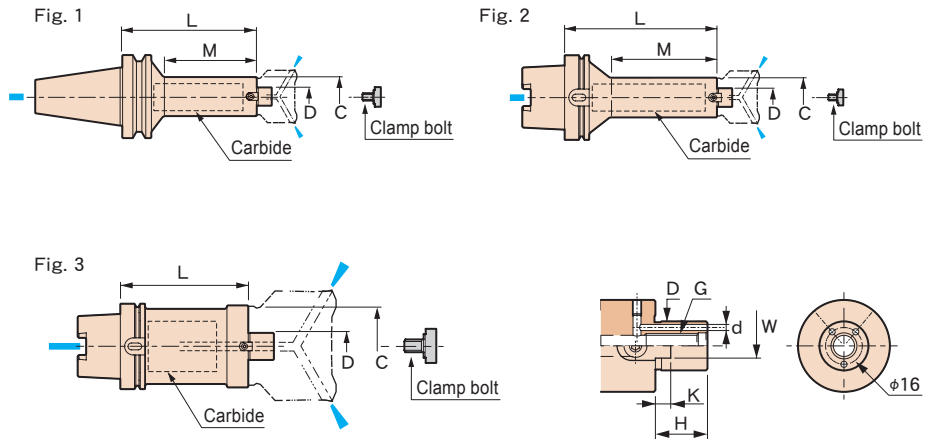

| CODE | Fig. | L | M | Kg | Moment kgf·m |
|------------------------------|------|-----|-----|------|-----------------|
| BT50-FMH16 -37-125H | 1 | 125 | 60 | 5.2 | — |
| NEW -175H | | 175 | 110 | 5.8 | |
| -225H | | 225 | 160 | 6.5 | |
| -275H | | 275 | 210 | 7.1 | |
| -325H | | 325 | 260 | 7.8 | |
| BT50-FMH22 -47-165H | 1 | 165 | 110 | 5.7 | 0.1 |
| -215H | | 215 | 160 | 6.5 | 0.2 |
| -265H | | 265 | 210 | 7.3 | 0.3 |
| -315H | | 315 | 260 | 8.2 | 0.6 |
| -365H | | 365 | 310 | 9.0 | 0.8 |
| BT50-FMH22 -60-165H | 1 | 165 | 110 | 6.9 | 0.2 |
| -215H | | 215 | 160 | 8.1 | 0.3 |
| -265H | | 265 | 210 | 9.3 | 0.6 |
| -315H | | 315 | 260 | 10.7 | 1.0 |
| -365H | | 365 | 310 | 11.9 | 1.3 |
| -415H | | 415 | 360 | 13.1 | 1.7 |
| BT50-FMH31.75-76-215H | 1 | 215 | 160 | 10.6 | 0.6 |
| -265H | | 265 | 210 | 12.7 | 1.0 |
| -315H | | 315 | 260 | 15.3 | 1.5 |
| -365H | | 365 | 310 | 17.6 | 2.3 |
| A100-FMH16 -37-125H | 1 | 125 | 60 | 3.9 | — |
| NEW -175H | | 175 | 110 | 4.5 | |
| -225H | | 225 | 160 | 5.2 | |
| -275H | | 275 | 210 | 5.8 | |
| -325H | | 325 | 260 | 6.4 | |
| A100-FMH22 -47-165H | 2 | 165 | 110 | 4.2 | 0.1 |
| -215H | | 215 | 160 | 5.1 | 0.3 |
| -265H | | 265 | 210 | 5.9 | |
| -315H | | 315 | 260 | 6.8 | 0.6 |
| -365H | | 365 | 310 | 7.6 | 0.8 |
| A100-FMH22 -60-165H | 2 | 165 | 110 | 5.9 | 0.2 |
| -215H | | 215 | 160 | 7.2 | 0.5 |
| -265H | | 265 | 210 | 8.4 | 0.7 |
| -315H | | 315 | 260 | 9.8 | 1.1 |
| -365H | | 365 | 310 | 11.1 | 1.4 |
| -415H | | 415 | 360 | 12.4 | 1.8 |
| A100-FMH31.75-76-215H | 2 | 215 | 160 | 9.7 | 0.7 |
| -265H | | 265 | 210 | 11.8 | 1.2 |
| -315H | | 315 | 260 | 14.0 | 1.7 |
| -365H | | 365 | 310 | 16.3 | 2.4 |
| A100-FMH31.75-96-250H | 3 | 250 | — | 13.6 | 1.3 |
| -300H | | 300 | | 16.3 | 2.0 |
| -350H | | 350 | | 17.4 | 2.6 |

Common dimensions

| CODE | Cutter dia. | φD | H | φC | W | K | φd | G | Clamp bolt |
|--------------------|-------------|-------|----|----|------|---|----|-----|------------|
| FMH16 -37 | 40 | 16 | 17 | 37 | 8 | 5 | 2 | M 8 | M 8※ |
| FMH22 -47 | 50/52 | 22 | 18 | 47 | 10 | 5 | 3 | M10 | M10※ |
| FMH22 -60 | 63/66 | 22 | 18 | 60 | 10 | 5 | 3 | M10 | M10※ |
| FMH31.75-76 | 80 | 31.75 | 30 | 76 | 12.7 | 7 | 4 | M16 | MBF-M16 |
| -96 | 100 | 31.75 | 30 | 96 | 12.7 | 7 | 4 | M16 | MBF-M16 |

Option

- Retention knob (BT50) → P.64

Std. Access.

- Coolant duct (Fixed) (HSK-A100) → P.104
- Clamp bolt (unless marked with in the list) • Stopper key

Note

- Swing type coolant ducts are available upon request (HSK-A). For details, please contact us.
- The clamp bolt marked with ※ in the list is a hexagonal socket bolt. Use a market standard bolt.
- Contact us to find out what manufacturers' cutters can be used with this product.

Caution

- The required clamp bolt design depends on the cutter manufacturer and the type of cutter.

Available for
DIN/ CAT.


RED SCREW arbor

PAT.

The arbor for screw-in End Mill

Displaying the highest cutting performance of any screw-in end mill!!

- ▷ Highly rigid design makes the best use of carbide properties (high Young's modulus).
- ▷ Ideal for deep standing-wall machining.



coolant-through



RSG

Carbide integral type


Carbide

NEW


φ16~40
Screw-in tool

Under-cut design

Works with these manufacturers' tools




Many effective lengths for machining

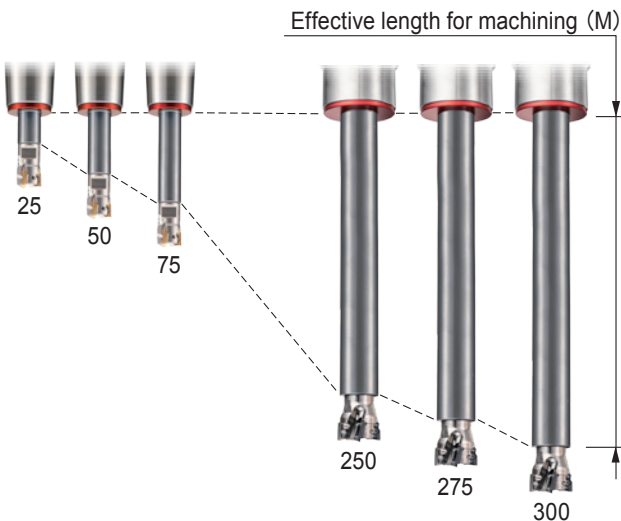




Heavy cutting ↔ Deep standing-wall machining

Machining example

RED screw arbor
BT50-RSG12-215-M100




A general holder +
A steel shank



○ Excellent
✗ Chattering

Cutting condition



2-flutes end-mill
Climb milling
Feed : 0.1mm/tooth
Material : S50C

RED SCREW arbor (RSG)



BT



Rigidity value ($\mu\text{m} / \text{kgf}$)



BT50-RSG16-400-M225

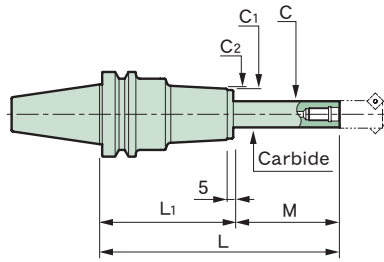

Dimensions for the screw-in end mill mounting.

Available for
DIN/ CAT.

■ Option


- Retention knob → P.64

■ Caution

- Some of the screw-in end mills cannot be attached to the RED screw arbor. Please check your screw-in end mills for conformance to the dimensions, or please contact MST.
 - Because cutting resistance is greater than the tool holder connection force associated with the machine spindle, please reduce the recommended cutting conditions by 50% for the RED screw arbors marked with *.
- Otherwise, the tool holder shank may experience fretting corrosion or fall out of the machine spindle.

S The rigidity value

A rigidity value represents the amount of deflection for the entire holder and tool when a bending load of 1 kgf (9.8 N) is applied to the tip of the tool. The smaller the numerical value is, the higher the rigidity and the more accurate the machining.



| CODE | L | M | L1 | Kg | S |
|---------------------|-----|-----|-----|-----|-----|
| BT40-RSG 8-105-M 25 | 105 | 25 | 80 | 1.4 | 0.6 |
| -135-M 25 | 135 | | 110 | 1.8 | 0.7 |
| -165-M 25 | 165 | | 140 | 2.1 | 0.8 |
| -130-M 50 | 130 | 50 | 80 | 1.4 | 1.5 |
| -160-M 50 | 160 | | 110 | 1.8 | 1.7 |
| -190-M 50 | 190 | | 140 | 2.1 | 1.8 |
| -155-M 75 | 155 | 75 | 80 | 1.5 | 3.1 |
| -185-M 75 | 185 | | 110 | 1.9 | 3.4 |
| -215-M 75 | 215 | | 140 | 2.2 | 3.5 |
| -170-M 90 | 170 | 90 | 80 | 1.5 | 4.5 |
| -200-M 90 | 200 | | 110 | 1.9 | 4.8 |
| -230-M 90 | 230 | | 140 | 2.2 | 4.9 |
| -185-M105 | 185 | 105 | 80 | 1.6 | 6.2 |
| -215-M105 | 215 | | 110 | 2.0 | 6.7 |
| -245-M105 | 245 | | 140 | 2.3 | 6.8 |
| BT40-RSG10-125-M 25 | 125 | 25 | 100 | 1.8 | 0.4 |
| -155-M 25 | 155 | | 130 | 2.2 | 0.5 |
| -185-M 25 | 185 | | 160 | 2.4 | 0.7 |
| -150-M 50 | 150 | 50 | 100 | 1.9 | 0.8 |
| -180-M 50 | 180 | | 130 | 2.3 | 1.0 |
| -210-M 50 | 210 | | 160 | 2.5 | 1.2 |
| -175-M 75 | 175 | 75 | 100 | 2.0 | 1.6 |
| -205-M 75 | 205 | | 130 | 2.4 | 1.8 |
| -235-M 75 | 235 | | 160 | 2.6 | 2.0 |
| -200-M100 | 200 | 100 | 100 | 2.0 | 2.7 |
| -230-M100 | 230 | | 130 | 2.4 | 3.0 |
| -260-M100 | 260 | | 160 | 2.6 | 3.3 |
| -220-M120 | 220 | 120 | 100 | 2.1 | 4.0 |
| -250-M120 | 250 | | 130 | 2.5 | 4.3 |
| -280-M120 | 280 | | 160 | 2.7 | 4.6 |
| BT40-RSG12-125-M 25 | 125 | 25 | 100 | 2.0 | 0.3 |
| -155-M 25 | 155 | | 130 | 2.4 | 0.4 |
| -185-M 25 | 185 | | 160 | 2.7 | 0.5 |
| -150-M 50 | 150 | 50 | 100 | 2.1 | |
| -180-M 50 | 180 | | 130 | 2.5 | 0.7 |
| -210-M 50 | 210 | | 160 | 2.8 | 0.9 |
| -175-M 75 | 175 | 75 | 100 | 2.3 | |
| -205-M 75 | 205 | | 130 | 2.7 | 1.1 |
| -235-M 75 | 235 | | 160 | 3.0 | 1.3 |

| CODE | L | M | L1 | Kg | S |
|---------------------|-----|-----|-----|-----|-----|
| BT40-RSG12-200-M100 | 200 | 100 | 100 | 2.4 | 1.4 |
| -230-M100 | 230 | | 130 | 2.8 | 1.6 |
| -260-M100 | 260 | | 160 | 3.1 | 1.9 |
| -225-M125 | 225 | 125 | 100 | 2.6 | 2.1 |
| -255-M125 | 255 | | 130 | 3.0 | 2.4 |
| -285-M125 | 285 | | 160 | 3.3 | 2.8 |
| BT40-RSG16-125-M 25 | 125 | 25 | 100 | 2.6 | 0.2 |
| -150-M 50 | 150 | 50 | | 2.8 | 0.3 |
| -175-M 75 | 175 | 75 | | 3.0 | 0.5 |
| -200-M100 | 200 | 100 | | 3.2 | 0.8 |
| -225-M125* | 225 | 125 | | 3.4 | 1.2 |
| BT50-RSG 8-120-M 25 | 120 | 25 | 95 | 4.0 | 0.6 |
| -150-M 25 | 150 | | 125 | 4.3 | 0.7 |
| -180-M 25 | 180 | | 155 | 4.8 | |
| -145-M 50 | 145 | 50 | 95 | 4.0 | 1.5 |
| -175-M 50 | 175 | | 125 | 4.3 | 1.7 |
| -205-M 50 | 205 | | 155 | 4.8 | |
| -170-M 75 | 170 | 75 | 95 | 4.1 | 3.1 |
| -200-M 75 | 200 | | 125 | 4.4 | 3.4 |
| -230-M 75 | 230 | | 155 | 4.9 | |
| -185-M 90 | 185 | 90 | 95 | 4.1 | 4.4 |
| -215-M 90 | 215 | | 125 | 4.4 | 4.8 |
| -245-M 90 | 245 | | 155 | 4.9 | |
| -200-M105 | 200 | 105 | 95 | 4.2 | 6.2 |
| -230-M105 | 230 | | 125 | 4.5 | 6.6 |
| -260-M105 | 260 | | 155 | 5.0 | |
| BT50-RSG10-140-M 25 | 140 | 25 | 115 | 4.3 | 0.4 |
| -170-M 25 | 170 | | 145 | 4.6 | 0.5 |
| -200-M 25 | 200 | | 175 | 5.6 | |
| -165-M 50 | 165 | 50 | 115 | 4.4 | 0.8 |
| -195-M 50 | 195 | | 145 | 4.7 | 0.9 |
| -225-M 50 | 225 | | 175 | 5.7 | 1.0 |
| -190-M 75 | 190 | 75 | 115 | 4.5 | 1.6 |
| -220-M 75 | 220 | | 145 | 4.8 | 1.7 |
| -250-M 75 | 250 | | 175 | 5.8 | 1.8 |
| -215-M100 | 215 | 100 | 115 | 4.5 | 2.7 |
| -245-M100 | 245 | | 145 | 4.8 | 2.9 |
| -275-M100 | 275 | | 175 | 5.8 | |

Common dimensions

| CODE | Cutter dia. | G | φD | H | H ₁ | φC | φC ₁ | φC ₂ |
|----------|-------------|-----|------|----|----------------|----|-----------------|-----------------|
| RSG 8 | 16 | M 8 | 8.5 | 18 | 6.5 | 15 | 30 | 32 |
| RSG10 | 20 | M10 | 10.5 | 22 | 6.5 | 19 | 36 | 38 |
| RSG12 | 25 | M12 | 12.5 | 22 | 6 | 24 | 43 | 45 |
| RSG16 | 32/40 | M16 | 17 | 25 | 6 | 29 | 52 | 54 |
| RSG16-37 | 40 | M16 | 17 | 25 | 6 | 37 | 71 | 73 |





BT50-RSG16-37-265-M150

| CODE | L | M | L ₁ | Kg | S |
|----------------------------|-----|-----|----------------|-----|-----|
| BT50-RSG10-235-M120 | 235 | 120 | 115 | 4.6 | 3.9 |
| -265-M120 | 265 | | 145 | 4.9 | 4.2 |
| -295-M120 | 295 | | 175 | 5.9 | |
| -255-M140 | 255 | 140 | 115 | 4.7 | 5.5 |
| -285-M140 | 285 | | 145 | 5.0 | 5.8 |
| -315-M140 | 315 | | 175 | 6.0 | |
| BT50-RSG12-140-M 25 | 140 | 25 | 115 | 4.6 | 0.2 |
| -170-M 25 | 170 | | 145 | 5.0 | 0.3 |
| -200-M 25 | 200 | | 175 | 5.8 | 0.4 |
| -165-M 50 | 165 | 50 | 115 | 4.7 | 0.5 |
| -195-M 50 | 195 | | 145 | 5.1 | 0.6 |
| -225-M 50 | 225 | | 175 | 5.9 | |
| -190-M 75 | 190 | 75 | 115 | 4.9 | 0.8 |
| -220-M 75 | 220 | | 145 | 5.3 | 1.0 |
| -250-M 75 | 250 | | 175 | 6.1 | |
| -215-M100 | 215 | 100 | 115 | 5.0 | 1.3 |
| -245-M100 | 245 | | 145 | 5.4 | 1.5 |
| -275-M100 | 275 | | 175 | 6.2 | 1.6 |
| -240-M125 | 240 | 125 | 115 | 5.2 | 2.1 |
| -270-M125 | 270 | | 145 | 5.6 | 2.3 |
| -300-M125 | 300 | | 175 | 6.4 | 2.4 |
| -265-M150 | 265 | 150 | 115 | 5.3 | 3.0 |
| -295-M150 | 295 | | 145 | 5.7 | 3.3 |
| -325-M150 | 325 | | 175 | 6.5 | 3.4 |
| -290-M175 | 290 | 175 | 115 | 5.5 | 4.2 |
| -320-M175 | 320 | | 145 | 5.9 | 4.6 |
| -350-M175 | 350 | | 175 | 6.7 | |
| BT50-RSG16-140-M 25 | 140 | 25 | 115 | 4.8 | 0.2 |
| -170-M 25 | 170 | | 145 | 5.4 | |
| -200-M 25 | 200 | | 175 | 6.6 | |
| -165-M 50 | 165 | 50 | 115 | 5.0 | 0.3 |
| -195-M 50 | 195 | | 145 | 5.6 | 0.4 |
| -225-M 50 | 225 | | 175 | 6.8 | |
| -190-M 75 | 190 | 75 | 115 | 5.3 | 0.5 |
| -220-M 75 | 220 | | 145 | 5.9 | 0.6 |
| -250-M 75 | 250 | | 175 | 7.0 | |
| -215-M100 | 215 | 100 | 115 | 5.5 | 0.7 |
| -245-M100 | 245 | | 145 | 6.1 | 0.9 |
| -275-M100 | 275 | | 175 | 7.2 | |
| -240-M125 | 240 | 125 | 115 | 5.7 | 1.1 |
| -270-M125 | 270 | | 145 | 6.3 | 1.3 |

| CODE | L | M | L ₁ | Kg | S |
|--------------------------------|-----|-----|----------------|-----|-----|
| BT50-RSG16-300-M125 | 300 | 125 | 175 | 7.4 | 1.3 |
| -265-M150 | 265 | 150 | 115 | 5.9 | 1.6 |
| -295-M150 | 295 | | 145 | 6.5 | 1.8 |
| -325-M150 | 325 | | 175 | 7.7 | |
| -290-M175 | 290 | 175 | 115 | 6.1 | 2.2 |
| -320-M175 | 320 | | 145 | 6.7 | 2.4 |
| -350-M175 | 350 | | 175 | 7.9 | 2.5 |
| -315-M200 | 315 | 200 | 115 | 6.3 | 3.0 |
| -345-M200 | 345 | | 145 | 6.9 | 3.2 |
| -375-M200 | 375 | | 175 | 8.1 | 3.3 |
| -340-M225 | 340 | 225 | 115 | 6.5 | 3.9 |
| -370-M225 | 370 | | 145 | 7.1 | 4.1 |
| -400-M225 | 400 | | 175 | 8.3 | 4.2 |
| BT50-RSG16- 37-190-M 75 | 190 | 75 | 115 | 6.8 | 0.2 |
| -215-M100 | 215 | 100 | | | 0.3 |
| NEW -240-M125 | 240 | 125 | | 7.6 | 0.4 |
| -265-M150 | 265 | 175 | | | 0.6 |
| -290-M175 | 290 | 200 | | 8.3 | 0.9 |
| -315-M200 | 315 | 225 | | | 1.1 |
| -340-M225 | 340 | 250 | | 9.0 | 1.5 |
| -365-M250 | 365 | 250 | | | 1.9 |
| -390-M275 | 390 | 275 | | 9.7 | 2.4 |
| -415-M300 | 415 | 300 | | | 2.9 |

RED SCREW arbor (RSG)

HSK-A

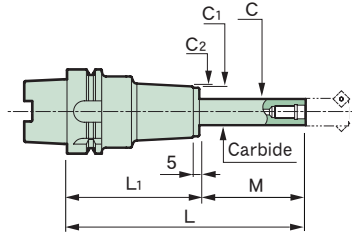

Dimensions for the screw-in end mill mounting.

■ Std. Access.

- Coolant duct (Fixed type) → P.64

■ Note


- Swing type coolant ducts are available upon request. For details, please contact us.

■ Caution

- Some of the screw-in end mills cannot be attached to the RED screw arbor. Please check your screw-in end mills for conformance to the dimensions, or please contact MST.
- Because cutting resistance is greater than the tool holder connection force associated with the machine spindle, please reduce the recommended cutting conditions by 50% for the RED screw arbors marked with ※. Otherwise, the tool holder shank may experience fretting corrosion or fall out of the machine spindle.

S The rigidity value

A rigidity value represents the amount of deflection of the entire holder and tool when a bending load of 1 kgf (9.8 N) is applied to the tip of the tool. The smaller the numerical value is, the higher the rigidity and the more accurate the machining.







| CODE | L | M | L ₁ | Kg | S |
|---------------------------|-----|-----|----------------|-----|-----|
| A63-RSG 8-105-M 25 | 105 | 25 | 80 | 1.3 | 0.6 |
| -135-M 25 | 135 | | 110 | 1.4 | 0.7 |
| -165-M 25 | 165 | | 140 | 1.9 | 0.8 |
| -130-M 50 | 130 | 50 | 80 | 1.3 | 1.5 |
| -160-M 50 | 160 | | 110 | 1.4 | 1.7 |
| -190-M 50 | 190 | | 140 | 1.9 | |
| -155-M 75 | 155 | 75 | 80 | 1.4 | 3.1 |
| -185-M 75 | 185 | | 110 | 1.5 | 3.4 |
| -215-M 75 | 215 | | 140 | 2.0 | |
| -170-M 90 | 170 | 90 | 80 | 1.4 | 4.4 |
| -200-M 90 | 200 | | 110 | 1.5 | 4.8 |
| -230-M 90 | 230 | | 140 | 2.0 | 4.9 |
| -185-M105 | 185 | 105 | 80 | 1.5 | 6.2 |
| -215-M105 | 215 | | 110 | 1.6 | 6.6 |
| -245-M105 | 245 | | 140 | 2.1 | 6.7 |
| A63-RSG10-125-M 25 | 125 | 25 | 100 | 1.6 | 0.4 |
| -155-M 25 | 155 | | 130 | 1.9 | 0.5 |
| -185-M 25 | 185 | | 160 | 2.3 | 0.6 |
| -150-M 50 | 150 | 50 | 100 | 1.7 | 0.8 |
| -180-M 50 | 180 | | 130 | 2.0 | 1.0 |
| -210-M 50 | 210 | | 160 | 2.4 | 1.2 |
| -175-M 75 | 175 | 75 | 100 | 1.8 | 1.6 |
| -205-M 75 | 205 | | 130 | 2.1 | 1.8 |
| -235-M 75 | 235 | | 160 | 2.5 | 2.0 |
| -200-M100 | 200 | 100 | 100 | 1.8 | 2.7 |
| -230-M100 | 230 | | 130 | 2.1 | 2.9 |
| -260-M100 | 260 | | 160 | 2.5 | 3.2 |
| -220-M120 | 220 | 120 | 100 | 1.9 | 4.0 |
| -250-M120 | 250 | | 130 | 2.2 | 4.2 |
| -280-M120 | 280 | | 160 | 2.6 | 4.5 |
| -240-M140 | 240 | 140 | 100 | 2.0 | 5.6 |
| -270-M140 | 270 | | 130 | 2.3 | 5.9 |
| -300-M140 | 300 | | 160 | 2.7 | 6.2 |

| CODE | L | M | L ₁ | Kg | S |
|----------------------------|-----|-----|----------------|-----|-----|
| A63 -RSG12-125-M 25 | 125 | 25 | 100 | 1.9 | 0.3 |
| -155-M 25 | 155 | | 130 | 2.3 | 0.4 |
| -185-M 25 | 185 | | 160 | 2.7 | 0.5 |
| -150-M 50 | 150 | 50 | 100 | 2.0 | |
| -180-M 50 | 180 | | 130 | 2.4 | 0.6 |
| -210-M 50 | 210 | | 160 | 2.8 | 0.8 |
| -175-M 75 | 175 | 75 | 100 | 2.2 | 0.9 |
| -205-M 75 | 205 | | 130 | 2.6 | 1.0 |
| -235-M 75 | 235 | | 160 | 3.0 | 1.3 |
| -200-M100 | 200 | 100 | 100 | 2.3 | 1.4 |
| -230-M100 | 230 | | 130 | 2.7 | 1.6 |
| -260-M100 | 260 | | 160 | 3.1 | 1.9 |
| -225-M125 | 225 | 125 | 100 | 2.5 | 2.1 |
| -255-M125 | 255 | | 130 | 2.9 | 2.4 |
| -285-M125 | 285 | | 160 | 3.3 | 2.7 |
| -250-M150 | 250 | 150 | 100 | 2.6 | 3.1 |
| -280-M150 | 280 | | 130 | 3.0 | 3.4 |
| -310-M150 | 310 | | 160 | 3.4 | 3.8 |
| A63 -RSG16-140-M 25 | 140 | 25 | 115 | 2.6 | 0.2 |
| -165-M 50 | 165 | 50 | | 2.8 | 0.4 |
| -190-M 75 | 190 | 75 | | 3.0 | 0.6 |
| -215-M100 | 215 | 100 | | 3.2 | 0.9 |
| -240-M125※ | 240 | 125 | | 3.4 | 1.3 |
| -265-M150※ | 265 | 150 | | 3.7 | 1.9 |
| -290-M175※ | 290 | 175 | | 3.9 | 2.5 |
| A100-RSG 8-120-M 25 | 120 | 25 | 95 | 2.6 | 0.6 |
| -150-M 25 | 150 | | 125 | 2.9 | 0.8 |
| -180-M 25 | 180 | | 155 | 3.4 | |
| -145-M 50 | 145 | 50 | 95 | 2.6 | 1.5 |
| -175-M 50 | 175 | | 125 | 2.9 | 1.7 |
| -205-M 50 | 205 | | 155 | 3.4 | |
| -170-M 75 | 170 | 75 | 95 | 2.7 | 3.1 |
| -200-M 75 | 200 | | 125 | 3.0 | 3.4 |

Common dimensions


| CODE | Cutter dia. | G | φD | H | H ₁ | φC | φC ₁ | φC ₂ |
|----------|-------------|-----|------|----|----------------|----|-----------------|-----------------|
| RSG 8 | 16 | M 8 | 8.5 | 18 | 6.5 | 15 | 30 | 32 |
| RSG10 | 20 | M10 | 10.5 | 22 | 6.5 | 19 | 36 | 38 |
| RSG12 | 25 | M12 | 12.5 | 22 | 6 | 24 | 43 | 45 |
| RSG16 | 32/40 | M16 | 17 | 25 | 6 | 29 | 52 | 54 |
| RSG16-37 | 40 | M16 | 17 | 25 | 6 | 37 | 71 | 73 |

| CODE | L | M | L ₁ |  Kg |  |
|----------------------------|-----|-----|----------------|--|---|
| A100-RSG 8-230-M 75 | 230 | 75 | 155 | 3.5 | 3.4 |
| -185-M 90 | 185 | 90 | 95 | 2.7 | 4.5 |
| -215-M 90 | 215 | | 125 | 3.0 | 4.9 |
| -245-M 90 | 245 | | 155 | 3.5 | 4.8 |
| -200-M105 | 200 | 105 | 95 | 2.8 | 6.3 |
| -230-M105 | 230 | | 125 | 3.1 | 6.7 |
| -260-M105 | 260 | | 155 | 3.6 | 6.6 |
| A100-RSG10-140-M 25 | 140 | 25 | 115 | 3.1 | 0.4 |
| -170-M 25 | 170 | | 145 | 3.5 | 0.5 |
| -200-M 25 | 200 | | 175 | 4.4 | |
| -165-M 50 | 165 | 50 | 115 | 3.2 | 0.8 |
| -195-M 50 | 195 | | 145 | 3.6 | 1.0 |
| -225-M 50 | 225 | | 175 | 4.5 | |
| -190-M 75 | 190 | 75 | 115 | 3.3 | 1.6 |
| -220-M 75 | 220 | | 145 | 3.7 | 1.8 |
| -250-M 75 | 250 | | 175 | 4.6 | |
| -215-M100 | 215 | 100 | 115 | 3.3 | 2.7 |
| -245-M100 | 245 | | 145 | 3.7 | 2.9 |
| -275-M100 | 275 | | 175 | 4.6 | |
| -235-M120 | 235 | 120 | 115 | 3.4 | 4.0 |
| -265-M120 | 265 | | 145 | 3.8 | 4.2 |
| -295-M120 | 295 | | 175 | 4.7 | |
| -255-M140 | 255 | 140 | 115 | 3.5 | 5.6 |
| -285-M140 | 285 | | 145 | 3.9 | 5.8 |
| -315-M140 | 315 | | 175 | 4.8 | |
| A100-RSG12-140-M 25 | 140 | 25 | 115 | 3.4 | 0.3 |
| -170-M 25 | 170 | | 145 | 3.7 | 0.4 |
| -200-M 25 | 200 | | 175 | 4.7 | |
| -165-M 50 | 165 | 50 | 115 | 3.5 | 0.5 |
| -195-M 50 | 195 | | 145 | 3.8 | 0.6 |
| -225-M 50 | 225 | | 175 | 4.8 | |
| -190-M 75 | 190 | 75 | 115 | 3.7 | 0.8 |
| -220-M 75 | 220 | | 145 | 4.0 | 1.0 |
| -250-M 75 | 250 | | 175 | 5.0 | |
| -215-M100 | 215 | 100 | 115 | 3.8 | 1.4 |
| -245-M100 | 245 | | 145 | 4.1 | 1.6 |
| -275-M100 | 275 | | 175 | 5.1 | |
| -240-M125 | 240 | 125 | 115 | 4.0 | 2.1 |
| -270-M125 | 270 | | 145 | 4.3 | 2.4 |
| -300-M125 | 300 | | 175 | 5.3 | |
| -265-M150 | 265 | 150 | 115 | 4.1 | 3.0 |
| -295-M150 | 295 | | 145 | 4.4 | 3.4 |
| -325-M150 | 325 | | 175 | 5.4 | |
| -290-M175 | 290 | 175 | 115 | 4.3 | 4.3 |
| -320-M175 | 320 | | 145 | 4.6 | 4.6 |
| -350-M175 | 350 | | 175 | 5.6 | |

| CODE | L | M | L ₁ |  Kg |  |
|--------------------------------|-----|-----|----------------|--|---|
| A100-RSG16-140-M 25 | 140 | 25 | 115 | 4.0 | 0.2 |
| -170-M 25 | 170 | | 145 | 4.5 | |
| -200-M 25 | 200 | | 175 | 5.7 | |
| -165-M 50 | 165 | 50 | 115 | 4.2 | 0.3 |
| -195-M 50 | 195 | | 145 | 4.7 | 0.4 |
| -225-M 50 | 225 | | 175 | 5.9 | |
| -190-M 75 | 190 | 75 | 115 | 4.5 | 0.5 |
| -220-M 75 | 220 | | 145 | 5.0 | 0.6 |
| -250-M 75 | 250 | | 175 | 6.1 | |
| -215-M100 | 215 | 100 | 115 | 4.7 | 0.8 |
| -245-M100 | 245 | | 145 | 5.2 | 0.9 |
| -275-M100 | 275 | | 175 | 6.3 | |
| -240-M125 | 240 | 125 | 115 | 4.9 | 1.1 |
| -270-M125 | 270 | | 145 | 5.4 | 1.3 |
| -300-M125 | 300 | | 175 | 6.5 | |
| -265-M150 | 265 | 150 | 115 | 5.1 | 1.6 |
| -295-M150 | 295 | | 145 | 5.6 | 1.8 |
| -325-M150 | 325 | | 175 | 6.7 | |
| -290-M175 | 290 | 175 | 115 | 5.3 | 2.2 |
| -320-M175 | 320 | | 145 | 5.8 | 2.4 |
| -350-M175 | 350 | | 175 | 7.0 | 2.5 |
| -315-M200 | 315 | 200 | 115 | 5.5 | 3.0 |
| -345-M200 | 345 | | 145 | 6.0 | 3.2 |
| -375-M200 | 375 | | 175 | 7.2 | 3.3 |
| -340-M225 | 340 | 225 | 115 | 5.7 | 3.9 |
| -370-M225 | 370 | | 145 | 6.3 | 4.2 |
| -400-M225 | 400 | | 175 | 7.4 | |
| A100-RSG16- 37-190-M 75 | 190 | 75 | 115 | 6.3 | 0.2 |
| -215-M100 | 215 | 100 | | | 0.3 |
| -240-M125 | 240 | 125 | | 7.1 | 0.4 |
| -265-M150 | 265 | 150 | | | 0.6 |
| -290-M175 | 290 | 175 | | 7.8 | 0.9 |
| -315-M200 | 315 | 200 | | | 1.1 |
| -340-M225 | 340 | 225 | | 8.5 | 1.5 |
| -365-M250 | 365 | 250 | | | 1.9 |
| -390-M275 | 390 | 275 | | 9.2 | 2.4 |
| -415-M300 | 415 | 300 | | | 2.9 |

Cutter arbor with spindle-through coolant (FMH)

- ▷ Standard design has through-coolant holes that allow superior chip evacuation, cutting edge cooling and lubrication.
- ▷ Achieves amazing high-feed machining
- ▷ We also have a variety of ultra-long type arbors.

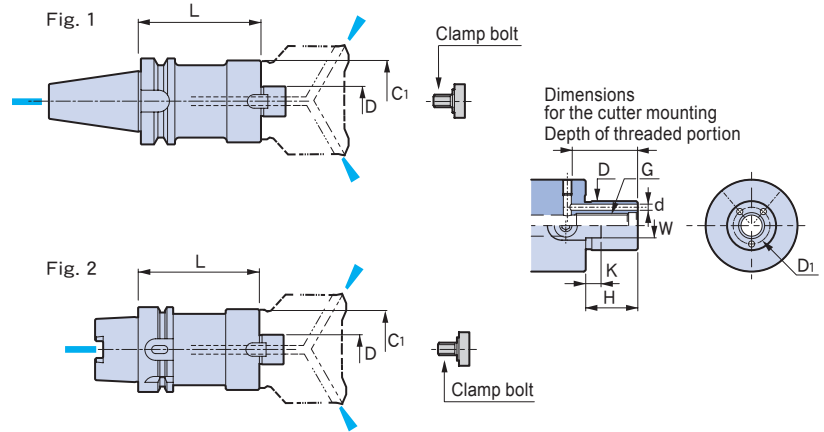

| CODE | Fig. | Cutter dia. | L | φC1 | kg | |
|------------------------------|----------------|-------------|-----|-----|-----|-----|
| BT40-FMH16 -29- 45 | 1 | 32 | 45 | 29 | 1.1 | |
| | | | 90 | | 1.4 | |
| | | | 120 | | 1.5 | |
| | -37- 45 | 40 | 45 | 37 | | 1.2 |
| | | | | 90 | | 1.6 |
| | | | | 120 | | 1.9 |
| BT40-FMH22 -47- 45 | 1 | 50/52 | 45 | 47 | 1.3 | |
| | | | 90 | | 1.9 | |
| | | | 150 | | 2.7 | |
| | | | 200 | | 3.3 | |
| | -60- 45 | 63/66 | 45 | 60 | | 1.4 |
| | | | | 90 | | 2.2 |
| | | | | 150 | | 3.2 |
| | | | | 200 | | 4.1 |
| BT40-FMH22.225-47- 45 | 1 | 50/52 | 45 | 47 | 1.3 | |
| | | | 90 | | 1.9 | |
| | | | 150 | | 2.7 | |
| | | | 200 | | 3.3 | |
| | -60- 45 | 63/66 | 45 | 60 | | 1.4 |
| | | | | 90 | | 2.2 |
| | | | | 150 | | 3.2 |
| | | | | 200 | | 4.1 |
| BT40-FMH25.4 -70- 60 | 1 | 80 | 60 | 70 | 1.9 | |
| | | | 90 | | 2.4 | |
| | | | 150 | | 3.4 | |
| | | | | | | |
| BT40-FMH31.75 -76- 60 | 1 | 80 | 60 | 76 | 2.1 | |
| | | | 90 | | 2.6 | |
| | | | 150 | | 3.6 | |
| | | | 200 | | 4.4 | |
| | -96- 60 | 100 | 60 | 96 | | 2.4 |
| | | | | 90 | | 3.1 |
| | | | | 150 | | 4.1 |
| | | | | 200 | | 4.9 |
| BT50-FMH16 -29- 90 | 1 | 32 | 90 | 29 | 3.9 | |
| | | | 150 | | 4.3 | |
| | | 40 | 90 | 37 | 4.1 | |
| | | | 150 | | 4.7 | |
| | | | 200 | | 5.3 | |


| CODE | Fig. | Cutter dia. | L | φC1 | kg | |
|------------------------------|----------------|-------------|-----|-----|------|------|
| BT50-FMH22 -47- 90 | 1 | 50/52 | 90 | 47 | 4.4 | |
| | | | 150 | | 5.4 | |
| | | | 200 | | 6.2 | |
| | | | 250 | | 7.2 | |
| | | | 300 | | 8.3 | |
| -60- 90 | 1 | 63/66 | 90 | 60 | 4.8 | |
| | | | 150 | | 6.4 | |
| | | | 200 | | 7.8 | |
| | | | 250 | | 9.2 | |
| | | | 300 | | 10.8 | |
| BT50-FMH22.225-47- 90 | 1 | 50/52 | 90 | 47 | 4.4 | |
| | | | 150 | | 5.4 | |
| | | | 200 | | 6.2 | |
| | | | 250 | | 7.2 | |
| | -60- 90 | 63/66 | 90 | 60 | | 4.8 |
| | | | | 150 | | 6.4 |
| | | | | 200 | | 7.7 |
| | | | | 250 | | 9.2 |
| BT50-FMH25.4 -70- 60 | 1 | 80 | 60 | 70 | 4.4 | |
| | | | 90 | | 5.3 | |
| | | | 150 | | 7.0 | |
| | | | | | | |
| | | | | | | |
| BT50-FMH31.75 -76- 60 | 1 | 80 | 60 | 76 | 4.5 | |
| | | | 90 | | 5.6 | |
| | | | 150 | | 7.6 | |
| | | | 200 | | 9.3 | |
| | -96- 60 | 100 | 60 | 96 | | 5.0 |
| | | | | 90 | | 6.4 |
| | | | | 150 | | 9.2 |
| | | | | 200 | | 11.5 |
| BT50-FMH38.1-100- 60 | 1 | 125 | 60 | 100 | 5.2 | |
| | | | 90 | | 6.6 | |
| | | | 150 | | 9.4 | |
| | | | 200 | | 11.7 | |
| | | | 250 | | 13.9 | |
| BT50-FMH50.8-100- 60 | 1 | 160 | 60 | 100 | 5.4 | |
| | | | 90 | | 6.9 | |
| | | | 150 | | 9.6 | |
| | | | 200 | | 11.8 | |
| | | | 250 | | 14.1 | |

Common dimensions

| CODE | φD | H | W | K | G | Clamp bolt |
|-----------|--------|----|-------|-----|-----|------------|
| FMH16 | 16 | 17 | 8 | 5 | M 8 | M 8 ※ |
| FMH22 | 22 | 18 | 10 | 5 | M10 | M10 ※ |
| FMH22.225 | 22.225 | 17 | 8 | 3.5 | M10 | M10 ※ |
| FMH25.4 | 25.4 | 22 | 9.5 | 5 | M12 | MBF-M12 |
| FMH31.75 | 31.75 | 30 | 12.7 | 7 | M16 | MBF-M16 |
| FMH38.1 | 38.1 | 34 | 15.9 | 9 | M20 | MBF-M20 |
| FMH50.8 | 50.8 | 36 | 19.05 | 10 | M24 | MBF-M24 |

| CODE | Fig. | Cutter dia. | L | φC1 | kg | | | |
|-----------------------------|------|-------------|------------------------------|-----|-------|-----|----|-----|
| A63 -FMH16 -29- 45 | 2 | 32 | 45 | 29 | 0.8 | | | |
| | | | 90 | | 1.1 | | | |
| | | | 120 | | 1.3 | | | |
| | | | 40 | 45 | 37 | 0.9 | | |
| | | | 90 | | 1.3 | | | |
| | | | 120 | | 1.6 | | | |
| A63 -FMH22 -47- 45 | 2 | 50/52 | 45 | 47 | 1.0 | | | |
| | | | 90 | | 1.6 | | | |
| | | | 150 | | 2.6 | | | |
| | | | 200 | | 3.5 | | | |
| | | | 63/66 | 60 | 60 | 1.4 | | |
| | | | 90 | | 1.9 | | | |
| | | | 150 | | 2.9 | | | |
| | | | 200 | | 3.8 | | | |
| | | | A63 -FMH22.225-47- 45 | 2 | 50/52 | 45 | 47 | 1.0 |
| | | | | | | 90 | | 1.6 |
| 150 | | 2.6 | | | | | | |
| 200 | | 3.4 | | | | | | |
| 63/66 | 60 | 60 | | | | 1.4 | | |
| 90 | | 1.9 | | | | | | |
| 150 | | 2.9 | | | | | | |
| 200 | | 3.8 | | | | | | |
| A63 -FMH25.4 -70- 60 | 2 | 80 | | | | 60 | 70 | 1.6 |
| | | | | | | 90 | | 2.1 |
| | | | 150 | | 3.1 | | | |
| | | | A63 -FMH31.75 -76- 60 | 2 | 80 | 60 | 76 | 1.7 |
| 90 | | 2.3 | | | | | | |
| 150 | | 3.3 | | | | | | |
| 200 | | 4.1 | | | | | | |
| 100 | 60 | 96 | | | | 2.1 | | |
| 90 | | 2.9 | | | | | | |
| A100-FMH16 -29- 90 | 2 | 32 | 90 | 29 | 2.4 | | | |
| | | | 150 | | 2.8 | | | |
| | | | 40 | 90 | 37 | 2.6 | | |
| | | | 150 | | 3.3 | | | |
| | | | 200 | | 3.9 | | | |
| A100-FMH22 -47- 90 | 2 | 50/52 | 90 | 47 | 2.9 | | | |
| | | | 150 | | 3.9 | | | |
| | | | 200 | | 4.8 | | | |
| | | | 250 | | 5.8 | | | |
| | | | 300 | | 6.9 | | | |

Clamp bolt

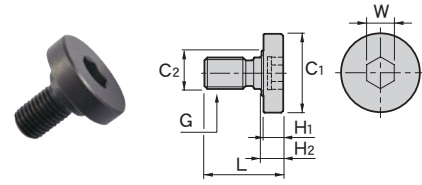

| CODE | L | φC1 | φC2 | H1 | H2 | W | G | FMH model |
|---------|----|-----|-----|----|----|----|-----|-----------|
| MBF-M12 | 30 | 33 | 23 | 10 | 11 | 10 | M12 | FMH25.4 |
| -M16 | 40 | 40 | | | | 14 | M16 | FMH31.75 |
| -M20 | 50 | 50 | 27 | 14 | 16 | 17 | M20 | FMH38.1 |
| -M24 | 59 | 65 | 37 | | | 19 | M24 | FMH50.8 |

| CODE | Fig. | Cutter dia. | L | φC1 | kg | |
|-------------------------------|------|-------------|-------------------------------|-----|-------|------|
| A100-FMH22 - 60- 90 | 2 | 63/66 | 90 | 60 | 3.5 | |
| | | | 150 | | 5.1 | |
| | | | 200 | | 6.4 | |
| | | | 250 | | 7.9 | |
| | | | 300 | | 9.5 | |
| | | | A100-FMH22.225- 47- 90 | 2 | 50/52 | 90 |
| 150 | | 3.9 | | | | |
| 200 | | 4.8 | | | | |
| 250 | | 5.8 | | | | |
| 300 | | 6.9 | | | | |
| 63/66 | 90 | 60 | | | 3.4 | |
| | 150 | | | | 5.0 | |
| | 200 | | | | 6.4 | |
| | 250 | | | | 7.9 | |
| | 300 | | | | 9.5 | |
| A100-FMH25.4 - 70- 60 | 2 | 80 | 60 | 70 | 3.1 | |
| | | | 90 | | 4.0 | |
| | | | 150 | | 5.7 | |
| A100-FMH31.75 - 76- 60 | 2 | 80 | 60 | 76 | 3.3 | |
| | | | 90 | | 4.3 | |
| | | | 150 | | 6.4 | |
| | | | 200 | | 8.1 | |
| | | | 250 | | 9.8 | |
| | | | 300 | | 11.5 | |
| | | | 100 | 90 | 96 | 5.3 |
| | | | | 150 | | 8.1 |
| | | | | 200 | | 10.4 |
| | | | | 250 | | 12.7 |
| 300 | | 15.1 | | | | |
| A100-FMH38.1 -100- 90 | 2 | 125 | 90 | 100 | 5.5 | |
| | | | 150 | | 8.2 | |
| | | | 200 | | 10.5 | |
| | | | 250 | | 12.8 | |
| A100-FMH50.8 -100- 90 | 2 | 160 | 90 | 100 | 5.7 | |
| | | | 150 | | 8.4 | |
| | | | 200 | | 10.7 | |
| | | | 250 | | 12.9 | |

- **Option**
 - Retention knob → P.64
- **Std. Access.**
 - Coolant duct(Fixed) (HSK-A) → P.104
 - Clamp bolt (unless marked with ※ in the list) ● Stopper key
- **Note**
 - The clamp bolt marked with ※ in the list is a hexagonal socket bolt. Use a market standard bolt.
 - Swing type coolant ducts are available upon request. For details, please contact us.
- **Caution**
 - The required clamp bolt design depends on the cutter manufacturer and the type of cutter.


Applicable for all applications, from finishing to roughing.

MFA



Super precision finishing boring holder

MBH



Finishing and heavy duty boring holder

MBJ




Wide range and multi-purpose boring holder

Super precision finishing boring holder

MFA P.57


Rigid design thanks to the square sliding head

The square slide system can achieve greater rigidity against cutting force compared to a round slide system since it has 2-face contact.

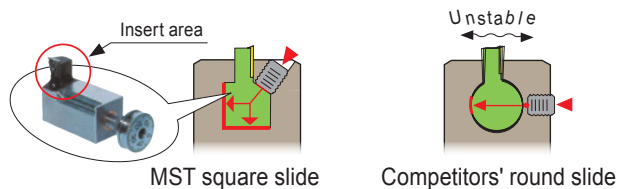

Guaranteed fine adjustment


It allows 0.01mm dia. fine adjustment easily and precisely. The setting diameter doesn't change when you clamp the head.



System

| MODEL | Boring dia. |
|-------|-------------|
| MFA20 | φ20 ~ 24.5 |
| MFA24 | φ24 ~ 30 |
| MFA29 | φ29 ~ 38 |
| MFA36 | φ36 ~ 52 |
| MFA50 | φ50 ~ 77 |
| MFA75 | φ75 ~ 102 |


Available for spindle-through coolant as standard.



Adjustable effective length

Using the extension allows for increased effective length


| MODEL | Length (mm) |
|-------|-------------------|
| MFA20 | 30 · 35 · 40 · 45 |
| MFA24 | |
| MFA29 | 30 · 40 · 50 · 60 |
| MFA36 | 40 · 50 · 60 · 70 |
| MFA50 | 45 · 60 · 75 · 90 |
| MFA75 | |

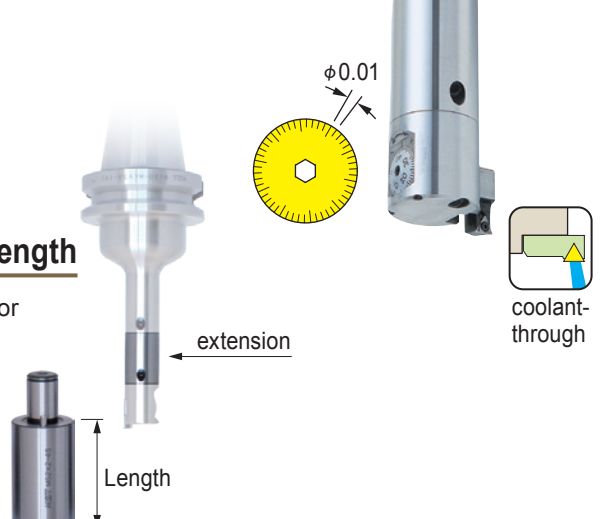

Finishing and heavy duty boring holder **MBH**


Sliding rack design ... Wide adjusting range

The micro head, MBH provides a wide adjusting range and secure clamping by making use of the sliding rack design for fine adjustment in combination with dovetail clamping capability.

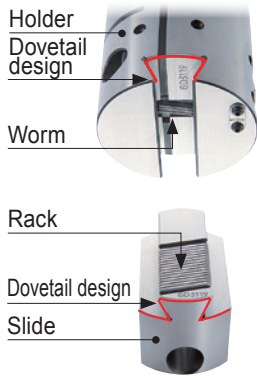

Dovetail clamping ... High rigidity and accuracy

The dovetail clamping capability holds the slide portion firmly without needing to change the setting diameter when clamping the slide. It is ideal for high-rigidity, high-accuracy boring applications.

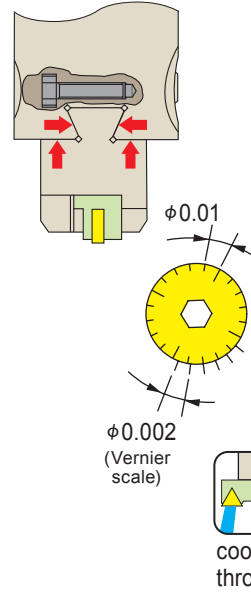

System


| MODEL | Boring dia. |
|--------|---------------------|
| MBH 50 | $\phi 50 \sim 80$ |
| MBH 75 | $\phi 75 \sim 120$ |
| MBH115 | $\phi 115 \sim 185$ |
| MBH180 | $\phi 180 \sim 250$ |
| MBH245 | $\phi 245 \sim 315$ |
| MBH310 | $\phi 310 \sim 380$ |





Wide range and multi-purpose boring holder **MBJ**

The combination of two kinds of boring bars allows for a wide range of boring applications from 5.5mm to 205mm dia.

MBJ45

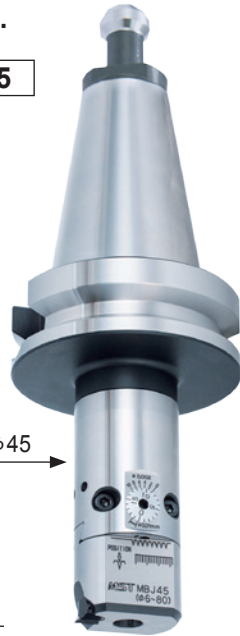

MBJ70

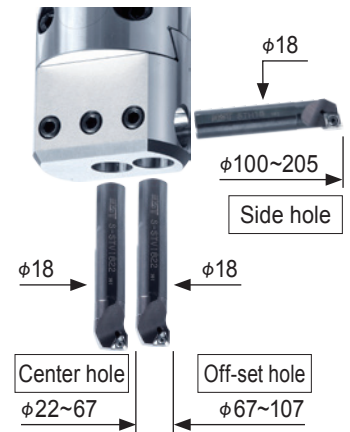






Cutting data


Micro Head for engraving

If you would like more detailed information, please contact MST and ask for a catalog.




MICRO HEAD MFA type (MFA)

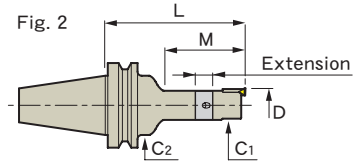

| CODE | Fig. | Boring dia. (φD) | L | M | φC1 | φC2 | Extension | Kg | | | | | |
|-----------------------|--------|------------------|----------|--------|--------|-----|-----------|-----|------|-----|-----|-----|-----|
| BT30-MFA20- 90 | 1 | 20~ 24.5 | 90 | 63 | 19 | — | — | 0.6 | | | | | |
| -MFA24- 90 | | 24~ 30 | | | 22 | | | | | | | | |
| -MFA29-105 | | 29~ 38 | 105 | 78 | 27.6 | | | | | | | | |
| -MFA36-105 | | | | | 36~ 52 | | | | 34.4 | | | | |
| BT40-MFA20-120 | 2 | 20~ 24.5 | 120 | 65 | 19 | 46 | — | 1.4 | | | | | |
| -150 | | | 150 | 81 | — | | | 1.5 | | | | | |
| -MFA24-150 | | 24~ 30 | — | — | 62 | | | 22 | 30 | 1.7 | | | |
| -180 | | | | | 180 | | | 92 | — | 1.8 | | | |
| -MFA29-150 | | 29~ 38 | 150 | 82 | 27.6 | | | — | — | 1.7 | | | |
| -180 | | | | | | | | | 180 | 112 | 30 | 1.8 | |
| -MFA36-150 | | 36~ 52 | 150 | 97 | 34.4 | | | 62 | — | 1.9 | | | |
| -195 | | | | | | | | | | 195 | 142 | 45 | 2.2 |
| -MFA50-150 | | 50~ 77 | 150 | 102 | 46 | | | — | — | 2.4 | | | |
| -195 | | | | | | | | | | 195 | 147 | 45 | 3.0 |
| -MFA75-150 | | 75~ 102 | 150 | 102 | 51 | | | — | — | 2.5 | | | |
| -195 | | | | | | | | | | 195 | 147 | 45 | 3.1 |
| BT50-MFA20-165 | | 2 | 20~ 24.5 | 165 | 54 | | | 19 | 62 | — | 4.9 | | |
| -195 | | | | 195 | 84 | | | — | | | 5.0 | | |
| -240 | | | | 240 | 64 | | | — | | | 6.3 | | |
| -MFA24-165 | | | | 24~ 30 | 165 | | | 52 | | | 22 | — | 4.9 |
| -195 | 195 | | 82 | | | 30 | 5.0 | | | | | | |
| -240 | 240 | | 62 | — | — | — | 6.3 | | | | | | |
| -270 | | | | | | | 270 | 92 | | | 30 | 6.4 | |
| -MFA29-165 | 29~ 38 | | 165 | 82 | 27.6 | 70 | — | 4.7 | | | | | |
| -195 | | | | | | | | 195 | | | 112 | 30 | 4.8 |
| -240 | | | | | | | | 240 | | | 82 | — | 6.7 |
| -270 | | | | | | | | 270 | | | 112 | 30 | 6.9 |
| -MFA36-165 | 36~ 52 | | 165 | 97 | 34.4 | — | — | 4.6 | | | | | |
| -210 | | | | | | | | 210 | | | 142 | 45 | 4.9 |
| -255 | | | | | | | | 255 | | | 97 | 80 | 7.9 |
| -300 | | | | | | | | 300 | | | 142 | 45 | 8.2 |
| -MFA50-165 | 1 | | 50~ 77 | 165 | 122 | 46 | — | 4.9 | | | | | |
| -210 | | 210 | | | | | | 167 | 45 | 5.5 | | | |
| -255 | | 2 | | | | | | 255 | 147 | 86 | 7.6 | | |
| -300 | | | | | | | | 300 | 192 | 45 | 8.2 | | |
| -MFA75-165 | 1 | 75~ 102 | 165 | 122 | 51 | — | 5.0 | | | | | | |
| -210 | | | | | | | 210 | 167 | 45 | 5.6 | | | |
| -255 | | | | | | | 2 | 255 | 147 | 86 | 7.7 | | |
| -300 | | | | | | | | 300 | 192 | 45 | 8.3 | | |

Extension




| CODE | Applicable head | φD | L | Kg |
|---------------|-----------------|------|----|-----|
| MS0-30 | MFA20 | 19 | 30 | 0.1 |
| -35 | | | 35 | 0.1 |
| -40 | | | 40 | 0.1 |
| -45 | | | 45 | 0.1 |
| MS1-30 | MFA24 | 22 | 30 | 0.1 |
| -35 | | | 35 | 0.1 |
| -40 | | | 40 | 0.1 |
| -45 | | | 45 | 0.1 |
| MS2-30 | MFA29 | 27.6 | 30 | 0.1 |
| -40 | | | 40 | 0.2 |
| -50 | | | 50 | 0.2 |
| -60 | | | 60 | 0.3 |
| MS3-40 | MFA36 | 34.4 | 40 | 0.3 |
| -45 | | | 45 | 0.3 |
| -50 | | | 50 | 0.3 |
| -70 | | | 70 | 0.5 |
| MS4-45 | MFA50 MFA75 | 46 | 45 | 0.6 |
| -60 | | | 60 | 0.7 |
| -75 | | | 75 | 0.9 |
| -90 | | | 90 | 1.1 |

Caution
 • Longer projection length causes chattering and reduced rigidity

Insert



| CODE | R | Insert material | Q'ty | Work material |
|------------------|-----|-------------------------|--------|---------------|
| TPA082-PA | 0.2 | Cermet | 10pcs. | Steel |
| TPA084-PA | 0.4 | | | |
| TPA082-MA | 0.2 | | | |
| TPA084-MA | 0.4 | Carbide | — | Stainless |
| TPA082-KA | 0.2 | | | |
| TPA084-KA | 0.4 | | | |
| TPA082-NA | 0.2 | Polycrystalline diamond | 1pc. | Aluminum |
| TPA084-NA | 0.4 | | | |
| TPA082-ND | 0.2 | | | |
| TPA084-ND | 0.4 | | | |

| CODE | Fig. | Boring dia. (ϕ D) | L | M | ϕ C1 | ϕ C2 | Extension | D1 | L1 |  Kg | | | | | | |
|---|--------|--|-----|----------|-----------|-----------|-----------|-----|-----|--|-----|-----|---|-----|----|-----|
| A40 -MFA20- 90 -MFA24- 90 -MFA29-105 -MFA36-105 -MFA50-105 | 3 | 20~ 24.5 | 90 | 65 | 19 | — | — | — | — | 0.4 | | | | | | |
| | | 24~ 30 | | | 22 | | | | | | | | | | | |
| | | 29~ 38 | 105 | 82 | 27.6 | | | | | | | | | | | |
| | | 36~ 52 | | | 34.4 | | | | | | | | | | | |
| | | 50~ 77 | | | 46 | | | | | | | | | | | |
| A50 -MFA20-120 -MFA24-120 -MFA29-120 -MFA36-120 -MFA50-120 -MFA75-120 | 4 | 20~ 24.5 | 120 | 69 | 19 | 41 | — | — | — | 0.8 | | | | | | |
| | | 24~ 30 | | | 22 | | | | | | | | | | | |
| | | 29~ 38 | | | 82 | | | | | | | | | | | |
| | 3 | 36~ 52 | 91 | 34.4 | — | | | | | — | — | — | — | 1.1 | | |
| | | 50~ 77 | | 46 | | | | | | | | | | 1.6 | | |
| | | 75~102 | | 51 | | | | | | | | | | 1.7 | | |
| | | | | | | | | | | | | | | | | |
| A63 -MFA20-150 -MFA24-150 -180 -MFA29-150 -180 -MFA36-150 -195 -MFA50-150 -195 -MFA75-150 -195 | 4 | 20~ 24.5 | 150 | 81 | 19 | 46 | — | — | — | 1.3 | | | | | | |
| | | 24~ 30 | | 62 | | | | | | 22 | 1.5 | | | | | |
| | | | 180 | 92 | | | | | | | 30 | 1.6 | | | | |
| | | 29~ 38 | 150 | 82 | 27.6 | | | | | | — | 1.5 | | | | |
| | | | 180 | 112 | | | | | | | 30 | 1.6 | | | | |
| | | 36~ 52 | 150 | 97 | 34.4 | | | | | 52 | — | 1.7 | | | | |
| | | | 195 | 142 | | | | | | | 45 | 2.0 | | | | |
| | | 50~ 77 | 150 | 102 | 46 | | | | | | — | 2.2 | | | | |
| | | | 195 | 147 | | | | | | | 45 | 2.7 | | | | |
| | | 75~102 | 150 | 102 | 51 | | | | | | — | 2.3 | | | | |
| | | | 195 | 147 | | | | | | | 45 | 2.8 | | | | |
| | | A100 -MFA20-165 -195 -240 -MFA24-165 -195 -240 -270 -MFA29-165 -195 -240 -270 -MFA36-165 -210 -255 -300 -MFA50-165 -210 -255 -300 -MFA75-165 -210 -255 -300 | 4 | 20~ 24.5 | 165 | | | | | 54 | 19 | 62 | — | — | — | 3.8 |
| | | | | | 195 | | | | | 84 | | | | | | |
| 240 | 64 | | | | | — | 5.3 | | | | | | | | | |
| 24~ 30 | 165 | | | 52 | 22 | | 3.8 | | | | | | | | | |
| | 195 | | | 82 | | 30 | 3.9 | | | | | | | | | |
| | 240 | | | 62 | | — | 5.4 | | | | | | | | | |
| 270 | 92 | | | | 30 | 5.5 | | | | | | | | | | |
| 29~ 38 | 165 | | | 82 | 27.6 | 70 | — | 3.7 | | | | | | | | |
| | 195 | | | 112 | | | 30 | 3.8 | | | | | | | | |
| | 240 | | | 82 | | | — | 5.8 | | | | | | | | |
| | 270 | | 112 | | 30 | | 6.0 | | | | | | | | | |
| 36~ 52 | 165 | | 97 | 34.4 | 80 | — | 3.7 | | | | | | | | | |
| | 210 | | 142 | | | 45 | 4.0 | | | | | | | | | |
| | 255 | | 97 | | | — | 7.2 | | | | | | | | | |
| | 300 | | 142 | | | 45 | 7.5 | | | | | | | | | |
| | 50~ 77 | | 165 | 131 | | 46 | — | — | 3.6 | | | | | | | |
| | | | 210 | 176 | | | | 45 | 4.2 | | | | | | | |
| 4 | | | 255 | 147 | | 85 | | — | 6.7 | | | | | | | |
| | 300 | | 192 | | 45 | | 7.3 | | | | | | | | | |
| 75~102 | 165 | | 131 | 51 | — | — | 3.7 | | | | | | | | | |
| | 210 | 176 | | 45 | | 4.3 | | | | | | | | | | |
| | 4 | 255 | 147 | | | 85 | — | 6.8 | | | | | | | | |
| 300 | | 192 | | 45 | 7.4 | | | | | | | | | | | |
| F63 -MFA20-150 -MFA24-150 -180 -MFA29-150 -180 -MFA36-150 -195 -MFA50-150 -195 | 4 | 20~ 24.5 | 150 | 81 | 19 | 46 | — | — | — | 1.3 | | | | | | |
| | | 24~ 30 | | 62 | | | | | | 22 | 1.5 | | | | | |
| | | | 180 | 92 | | | | | | | 30 | 1.6 | | | | |
| | | 29~ 38 | 150 | 82 | 27.6 | | | | | | — | 1.5 | | | | |
| | | | 180 | 112 | | | | | | | 30 | 1.6 | | | | |
| | | 36~ 52 | 150 | 97 | 34.4 | | | | | 52 | — | 1.7 | | | | |
| | | | 195 | 142 | | | | | | | 45 | 2.0 | | | | |
| | | 50~ 77 | 150 | 102 | 46 | | | | | | — | 2.2 | | | | |
| | | | 195 | 147 | | | | | | | 45 | 2.7 | | | | |
| | | ST25T -MFA20- 75 -MFA24- 90 -MFA29-105 | 5 | 20~ 24.5 | 75 | | | | | 75 | 19 | — | — | 25 | 70 | — |
| 24~ 30 | 90 | | | 85 | 22 | | | | | | | | | | | |
| 29~ 38 | 105 | | | 105 | 27.6 | | | | | | | | | | | |
| S 32 -MFA20- 90 -MFA24- 90 -MFA29-105 -MFA36-105 -MFA50-105 | 5 | 20~ 24.5 | 90 | 75 | 19 | — | — | 32 | 70 | — | | | | | | |
| | | 24~ 30 | | 80 | 22 | | | | | | | | | | | |
| | | 29~ 38 | 105 | 95 | 27.6 | | | | | | | | | | | |
| | | 36~ 52 | | | 34.4 | | | | | | | | | | | |
| | | 50~ 77 | | | 46 | | | | | | | | | | | |

■Option

- Insert •Retention knob (BT) →P.64

■Std. Access.

- T wrench •Insert clamping screw •Coolant duct(Fixed)(HSK-A)→P.104
- Torx wrench

■Note

- Swing type coolant ducts are available upon request. For details, please contact us.
- Drive key slot and cutting direction are in alignment.
- The extension mentioned in the list is set between shank and head. The number refers to the extension length.









MICRO HEAD MBH type (MBH)



BT50-MBH180-225



A100-MBH75-165



| CODE | Fig. | Boring dia. (φD) | L | M | φC | L ₁ | Cartridge | Kg |
|------------------------|------|------------------|-----|-----|-----|----------------|------------------|------|
| BT40-MBH 50-150 | 2 | 50~ 80 | 150 | 118 | 45 | — | PTC 10 | 2.1 |
| -210 | 1 | | 210 | 155 | | 28 | STGP10 | 3.0 |
| -MBH 75-165 | 3 | 75~120 | 165 | 165 | 70 | — | PTC 12 STGP12 | 4.0 |
| -MBH115-165 | | 115~185 | | | 110 | | | 5.9 |
| -MBH180-165 | | 180~250 | | | 153 | | | 6.6 |
| BT50-MBH 50-150 | 2 | 50~ 80 | 150 | 107 | 45 | — | PTC 10 STGP10 | 4.5 |
| -180 | | | 180 | 137 | | | | 5.6 |
| -240 | 1 | | 240 | 155 | | 47 | | 6.3 |
| -300 | | | 300 | | | 107 | | 7.0 |
| -MBH 75-165 | 3 | 75~120 | 165 | 127 | 70 | — | PTC 12 STGP12 | 6.7 |
| -225 | | | 225 | 187 | | | | 8.5 |
| -285 | | | 285 | 247 | | | | 10.3 |
| -315 | | | 315 | 277 | | | | 11.2 |
| -MBH115-165 | | 115~185 | 165 | 165 | 110 | | | 8.6 |
| -225 | | | 225 | 225 | | | | 10.4 |
| -285 | | | 285 | 285 | | | | 12.2 |
| -315 | | | 315 | 315 | | | | 13.1 |
| -MBH180-165 | | 180~250 | 165 | 165 | 153 | | | 9.3 |
| -225 | | | 225 | 225 | | | | 11.1 |
| -285 | | | 285 | 285 | | | 12.9 | |
| -MBH245-165 | | 245~315 | 165 | 165 | 200 | | 10.0 | |
| -225 | | | 225 | 225 | | | 11.8 | |
| -285 | | | 285 | 285 | | | 13.6 | |
| -MBH310-165 | | 310~380 | 165 | 165 | 255 | | 11.0 | |
| -225 | | | 225 | 225 | | | 12.8 | |
| A50M-MBH 50-135 | 5 | 50~ 80 | 135 | 109 | 45 | — | PTC10/STGP10 | 1.6 |
| -MBH 75-175 | | 75~120 | 175 | 149 | 70 | | PTC12/STGP12 | 3.4 |
| A63 -MBH 50-150 | 5 | 50~ 80 | 150 | 119 | 45 | — | PTC 10 STGP10 | 1.9 |
| -210 | | | 210 | 179 | | | | 2.6 |
| -MBH 75-195 | 6 | 75~120 | 195 | 195 | 70 | | PTC 12 STGP12 | 4.5 |
| -MBH115-195 | | 115~185 | | | 110 | | | 6.5 |
| -MBH180-195 | | 180~250 | | | 153 | | | 7.2 |
| A100-MBH 50-150 | 5 | 50~ 80 | 150 | 116 | 45 | — | PTC 10 STGP10 | 3.3 |
| -180 | | | 180 | 146 | | | | 3.6 |
| -240 | 4 | | 240 | 155 | | 56 | | 5.2 |
| -300 | | | 300 | | | 116 | | 6.8 |
| -MBH 75-165 | 6 | 75~120 | 165 | 131 | 70 | — | PTC 12 STGP12 | 5.3 |
| -225 | | | 225 | 191 | | | | 6.9 |
| -285 | | | 285 | 251 | | | | 8.6 |
| -315 | | | 315 | 281 | | | | 9.4 |

| CODE | Fig. | Boring dia. (φD) | L | M | φC | L ₁ | Cartridge | Kg | |
|------------------------|------|------------------|-----|-----|-----|----------------|-----------|------|------|
| A100-MBH115-165 | 4 | 115~185 | 165 | 165 | 110 | — | PTC 12 | 7.2 | |
| -225 | | | 225 | 225 | | | | 8.9 | |
| -285 | | | 285 | 285 | | | | 10.5 | |
| -315 | | | 315 | 315 | | | | 11.4 | |
| -MBH180-165 | | 180~250 | 165 | 165 | 153 | | 245~315 | 225 | 7.9 |
| -225 | | | 225 | 225 | | | | | 9.6 |
| -285 | | | 285 | 285 | | | | | 11.2 |
| -MBH245-165 | | 245~315 | 165 | 165 | 200 | | 225 | 285 | 8.7 |
| -225 | | | 225 | 225 | | | | | 10.3 |
| -285 | | | 285 | 285 | | | | | 12.0 |
| -MBH310-165 | | 310~380 | 165 | 165 | 255 | | 225 | | 9.6 |
| -225 | | | 225 | 225 | | | | | 11.2 |



Option

- Insert • Cartridge • Coolant-through • Retention knob(BT)→P.64

Std. Access.

- T wrench • Coolant duct(Fixed) (HSK-A)→P.104

Note


- Swing type coolant ducts are available upon request. For details, please contact us.
- Drive key slot and cutting direction are in alignment.
- Add "C" after the MBH model no. for through-spindle coolant when you order. (Example: BT50-MBH75C-165)

Caution

- Each slide part is produced to match precisely with its corresponding slide, so such parts are not interchangeable with each other.
- The undercut area of the A50M is different from the standards. Please be careful to check for interference with the ATC arm.




Cartridge

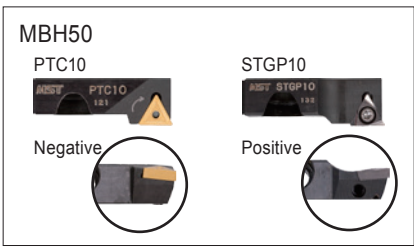

| CODE | Work-piece material | Holder type |
|--------|---------------------------------------|---------------|
| PTC10 | Steel·Cast Iron·Stainless | MBH50 |
| STGP10 | Steel·Cast Iron Stainless·Aluminum | |
| PTC12 | Steel·Cast Iron | MBH75 ~310 |
| STGP12 | Steel·Cast Iron Stainless·Aluminum | |

- Note**
- PTC : Pin lock type
 - STGP: Clamp-on type

Insert

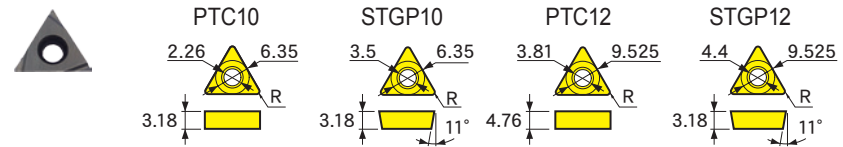

| CODE | R | Insert material | Work-piece material | Application | Q'ty | Cartridge | |
|------------|---------|-------------------------|---------------------|----------------|--------|-----------|-----------|
| TNB114-PB | 0.4 | Carbide coating | Steel | Semi-finishing | 10pcs. | PTC 10 | |
| -MB | | Carbide | Stainless | | | | |
| -KB | | | Cast iron | | | | |
| -PMA | | Cermet | Steel·stainless | Finishing | | | |
| -KA | Carbide | Cast iron | | | | | |
| TPC112-PA | 0.2 | Cermet | Steel | Finishing | 10pcs. | STGP10 | |
| TPC114-PA | 0.4 | | | | | | |
| TPC112-MA | 0.2 | Carbide | Stainless | | | | |
| TPC114-MA | | | 0.4 | | | | |
| TPC112-KA | | | 0.2 | | | | Cast iron |
| TPC114-KA | 0.4 | | | | | | |
| TPC112-NA | 0.2 | | Aluminum | | | | |
| TPC114-NA | 0.4 | | | | | | |
| TPC112-ND | 0.2 | Polycrystalline diamond | | | 1pc. | | |
| TPC114-ND | 0.4 | | | | | | |
| TNB168-PB | 0.8 | Carbide coating | Steel | Semi-finishing | 10pcs. | PTC 12 | |
| -MB | | | Stainless | | | | |
| -KB | | Carbide | Cast iron | | | | |
| TNB164-PMA | 0.4 | Cermet | Steel·stainless | Finishing | | | |
| -KA | | Carbide | Cast iron | | | | |
| TPC164-PA | 0.4 | Cermet | Steel | Finishing | 10pcs. | STGP12 | |
| -MA | | Carbide coating | Stainless | | | | |
| -KA | | Carbide | Cast iron | | | | |
| -NA | | | Aluminum | | | | |
| -ND | | Polycrystalline diamond | | | 1pc. | | |




MICRO HEAD MBJ45 type (MBJ45)



A100-MBJ45-150



S32-MBJ45-105

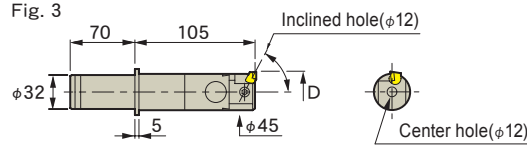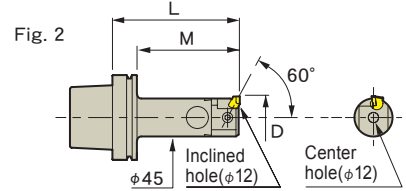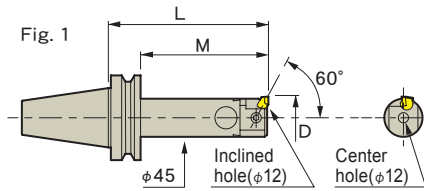

| CODE | Fig. | Boring dia. (φD) | L | M | Kg |
|----------------|------|------------------|-----|-----|-----|
| BT30-MBJ45-120 | 1 | 5.5~80 | 120 | 98 | 1.3 |
| BT40-MBJ45-150 | 1 | 5.5~80 | 150 | 123 | 2.2 |
| BT50-MBJ45-150 | 1 | 5.5~80 | 150 | 112 | 4.6 |
| -180 | | | 180 | 142 | 5.6 |
| A63 -MBJ45-150 | 2 | 5.5~80 | 150 | 124 | 2.0 |
| A100-MBJ45-150 | 2 | 5.5~80 | 150 | 121 | 3.3 |
| -180 | | | 180 | 151 | 3.7 |
| S32 -MBJ45-105 | 3 | 5.5~80 | — | — | — |

- Option
- Insert ● Insert holder
 - Insert and insert holder set ● Retention knob (BT)→P.64
- Std. Access.
- Wrench set
 - Coolant duct(Fixed) (HSK-A)→P.104
- Note
- Swing type coolant ducts are available upon request. For details, please contact us.
 - Drive key slot and cutting direction are in alignment.

Insert holder, Insert

For center hole



| Boring diameter φ5.5~8 | | Boring diameter φ8~10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|--------|-------------------------|-----------------|---------------|---------------|------------|-----|--------|--------|-------|---------------|--|-----------------|--|-----------|--|-----------|--|----------|--|----------|--|--|---|------|---|-----------------|------|---------------|-----------|-----|--------|--------|-------|------|--|-----------------|---|-----------------|------|---------------|-----------|-----|-----------|--------|-------|-----------|-----|----------|--|------|-----------|-----------------|-----------------|---------------|-----------|-----------|--------|--------|-------|---------------|------------|-----------------|---------|-----------|----------|------------|-----|----------|--|----------|--|------|---|-----------------|------|---------------|-----------|-----|--------|--------|--|---------------|---|-----------------|------|---------------|-----------|-----------|--------|----------|-------|-----------|-----|--|--|--|------------|-----|-----------------|--|-----------|------------|-----|--|--|-----------|--|------|---------|-----------------|----------|---------------|-----------|-----|--------|--------|-------|-----------|-----|--|--|--|---|------|-----------------|-----------------|-----------|---------------|-----------|-----|--------|-----------|------------|-----------|---------|--|----------|------------|-----------|-----|---------|--|-----------|-----------|-----|--|--|-----------|------------|-----|---------|--|----------|------------|-----|--|--|--|-----------|-----|-------------------------|------|----------|-----------|-----|--|--|--|
| Insert holder | Insert | Insert holder | Insert | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1"> <thead> <tr> <th>CODE</th> <th>R</th> <th>Insert material</th> <th>Q'ty</th> <th>Work material</th> </tr> </thead> <tbody> <tr> <td>STV-C12055</td> <td>0.2</td> <td>Cermet</td> <td>10pcs.</td> <td>Steel</td> </tr> <tr> <td rowspan="3">Carbide shank</td> <td></td> <td>Carbide coating</td> <td></td> <td>Stainless</td> </tr> <tr> <td></td> <td>Cast iron</td> <td></td> <td>Aluminum</td> </tr> <tr> <td></td> <td>Aluminum</td> <td></td> <td></td> </tr> </tbody> </table> | CODE | R | Insert material | Q'ty | Work material | STV-C12055 | 0.2 | Cermet | 10pcs. | Steel | Carbide shank | | Carbide coating | | Stainless | | Cast iron | | Aluminum | | Aluminum | | | <table border="1"> <thead> <tr> <th>CODE</th> <th>R</th> <th>Insert material</th> <th>Q'ty</th> <th>Work material</th> </tr> </thead> <tbody> <tr> <td>TPE042-PA</td> <td>0.2</td> <td>Cermet</td> <td>10pcs.</td> <td>Steel</td> </tr> <tr> <td>-MKA</td> <td></td> <td>Carbide coating</td> <td></td> <td>Stainless</td> </tr> <tr> <td>-NA</td> <td></td> <td>Carbide</td> <td></td> <td>Cast iron</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td>Aluminum</td> </tr> </tbody> </table> | CODE | R | Insert material | Q'ty | Work material | TPE042-PA | 0.2 | Cermet | 10pcs. | Steel | -MKA | | Carbide coating | | Stainless | -NA | | Carbide | | Cast iron | | | | | Aluminum | <table border="1"> <thead> <tr> <th>CODE</th> <th>R</th> <th>Insert material</th> <th>Q'ty</th> <th>Work material</th> </tr> </thead> <tbody> <tr> <td>STV-C1208</td> <td>0.2</td> <td>Cermet</td> <td>10pcs.</td> <td>Steel</td> </tr> <tr> <td rowspan="5">Carbide shank</td> <td></td> <td>Carbide coating</td> <td></td> <td>Stainless</td> </tr> <tr> <td></td> <td>Cast iron</td> <td></td> <td>Aluminum</td> </tr> <tr> <td></td> <td>Aluminum</td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | CODE | R | Insert material | Q'ty | Work material | STV-C1208 | 0.2 | Cermet | 10pcs. | Steel | Carbide shank | | Carbide coating | | Stainless | | Cast iron | | Aluminum | | Aluminum | | | | | | | | | | | <table border="1"> <thead> <tr> <th>CODE</th> <th>R</th> <th>Insert material</th> <th>Q'ty</th> <th>Work material</th> </tr> </thead> <tbody> <tr> <td>TPE032-PA</td> <td>0.2</td> <td>Cermet</td> <td>10pcs.</td> <td>Steel</td> </tr> <tr> <td>TPE034-PA</td> <td>0.4</td> <td></td> <td></td> <td></td> </tr> <tr> <td>TPE032-MKA</td> <td>0.2</td> <td>Carbide coating</td> <td></td> <td>Stainless</td> </tr> <tr> <td>TPE034-MKA</td> <td>0.4</td> <td></td> <td></td> <td>Cast iron</td> </tr> <tr> <td>TPE032-NA</td> <td>0.2</td> <td>Carbide</td> <td></td> <td>Aluminum</td> </tr> <tr> <td>TPE034-NA</td> <td>0.4</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | CODE | R | Insert material | Q'ty | Work material | TPE032-PA | 0.2 | Cermet | 10pcs. | Steel | TPE034-PA | 0.4 | | | | TPE032-MKA | 0.2 | Carbide coating | | Stainless | TPE034-MKA | 0.4 | | | Cast iron | TPE032-NA | 0.2 | Carbide | | Aluminum | TPE034-NA | 0.4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CODE | R | Insert material | Q'ty | Work material | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| STV-C12055 | 0.2 | Cermet | 10pcs. | Steel | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Carbide shank | | Carbide coating | | Stainless | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Cast iron | | Aluminum | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Aluminum | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CODE | R | Insert material | Q'ty | Work material | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TPE042-PA | 0.2 | Cermet | 10pcs. | Steel | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -MKA | | Carbide coating | | Stainless | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -NA | | Carbide | | Cast iron | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | Aluminum | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CODE | R | Insert material | Q'ty | Work material | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| STV-C1208 | 0.2 | Cermet | 10pcs. | Steel | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Carbide shank | | Carbide coating | | Stainless | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Cast iron | | Aluminum | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Aluminum | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CODE | R | Insert material | Q'ty | Work material | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TPE032-PA | 0.2 | Cermet | 10pcs. | Steel | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TPE034-PA | 0.4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TPE032-MKA | 0.2 | Carbide coating | | Stainless | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TPE034-MKA | 0.4 | | | Cast iron | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TPE032-NA | 0.2 | Carbide | | Aluminum | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TPE034-NA | 0.4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1"> <thead> <tr> <th>CODE</th> <th>R</th> <th>Insert material</th> <th>Q'ty</th> <th>Work material</th> </tr> </thead> <tbody> <tr> <td>STV-C1210</td> <td>0.2</td> <td>Cermet</td> <td>10pcs.</td> <td>Steel</td> </tr> <tr> <td rowspan="6">Carbide shank</td> <td></td> <td>Carbide coating</td> <td></td> <td>Stainless</td> </tr> <tr> <td></td> <td>Cast iron</td> <td></td> <td>Aluminum</td> </tr> <tr> <td></td> <td>Aluminum</td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | CODE | R | Insert material | Q'ty | Work material | STV-C1210 | 0.2 | Cermet | 10pcs. | Steel | Carbide shank | | Carbide coating | | Stainless | | Cast iron | | Aluminum | | Aluminum | | | | | | | | | | | | | | | <table border="1"> <thead> <tr> <th>CODE</th> <th>R</th> <th>Insert material</th> <th>Q'ty</th> <th>Work material</th> </tr> </thead> <tbody> <tr> <td>TPE082-PA</td> <td>0.2</td> <td>Cermet</td> <td>10pcs.</td> <td>Steel</td> </tr> <tr> <td>TPE084-PA</td> <td>0.4</td> <td></td> <td></td> <td></td> </tr> <tr> <td>TPE082-MA</td> <td>0.2</td> <td>Carbide coating</td> <td></td> <td>Stainless</td> </tr> <tr> <td>TPE084-MA</td> <td>0.4</td> <td></td> <td></td> <td>Cast iron</td> </tr> <tr> <td>TPE082-KNA</td> <td>0.2</td> <td>Carbide</td> <td></td> <td>Aluminum</td> </tr> <tr> <td>TPE084-KNA</td> <td>0.4</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | CODE | R | Insert material | Q'ty | Work material | TPE082-PA | 0.2 | Cermet | 10pcs. | Steel | TPE084-PA | 0.4 | | | | TPE082-MA | 0.2 | Carbide coating | | Stainless | TPE084-MA | 0.4 | | | Cast iron | TPE082-KNA | 0.2 | Carbide | | Aluminum | TPE084-KNA | 0.4 | | | | <table border="1"> <thead> <tr> <th>CODE</th> <th>R</th> <th>Insert material</th> <th>Q'ty</th> <th>Work material</th> </tr> </thead> <tbody> <tr> <td>STV-C1212</td> <td>0.2</td> <td>Cermet</td> <td>10pcs.</td> <td>Steel</td> </tr> <tr> <td rowspan="6">Carbide shank</td> <td></td> <td>Carbide coating</td> <td></td> <td>Stainless</td> </tr> <tr> <td></td> <td>Cast iron</td> <td></td> <td>Aluminum</td> </tr> <tr> <td></td> <td>Aluminum</td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | CODE | R | Insert material | Q'ty | Work material | STV-C1212 | 0.2 | Cermet | 10pcs. | Steel | Carbide shank | | Carbide coating | | Stainless | | Cast iron | | Aluminum | | Aluminum | | | | | | | | | | | | | | | <table border="1"> <thead> <tr> <th>CODE</th> <th>R</th> <th>Insert material</th> <th>Q'ty</th> <th>Work material</th> </tr> </thead> <tbody> <tr> <td>TPE112-PA</td> <td>0.2</td> <td>Cermet</td> <td>10pcs.</td> <td>Steel</td> </tr> <tr> <td>TPE114-PA</td> <td>0.4</td> <td></td> <td></td> <td></td> </tr> <tr> <td>TPE112-MA</td> <td>0.2</td> <td>Carbide coating</td> <td></td> <td>Stainless</td> </tr> <tr> <td>TPE114-MA</td> <td>0.4</td> <td></td> <td></td> <td>Cast iron</td> </tr> <tr> <td>TPE112-KNA</td> <td>0.2</td> <td>Carbide</td> <td></td> <td>Aluminum</td> </tr> <tr> <td>TPE114-KNA</td> <td>0.4</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | CODE | R | Insert material | Q'ty | Work material | TPE112-PA | 0.2 | Cermet | 10pcs. | Steel | TPE114-PA | 0.4 | | | | TPE112-MA | 0.2 | Carbide coating | | Stainless | TPE114-MA | 0.4 | | | Cast iron | TPE112-KNA | 0.2 | Carbide | | Aluminum | TPE114-KNA | 0.4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CODE | R | Insert material | Q'ty | Work material | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| STV-C1210 | 0.2 | Cermet | 10pcs. | Steel | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Carbide shank | | Carbide coating | | Stainless | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Cast iron | | Aluminum | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Aluminum | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CODE | R | Insert material | Q'ty | Work material | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TPE082-PA | 0.2 | Cermet | 10pcs. | Steel | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TPE084-PA | 0.4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TPE082-MA | 0.2 | Carbide coating | | Stainless | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TPE084-MA | 0.4 | | | Cast iron | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TPE082-KNA | 0.2 | Carbide | | Aluminum | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TPE084-KNA | 0.4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CODE | R | Insert material | Q'ty | Work material | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| STV-C1212 | 0.2 | Cermet | 10pcs. | Steel | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Carbide shank | | Carbide coating | | Stainless | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Cast iron | | Aluminum | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Aluminum | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CODE | R | Insert material | Q'ty | Work material | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TPE112-PA | 0.2 | Cermet | 10pcs. | Steel | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TPE114-PA | 0.4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TPE112-MA | 0.2 | Carbide coating | | Stainless | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TPE114-MA | 0.4 | | | Cast iron | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TPE112-KNA | 0.2 | Carbide | | Aluminum | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TPE114-KNA | 0.4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1"> <thead> <tr> <th>CODE</th> <th>R</th> <th>Insert material</th> <th>Q'ty</th> <th>Work material</th> </tr> </thead> <tbody> <tr> <td>STV-C1214</td> <td>0.2</td> <td>Cermet</td> <td>10pcs.</td> <td>Steel</td> </tr> <tr> <td rowspan="6">Carbide shank</td> <td></td> <td>Carbide coating</td> <td></td> <td>Stainless</td> </tr> <tr> <td></td> <td>Cast iron</td> <td></td> <td>Aluminum</td> </tr> <tr> <td></td> <td>Aluminum</td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | CODE | R | Insert material | Q'ty | Work material | STV-C1214 | 0.2 | Cermet | 10pcs. | Steel | Carbide shank | | Carbide coating | | Stainless | | Cast iron | | Aluminum | | Aluminum | | | | | | | | | | | | | | | <table border="1"> <thead> <tr> <th>CODE</th> <th>R</th> <th>Insert material</th> <th>Q'ty</th> <th>Work material</th> </tr> </thead> <tbody> <tr> <td>TPE112-PA</td> <td>0.2</td> <td>Cermet</td> <td>10pcs.</td> <td>Steel</td> </tr> <tr> <td>TPE114-PA</td> <td>0.4</td> <td></td> <td></td> <td></td> </tr> <tr> <td>TPE112-MA</td> <td>0.2</td> <td>Carbide coating</td> <td></td> <td>Stainless</td> </tr> <tr> <td>TPE114-MA</td> <td>0.4</td> <td></td> <td></td> <td>Cast iron</td> </tr> <tr> <td>TPE112-KNA</td> <td>0.2</td> <td>Carbide</td> <td></td> <td>Aluminum</td> </tr> <tr> <td>TPE114-KNA</td> <td>0.4</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | CODE | R | Insert material | Q'ty | Work material | TPE112-PA | 0.2 | Cermet | 10pcs. | Steel | TPE114-PA | 0.4 | | | | TPE112-MA | 0.2 | Carbide coating | | Stainless | TPE114-MA | 0.4 | | | Cast iron | TPE112-KNA | 0.2 | Carbide | | Aluminum | TPE114-KNA | 0.4 | | | | <table border="1"> <thead> <tr> <th>CODE</th> <th>R</th> <th>Insert material</th> <th>Q'ty</th> <th>Work material</th> </tr> </thead> <tbody> <tr> <td>STV1216</td> <td>0.2</td> <td>Cermet</td> <td>10pcs.</td> <td>Steel</td> </tr> <tr> <td rowspan="10">Steel shank</td> <td></td> <td>Carbide</td> <td></td> <td>Stainless</td> </tr> <tr> <td></td> <td>Cast iron</td> <td></td> <td>Aluminum</td> </tr> <tr> <td></td> <td>Aluminum</td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | CODE | R | Insert material | Q'ty | Work material | STV1216 | 0.2 | Cermet | 10pcs. | Steel | Steel shank | | Carbide | | Stainless | | Cast iron | | Aluminum | | Aluminum | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | <table border="1"> <thead> <tr> <th>CODE</th> <th>R</th> <th>Insert material</th> <th>Q'ty</th> <th>Work material</th> </tr> </thead> <tbody> <tr> <td>TPC092-PA</td> <td>0.2</td> <td>Cermet</td> <td>10pcs.</td> <td>Steel</td> </tr> <tr> <td>TPC094-PA</td> <td>0.4</td> <td></td> <td></td> <td></td> </tr> <tr> <td>TPC092-MA</td> <td>0.2</td> <td>Carbide</td> <td></td> <td>Stainless</td> </tr> <tr> <td>TPC094-MA</td> <td>0.4</td> <td></td> <td></td> <td>Cast iron</td> </tr> <tr> <td>TPC092-KNA</td> <td>0.2</td> <td>Carbide</td> <td></td> <td>Aluminum</td> </tr> <tr> <td>TPC094-KNA</td> <td>0.4</td> <td></td> <td></td> <td></td> </tr> <tr> <td>TPC092-ND</td> <td>0.2</td> <td>Polycrystalline diamond</td> <td>1pc.</td> <td>Aluminum</td> </tr> <tr> <td>TPC094-ND</td> <td>0.4</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | CODE | R | Insert material | Q'ty | Work material | TPC092-PA | 0.2 | Cermet | 10pcs. | Steel | TPC094-PA | 0.4 | | | | TPC092-MA | 0.2 | Carbide | | Stainless | TPC094-MA | 0.4 | | | Cast iron | TPC092-KNA | 0.2 | Carbide | | Aluminum | TPC094-KNA | 0.4 | | | | TPC092-ND | 0.2 | Polycrystalline diamond | 1pc. | Aluminum | TPC094-ND | 0.4 | | | |
| CODE | R | Insert material | Q'ty | Work material | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| STV-C1214 | 0.2 | Cermet | 10pcs. | Steel | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Carbide shank | | Carbide coating | | Stainless | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Cast iron | | Aluminum | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Aluminum | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CODE | R | Insert material | Q'ty | Work material | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TPE112-PA | 0.2 | Cermet | 10pcs. | Steel | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TPE114-PA | 0.4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TPE112-MA | 0.2 | Carbide coating | | Stainless | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TPE114-MA | 0.4 | | | Cast iron | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TPE112-KNA | 0.2 | Carbide | | Aluminum | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TPE114-KNA | 0.4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CODE | R | Insert material | Q'ty | Work material | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| STV1216 | 0.2 | Cermet | 10pcs. | Steel | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Steel shank | | Carbide | | Stainless | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Cast iron | | Aluminum | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Aluminum | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CODE | R | Insert material | Q'ty | Work material | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TPC092-PA | 0.2 | Cermet | 10pcs. | Steel | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TPC094-PA | 0.4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TPC092-MA | 0.2 | Carbide | | Stainless | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TPC094-MA | 0.4 | | | Cast iron | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TPC092-KNA | 0.2 | Carbide | | Aluminum | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TPC094-KNA | 0.4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TPC092-ND | 0.2 | Polycrystalline diamond | 1pc. | Aluminum | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TPC094-ND | 0.4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

For inclined hole

S-STA12


| Boring diameter $\phi 48 \sim 80$ | | | | | |
|-----------------------------------|-----------|--------|-------------------------|--------|---------------|
| Insert holder | | Insert | | | |
| CODE | CODE | R | Insert material | Q'ty | Work material |
| S-STA12 | TPC112-PA | 0.2 | Cermet | 10pcs. | Steel |
| | TPC114-PA | 0.4 | | | |
| | TPC112-MA | 0.2 | Carbide | | Stainless |
| | TPC114-MA | 0.4 | | | |
| | TPC112-KA | 0.2 | Cast iron | | |
| | TPC114-KA | 0.4 | | | |
| | TPC112-NA | 0.2 | Aluminum | | |
| | TPC114-NA | 0.4 | | | |
| | TPC112-ND | 0.2 | Polycrystalline diamond | | 1pc. |
| | TPC114-ND | 0.4 | | | |

Steel shank



3.5 6.35
t = 3.18

Insert and insert holder set

| CODE | Insert holder | Q'ty | Insert | Q'ty | Work material |
|-------|---------------|------|------------|--------|-----------------------|
| PJ-45 | STV1216 | 1pc. | TPC094-PA | 10pcs. | Steel |
| | S-STA12 | | TPC114-PA | | |
| KJ-45 | STV1216 | 1pc. | TPC094-KNA | 10pcs. | Cast iron Aluminum |
| | S-STA12 | | TPC114-KA | | |

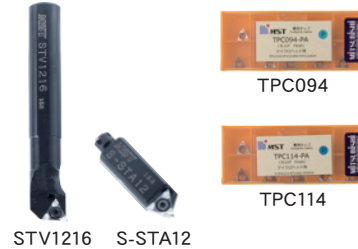

MICRO HEAD MBJ70 type (MBJ70)

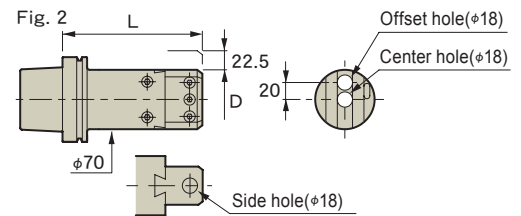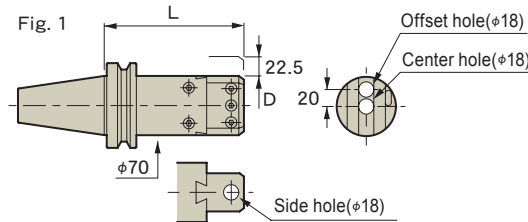

| CODE | Fig. | Chucking range(φD) | L | Kg |
|----------------|------|--------------------|-----|-----|
| BT40-MBJ70-165 | 1 | 22~205 | 165 | 4.2 |
| BT50-MBJ70-165 | 1 | 22~205 | 165 | 6.5 |
| A63 -MBJ70-195 | 2 | 22~205 | 195 | 4.6 |
| A100-MBJ70-165 | 2 | 22~205 | 165 | 5.4 |

Option

- Insert • Insert holder • Insert and insert holder set
- Clamping sleeve • Retention knob (BT) → P.64

Std. Access.

- Wrench set • Coolant duct (Fixed)(HSK-A) → P.104

Note

- Swing type coolant ducts are available upon request. For details, please contact us.
- Drive key slot and insertion direction are in alignment.
- The throw-away insert for aluminum is a diamond insert. Sales unit is per 1 piece.

Insert holder, Insert

For center hole · inclined hole

S-STV1822

| Boring diameter $\phi 22 \sim 107$ | | | | | |
|------------------------------------|-----------|--------|-------------------------|--------|---------------|
| Insert holder | | Insert | | | |
| CODE | CODE | R | Insert material | Q'ty | Work material |
| S-STV1822 | TPC112-PA | 0.2 | Cermet | 10pcs. | Steel |
| | TPC114-PA | 0.4 | | | |
| | TPC112-MA | 0.2 | Carbide | | Stainless |
| | TPC114-MA | 0.4 | | | |
| | TPC112-KA | 0.2 | Cast iron | | |
| | TPC114-KA | 0.4 | | | |
| | TPC112-NA | 0.2 | Aluminum | | |
| | TPC114-NA | 0.4 | | | |
| | TPC112-ND | 0.2 | Polycrystalline diamond | | 1pc. |
| | TPC114-ND | 0.4 | | | |

Steel shank

Center hole 70
Boring diameter $\phi 22 \sim 67$

Offset hole 70
Boring diameter $\phi 67 \sim 107$

3.5 6.35
t = 3.18

For side hole

Boring diameter $\phi 100 \sim 205$

STH18

| Insert holder | | Insert | | | |
|---------------|-----------|-------------------------|-----------------|--------|---------------|
| CODE | CODE | R | Insert material | Q'ty | Work material |
| STH18 | CCD094-PA | 0.4 | Carbide coating | 10pcs. | Steel |
| | CCD094-MA | | | | |
| | CCD094-KA | Carbide | Cast iron | | |
| | CCD094-NA | | | | |
| | CCD094-ND | Polycrystalline diamond | 1pc. | | Aluminum |

Steel shank

4 A D

9.525 4.4
R t = 3.97

| A | φD |
|----|---------|
| 15 | 100~145 |
| 35 | 140~185 |
| 45 | 160~205 |

Insert and insert holder set

| CODE | Insert holder | Q'ty | Insert | Q'ty | Work material |
|-------|---------------|------|-----------|--------|---------------|
| PJ-70 | S-STV1822 | 1pc. | TPC114-PA | 10pcs. | Steel |
| | STH18 | | CCD094-PA | | |
| KJ-70 | S-STV1822 | 1pc. | TPC114-KA | 10pcs. | Cast iron |
| | STH18 | | CCD094-KA | | |



Cutting data

MFA type

| | | | |
|--|--|---|---|
| <p>S45C - Finishing - Insert : TPA084-PA (Nose R0.4)</p> <p>n 3317 min⁻¹ Vf 331 mm/min Vc 250 m/min f 0.1 mm/rev</p> <p>BT50-MFA24-270</p> | <p>SUS304 - Finishing - Insert : TPA084-MA (Nose R0.4)</p> <p>n 1326 min⁻¹ Vf 132 mm/min Vc 100 m/min f 0.1 mm/rev</p> <p>BT50-MFA24-240</p> | <p>FC250 - Finishing - Insert : TPA084-KA (Nose R0.4)</p> <p>n 636 min⁻¹ Vf 63 mm/min Vc 100 m/min f 0.1 mm/rev</p> <p>BT50-MFA50-300</p> | <p>A5056 - Finishing - Insert : TPA084-NA (Nose R0.4)</p> <p>n 3538 min⁻¹ Vf 353 mm/min Vc 400 m/min f 0.1 mm/rev</p> <p>BT50-MFA36-300</p> |
|--|--|---|---|

MBH type

| | | | |
|--|--|---|---|
| <p>S45C - Semi-finishing - Insert : TNB168-PB (Nose R0.8) Cartridge : PTC12</p> <p>n 575 min⁻¹ Vf 86 mm/min Vc 150 m/min f 0.15 mm/rev</p> <p>BT50-MBH75-315</p> | <p>SUS304 - Semi-finishing - Insert : TNB168-MB (Nose R0.8) Cartridge : PTC12</p> <p>n 383 min⁻¹ Vf 57 mm/min Vc 100 m/min f 0.15 mm/rev</p> <p>BT50-MBH75-315</p> | <p>FC250 - Semi-finishing - Insert : TNB168-KB (Nose R0.8) Cartridge : PTC12</p> <p>n 383 min⁻¹ Vf 57 mm/min Vc 100 m/min f 0.15 mm/rev</p> <p>BT50-MBH75-315</p> | <p>A5056 - Semi-finishing - Insert : TPC164-NA (Nose R0.4) Cartridge : STGP12</p> <p>n 806 min⁻¹ Vf 120 mm/min Vc 200 m/min f 0.15 mm/rev</p> <p>BT50-MBH75-315</p> |
| <p>S45C - Finishing - Insert : TPC164-PA (Nose R0.4) Cartridge : STGP12</p> <p>n 1057 min⁻¹ Vf 105 mm/min Vc 250 m/min f 0.1 mm/rev</p> <p>BT50-MBH75-315</p> | <p>SUS304 - Finishing - Insert : TPC164-MA (Nose R0.4) Cartridge : STGP12</p> <p>n 507 min⁻¹ Vf 50 mm/min Vc 120 m/min f 0.1 mm/rev</p> <p>BT50-MBH75-315</p> | <p>FC250 - Finishing - Insert : TPC164-KA (Nose R0.4) Cartridge : STGP12</p> <p>n 507 min⁻¹ Vf 50 mm/min Vc 120 m/min f 0.1 mm/rev</p> <p>BT50-MBH75-315</p> | <p>A5056 - Finishing - Insert : TPC164-NA (Nose R0.4) Cartridge : STGP12</p> <p>n 1693 min⁻¹ Vf 169 mm/min Vc 400 m/min f 0.1 mm/rev</p> <p>BT50-MBH75-315</p> |

MBJ type

| | | | |
|--|--|--|--|
| <p>S45C - Finishing - Insert : TPE032-PA (Nose R0.2) Insert holder : STV-C1208</p> <p>n 3107 min⁻¹ Vf 186 mm/min Vc 80 m/min f 0.06 mm/rev</p> <p>BT40-MBJ45-150</p> | <p>SUS304 - Finishing - Insert : TPE032-MKA (Nose R0.2) Insert holder : STV-C1208</p> <p>n 1165 min⁻¹ Vf 69 mm/min Vc 30 m/min f 0.06 mm/rev</p> <p>BT40-MBJ45-150</p> | <p>FC250 - Finishing - Insert : TPE032-MKA (Nose R0.2) Insert holder : STV-C1208</p> <p>n 3107 min⁻¹ Vf 186 mm/min Vc 80 m/min f 0.06 mm/rev</p> <p>BT40-MBJ45-150</p> | <p>A5056 - Finishing - Insert : TPE032-NA (Nose R0.2) Insert holder : STV-C1208</p> <p>n 6602 min⁻¹ Vf 396 mm/min Vc 170 m/min f 0.06 mm/rev</p> <p>BT40-MBJ45-150</p> |
|--|--|--|--|

Retention knob





Caution

- Retention knobs in this catalog are typical models for various machine tool companies. Confirm the correct retention knob design refer to the machine specification sheet.
- We manufacture other kinds of retention knobs. Please contact us for the details.

| Machine manufacturers | Standard type | | | | | | For through spindle coolant type | | |
|------------------------|---------------------|-----------------------------------|---------------------------|-----------------------------------|-------------------------------|-----------------------------------|----------------------------------|---------|-----------------------|
| | BT30 | | BT40 | | BT50 | | BT30 | BT40 | BT50 |
| | Standard | Standard type with a through hole | Standard | Standard type with a through hole | Standard | Standard type with a through hole | | | |
| OKUMA | - | | P40T-2 (MB series) | P-339 | P50T-2 | P-419 | - | P-499 | P-419 |
| | | | P40T-1 (MILLAC series) | P-297 | | | | | |
| OKK | - | | P40T-1 | - | P-143 | - | - | - | - |
| OHTORI | - | | P40T-1 | P-297 | P50T-1 | P-299 | - | - | - |
| KITAMURA | P30T-1 | P-445 | P-348 | P-323-1 | P-400 | | - | P-323-1 | P-400 |
| | P-399(Mycenter-1Xi) | | | | | | | | |
| KIRA | P30T-1 | P-445 | P40T-1 | P-297 | - | | - | P-323-1 | - |
| KIWA | P30T-1 | P-445 | P-348 | P-323-1 | P-400 | | - | P-323-1 | P-400 |
| KURASHIKI | - | | P40T-1 | P-297 | P50T-1 | P-299 | - | - | - |
| KOMATSU NTC | P30T-1 | P-445 | P40T-1 | P-297 | P50T-1 | P-299 | P-522 | P-505 | P-384 |
| JTEKT | - | | P40T-1 | P-297 | P50T-1 | P-299 | - | P-297 | P-299 |
| SHIZUOKA | P30T-1 | P-445 | P-141 | P-498 | P-143 | P-402 | - | - | - |
| SNK | - | | P40T-2 | P-339 | P50T-2 | P-419 | - | - | - |
| SUGINO | P30T-2 | P-497 | - | | - | | - | - | - |
| DMG MORI | P30T-1 | P-445 | P-141 | - | P-143 | - | - | P-435 | P-513 |
| TOSHIBA MACHINE | - | | - | | P50T-1 | P-299 | - | - | - |
| NIIGATA MACHINE TECHNO | - | | - | | P50T-2 | P-419 | - | - | - |
| FANUC | P30T-1 | P-522 | - | | - | | P-522 | - | - |
| BROTHER | P30T-2 | P-511 | - | | - | | P-511 | - | - |
| HOWA | P30T-1 | P-445 | P40T-1 | P-297 | P50T-1 | P-299 | - | - | - |
| MAKINO | - | | P40T-1 | P-297 (V-series) | P50T-1 | P-299 (A, MCC, V-series) | - | P-323-1 | P-299 |
| | | | P-348 | P-323-1 (a-series, D-series) | P-400 (A-series, a-series) | | | | |
| MATSUURA | P30T-2 | P-511 | P-348 | P-323-1 | P50T-2 | P-419 | - | P-323-1 | - |
| | P-399 | | | | P-400 | | | | |
| MITSUI SEIKI | - | | P-007 | - | P-008 | P-250 | - | - | - |
| MITSUBISHI | - | | P40T-1 | - | P50T-2 | - | - | - | - |
| YASDA | - | | P-348 | P-438 | P50T-1 | P-299 | - | P-509 | P-459 |
| | | | | | P-400 (YBM1218V) | | | - | P-288-1 (YBM1218V) |
| YAMAZAKI GIKEN | - | | P40T-1 | P-297 | P50T-2 | P-419 | - | - | - |
| MAZAK | - | | P-227 | | P-514 | | - | P-227 | P-514 |




BT30



| CODE | φD | φd | θ | Note |
|---------------|-----|-----|----|------------------------|
| P30T-1 | 7 | - | 45 | MAS-1 |
| P-445 | | 3 | | P30T-1 through hole |
| P30T-2 | | - | 60 | MAS-2 |
| P-497 | | 2 | | P30T-2 through hole |
| -522 | 8 | 4 | 45 | FANUC center-through |
| -511 | 7.5 | 2.5 | 60 | BROTHER center-through |

| CODE | Note |
|--------------|--------|
| P-399 | JIS30P |



BT40



| CODE | φd | θ | Note |
|---------------|----|----|---------------------------|
| P40T-1 | - | 45 | MAS-1 |
| P-297 | 4 | | P40T-1 through hole |
| P40T-2 | - | 60 | MAS-2 |
| P-339 | 4 | | P40T-2 through hole |
| -141 | - | 90 | - |
| -498 | 4 | | P-141 through hole |
| -505 | 3 | 45 | KOMATSU NTCcenter-through |

| CODE | φd | Note |
|---------------|----|----------------------|
| P-348 | - | JIS40P |
| -323-1 | 7 | P-348 through hole |
| -499 | 4 | OKUMA center-through |
| -438 | 7 | YASDA through hole |
| -509 | | YASDA center-through |




| CODE | Note |
|--------------|--------------|
| P-007 | MITSUI SEIKI |



| CODE | Note |
|--------------|-------|
| P-227 | MAZAK |

| CODE | Note |
|--------------|-------------------------|
| P-435 | DMG MORI center-through |


BT50

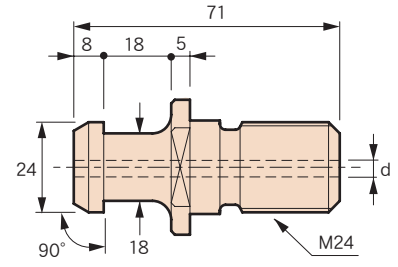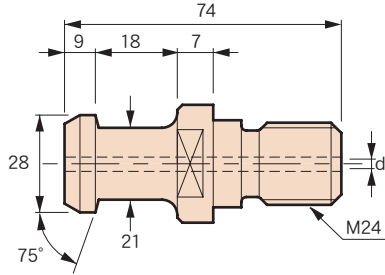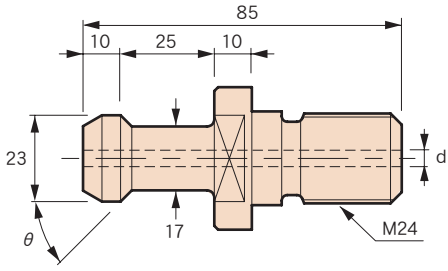

| CODE | φd | θ | Note |
|---------------|-----|----|----------------------------|
| P50T-1 | - | 45 | MAS-1 |
| P-299 | 6 | | P50T-1 through hole |
| P50T-2 | - | 60 | MAS-2 |
| P-419 | 6 | | P50T-2 through hole |
| -143 | - | 90 | - |
| -402 | 7 | | P-143 through hole |
| -459 | | 45 | YASDA center-through |
| -513 | 8 | 90 | DMG MORI center-through |
| -384 | 5.5 | 45 | KOMATSU NTC center-through |

| CODE | φd | Note |
|---------------|----|--------------------|
| P-400 | 10 | JIS50P |
| -288-1 | 6 | P-400 through hole |

| CODE | φd | Note |
|--------------|----|--------------------|
| P-008 | - | mitsui seiki |
| -250 | 8 | P-008 through hole |

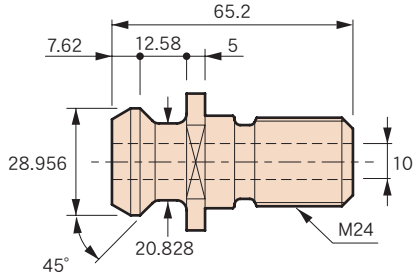

| CODE | Note |
|--------------|-------|
| P-514 | MAZAK |

HSK-T Tooling Systems for Turning Mill

**World
standard
ISO**
for Turning Mill
HSK
TOOLING SYSTEM

Set screw holders for Round shank

For through-spindle coolant
CC type



For nozzle-coolant
CN type



➔ P.69

Insert holders for Square-shank


For external turning and cutting off
SV type



For external / face turning
SA type



For external / face turning
SB type



For external / face turning
SC type



For external / face turning
SN type



For face turning
SH type



➔ P.70

BLANK TOOL

CHECKING ARBOR



➔ P.72




➔ P.72



HSK-T TOOLING SYSTEMS for TURNING MILL

The obvious choice for ISO standard, HSK-T specs turning mill spindles!!

- ▷ A full range of milling tool holders, covering 70% of multi-tasking machine applications!
- ▷ Compatible with machining center holders!
- ▷ Supplied by tool holder manufacturer world wide!
- ▷ Extensive line-up and reasonable price!

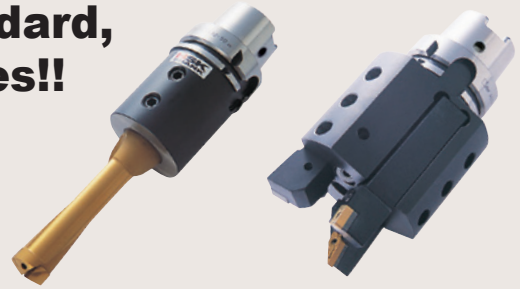


Standardized by many machine tool manufacturers!

| | | | |
|--|---|--|---|
| OKUMA · MULTUS SERIES · MACTURN SERIES etc | DMG MORI · NT (NTX) Series · FD Series · CTX Series | Nakamura-tome Precision Industry · Super NTJX Series · Super NTMX Series etc | YAMAZAKI MAZAK · INTEGREX i Series J Series e Series etc |
| MATSUURA MACHINERY CORPORATION · CUBLEX Series | HERMLE · MT Series | HORKOS · NS70 Version | |

Turning tools (HSK-T standard)



Maintains high precision during turning operation

By using an ICTM tool holder, which minimizes the gap between the machine spindle drive key and tool holder drive key way, the height of the cutting edge is maintained precisely and variation in workpiece diameter is minimized.

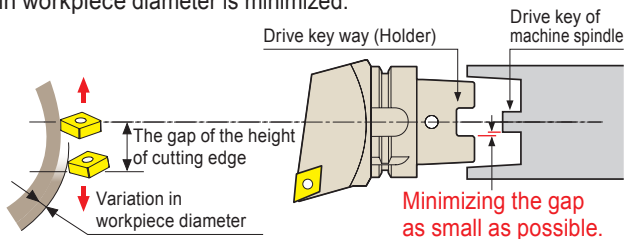

High bending rigidity


During turning, the cutting force of a spindle axis becomes very large. Therefore, a rigid, two-face-contact clamping system performs very well.

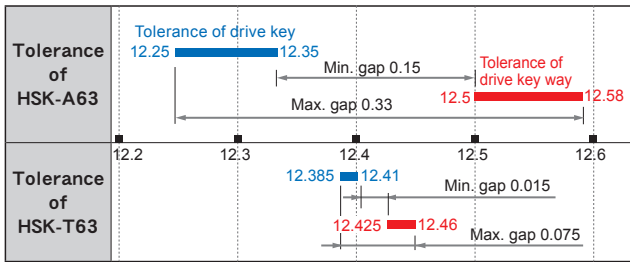

Designed to shorten undercut area

We made an undercut area thicker and as short as possible in order to increase the holder rigidity.

Improved rigidity!




Undercut area
 Width 4 mm
 Depth 0.5 mm

Rotating tools (HSK-A standard)


Compatible with machining center

Needless to say, the holder of a machining center and a turning mill machine can be shared.

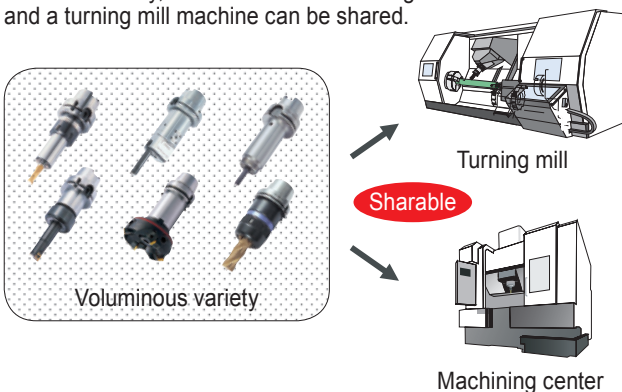

Pre-balanced design

The HSK-A-type shank is unbalanced in its standard form, but at MST we have applied our original pre-balancing to make the tool holders applicable for high-speed machining. According to DIN standards, only the area marked with ※ in the hollow shank needs to be finished. However, MST provides perfect finishing for all areas after heat treatment in order to improve balance.

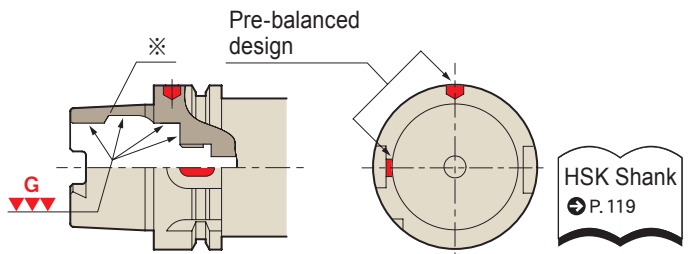



HSK Shank
 P. 119

Set screw holders for Round shank

CC type for through-spindle coolant



T63-CC32-90





| CODE | L | φD | φC | H ₁ | M | Kg |
|-----------------------|-----|----|----|----------------|-----|-----|
| T40 -CC32- 90 | 90 | 32 | 58 | 62 | M12 | 1.2 |
| T50 -CC32- 85 | 85 | 32 | 62 | 62 | M12 | 1.4 |
| T63 -CC32- 90 | 90 | 32 | 62 | 62 | M12 | 1.6 |
| -CC40-100 | 100 | 40 | 68 | 72 | | 2 |
| T100 -CC40-105 | 105 | 40 | 82 | 72 | M12 | 4.5 |
| -CC50-115 | 115 | 50 | 92 | 82 | M14 | 5.3 |

- **Option**
 - Sleeve for set screw holder (SS)
- **Std. Access.**
 - Coolant duct→P.104
- **Note**
 - Available for both boring bar and indexable drill.

CN type for nozzle-coolant




T63-CN32-95

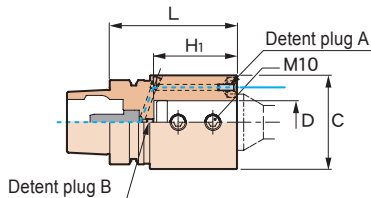

| CODE | L | φD | φC | H ₁ | M | Kg |
|-----------------------|-----|----|----|----------------|-----|-----|
| T40 -CN32- 95 | 95 | 32 | 70 | 62 | M12 | 2 |
| T50 -CN32-100 | 100 | 32 | 70 | 62 | M12 | 2.1 |
| T63 -CN32- 95 | 95 | 32 | 70 | 62 | M12 | 2.2 |
| -CN40-105 | 105 | 40 | 78 | 71 | | 2.7 |
| T100 -CN40-115 | 115 | 40 | 82 | 72 | M12 | 4.9 |
| -CN50-125 | 125 | 50 | 92 | 82 | M14 | 5.8 |

- **Option**
 - Sleeve for set screw holder (SS)
- **Std. Access.**
 - Coolant duct→P.104
 - Detent plug for a nozzle A = Set screw (M5-12L)
 - Detent plug for Center through B = Set screw (M5-5L)
- **Note**
 - The coolant nozzle direction is adjustable.
 - Nozzle-coolant type is available for through-spindle coolant.
 - Available for both boring bar and indexable drill.

Sleeve for set screw holders





| CODE | L | φD | φC ₁ | φC ₂ | H ₁ | G |
|----------------|----|----|-----------------|-----------------|----------------|-----|
| SS32- 8 | 55 | 8 | 38 | 32 | 35 | M 6 |
| -10 | | | | | 40 | M 8 |
| -12 | | | | | 45 | |
| -16 | | | | | 50 | |
| -20 | | | | | | |
| -25 | | | | | 58 | ※ |
| SS40- 8 | 60 | 8 | 46 | 40 | 35 | M 6 |
| -10 | | | | | 40 | M 8 |
| -12 | | | | | 45 | |
| -16 | | | | | 50 | |
| -20 | | | | | | M10 |
| -25 | | | | | 58 | |
| -32 | | | | | 62 | ※ |

- **Note**
 - Items marked with ※ in the G section of the list means they are screw-tightening type.
 - Available for both boring bar and indexable drill.

Insert holders for Square-shank

SV type for external turning and cutting off

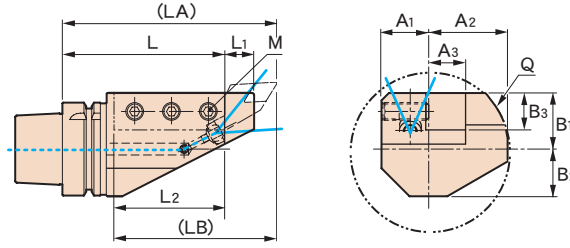

| CODE | L | L ₁ | L ₂ | (LA) | (LB) | A ₁ | A ₂ | A ₃ | B ₁ | B ₂ | B ₃ | M | Q | kg |
|--------------------------|-----|----------------|----------------|------|------|----------------|----------------|----------------|----------------|----------------|----------------|-----|-----|-----|
| T40 -SV2020R- 90 | 90 | 15 | 60 | 120 | 90 | 24.5 | 39 | 20 | 25 | 22 | 20 | M10 | 78 | 1.5 |
| -SV2020L- 90 | | | | | | | | | | | | | | |
| T50 -SV2020R- 95 | 95 | 15 | 60 | 125 | 90 | 25 | 43.5 | 20 | 25 | 25 | 20 | M10 | 87 | 1.9 |
| -SV2020L- 95 | | | | | | | | | | | | | | |
| T63 -SV2020R-105 | 105 | 20 | 70 | 135 | 100 | 32 | 45 | 20 | 33 | 32 | 20 | M12 | 90 | 2.7 |
| -SV2020L-105 | | | | | | | | | | | | | | |
| -SV2525R-105※ | | | | | | | | 105 | 135 | 45 | 28 | | 90 | 2.7 |
| -SV2525L-105※ | | | | | | | | | | | | | | |
| -SV2525R-105D | 115 | 145 | 53.5 | 38 | 108 | 3.3 | | | | | | | | |
| -SV2525L-105D | | | | | | | | | | | | | | |
| -SV2525R-115 | 115 | 145 | 53.5 | 38 | 108 | 3.3 | | | | | | | | |
| -SV2525L-115 | | | | | | | | | | | | | | |
| T100 -SV2525R-150 | 150 | 20 | 70 | 190 | 150 | 37 | 59 | 25 | 48 | 43 | 25 | M12 | 118 | 9.1 |
| -SV2525L-150 | | | | | | | | | | | | | | |
| -SV3232R-150 | | 25 | 100 | 195 | 145 | 40 | 68.5 | 32 | 47 | 32 | M14 | 137 | 9.3 | |
| -SV3232L-150 | | | | | | | | | | | | | | |



- **Std. Access.**
 ● Coolant duct→P.104

- **Note**
 ● The coolant nozzle direction is adjustable.

- **Caution**
 ● The maximum coolant pressure for the nozzle on the holder is 1.5MPa.
 ● The holder marked with ※ in the chart cannot be installed on the Mazak INTEGREX I and J series.

SA type for external / face turning

The multi-inserts type holder reduces using holders quantity, it saves A.T.C. magazine pot.

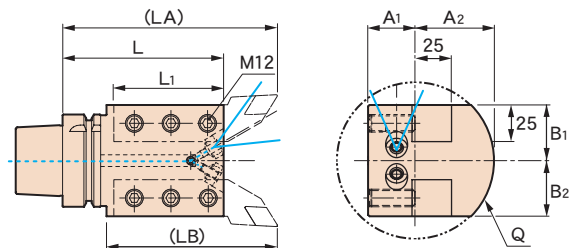

| CODE | L | L ₁ | (LA) | (LB) | A ₁ | A ₂ | B ₁ | B ₂ | Q | kg |
|-------------------------|-----|----------------|------|------|----------------|----------------|----------------|----------------|-----|-----|
| T63 -SA2525-105※ | 105 | 70 | 135 | 100 | 32 | 54 | 38 | 38 | 108 | 3.7 |
| -115 | | | | | | | | | | |
| T100 -SA2525-150 | 150 | 70 | 185 | 105 | 37 | 59 | 48 | 48 | 118 | 9.3 |



- **Std. Access.**
 ● Coolant duct→P.104
 ● Detent plug for a nozzle=Set screw(M5-12L)(Ex.) When using only right-hand, plug the nozzle on the left-hand side.

- **Note**
 ● The coolant nozzle direction is adjustable.

- **Caution**
 ● The maximum coolant pressure for the nozzle on the holder is 1.5MPa.
 ● The holder marked with ※ in the chart cannot be installed on the Mazak INTEGREX I and J series.

SB type for external / face turning

The multi-inserts type holder reduces using holders quantity, it saves A.T.C. magazine pot.

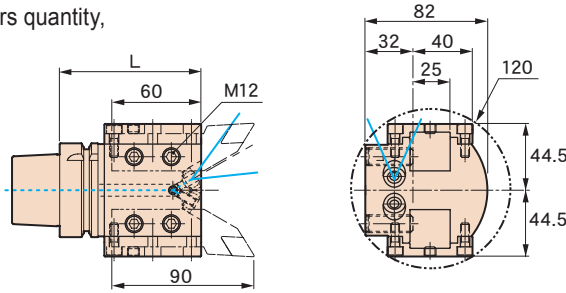

| CODE | L | Kg |
|-------------------------|-----|-----|
| T63-SB2525- 95 * | 95 | 3.2 |
| -105 | 105 | |

Std. Access.

- Coolant duct → P.104
- Detent plug for a nozzle = Set screw (M5-12L)
(Ex.) When using only right-hand, plug the nozzle on the left-hand side.

Note



- The coolant nozzle direction is adjustable.

Caution

- The maximum coolant pressure for the nozzle on the holder is 1.5MPa.
- The holder marked with * in the chart cannot be installed on the Mazak INTEGREX I and J series.

SC type for external / face turning

The multi-inserts type holder reduces using holders quantity, it saves A.T.C. magazine pot.

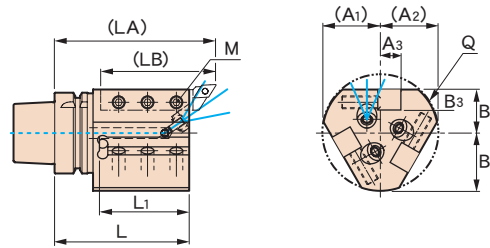

| CODE | L | L1 | (LA) | (LB) | (A1) | (A2) | A3 | B1 | B2 | B3 | M | Q | Kg |
|-------------------------|-----|----|------|------|------|------|----|----|------|----|-----|-----|-----|
| T40 -SC1616R- 90 | 90 | 60 | 110 | 80 | 38 | 38 | 16 | 30 | 38.5 | 16 | M10 | 77 | 1.7 |
| T50 -SC2020R- 95 | 95 | 60 | 125 | 90 | 44.5 | 44.5 | 20 | 35 | 45 | 20 | M10 | 90 | 2.4 |
| T63 -SC2020R-105 | 105 | 70 | 140 | 105 | 44.5 | 44.5 | 20 | 35 | 45 | 20 | M12 | 90 | 3.0 |
| T100-SC2525R-150 | 150 | 70 | 185 | 105 | 59 | 59 | 25 | 48 | 59 | 25 | M12 | 108 | 9.7 |

Std. Access.

- Coolant duct → P.104
- Detent plug for a nozzle = Set screw (M5-12L)



Note

- The coolant nozzle direction is adjustable.

Caution

- The maximum coolant pressure for the nozzle on the holder is 1.5MPa.

SN type for external / face turning

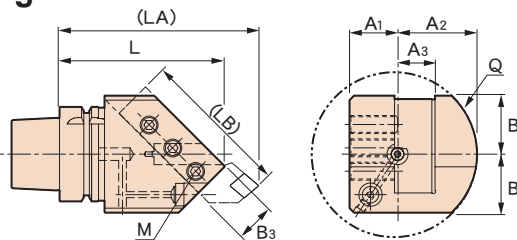

| CODE | L | (LA) | (LB) | A1 | A2 | A3 | B1 | B2 | B3 | M | Q | Kg |
|-------------------------|-----|------|------|----|----|----|----|----|----|-----|-----|-----|
| T40 -SN2020R-100 | 100 | 125 | 80 | 25 | 40 | 20 | 32 | 32 | 20 | M10 | 80 | 1.7 |
| T50 -SN2020R-110 | 110 | 135 | 85 | 25 | 45 | 20 | 35 | 35 | 20 | M10 | 90 | 2.2 |
| T63 -SN2020R-110 | 110 | 135 | 85 | 25 | 45 | 20 | 35 | 35 | 20 | M10 | 90 | 2.5 |
| -SN2020L-110 | | | | | | | | | | | | |
| -SN2525R-110 | | | | | | | | | | | | |
| -SN2525L-110 | | | | | | | | | | | | |
| T100-SN2525R-135 | 135 | 165 | 105 | 32 | 54 | 25 | 43 | 43 | 25 | M12 | 108 | 6.1 |
| -SN2525L-135 | | | | | | | | | | | | |
| -SN3232R-135 | | | | | | | | | | | | |
| -SN3232L-135 | | | | | | | | | | | | |

Std. Access.

- Coolant duct → P.104




Note

- The coolant nozzle direction is adjustable.

Caution

- The maximum coolant pressure for the nozzle on the holder is 1.5MPa.

SH type for face turning

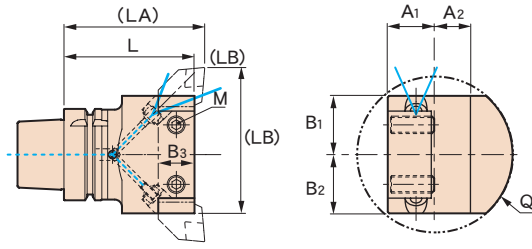


| CODE | L | (LA) | (LB) | A ₁ | A ₂ | B ₁ | B ₂ | B ₃ | M | Q | Kg |
|-------------------------|-----|------|------|----------------|----------------|----------------|----------------|----------------|-----|-----|-----|
| T40 -SH2020- 75 | 75 | 79 | 70 | 25 | 20 | 25 | 25 | 20 | M12 | 80 | 1.2 |
| -120 | 120 | 124 | | | | | | | | | 1.6 |
| T50 -SH2020- 90 | 90 | 94 | 75 | 25 | 20 | 27.5 | 27.5 | 20 | M12 | 90 | 1.8 |
| -120 | 120 | 124 | | | | | | | | | 2.3 |
| T63 -SH2020- 90 | 90 | 94 | 80 | 32 | 20 | 30 | 30 | 20 | M12 | 90 | 2.5 |
| -SH2525- 90 | | 97 | | | | | | | | | 100 |
| -120 | | 120 | 127 | | | | | | | | 3.6 |
| T100 -SH2525-105 | 105 | 112 | 120 | 32 | 25 | 48 | 48 | 25 | M12 | 118 | 6.1 |
| -150 | 150 | 157 | | | | | | | | | 8.8 |
| -SH3232-105 | 105 | 113 | 145 | 40 | 32 | 57 | 57 | 32 | M14 | 148 | 7.7 |


- **Std. Access.**
- Coolant duct → P.104
 - Detent plug for a nozzle = Set screw (M5-12L)
(Ex.) When using only right-hand, plug the nozzle on the left-hand side.
- **Note**
- The coolant nozzle direction is adjustable.

- **Caution**
- The maximum coolant pressure for the nozzle on the holder is 1.5MPa.

BLANK TOOL (For additional machining)

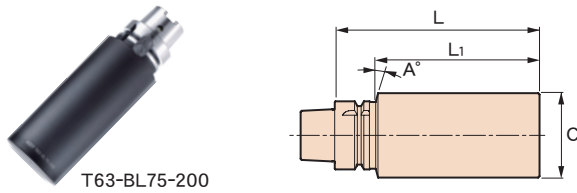

CHECKING ARBOR

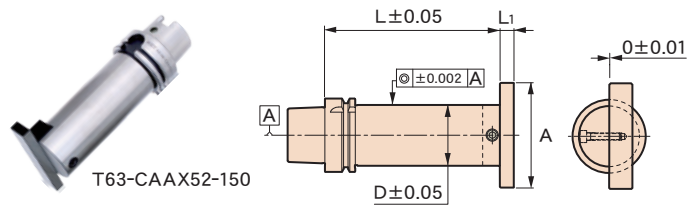

| CODE | L | L ₁ | φC | A° | Kg |
|------------------------|-----|----------------|-----|----|------|
| T40 -BL 32- 35 | 35 | 15 | 32 | 0 | 0.3 |
| -BL 48-120 | 120 | 97 | 48 | 15 | 1.6 |
| -BL 95- 75 | 75 | 52 | 95 | | 2.9 |
| T50 -BL 40- 42 | 42 | 16 | 40 | 0 | 0.6 |
| -BL 62-150 | 150 | 120 | 62 | 15 | 3.3 |
| -BL105- 90 | 90 | 60 | 105 | | 4.3 |
| T63 -BL 52- 45 | 45 | 19 | 52 | 0 | 1.0 |
| -BL 75-200 | 200 | 168 | 75 | 15 | 6.6 |
| -BL115- 90 | 90 | 58 | 115 | | 5.5 |
| T100 -BL 87- 45 | 45 | 16 | 87 | 0 | 2.8 |
| -BL100-200 | 200 | 166 | 100 | | 12.6 |
| -BL118-120 | 120 | 86 | 118 | 15 | 9.7 |


| CODE | L | L ₁ | φD | A | Kg |
|-------------------------|-----|----------------|----|-----|-----|
| T40 -CAAX32-150 | 150 | 10 | 32 | 60 | 1.1 |
| T50 -CAAX40-150 | 150 | 10 | 40 | 70 | 1.7 |
| T63 -CAAX52-150 | 150 | 10 | 52 | 90 | 2.9 |
| T100 -CAAX60-250 | 250 | 12 | 60 | 110 | 7.2 |

- **Std. Access.**
- Coolant duct → P.104
 - Special case
- **Usage**
1. Measure the concentricity of the spindle using cylinder area.
 2. When using a flat surface, adjustment of the insert position can be verified.
 3. Confirm and adjust the absolute dimension in the X direction.
 4. Measure the bending of the spindle using flange surface area.
 5. Can be used with tool presetter.
- **Note**
- ATC repeatability can be observed.
 - Flatness of square test bar for the datum A is within ±0.01mm.

- **Std. Access.**
- Coolant duct → P.104
- **Note**
- Material: SNCM439, Heat treatment hardness : 43HRC±2
 - Hardening depth indicates depth to the center.
- **Caution**
- If heat treatment is applied again to a holder produced from a blank tool, the original taper area may be deformed. Therefore, please do not apply heat treatment.

Universal Facing Boring Head

Universal Boring Head allows any applications just using this holder.

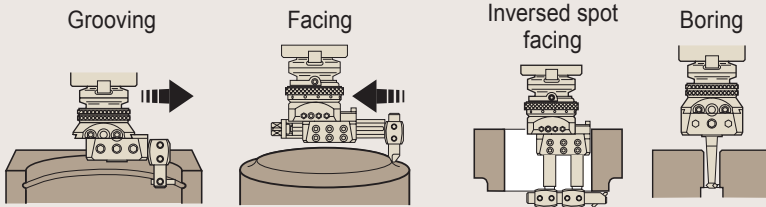

Automatic feeding using the machine spindle rotation.

High accuracy and Long life

Hand scraping surface leads to higher accuracy and longer life.




Specification

We guarantee a slide traverse accuracy of 5μm squareness at 50L, and we provide thorough overhaul and repair after-service.


| TYPE | Max. Boring diameter | Max. slide movement | Automatic feed speed | Fine adjustment (one graduation) | Fast return screw | Max. rotation min ⁻¹ | Kg |
|--------|----------------------|---------------------|--|----------------------------------|-------------------|---------------------------------|------|
| MU | φ260 | 48 | 0.05 / Rotation | 0.005 Vernier scale 0.001 | — | 600 | 2.1 |
| MU-S4 | φ400 | 52 | 0.02 } 0.24 / Rotation 12 speeds | 0.005 | 3.0 / Rotation | 400 | 7 |
| MU-S5 | φ620 | 112 | | | | | 8.7 |
| MU-S6H | φ800 | 140 | | | | 250 | 21 |
| MU-S6 | φ920 | 210 | | | | | 23.3 |

Parts name

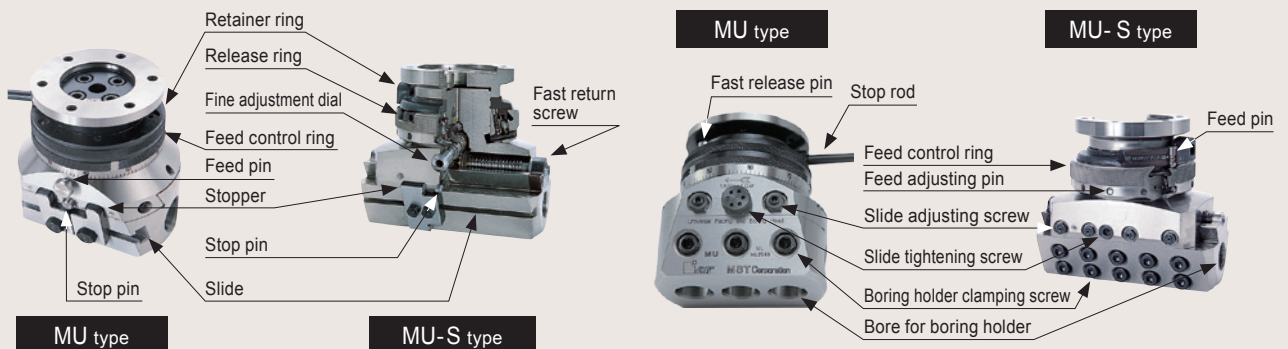

Combination of shank and head

Shank

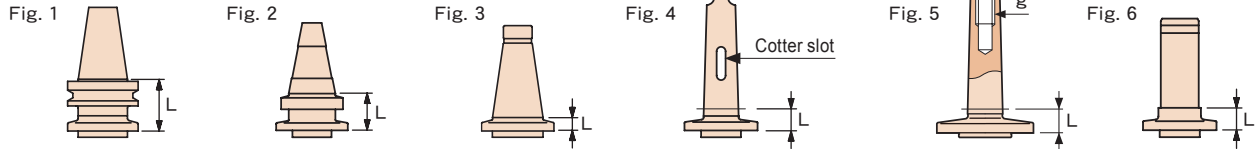


※Please inform us when the cotter slot is needed.
(please inform us the machine brand and model).

| CODE | Fig. | L | g |
|---------------------|------|------|-----|
| BT40 -MU | 1 | 49 | — |
| H 40 -MU | 2 | 34 | — |
| NT40U-MU | 3 | 15 | — |
| MT3 -MU(Tang type) | 4 | 18 | — |
| MT4 -MU(Tang type) | 5 | 19.5 | — |
| MT3 -MU(Screw type) | | 18 | M12 |
| MT4 -MU(Screw type) | 6 | 19.5 | M16 |
| S32 -MU-20 | | 20 | — |
| S42 -MU-20 | | | |

| CODE | Fig. | L | g |
|---------------------------|------|------|-----|
| BT50 -MU-S4/S5 | 1 | 73.5 | — |
| H 50 -MU-S4/S5 | 2 | 44.5 | — |
| NT40U-MU-S4/S5 | 3 | 17.1 | — |
| NT50U-MU-S4/S5 | | 18.7 | — |
| MT4 -MU-S4/S5(Tang type) | 4 | 28 | — |
| MT5 -MU-S4/S5(Tang type) | | 29.5 | — |
| MT6 -MU-S4/S5(Tang type) | 5 | 27 | M16 |
| MT4 -MU-S4/S5(Screw type) | | | |

| CODE | Fig. | L |
|---------------------------|------|------|
| BT50 -MU-S6H/S6 | 1 | 77 |
| NT50U-MU-S6H/S6 | 2 | 28.2 |
| MT6 -MU-S6H/S6(Tang type) | 3 | 35 |

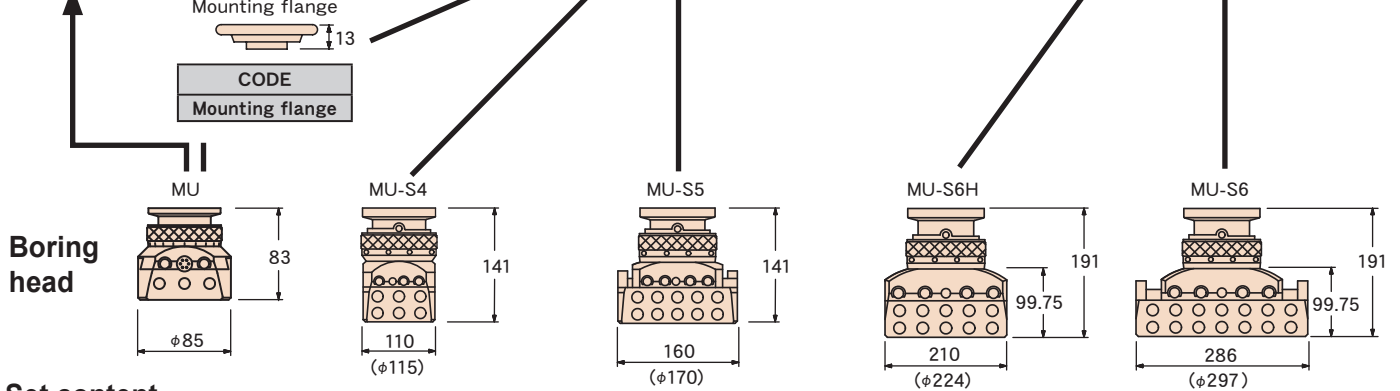


Set content

| Boring head (set) | | MU | MU-S4 | MU-S5 | MU-S6H | MU-S6 |
|---|--------------------------|------------------------|------------------------|------------------------|------------------------|------------|
| Accessories | | | | | | |
| Boring head | | MU-H | MU-S4-H | MU-S5-H | MU-S6H-H | MU-S6-H |
| Boring bar | Diameter×length | 18× 60 | 22× 85 | 22× 85 | 30×120 | 30×120 |
| | Effective length | 30 | 45 | 45 | 70 | 70 |
| | Q'ty | 1 | 1 | 1 | 1 | 1 |
| | | 18× 90 | 22×125 | 22×125 | 30×200 | 30×200 |
| Boring bar holder | Diameter×Shank length | 18× 82 | 22× 98 | 22× 98 | 30×120 | 30×120 |
| | Q'ty | 1 | 3 | 2 | 2 | 2 |
| | | 18×120 | 22×180 | 22×130 | 30×220 | 30×220 |
| | Q'ty | 1 | 1 | 1 | 1 | 1 |
| Adjustment collar for boring bar holder | Inner diameter×Thickness | — | 22×10 | 22×10 | 30×10 | 30×10 |
| | Q'ty | — | 1 | 1 | 1 | 1 |
| | | — | 22×20 | 22×20 | 30×20 | 30×20 |
| | Q'ty | — | 1 | 1 | 1 | 1 |
| | | — | 22×60 | 22×45 | 30×40 | 30×40 |
| | Q'ty | — | 1 | 1 | 1 | 1 |
| Draw bolt for boring bar holder | Diameter×length | — | M12×40 | M12×89 | M16×80 | M16×120 |
| | Q'ty | — | 1 | 1 | 1 | 1 |
| | | — | — | — | 30×70 | 30×80 |
| | Q'ty | — | — | — | 1 | 1 |
| Clamping sleeve | Outer dia.× Inner dia. | 18× 8 | 22× 8 | 22× 8 | 22×12 | 22×12 |
| | Q'ty | 1 | 1 | 1 | 1 | 1 |
| | | 18×10 | 22×10 | 22×10 | 22×14 | 22×14 |
| | Q'ty | 1 | 1 | 1 | 1 | 1 |
| | | 18×12 | 22×12 | 22×12 | 22×18 | 22×18 |
| | Q'ty | 1 | 1 | 1 | 1 | 1 |
| Insert | Material | □ × length | □ × length | □ × length | □ × length | □ × length |
| | HSS | □ 6×30L-H | □ 6×40L-H | □ 6×40L-H | □ 10×60L-H | □ 10×60L-H |
| | Q'ty | 3 | 3 | 3 | 3 | 3 |
| | Carbide | □ 6×30L-C | □ 6×30L-C | □ 6×30L-C | □ 10×60L-C | □ 10×60L-C |
| Q'ty | 1 | 1 | 1 | 1 | 1 | |
| Other accessories | •Stop rod | •Stop rod | •Stop rod | •Stop rod | •Stop rod | |
| | •Spanner | •T handle wrench | •T handle wrench | •T handle wrench | •T handle wrench | |
| | •Knocking rod | •Connection for wrench | •Connection for wrench | •Connection for wrench | •Connection for wrench | |
| | •L wrench | •L wrench | •L wrench | •L wrench | •L wrench | |
| | | •Spanner | •Spanner | •Spanner | •Spanner | |
| | | | •Auxiliary bar | •Auxiliary bar | •Auxiliary bar | |
| | | | •L wrench | •L wrench | •L wrench | |
| | | | •Spanner | •Spanner | •Spanner | |

■ Note
•We can provide only the head without accessories.

The fixture creates the new machining process.

- ▷ A highly rigid work-clamping fixture developed for both 5-axis machining centers and multi-surface machining with 3-axis machining centers (with a rotary table)

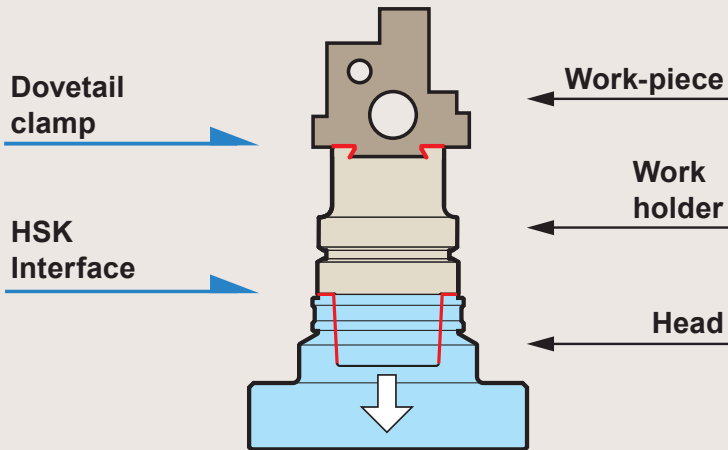

5-axis machine
Clamping force







Automated robotic work-piece changing system
3-axis + rotary table



Small- and Medium-size Enterprises Award for Excellence in New Innovative Technologies and Products
The Resona Foundation for Small and Medium Enterprise Promotion and The Daily Industrial News



Multi-surface machining

Process integration on a 3-axis machining center with a rotary table and 5-axis machining center

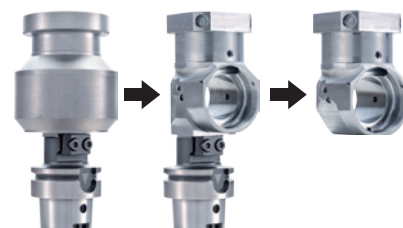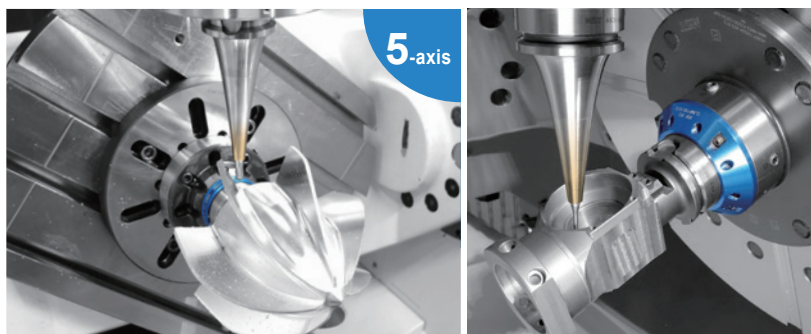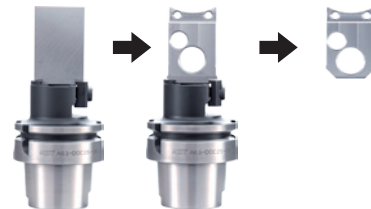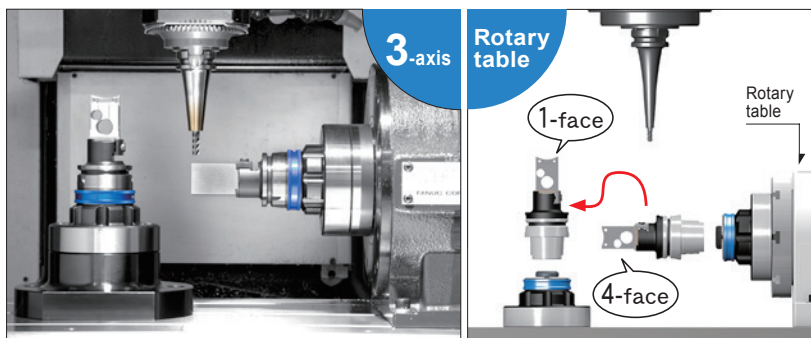


Clamping force

HSK (2-face clamping interface) and dovetail clamping

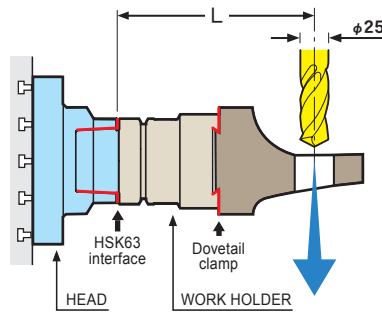


Maximum cutting force

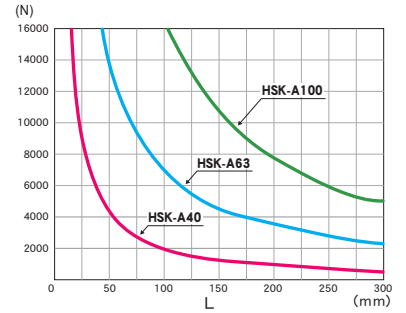


Avoids interference

The fixture(work-holders and heads) design has much smaller than the work-piece.



- The fixture has less interference with a tool holder and a cutting tool and it endures large machining force in a different direction.

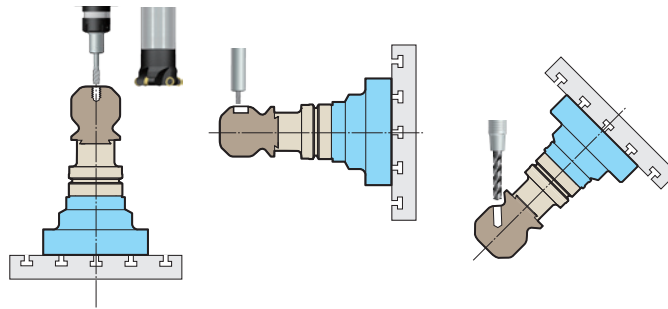


Quick change

Clamping 5-sec. Unclamping 5-sec.





- Easy operation – just mount the work holder on the head and tighten with a wrench.

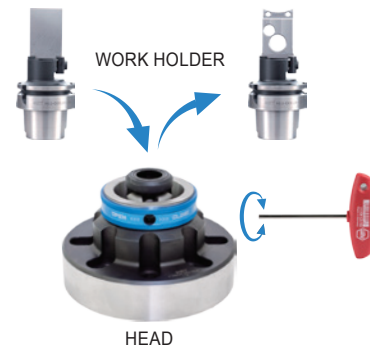

Off-line set-up

Minimizing machine downtime.

- You can start machining the next work-piece quickly when it is mounted in a work holder in advance.
- The machine runs continuously, so you can maximize the machine utilization ratio.

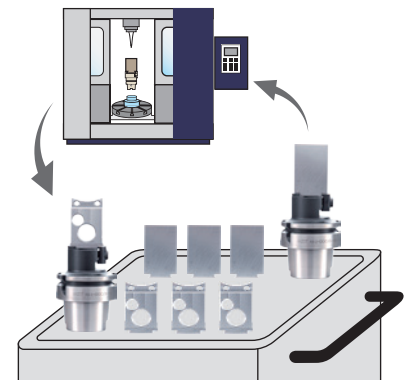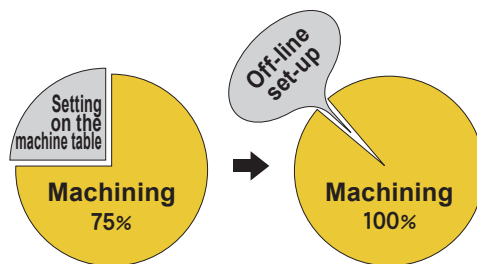

Repeatability

No alignment by experienced workers required.

Concentricity $2\mu\text{m}/L$


Z-axis direction $1\mu\text{m}$

Rotation direction $0.1\sim 0.3\text{mm}/D$

| L=3xD | D | L |
|-------|-----|-----|
| A40 | 40 | 120 |
| A63 | 63 | 190 |
| A100 | 100 | 300 |



If necessary, please off-set the rotational direction using a touch probe.

BLUM high-accuracy touch probe

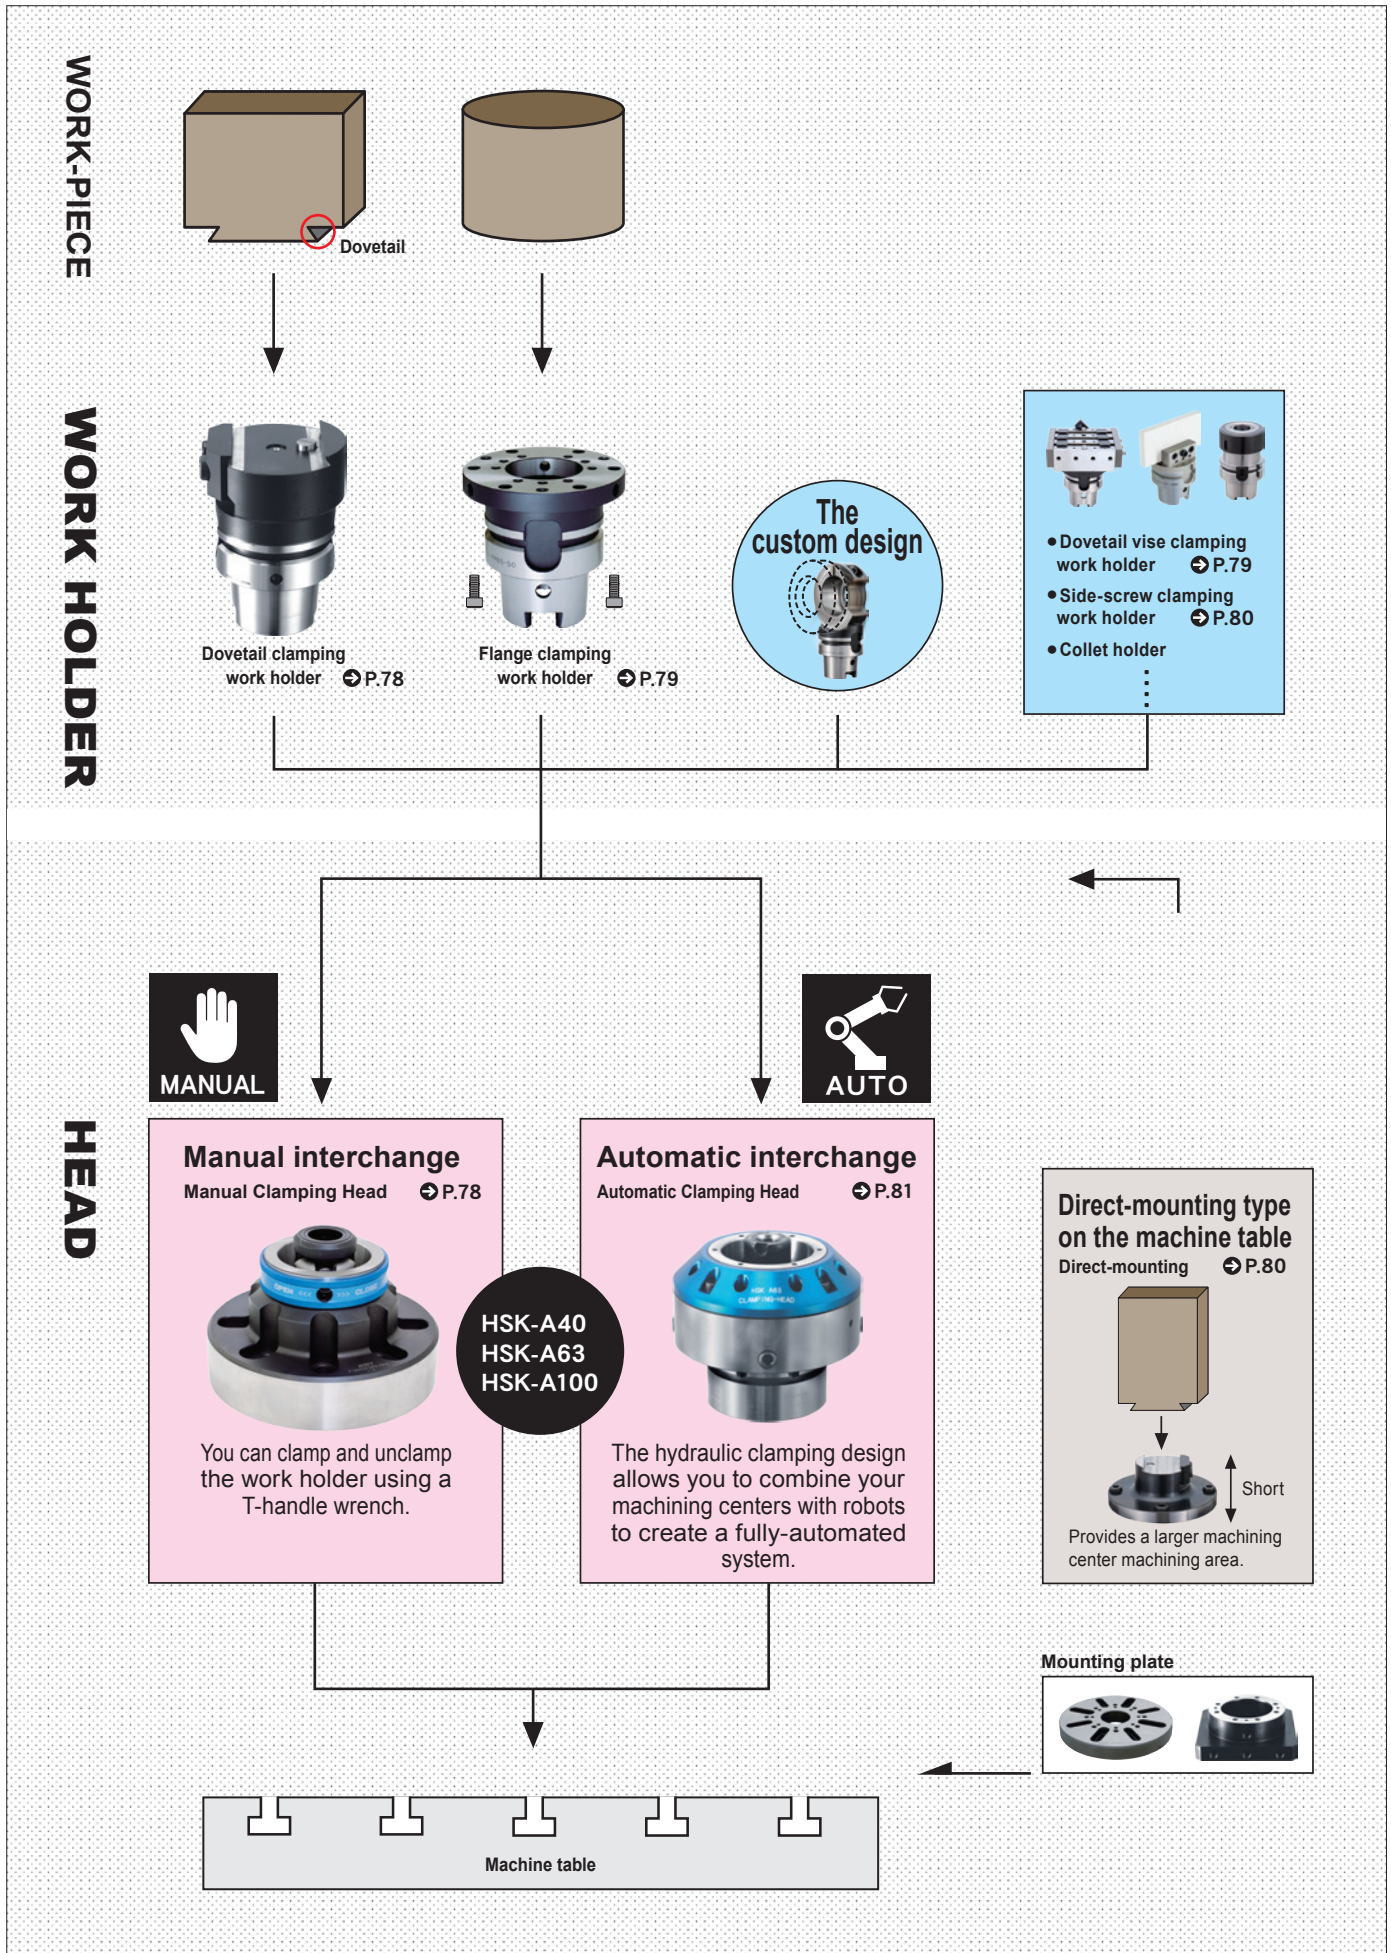

HEAD

The Manual Clamping Head (Manual exchange)

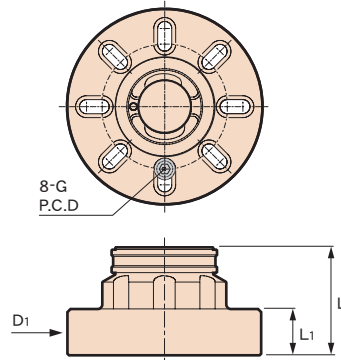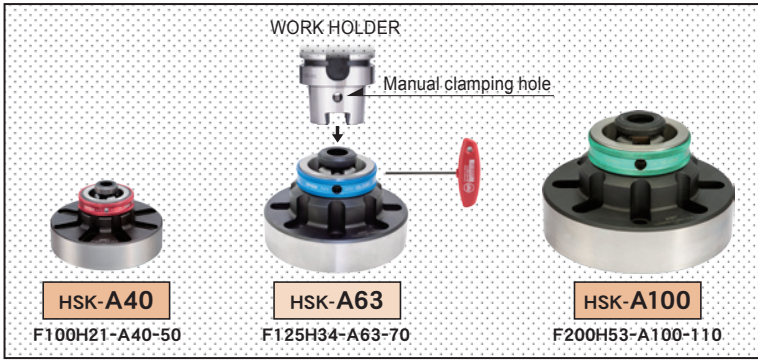


| CODE | Interface | L | ϕD_1 | L ₁ | G | P.C.D. | Clamping force (kN) | Kg |
|--------------------------|-----------|-----|------------|----------------|--------|---------|---------------------|-----|
| F 100H21-A40 - 50 | HSK-A40 | 50 | 100 | 25 | M 6×30 | 55~ 85 | 10 | 1.7 |
| F 125H34-A63 - 70 | HSK-A63 | 70 | 125 | 30 | M 8×35 | 80~100 | 20 | 3.8 |
| F 200H53-A100-110 | HSK-A100 | 110 | 200 | 50 | M12×50 | 125~160 | 30 | 14 |

- Option
 - Mounting plate
- Std access.
 - T-handle wrench • Mounting bolt × 4pcs.
- Note
 - A manual clamping hole on the work holder is required for mounting.


Please use a mounting plate if the fixing hole of the head doesn't match with a T-groove on the machine table. Also, we can make a custom-designed mounting plate for you if necessary.

| CODE | Interface | T | ϕD | ϕH | G ₁ | G ₂ | G ₃ | P.C.D. | Kg |
|---------------------|-----------|----|----------|----------|----------------|----------------|----------------|---------|-----|
| F160H32-A40 | HSK-A40 | 20 | 160 | 32 | M 5×20 | M 6×20 | M 6 | 80~125 | 2.6 |
| F200H32-A40 | | 25 | 200 | | M 8×25 | M10×25 | | 100~160 | 5 |
| F160H50-A63 | HSK-A63 | 20 | 160 | 50 | M 5×20 | M 6×20 | M 6 | 80~125 | 2.4 |
| F200H50-A63 | | 25 | 200 | | M 8×25 | M10×25 | | 100~160 | 4.7 |
| F250H50-A63 | | 30 | 250 | 50 | M10×30 | M12×30 | M12 | 140~200 | 9.4 |
| F250H80-A100 | HSK-A100 | 30 | 250 | 80 | M10×30 | M12×30 | M12 | 140~200 | 8.7 |



WORK HOLDER

Dovetail clamping work holder

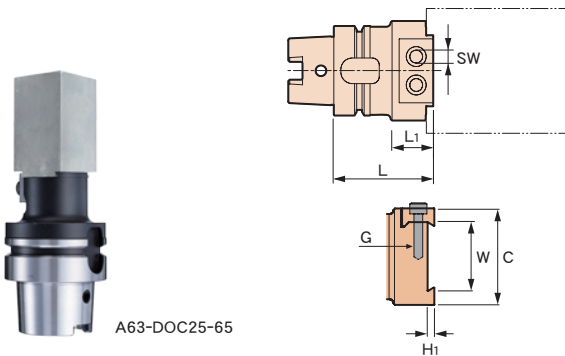


| CODE | L | L ₁ | ϕC | W | H ₁ | G | SW | Kg |
|-------------------------|----|----------------|----------|------|----------------|-----|----|-----|
| A40 -DOC 17.5-55 | 55 | 25 | 30 | 17.5 | 2 | M 5 | 4 | 0.4 |
| | | 28 | 40 | 25 | 3 | M 6 | 5 | 0.6 |
| | | 25 | 50 | 35 | | | | 0.7 |
| A63 -DOC 25 -65 | 65 | 30 | 70 | 50 | 5 | M 8 | 6 | 1.2 |
| | | 30 | 70 | 50 | 5 | M 8 | 6 | 1.8 |
| A63 -DOC 35 -65 | 70 | 30 | 70 | 50 | 5 | M 8 | 6 | 1.8 |
| | | 35 | 100 | 70 | | M10 | 8 | 3 |
| A100-DOC 35 -70 | 70 | 27 | 50 | 35 | 3 | M 6 | 5 | 3.3 |
| | | 32 | 70 | 50 | 5 | M 8 | 6 | 3.8 |
| | | 35 | 100 | 70 | | M10 | 8 | 5 |
| -DOC 70 -75 | 75 | 40 | 140 | 100 | 10 | | | 7.7 |

Dovetail grooving a work-piece

Dovetail grooving of the work-piece clamping area using an angular cutter is required prior to machining. After machining, cut off the dovetail of the work-piece.



Details of dovetail dimensions



| Holder type | W | H | P | SW | SD |
|-----------------|------|------|-----|----|-----|
| DOC 17.5 | 17.5 | 2.5 | 2.5 | 4 | 2 |
| DOC 25 | 25 | 3.5 | | 6 | 2.5 |
| DOC 35 | 35 | | 5.5 | 8 | |
| DOC 50 | 50 | 5.5 | 9 | 10 | 4 |
| DOC 70 | 70 | | 18 | 12 | |
| DOC100 | 100 | 10.5 | 26 | 15 | |

Flange clamping work holder



A63-FP85-50




Fig. 1




Fig. 2






Fig. 3



3 Ways to Mount Work-pieces

- ① Center bolt
- ② Flange bolt from the head
- ③ Flange bolt from the work-piece



| CODE | Fig. | L | φD | φD1 | φD2 | φD3 | φd | h1 | h2 | T1 | T2 | T3 | φd2 | φd3 | G1 | G2 | KG |
|-----------------------|------|----|-----|-----|-----|-----|------------------|----|----|-------|-------|-----|-----|-----|--------|-------|-----|
| A40 -FP 40-35 | 3 | 35 | 40 | 32 | — | — | 25 | 12 | 4 | M4×6 | — | — | — | — | M 6×15 | M4×8 | 0.3 |
| -FP 63-40 | 2 | 40 | 63 | — | 50 | — | +0.053 +0.020 | — | — | — | M5 | — | 5.5 | — | M 6×20 | — | 0.5 |
| A63 -FP 63-45 | 3 | 45 | 63 | 50 | — | — | 40 | 13 | 5 | M5×8 | — | — | — | — | M10×20 | M6×10 | 0.9 |
| -FP 85-50 | 2 | 50 | 85 | — | 73 | — | +0.064 +0.025 | — | — | — | M6 | — | 6.6 | — | M10×25 | — | 1.2 |
| -FP110-55 | 1 | 55 | 110 | — | 95 | — | — | — | — | — | M6×9 | M 8 | 9 | — | M10×30 | — | 1.7 |
| A100 -FP100-55 | 3 | 55 | 100 | 85 | — | — | 70 | 17 | 7 | M8×12 | — | — | — | — | M12×25 | M8×16 | 3.0 |
| -FP130-65 | 2 | 65 | 130 | — | 115 | — | +0.076 +0.030 | — | — | — | M8 | — | 9 | — | M12×35 | — | 4.2 |
| -FP160-70 | 1 | 70 | 160 | — | 140 | — | — | — | — | — | M8×12 | M10 | 11 | — | M12×40 | — | 5.3 |

Std access.

- Center bolt (G1)×1pc. • Set screw (G2)×3pcs.
- M6 special small-head bolt (the head diameter size is the same as the M5 bolt)×3pcs. (A63FP-85-50 / A63-FP110-55)
- ※Regular M6 cap screw doesn't fit.

Option


- Positioner boss • Adapter

Note

- Use the G1 set screw when you use the center bolt to clamp the work-piece. When you need whirl-stop machining of a work-piece, make a flat surface on the work-piece and clamp it using a set screw (G2).

Positioner boss (Flange clamping)

Use it when you need centering.

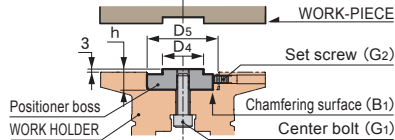

| CODE | Holder type | φD4 | φD5 | h | KG |
|-------------|-------------|-----------------------------------|-----|----|------|
| IR15-A40 FP | HSK-A40 | 15 ⁰ _{-0.027} | 25 | 15 | 0.05 |
| IR25-A63 FP | HSK-A63 | 25 ⁰ _{-0.033} | 40 | 16 | 0.1 |
| IR40-A100FP | HSK-A100 | 40 ⁰ _{-0.039} | 70 | 20 | 0.5 |

Note

- When you do not want the work-piece to rotate, make a flat surface on the O.D. (B1) of the boss, and attach it using a set screw (G2).



Please use an adapter for small size work-pieces.

Minimizing clamping area for a small-size work-pieces reduces the interference area.



| CODE | Work holder | Fig. | φD | φD1 | φd | H1 | H2 | H | T1 | G1 | G2 | G3 | KG |
|-------------|---------------|------|------------------|-----|----|----|----|----|------|--------|-------|-------|-----|
| RS-A63 -A40 | A63 -FP 63-45 | 1 | 40 | 32 | 25 | 12 | 4 | 50 | M4×6 | M 6×20 | M4×8 | M5×16 | 0.5 |
| | -FP 85-50 | — | +0.064 +0.025 | — | — | — | — | — | — | — | — | — | — |
| | -FP110-55 | — | — | — | — | — | — | — | — | — | — | — | — |
| RS-A100-A40 | A100-FP100-55 | 2 | 40 | 32 | 25 | 12 | 4 | 60 | M4×6 | M 6×20 | M4×8 | M8×25 | 1.5 |
| | -FP130-65 | — | +0.053 +0.020 | — | — | — | — | — | — | — | — | — | — |
| | -FP160-70 | — | — | — | — | — | — | — | — | — | — | — | — |
| RS-A100-A63 | A100-FP100-55 | 1 | 63 | 50 | 40 | 13 | 5 | 55 | M5×8 | M10×20 | M6×10 | M8×25 | 1.7 |
| | -FP130-65 | — | +0.053 +0.020 | — | — | — | — | — | — | — | — | — | — |
| | -FP160-70 | — | — | — | — | — | — | — | — | — | — | — | — |

Std access.

- Center bolt (G1)×1pc. • Set screw (G2)×3pcs.
- Fixing bolt (G3)×3pcs.

Note

- Attach the work-piece with the center bolt (G1). When you do not want the work-piece to rotate, secure the chamfering surface using a set screw.

Fig. 1





Fig. 2




Dovetail Vise clamping work holder




A63-DOV90

Fig. 1

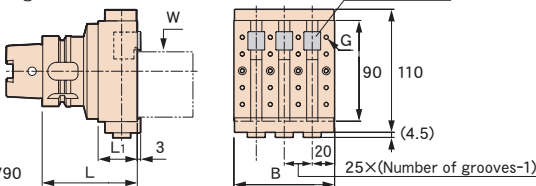

A63-DOV110I

Fig. 2

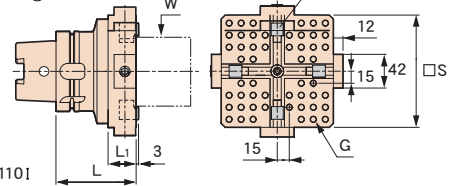

| CODE | Fig. | □S | Number of grooves | B | W | G (Depth) | L | L1 | KG |
|---------------------|------|-----|-------------------|-----|-------|-----------|-----------|----|-----|
| A63 -DOV 90 | 1 | — | 3 | 90 | 12~73 | 20-M4(6) | 85 | 35 | 3.8 |
| 110I | 2 | 110 | — | — | 36~80 | 24-M8(10) | 90 | — | 5.7 |
| A100 -DOV140 | 1 | — | 5 | 140 | 12~73 | 30-M4(6) | 100 | 35 | 7.7 |
| | 140I | 2 | 140 | — | — | 36~110 | 52-M8(10) | — | 9.9 |

Std access.


- 8mm hexagonal wrench

Angular cutter
For more information, please contact MST.

Note

- Dovetail grooving of the work-piece clamping area using an angular cutter is required prior to machining. After machining, cut off the dovetail of the work-piece.
- Work-piece clamping jaws move individually.
- Please use the screw hole on the top face as necessary.

Side screw clamping work holder

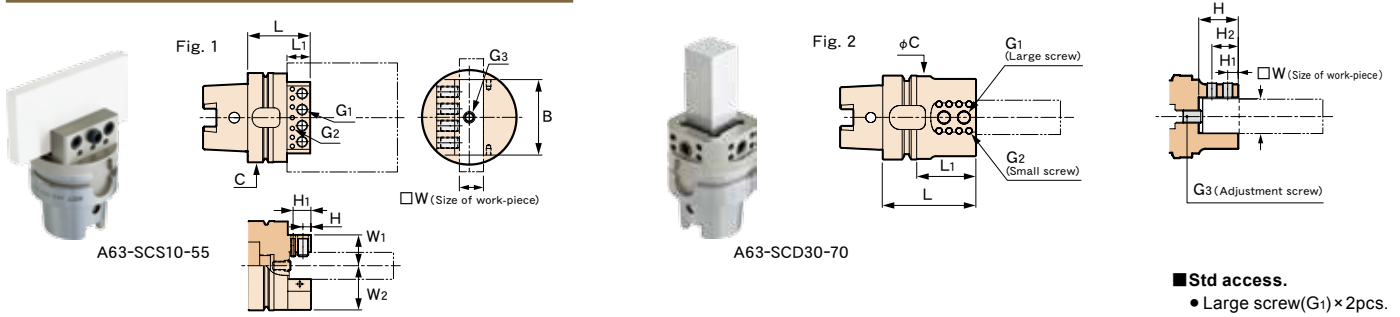


■Std access.
● Large screw(G1)×2pcs.

| CODE | Fig. | □W | W1 | W2 | B | L | L1 | φC | H | H1 | H2 | G1 (Bolt) | G2 | G3 | Kg | | | | | | | | | |
|-----------------------|------|---------|------|------|----|----|----|----|-----|----|----|-----------|----|-----|-----|----|----|----|----|----|--------|--------|-----|-----|
| A40 -SCS10-40 | 1 | 5 ~ 10 | 13 | 18.6 | 30 | 40 | 11 | 39 | 4.5 | — | — | M 6×10 | — | M 6 | 0.5 | | | | | | | | | |
| -SCD20-55 | 2 | 15 ~ 20 | — | — | — | 55 | 30 | 49 | 25 | 11 | — | M 8×16 | M4 | M10 | 0.5 | | | | | | | | | |
| A63 -SCS10-55 | 1 | 5 ~ 10 | 20 | 23.5 | 50 | 55 | 21 | 62 | 7.5 | 17 | — | M10×15 | M5 | M10 | 1.1 | | | | | | | | | |
| | | 15 ~ 20 | 25 | 28.5 | | | | | | | | | | | | | | | | | | | | |
| -SCD20-65 | 2 | 15 ~ 20 | — | — | — | 65 | 30 | 49 | 25 | 11 | — | M 8×16 | M4 | M10 | 1.2 | | | | | | | | | |
| -SCD25-70 | | 20 ~ 25 | — | — | | | | | | | | | | | 70 | 35 | 56 | 30 | 8 | 20 | 1.3 | | | |
| -SCD30-70 | | 25 ~ 30 | — | — | | | | | | | | | | | — | 44 | 62 | 35 | 9 | 24 | M10×20 | M5 | 1.4 | |
| -SCD40-85 | | 35 ~ 40 | — | — | | | | | | | | | | | — | 85 | 52 | 76 | 45 | 12 | 30 | M12×20 | M6 | 1.9 |
| A100 -SCS20-70 | 1 | 12 ~ 20 | 29.5 | 34 | 80 | 70 | 26 | 99 | 9 | 20 | — | M12×20 | M5 | M12 | 3.6 | | | | | | | | | |
| | | 22 ~ 30 | 34.5 | 39 | | | | | | | | | | | | | | | | | | | | |
| -SCS30-70 | 2 | 15 ~ 20 | — | — | — | 70 | 30 | 49 | 25 | 11 | — | M 8×16 | M4 | M10 | 3 | | | | | | | | | |
| -SCD20-70 | | 20 ~ 25 | — | — | | | | | | | | | | | 75 | 35 | 56 | 30 | 8 | 20 | 3.4 | | | |
| -SCD30-80 | | 25 ~ 30 | — | — | | | | | | | | | | | — | 80 | — | 62 | 35 | 9 | 24 | M10×20 | M5 | 3.5 |
| -SCD40-90 | | 35 ~ 40 | — | — | | | | | | | | | | | — | 90 | 45 | 76 | 45 | 12 | 30 | M12×20 | M6 | 3.9 |

Direct-mounting (Direct-mounting type on the machine table)

Dovetail clamping type

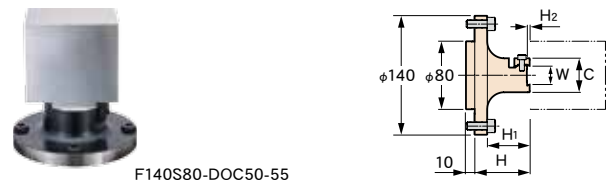

■ Angular cutter
For more information, please contact MST.



■Option
● Mounting plate
■Std access.
● Mounting bolt×4pcs. (DOC100)

■Note
● Dovetail grooving of the work-piece clamping area using an angular cutter is required prior to machining. After machining, cut off the dovetail of the work-piece.

| CODE | H | H1 | H2 | φC | W | Kg |
|---------------------------|----|----|----|----|------|-----|
| F140S80-DOC17.5-60 | 60 | 45 | 2 | 30 | 17.5 | 2.5 |
| -DOC25 -60 | | | 3 | 40 | 25 | 2.6 |
| -DOC35 -55 | 55 | 40 | — | 50 | 35 | 2.8 |

| CODE | H | H1 | H2 | φC | W | Kg |
|--------------------------|----|----|----|-----|-----|-----|
| F140S80-DOC 50-55 | 55 | 40 | 5 | 70 | 50 | 3.4 |
| -DOC 70-55 | | | | 100 | 70 | 4.7 |
| -DOC100-55 | | | | 140 | 100 | 5.5 |

Flange clamping type

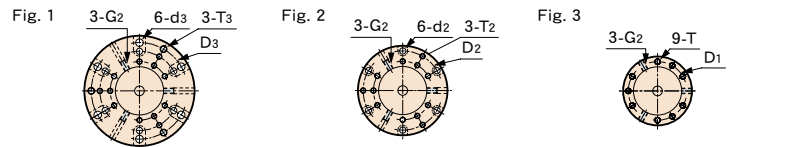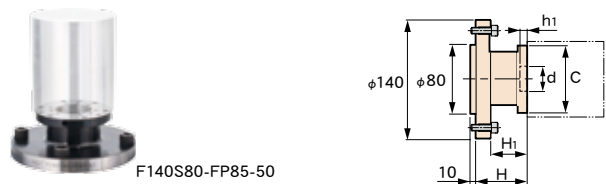

| CODE | Fig. | H | H1 | φC | φD1 | φD2 | φD3 | φd | h1 | T1 | T2 | T3 | d2 | d3 | G2 | Kg |
|-------------------------|------|----|----|-----|-----|-----|-----|----|----|-------|----|----|----|----|-------|-----|
| F140S80-FP 63-50 | 3 | 50 | 25 | 63 | 50 | — | — | 40 | 13 | M5×8 | — | — | — | — | M6×10 | 2.6 |
| -FP 85-50 | 2 | | | | | | | | | | | | | | | 85 |
| -FP110-70 | 1 | 70 | 45 | 110 | — | — | 95 | — | — | M6×9 | M8 | — | 9 | — | M8×16 | 3.7 |
| -FP130-75 | 2 | 75 | — | 130 | 85 | 115 | — | 70 | 17 | M8×12 | M8 | — | 9 | — | M8×16 | 5.5 |


■Option
● Mounting plate ● Positioner boss→P.79 ● Adapter→P.79

The mounting plate is required.

Also, we can make a custom design mounting plate.



| CODE | Kg |
|-------------------------|-----|
| F200H80-MP140-25 | 4.3 |

■Std access. ● Mounting bolt×4pcs.

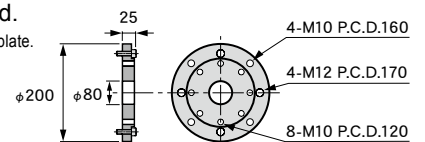




The Automatic Clamping Head (Automatic exchange)

The hydraulic clamping design allows you to interchange work-pieces automatically, and makes it possible for you to combine your machining centers with robots to create a fully-automated system.

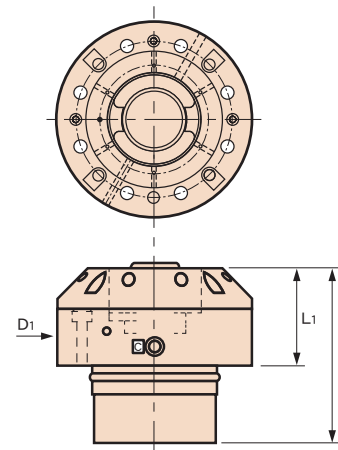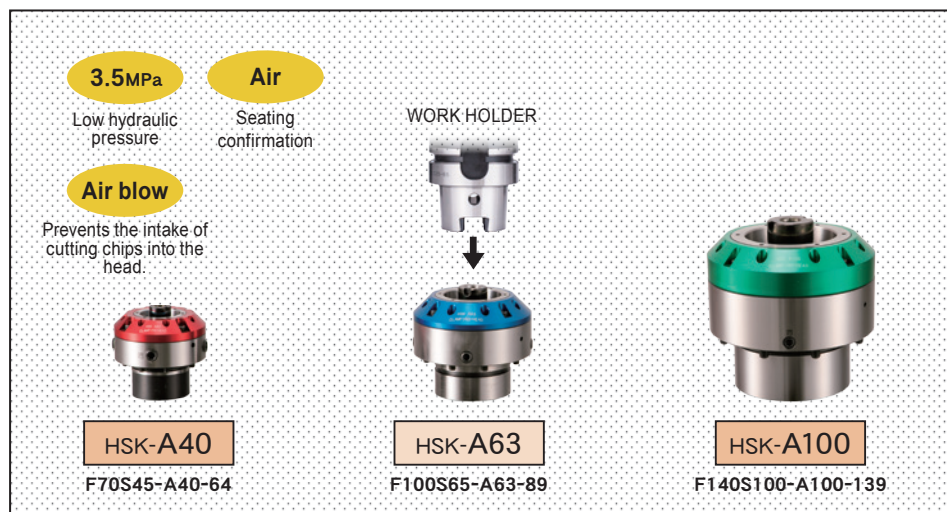

| CODE | Interface | L | $\phi D1$ | L ₁ | Clamping force (kN) | Max. loading weight (kg) | |
|-------------------|-----------|-----|-----------|----------------|---------------------|--------------------------|-----|
| F70S45 -A40 - 64 | HSK-A40 | 64 | 70 | 35 | 6 | 50 | 1.1 |
| F100S65 -A63 - 89 | HSK-A63 | 89 | 100 | 50 | 24 | 140 | 3.1 |
| F140S100-A100-139 | HSK-A100 | 139 | 140 | 80 | 55 | 640 | 9.7 |

■ Note
 • Hydraulic pressure : 3.5MPa

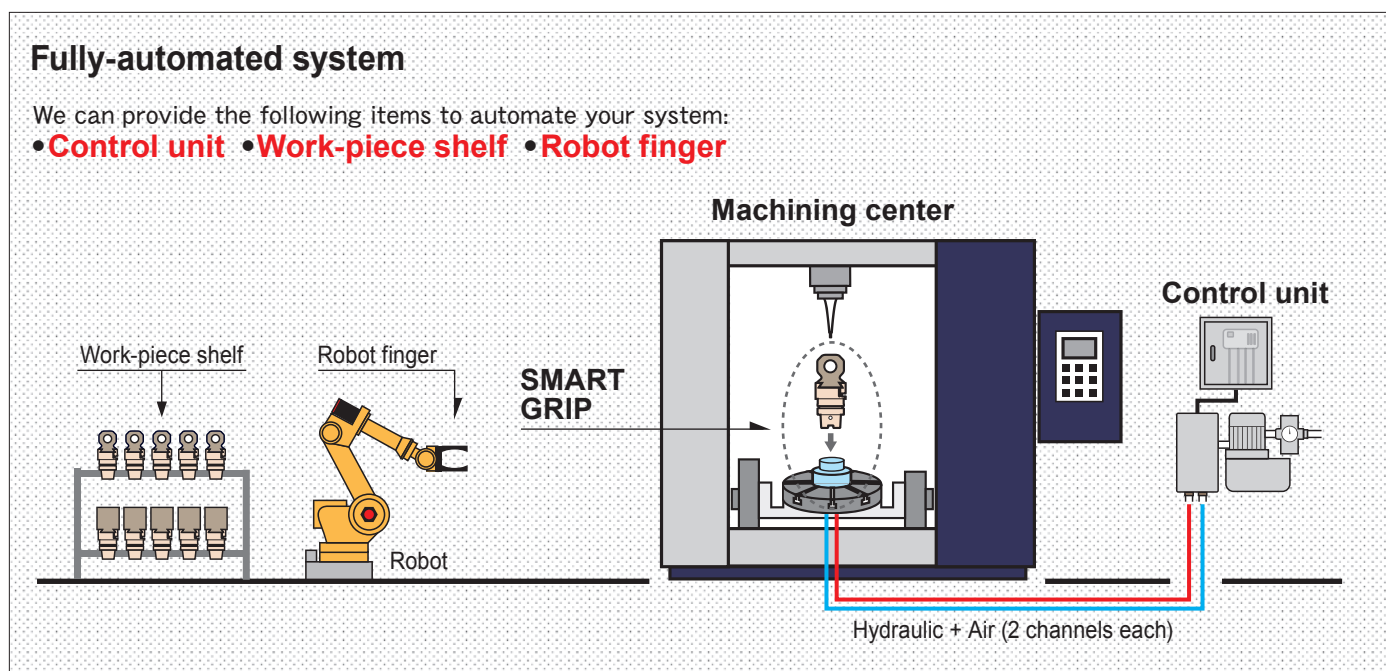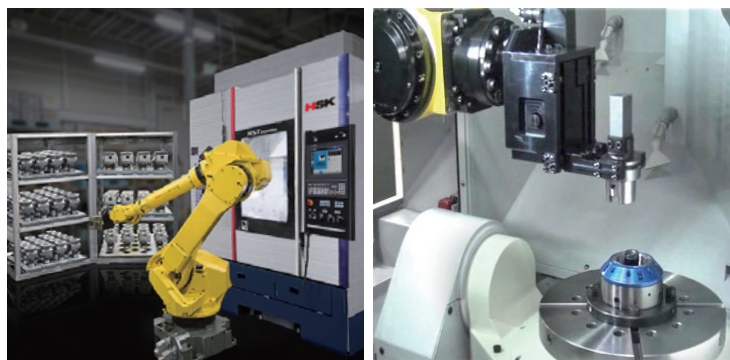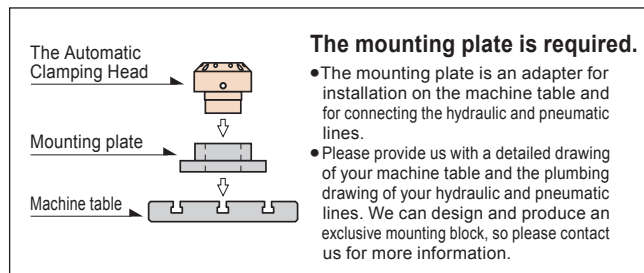


Easy and accurate Z-axis origin setting!

It is easy to accurately set the Z-axis origin of the machining center, the reference surface of work-piece, and the jig fixture.




ZPM

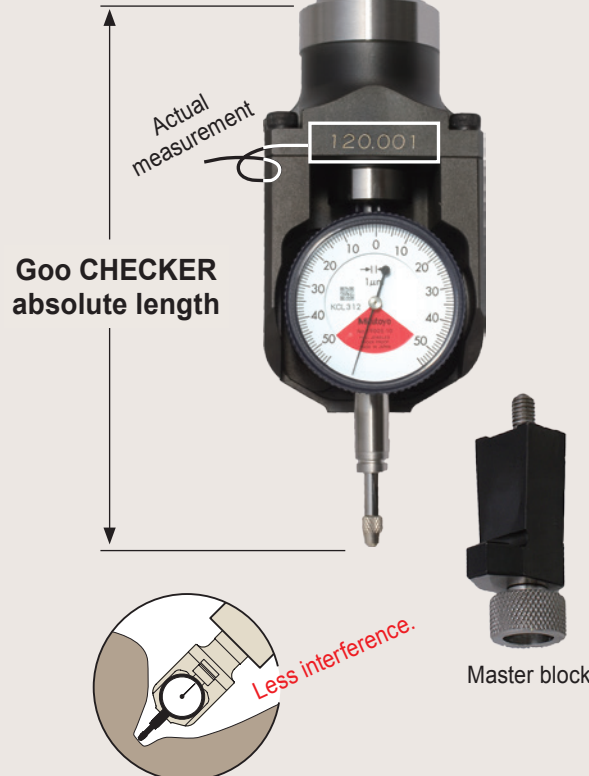

Available for using 5-axis machine.


Measuring steps are easy.

Accurate measuring of the distance from the Z-axis origin to the reference surface of the work-piece and jig fixture is easy.

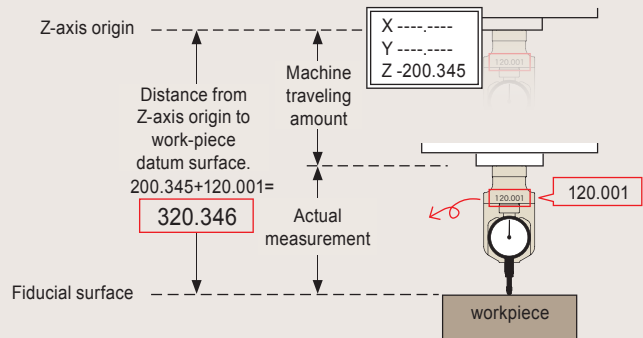


Sharable Z-axis origin for several machining centers

After measuring the distance from the Z-axis origin to the table surface of each machining center and correcting any variations, multiple machining centers can share the tool holders and programming.

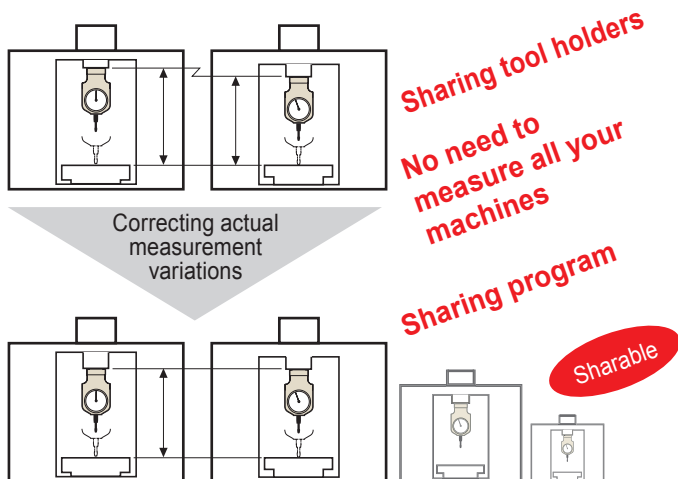


Flatness check

Precise measurement for flatness.



Step measurement

Measurement for steps on the work-piece.




Goo Checker ZPM type (ZPM)

Thanks to its compact design, interference is reduced, making it the optimum holder for compact machining centers.



Easy confirmation of actual value (self-check function)

1. Attach the master block to the holder, and tighten the screw until it stops.
2. Adjust the dial gauge to "0".

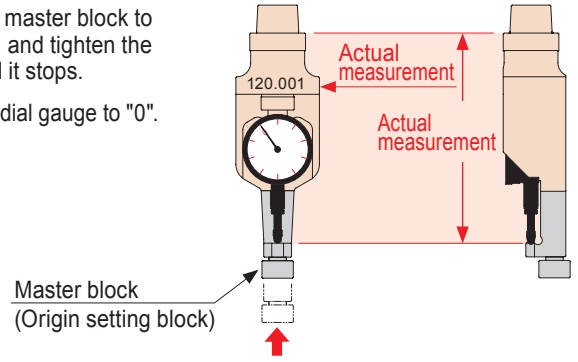

| CODE | Fig. | L | L1 | Kg |
|---------------------|------|-----|-----|-----|
| BT30-ZPM-130 | 1 | 130 | 100 | 1.0 |
| -165 | | 165 | 135 | 1.2 |
| BT40-ZPM-150 | 2 | 150 | 120 | 1.3 |
| -210 | | 210 | 180 | 1.5 |
| BT50-ZPM-180 | 2 | 180 | 150 | 2.9 |
| -240 | | 240 | 210 | 4.1 |
| A63 -ZPM-150 | 3 | 150 | 120 | 1.2 |
| -210 | | 210 | 180 | 1.5 |
| A100-ZPM-180 | 3 | 180 | 150 | 2.5 |
| -240 | | 240 | 210 | 3.8 |
| E32 -ZPM-120 | 3 | 120 | 90 | 0.7 |
| -165 | | 165 | 135 | 1.0 |
| E40 -ZPM-120 | 3 | 120 | 90 | 0.8 |
| -180 | | 180 | 150 | 1.1 |
| E50 -ZPM-150 | 3 | 150 | 120 | 1.0 |
| -195 | | 195 | 165 | 1.3 |
| F63 -ZPM-150 | 3 | 150 | 120 | 1.1 |
| -210 | | 210 | 180 | 1.3 |
| DN40-ZPM-150 | 2 | 150 | 120 | 1.3 |
| DN50-ZPM-180 | 2 | 180 | 150 | 2.9 |
| CT40-ZPM-150 | 2 | 150 | 120 | 1.3 |
| CT50-ZPM-240 | 2 | 240 | 210 | 4.1 |

Option

- Retention knob (BT/DIN/CAT.) → P.64

Std. Access.

- Master block
- Indicator, 1/ 1000 reading

Caution

- A.T.C is not available. (except for BT30)

Fig. 1




Fig. 2



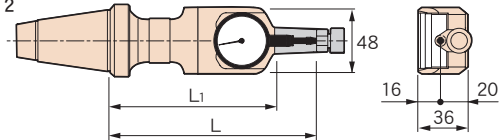


Fig. 3


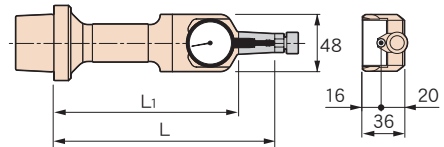


Goo Checker ZPB type (ZPB)

High reliability due to its machined solid structure.

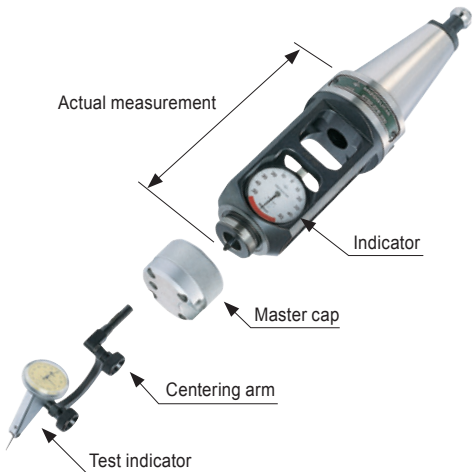

Usage example for test indicator

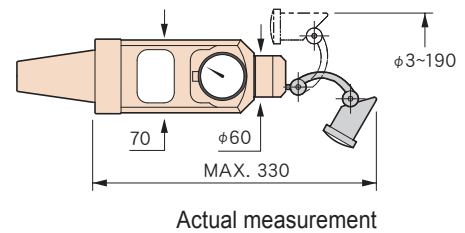

| CODE | Kg |
|---------------------|-----|
| BT40-ZPB-200 | 3.3 |
| BT50-ZPB-200 | 5.2 |

Option

- Retention knob → P.64

Std. Access.


- Indicator, 1/ 1000 reading
- Test Indicator, 2/ 1000 reading
- Centering arm
- Master cap
- Wooden box

Centering bar

To identify workpiece datum position

CODE

ST6-CEB102

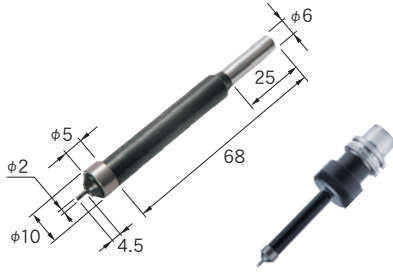


Usage


① Rotate a spindle in low-speed rotation (450~600 min^{-1})

② Contact the stylus carefully with a work-piece by micro feeding until it doesn't have a swing.

③ You can find the alignment between the machine spindle center and the work-piece edge face after the stylus moves another 1mm (the radius of dia. 2mm stylus).



Rapid eccentricity



Measuring instrument tool holder (HSK-E25)

Use when centering a workpiece.

The spring collet (C10-6-P) and the centering bar (ST6-CEB102) are required and sold separately. Tighten nuts by hand.



CODE

E25-CEH10-37

Option

- Centering bar
- Spring collet (C10-6-P) → P.38



Caution

- Not usable for machining.

MAINTENANCE TOOL

TOOL CLINIC

Our engineers are here to improve your productivity by demonstrating the correct usage and maintenance of tool holders.

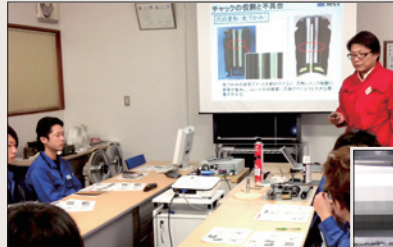

➔ P.114

TOOL SET UP STATION

Work table
6S DESK



6SD

➔ P.86

Tool washing machine
CLEAN BOX




CBX

➔ P.88

For machine spindle maintenance

**TEST BAR
CHECKMATE**

**CMA
CMB**



➔ P.90

TOOL CAP



**TCA
TCB
TCC**

➔ P.91

TOOL SET UP STAND


**Petit-Ball
MY CUBE
HF series**



➔ P.94

Collet stand
PALETTE


PA



➔ P.96

ENDMILL HOUSE

EMO



➔ P.97

TOOL HOLDER STORING CABINET

HBX



➔ P.98

ANGLE HEAD

M/C Tool

HSK-T Tooling Systems for Turning Mill

General Purpose Tool

JIG

Measuring Equipment

Maintenance Tool

Wire EDM fixture

Technical Information


| |
|--------|
| CODE |
| 6SD-01 |

Ensures safe tool settings! Improves the work environment in the factory!

- ▷ Helps in the rapid implementation of the five S's in your factory.
- ▷ Compact and space saving.
- ▷ Do-it-yourself style allows you to do the assembly.


White board and Punched board

Useful as a bulletin board or message board, and for attaching drawings. Freely mounting position on the left or right side.

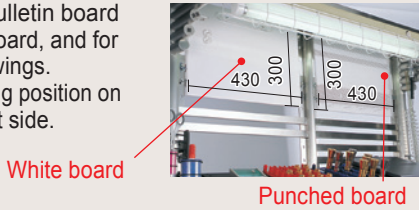

Shelf Board

Shelf is deep enough for a laptop computer, and the shelf can be attached at whatever height you desire.

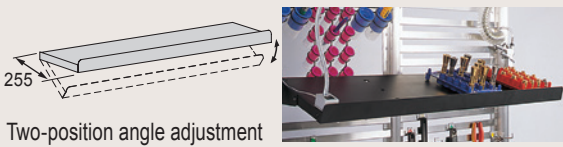

Hook base panel




Spotlight (Option)

100V-4W desk lamp. It can be attached anywhere.


Tool insert stand (Option)

Insert and store frequently used hand tools, stationery, etc.

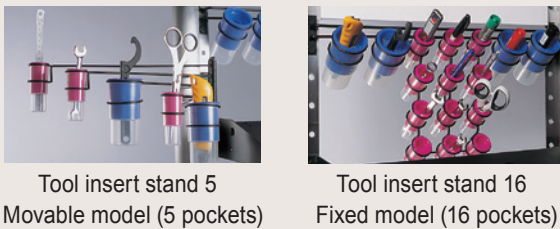


Dust Shooter (Option)

Easy trash separation.

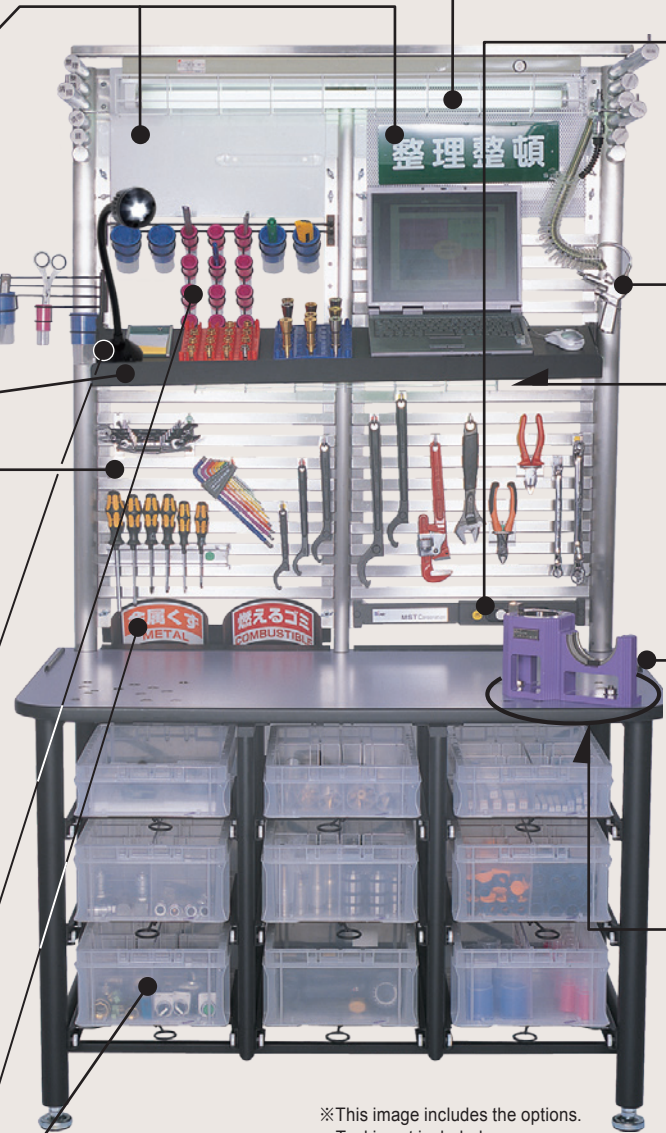

※This image includes the options.
Tool is not included.

Container box



Storage



Can be removed and carried.



Organizing



The see-through box allows easy storage and organizing.

Optional dividers allow you to easily organize and systematize items.

Upper lighting

Safety light cover.

Lighting switch and socket

Upper lighting (32W) and under shelf lighting (20W) (max. capacity 1,500W)



Air gun

Can be mounted on either the right or left.


Lower lighting

Brightly lit, safe work space




Safety stopper

Prevents dropping of cutting tools and tool holders.



Tabletop

The tool setup stand (sold separately) can be installed anywhere using the tabletop holes. No need to put your own holes in the tabletop.



Tool set up stand

➔ P.94




MY CUBE



Petit Ball

Dimensions

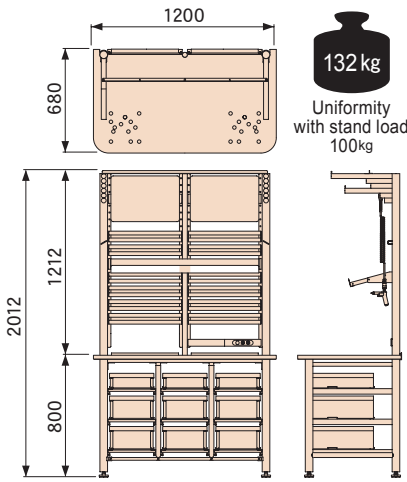

Std. Access.

| CODE | Description | Q'ty | Description | Q'ty |
|---------|-------------------|--------|---|------|
| 6SD-FBP | Hook base panel | 12pcs. | Shelf Board | 1pc. |
| -FS | Short hook | 3pcs. | Upper lighting / Lower lighting ※Select 50Hz or 60Hz | 1ea. |
| -FL | Long hook | 2pcs. | Power code set (Socket / Lighting / switch / Power code) | 1set |
| -UFS | U-type short hook | 3pcs. | | |
| -UFL | U-type long hook | 1pc. | | |
| -FSP | Hook for spanner | 1pc. | | |
| -FDR | Hook for driver | 1pc. | White board. Marker pen for whiteboard. Whiteboard eraser. Magnet pocket. Punched board. Name seal set. Magnets(3pcs.). Memo book. | 1set |
| CN -103 | Container box | 3pcs. | | |
| -150 | | 6pcs. | | |
| 6SD-AIR | Air gun set | 1set | | |

Caution

- Assembly by buyer.
- Customers pay the shipping cost.
- 100V electric power supply (transformer is required)

Option

Side table

| CODE | Uniformity with stand load :40kg |
|---------|----------------------------------|
| 6SD-STB | |

Side Table for the 6S DESK

Std. Access.

- Container box (CN-103)(1pc.)
- Container box (CN-150)(2pcs.)
- Lid for Container Box (3pcs.)



Dust Shooter

| CODE |
|---------|
| 6SD-DST |

Comes with two kinds of sign seals.

- ※Trash cans are not provided.
- Please prepare it by yourself.



Spotlight

| CODE |
|---------|
| 6SD-SPT |

100V-4W desk lamp



Tool insert stand 5

| CODE | Attachment q'ty |
|---------|-----------------|
| 6SD-IS5 | 5pcs. |


5-pocket movable model



Tool insert stand 16

| CODE | Attachment q'ty |
|----------|-----------------|
| 6SD-IS16 | 16pcs. |


16-pocket fixed model



Consumables / Replacement parts

Container box


| CODE | h | Capacity | Q'ty |
|----------|-----------|----------|-------|
| CN-103-3 | 103 (88) | 8 ℓ | 3pcs. |
| -150-3 | 150 (135) | 12 ℓ | |



※ () : Inside dimension

Lid for container box


| CODE | Q'ty |
|---------|-------|
| CN-FT-3 | 3pcs. |



※Lockable


Dividers for storage cabinet

| CODE | Required box | Q'ty |
|-----------|--------------|------------------------------|
| CN-S 84-3 | CN-103 | 9 pcs. (for 6 rooms) |
| -S135-3 | -150 | (Container box 3 pcs. / set) |



Hook base panel

| CODE | Q'ty |
|---------|-------|
| 6SD-FBP | 2pcs. |



Air gun set

| CODE |
|---------|
| 6SD-AIR |



Hook


Short hook

| CODE | Q'ty |
|--------|-------|
| 6SD-FS | 5pcs. |




U-type short hook

| CODE | Q'ty |
|---------|-------|
| 6SD-UFS | 5pcs. |




Hook for spanner

| CODE | Q'ty |
|---------|------|
| 6SD-FSP | 1pc. |




Long hook

| CODE | Q'ty |
|--------|-------|
| 6SD-FL | 5pcs. |




U-type long hook

| CODE | Q'ty |
|---------|-------|
| 6SD-UFL | 5pcs. |



Hook for driver

| CODE | Q'ty |
|---------|------|
| 6SD-FDR | 1pc. |



ANGLE HEAD

M/C Tool

HSK-T Tooling Systems for Turning Mill

General Purpose Tool

JIG

Measuring Equipment

Maintenance Tool

Wire EDM fixture


Technical Information

| |
|--------|
| CODE |
| CBX-01 |

Wash the tooling holders, collets, nuts, cutting tools, and small work-pieces thoroughly to maintain their accuracy!

- ▷ Wash tool holders, cutting tools and jig fixtures.
- ▷ No plumbing required.
- ▷ Safe cleaning system using water.
- ▷ Built-in water heater improves washing capability.

Compact built-in sink

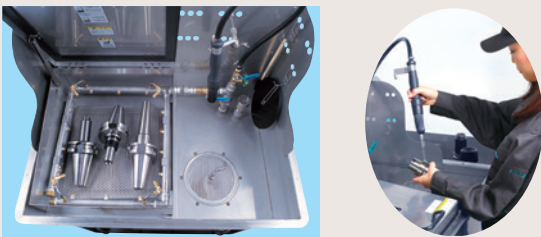

Automatic washing space

Shoots cleaning fluid from 18 location nozzles.

Hand washing space

Heavy dirt can be washed off using the hand nozzle brush and hot water (40°C / 104°F)

Built-in sink with an overflow drain allows pre-soaked washing.

Top cover

Top cover of washing unit can be opened and closed with one hand. Comes with an automatic shutoff function for the washing cycle. Automatic washing stops automatically when the top cover is lifted during operation.




Washing Unit

18 nozzles shoot hot water from every angle to wash off all the dirt.



Timer operating mode

Operation can be stopped automatically using the clock timer. (The time can be set arbitrarily, up to 12 min.)



※This image includes the options.


Tank

The use of heated cleaning fluid (40°C) increases the cleaning power and makes cleaning easy even in the winter.





Dimensions

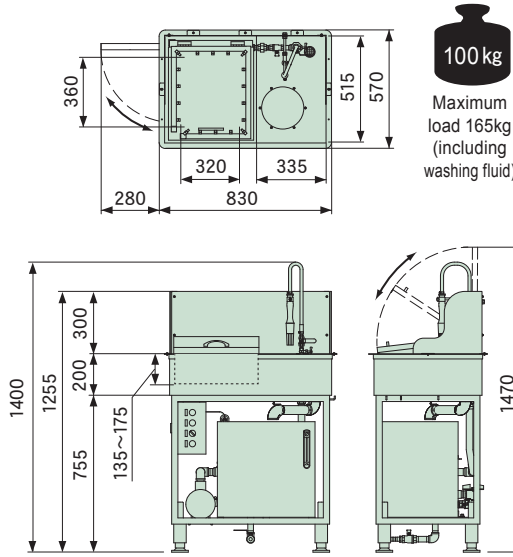

Specification

| | |
|----------|---|
| Material | SU304 (Sink, Tank, Cleaning unit) SS 400 (Base frame) |
| Tank | Approx. 65L (Level gauge with thermometer is standard accessory.) |
| Pump | 0.3~0.51kW (50/60Hz) (Produced by Grundfos) |
| Heater | 3kW (with temperature control) |
| Weight | Approx. 100kg (165kg, including cleaning fluid) |
| Voltage | 3-phase 200V (Rated 15A) |

Std. Access.

| CODE | Description | Q'ty |
|---------|--|-------|
| CBX-HNZ | Hand nozzle | 1pc. |
| -MFIL | Main filter | 2pcs. |
| -SFIL | Sub-filter | 2pcs. |
| -TRP | Drain trap | 1pc. |
| -GSTP | Rubber drain plug | 1pc. |
| -WBSK | Washing basket | 1pc. |
| -WTBL | Washing table | 1pc. |
| | Sink outer cover | 1 set |
| | Hook | 2pcs. |
| | Bamboo brush | 1pc. |
| | Primary power code (plug attached 15m) | 1pc. |

Caution


- Be sure to use water-soluble cleaning fluid.
- Customers pay the shipping cost.
- 200V electric power supply (transformer is required)

Outer sink cover

Prevents splashing of the washing cleaner.

Hand nozzle

Easy to attach and detach.



Attach

Remove

Filter

Can be changed easily when it becomes dirty.




Main filter

Sub-filter

Option

Draining basket

| | |
|---------|---|
| CODE | Uniformity with stand load 40kg |
| CBX-SBX | <ul style="list-style-type: none"> ■ Std. Access. ● Triple hook |

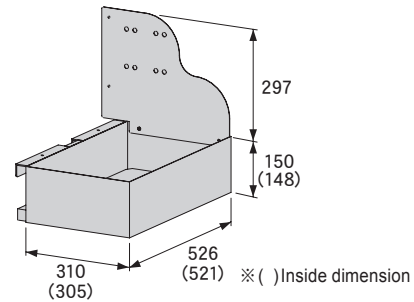

Used for draining, air blowing, rust-proofing, etc.
Can be attached to either the right or left side of the unit.

Consumables / Replacement parts

Washing basket

| | |
|----------|--|
| CODE | |
| CBX-WBSK | |



Collet and small parts can be washed.



Washing table

| | |
|----------|--|
| CODE | |
| CBX-WTBL | |

Used in a sink as an auxiliary table when washing by hand.



Main filter

| | |
|----------|-------|
| CODE | Q'ty |
| CBX-MFIL | 5pcs. |



Hand nozzle

| | |
|---------|--|
| CODE | |
| CBX-HNZ | |



Drain trap

| | |
|---------|--|
| CODE | |
| CBX-TRP | |



Sub-filter

| | |
|----------|-------|
| CODE | Q'ty |
| CBX-SFIL | 3pcs. |



Rubber drain plug

| | |
|----------|--|
| CODE | |
| CBX-GSTP | |



Cleaning fluid

| | |
|---------|--|
| CODE | |
| CBX-EKI | |



- Capacity 18 ℓ
- Product name: "Clean Super 285" weak alkaline cleaner

⚠ Be sure to use water-soluble cleaning fluid.

The sink, washing unit and tank are made of stainless steel, resulting in easy maintenance and less staining.

TEST BAR CHECKMATE

For machine spindle maintenance


The maintaining machine spindle run-out accuracy allows superior machining quality. Maximizes tool holder performance!

Periodically checking the run-out accuracy will result in superior machining.

- ▷ Light-weight (20% lighter), hollow design makes it easy to use.
- ▷ The actual measurement values are marked on the body.
- ▷ Ideal for setting Z axis datum.
- ▷ Reasonable price.

You can recognize the exact run-out accuracy and the highest run-out of the spindle.

You can check the spindle condition more precisely using the run-out value and position marked on the body.

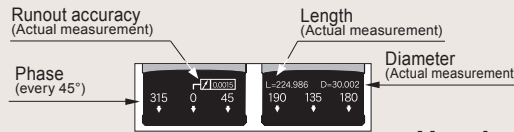



It can be installed into the spindle in every phase.

There is no drive-key groove, so measurements can be made without worrying about the phase.



The name ring and scale ring protect it from scratches and dents.

The taper area and straight area do not touch the table surface even if they are placed horizontally.

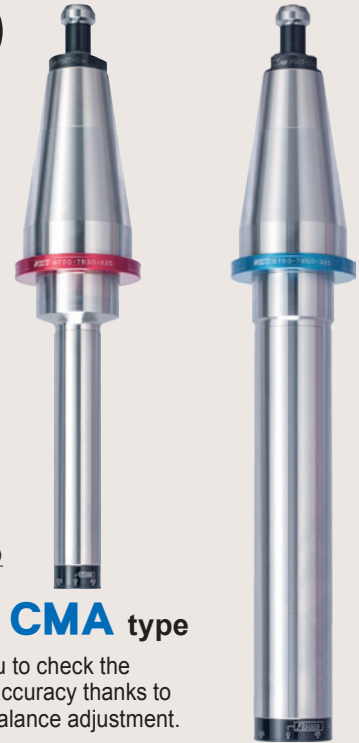


Handy CMA type

Allows you to check the dynamic accuracy thanks to optional balance adjustment.

Full-fledged CMB type

Z-axis deflection and spindle travel accuracy can be measured.

| | CODE | Fig. | φD | φD1 | L | L1 | L2 | L3 | Kg |
|------------------|------------------|------|----|-----|-----|-----|-----|-----|-----|
| BT / DIN / CAT. | NT30 -CMA20-125 | 1 | 20 | 32 | 125 | 45 | 65 | 15 | 0.7 |
| | NT40 -CMA25-175 | 2 | 25 | 42 | 175 | 50 | 110 | | 1.3 |
| | NT50 -CMA30-225 | | 30 | 53 | 225 | 65 | 145 | | 3.5 |
| | NT30 -CMB30-175 | 1 | 30 | 32 | 175 | 45 | 115 | 15 | 1.0 |
| | NT40 -CMB40-325 | 2 | 40 | 42 | 325 | | 265 | | 2.8 |
| NT50 -CMB50-325 | | 50 | 53 | | 60 | 250 | | 5.7 | |
| HSK-A / -E | HSK32 -CMA20-125 | 3 | 20 | 26 | 125 | 35 | 75 | 15 | 0.4 |
| | HSK40 -CMA20-125 | | | 32 | | 45 | 65 | | 0.5 |
| | HSK50 -CMA25-175 | | 25 | 42 | 175 | 50 | 110 | | 1.0 |
| | HSK63 -CMA25-175 | | | | | | | | 1.2 |
| | HSK80 -CMA30-225 | | 30 | 53 | 225 | 65 | 145 | | 2.2 |
| | HSK100-CMA30-225 | | | | | | | | 3.0 |
| | HSK125-CMA30-225 | | | | | | | | 4.1 |
| | HSK32 -CMB25-175 | 3 | 25 | 26 | 175 | 35 | 125 | 15 | 0.7 |
| | HSK40 -CMB30-175 | | 30 | 32 | | 40 | 120 | | 0.9 |
| | HSK50 -CMB40-225 | | 40 | 42 | 225 | 45 | 165 | | 1.8 |
| HSK63 -CMB40-325 | | | | 325 | | 265 | | 2.7 | |
| HSK80 -CMB50-325 | | 50 | 53 | | 60 | 250 | | 4.4 | |
| HSK100-CMB50-325 | | | | | | | | 5.2 | |
| HSK125-CMB50-325 | | | | | | | | 6.3 | |
| HSK-F | HSK63F-CMA25-175 | 3 | 25 | 42 | 175 | 50 | 110 | 15 | 1.2 |
| | HSK80F-CMA30-225 | | 30 | 53 | 225 | 65 | 145 | | 2.3 |
| | HSK63F-CMB40-325 | 3 | 40 | 42 | 325 | 45 | 265 | 15 | 2.7 |
| | HSK80F-CMB50-325 | | 50 | 53 | | 60 | 250 | | 4.5 |

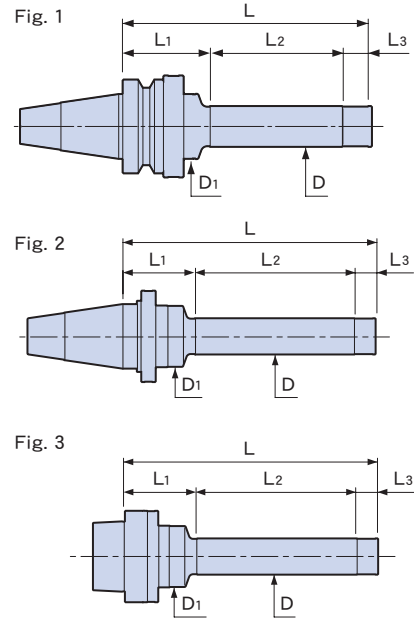

Exclusive retention knob

| CODE | Shank |
|-------|--------|
| P-576 | CAT.40 |
| -575 | CAT.50 |
| -578 | DIN40 |
| -577 | DIN50 |

- Option**
- Coolant duct(HSK-A) •Retention knob(BT)
 - Exclusive retention knob(CAT. / DIN)
 - Balance adjustment (only for CMA type) less than G2.5 /30000min⁻¹
※Please order by adding "BL" to the end of the code.
(Ex. : HSK63-CMA25-175 BL)
- Std. Access.**
- Accuracy inspection sheet

- Note**
- NT type is available for BT/CAT. and DIN spindle by changing the retention knob.
 - HSK type is available for both HSK-A and HSK-E spindles. •HSK-F type is available only for HSK-F spindle.
 - A special design retention knob is required for CAT./DIN spindle. A market standard retention knob for ANSI/DIN/ISO is not available. Contact us for the details.
 - Use a market standard retention knob for the BT spindle.
 - NT30 type can be installed into a spindle at 0°and 180°.
- Caution**
- A.T.C is not available. (except for NT30)

The sub-zero treatment prevents secular change.


See-through tool cover. You can take care of your tools safely and simply.

- ▷ Prevent cutting tools from coming into contact with each other and being damaged or chipped.
- ▷ Prevent getting injured when taking the tool holder in and out or when carrying.
- ▷ Minimize grinding costs for reconditioning and lead to reduced operating costs.
- ▷ Applicable for various shapes or brands.

TCC type
Attached by deforming its cap.

TCB type
Attaches directly to the tip of the cutting tool.

TCA type
Attaches to the tip of a tool holder.

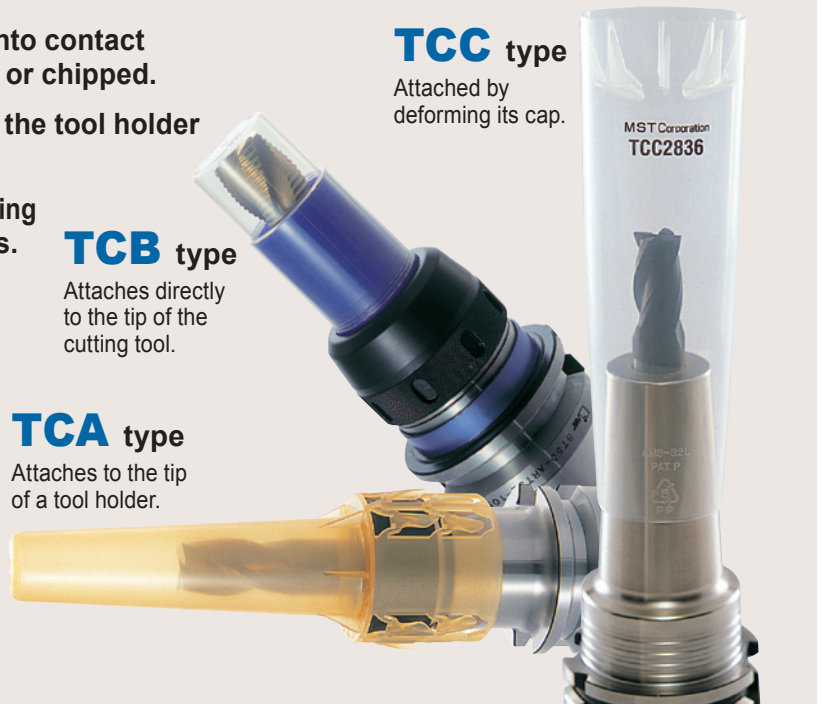

The tool is visible

The cutting tools can be stored with the caps on. By placing the cap on the tip of the tool holder, the cutter doesn't receive any stress, alleviating any worries over the cutters breaking.



Prevents chipping and damage to cutting tools

Storing cutters with caps will prevent them from hitting each other and being chipped. This will minimize grinding costs for reconditioning and lead to reduced operating costs.



Will not slip off

Can be put on with one touch, and won't fall off when turned upside down.



Conventional

It can be used with every configuration and brand.





TCA type


Attaches to the tip of a tool holder.

ANGLE HEAD

M/C Tool



TCA2022 TCA2830 TCA3436 TCA4043 TCA4650

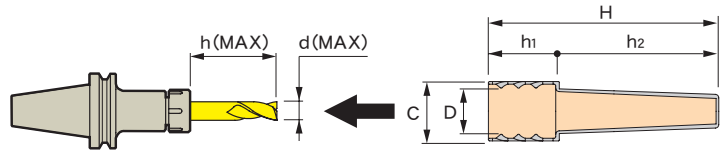

Code system

| | | | |
|-----|----------------------------|---|-------------------|
| TCA | 2030 (Min.~MAX.) | — | 50 (pc) |
| | D dimension | | Q'ty |

| CODE | φD | φC | φd | H | h | h1 | h2 | Type | Note |
|---------|-------|----|----|-----|-----|----|-----|------------------|--|
| TCA2022 | 20~22 | 29 | 8 | 100 | 70 | 30 | 70 | DTA7/DTB7 | 10pcs. 50pcs. 100pcs.300pcs. 500pcs. Please order by adding Q'ty to the end of the code. Ex. TCA2022-10 |
| TCA2830 | 28~30 | 34 | 14 | 130 | 90 | 40 | 90 | DTA12/DTB12/DTE7 | |
| TCA3436 | 34~36 | 41 | | 135 | | 45 | | CTA10/CTH10 | |
| TCA4043 | 40~43 | 47 | 20 | 152 | 105 | 47 | 105 | DTE12 | |
| TCA4650 | 46~50 | 54 | | 167 | 120 | | 120 | CTA20/CTH20 | |


Cap dispenser

Tool caps can be easily removed from the dispenser.

Dispenser exclusively for storing TCA-type tool caps. Made of transparent acrylic resin, allowing you to confirm which caps are still in the dispenser.

HSK-T Tooling Systems for Turning Mill

General Purpose Tool

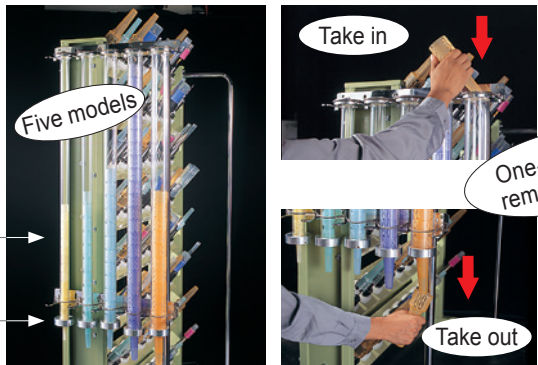

Cap dispenser

Dedicated bracket

Cap dispenser

Five models available for different sizes.

| CODE | Type | Q'ty |
|---------|---------|--------|
| CAP2022 | TCA2022 | 31pcs. |
| CAP2830 | TCA2830 | 20pcs. |
| CAP3436 | TCA3436 | |
| CAP4043 | TCA4043 | 22pcs. |
| CAP4650 | TCA4650 | |

Dedicated bracket

Five cap servers can be attached. Attach the bracket to a wall using bolts.

| CODE |
|--------|
| SRV-01 |


JIG

TCB type


Attaches directly to the tip of the cutting tool. Handles a broad range of sizes.

Measuring Equipment

Maintenance Tool

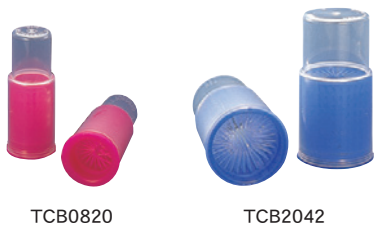

TCB0820 TCB2042

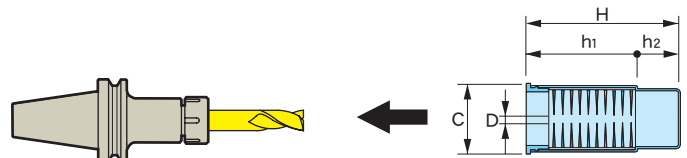

Code system

| | | | |
|-----|----------------------------|---|--------------------|
| TCB | 2042 (Min.~MAX.) | — | 300 (pc) |
| | D dimension | | Q'ty |

| CODE | φD | φC | H | h1 | h2 | Note |
|---------|-------|----|-----|----|----|---|
| TCB0820 | 8~20 | 33 | 82 | 52 | 30 | 10pcs. 50pcs. 100pcs. 300pcs. 500pcs. Please order by adding Q'ty to the end of the code. Ex. TCB0820-10 |
| TCB2042 | 20~42 | 54 | 102 | 62 | 40 | |


■ Note
•The bristles of the brush may become deformed during use. If such deformation occurs, remove the brush and immerse it in hot water (60°C to 80°C). This should restore the deformed bristles to their original state.

Wire EDM fixture

Technical Information

TCC type

Attached by deforming its cap.
Simple and reasonably priced.
For small size tool holders and cutting tools.

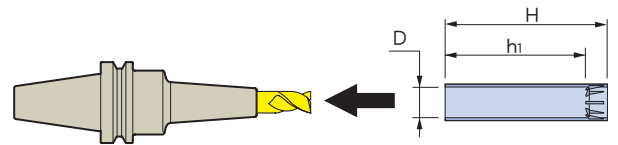

| | | | | |
|-------------|-----|---------------------|---|-------------|
| Code system | TCC | 2228 (Min.~MAX.) | — | 100 (pc) |
| | | | | |

| CODE | φD | h ₁ | H | Q'ty |
|-------------|------------|----------------|-----|----------|
| TCD03-50 | 3 | — | 25 | 50 pcs. |
| TCD04-50 | 4 | — | 32 | 50 pcs. |
| TCC0607- 50 | 5.4~ 6.7 | 35 | 40 | 50 pcs. |
| -100 | | | | 100 pcs. |
| -500 | | | | 500 pcs. |
| TCC0709- 50 | 6.8~ 8.9 | 35 | 40 | 50 pcs. |
| -100 | | | | 100 pcs. |
| -500 | | | | 500 pcs. |
| TCC0911- 50 | 8.9~ 10.9 | 65 | 70 | 50 pcs. |
| -100 | | | | 100 pcs. |
| -500 | | | | 500 pcs. |
| TCC1113- 50 | 10.9~ 13.4 | 65 | 70 | 50 pcs. |
| -100 | | | | 100 pcs. |
| -500 | | | | 500 pcs. |
| TCC1418- 25 | 13.8~ 17.8 | 100 | 110 | 25 pcs. |
| - 50 | | | | 50 pcs. |
| -250 | | | | 250 pcs. |
| TCC1822- 25 | 17.8~ 22.4 | 100 | 110 | 25 pcs. |
| - 50 | | | | 50 pcs. |
| -250 | | | | 250 pcs. |
| TCC2228- 25 | 22.3~ 28 | 135 | 150 | 25 pcs. |
| - 50 | | | | 50 pcs. |
| -250 | | | | 250 pcs. |
| TCC2836- 10 | 28 ~ 36 | 130 | 150 | 10 pcs. |
| - 20 | | | | 20 pcs. |
| - 50 | | | | 50 pcs. |
| -200 | | | | 200 pcs. |
| TCC3646- 10 | 36.2~ 47 | 165 | 190 | 10 pcs. |
| - 20 | | | | 20 pcs. |
| - 50 | | | | 50 pcs. |
| -200 | | | | 200 pcs. |
| TCC4760- 10 | 46 ~ 60 | 160 | 190 | 10 pcs. |
| - 20 | | | | 20 pcs. |
| - 50 | | | | 50 pcs. |
| -200 | | | | 200 pcs. |

Variety set


| CODE | Q'ty |
|-------|---|
| TCC-F | 2 pieces per cutting tool cover size for TCC0607 to 4760 (Total of 20 pieces / set) |

Usage

1. Hold the mouth of the tool cap vertically, and then press it so that its oval shape becomes round.
2. Once the mouth of the tool cap becomes round, push it into the cutting tool or tool holder.



You can cut it to any desired length.

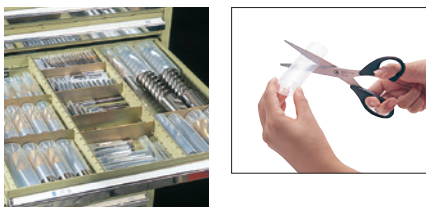

Tool set up stand

Tool tightening stand

The setup time can be shortened!
Not only can you mount cutting tools simply and quickly without using other tools, but also clamping collets and retention knobs!

7.7ボール
Petit Ball 40
 BT40/DIN40/CAT.40

Freely set vertically or horizontally

マキユ7
My CUBE 50
 BT50/DIN50/CAT.50
マキユ7
My CUBE 100
 HSK-A100/T100

Vise clamping type
HF SERIES

BT30/BT40/BT50
 HSK A40/A50/A63/A100
 E32/E40/E50/F63
 T40/T50/T63/T100

Affordable



Usable either vertically or horizontally (Petit Ball, My CUBE)

The tool can be placed either vertically or horizontally, whatever angle is most convenient for you.



Nut tightening



Clamping DETa-1 Collet(DTB)




Retention knob tightening



Clamping SLIMLINE collet

Multi-purpose usage

By using adapters, various tool holder shank types, including straight arbor DTB holders, can be used.

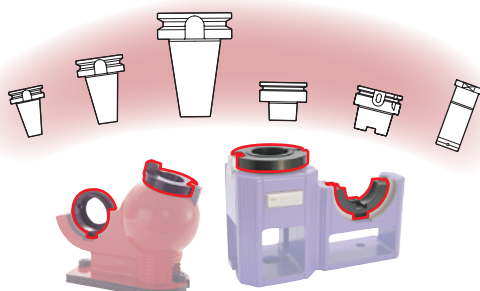


Accuracy assured


The taper is the most crucial part for maintaining the accuracy of a tool holder. A special resin is applied to the taper contact area to prevent scratches on the tool holder.



Petit Ball

| CODE | Shank type |  |
|--------------|-------------------|---|
| Petit Ball40 | BT40/DIN40/CAT.40 | 6.1 |

- **Option**
 - Adapter
- **Std. Access.**
 - Name plate
- **Caution**
 - No mounting bolts are provided. Use two M8 bolts for mounting.

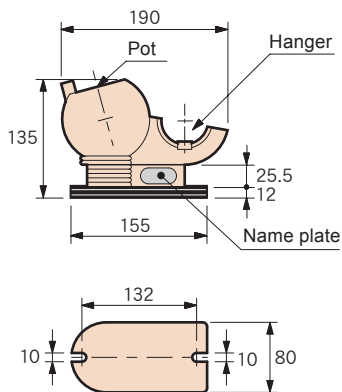


Name plate

A specially finished name plate is provided, on which your company name is inscribed. Up to 12 characters (upper-case alphabetic characters, numeric characters, and/or hyphens).



Adapter (Petit Ball)




Adapter for pot

| CODE | Shank type |
|-----------|------------|
| AP40-T30V | BT30 |


Adapter for hanger

| CODE | Shank type |
|-----------|----------------|
| AP40-T30H | BT30 |
| -S25H | ST25T-DTB7 |
| -S32H | ST32T-DTB7, 12 |

MY CUBE

| CODE | Shank type |  |
|------------|-----------------------|---|
| MY CUBE 50 | BT50 / DIN50 / CAT.50 | 9.7 |
| MY CUBE100 | HSK-A100, T100 | 9.6 |

- **Option**
 - Adapter
- **Std. Access.**
 - Name plate
- **Caution**
 - No mounting bolts are provided. Use two M12 bolts for mounting.

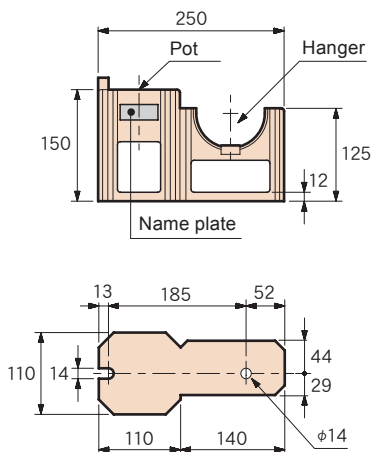

Name plate

A specially finished name plate is provided, on which your company name is inscribed. Up to 12 characters (upper-case alphabetic characters, numeric characters, and/or hyphens).



Adapter (MY CUBE50)



Adapter for pot

| CODE | Shank type |
|-----------|-------------------|
| AP50-T30V | BT30 |
| -T40V | BT40/DIN40/CAT.40 |
| -A63V | HSK-A63, T63 |
| -F63V | HSK-F63 |

Adapter for hanger

| CODE | Shank type |
|-----------|----------------|
| AP50-T30H | BT30 |
| -T40H | BT40 |
| -A63H | HSK-A63, T63 |
| -F63H | HSK-F63 |
| -S25H | ST25T-DTB7 |
| -S32H | ST32T-DTB7, 12 |

HF series


| CODE | Fig. | Shank type | H | W | t |  |
|---------|------|--------------|-----|----|----|---|
| HF-BT30 | 1 | BT30 | 77 | 70 | 30 | 0.8 |
| -BT40 | | BT40 | 90 | 90 | 37 | 1.2 |
| -BT50 | | BT50 | — | — | — | 2.2 |
| HF-A40 | 1 | HSK-A40, T40 | 72 | 60 | 30 | 0.8 |
| -A50 | | -A50, T50 | 77 | 70 | 37 | 1.0 |
| -A63 | | -A63, T63 | 87 | 90 | — | 1.2 |
| -A100 | | -A100, T100 | — | — | — | 2.1 |
| HF-E32 | 3 | HSK-E32 | 98 | 64 | — | 1.0 |
| -E40 | | -E40 | 100 | 70 | — | 1.1 |
| -E50 | | -E50 | 106 | 80 | — | 1.3 |
| -F63 | | -F63 | 120 | 90 | — | 1.6 |

Fig. 1

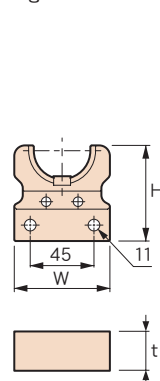


Fig. 2



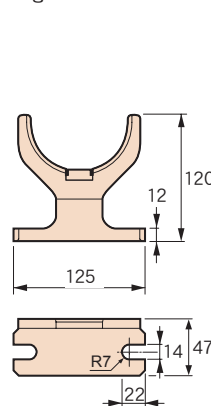


Fig. 3

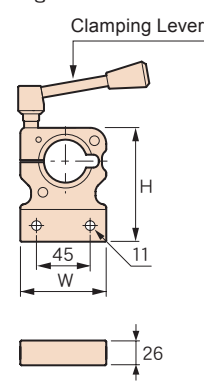


This pallet neatly houses collets.

- ▷ Uniquely designed by an industrial designer.
- ▷ Protects the collets from damage to maintain their accuracy.
- ▷ Both top side and back side are usable.
- ▷ Affixing labels allows easy storage by size.
- ▷ Has standard outer dimensions ensuring applicability to various types of drawers and shelves.
- ▷ Applicable regardless of manufacturer.

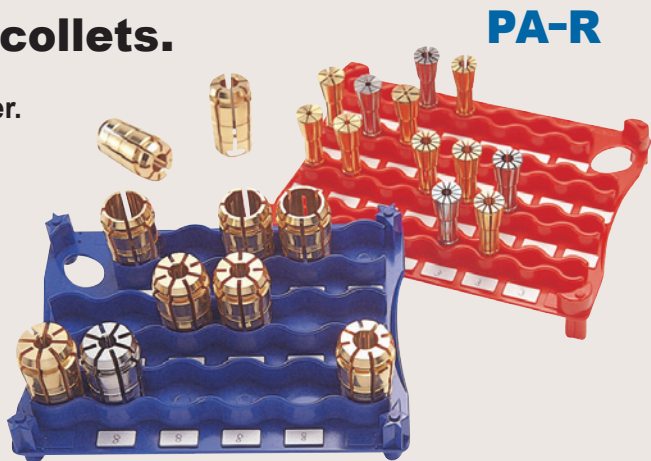

PA-B


Neatly arranged by size




A stand for the SLIMLINE 2PIECE type collets is also available.




PA-R

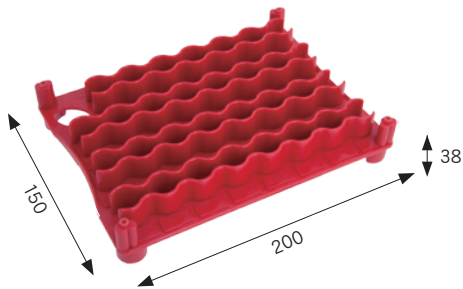

PA-B

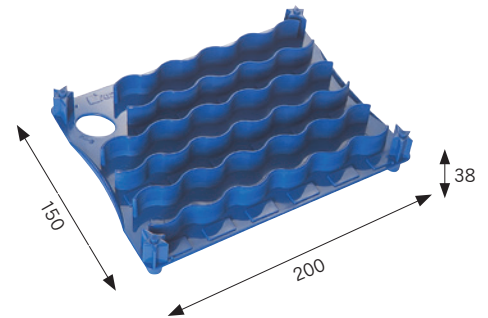


Storage side of Spring collet (C10)

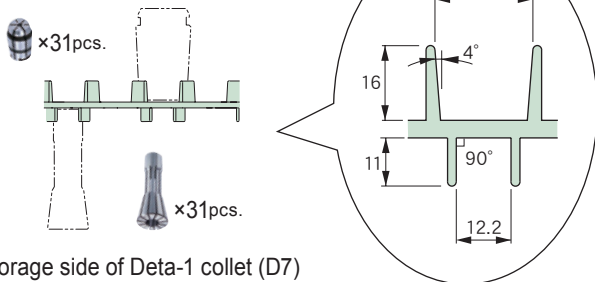

Storage side of Deta-1 collet (D7)

Storage side of Spring collet (C20)

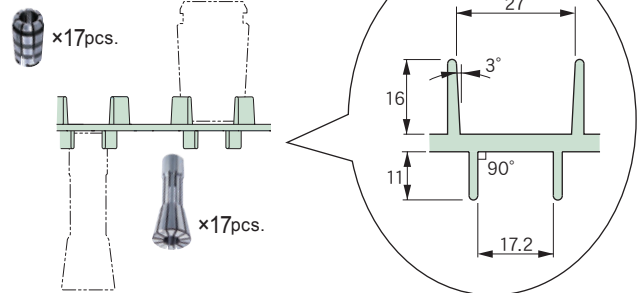

Storage side of Deta-1 collet (D12)

| CODE | Q'ty |
|---------|--------|
| PA-R- 1 | 1pc. |
| - 5 | 5pcs. |
| -10 | 10pcs. |

| CODE | Q'ty |
|---------|--------|
| PA-B- 1 | 1pc. |
| - 5 | 5pcs. |
| -10 | 10pcs. |

Are you having trouble storing your cutting tools ?




Cutting tool expenses increase due to cutting edge chipping.

The required cutting tool cannot be found easily.

Save cutting tool expenses and time with the optimum working environment!

- ▶ Cutting tool life is extended because the cutting edge is not dulled from striking other cutters.
- ▶ You can find the required cutting tool immediately.

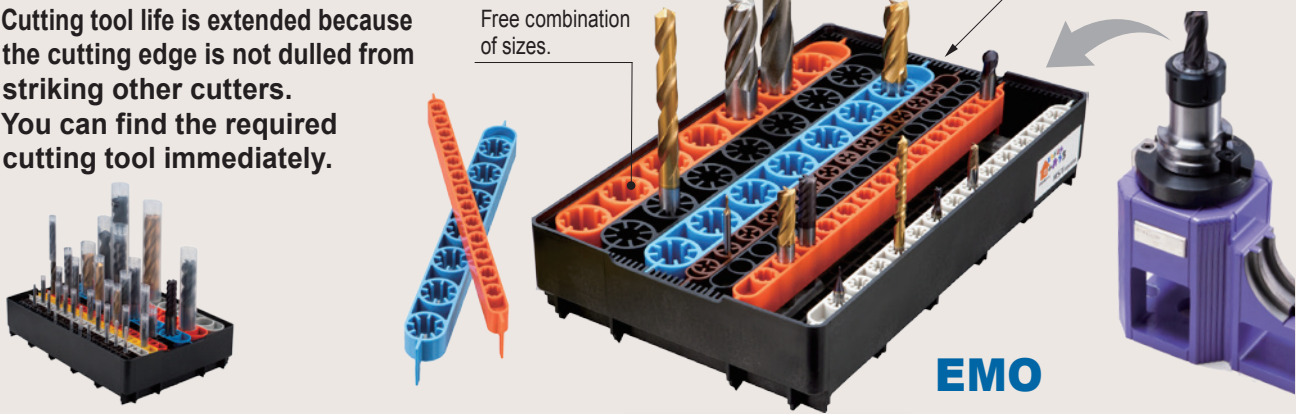

EMO

Value set


This is a convenient value set that can be immediately used and handles tool shank diameters of 3 mm to 12 mm. (Stores 156 cutting tools)

| CODE | Stand | Base | TOOL CAP | TOOL CAP storage box | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------|---|------------|----------|----------------------|------|-----|-------|-----|-------|-----|-------|------|-------|------|-------|------|--|------------|------|-----|--------|-----|--------|-----|--------|-----|--------|------|--------|------|--------|------|
| EMO-SET-01 | <table border="1"> <thead> <tr> <th>Cutter dia</th> <th>Q'ty</th> </tr> </thead> <tbody> <tr><td>φ 3</td><td>1pc.</td></tr> <tr><td>φ 4</td><td>2pcs.</td></tr> <tr><td>φ 6</td><td>3pcs.</td></tr> <tr><td>φ 8</td><td>2pcs.</td></tr> <tr><td>φ 10</td><td>2pcs.</td></tr> <tr><td>φ 12</td><td>2pcs.</td></tr> </tbody> </table> | Cutter dia | Q'ty | φ 3 | 1pc. | φ 4 | 2pcs. | φ 6 | 3pcs. | φ 8 | 2pcs. | φ 10 | 2pcs. | φ 12 | 2pcs. | 1pc. | <table border="1"> <thead> <tr> <th>Cutter dia</th> <th>Q'ty</th> </tr> </thead> <tbody> <tr><td>φ 3</td><td>50pcs.</td></tr> <tr><td>φ 4</td><td>50pcs.</td></tr> <tr><td>φ 6</td><td>50pcs.</td></tr> <tr><td>φ 8</td><td>50pcs.</td></tr> <tr><td>φ 10</td><td>50pcs.</td></tr> <tr><td>φ 12</td><td>50pcs.</td></tr> </tbody> </table> | Cutter dia | Q'ty | φ 3 | 50pcs. | φ 4 | 50pcs. | φ 6 | 50pcs. | φ 8 | 50pcs. | φ 10 | 50pcs. | φ 12 | 50pcs. | 1pc. |
| | Cutter dia | Q'ty | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | φ 3 | 1pc. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | φ 4 | 2pcs. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | φ 6 | 3pcs. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | φ 8 | 2pcs. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| φ 10 | 2pcs. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| φ 12 | 2pcs. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Cutter dia | Q'ty | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| φ 3 | 50pcs. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| φ 4 | 50pcs. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| φ 6 | 50pcs. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| φ 8 | 50pcs. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| φ 10 | 50pcs. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| φ 12 | 50pcs. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

φ 3...13pcs. φ 4...26pcs. φ 6...39pcs.
φ 8...26pcs. φ 10...26pcs. φ 12...26pcs.

Stand

Parts for storing and securing cutting tools. It is possible to identify the cutting tool size by color, and the cutting tool you need can be found at a glance. Use this stand inserting it into the base.



| CODE | φd | W | max. Q'ty | Color | Q'ty |
|-------------|--------|-----------|-----------------------------|--------|-------|
| EMO-STD 3-2 | 3 | 15mm (1W) | 13 pcs./cutting tools/stand | Black | 2pcs. |
| -5 | Black | | | 5pcs. | |
| -STD 4-2 | 4 | | | Brown | 2pcs. |
| -5 | Brown | | | 5pcs. | |
| -STD 6-2 | 6 | | | Gray | 2pcs. |
| -5 | Gray | | | 5pcs. | |
| -STD 8-2 | 8 | 30mm (2W) | 7 pcs./cutting tools/stand | Yellow | 2pcs. |
| -5 | Yellow | | | 5pcs. | |
| -STD10-2 | 10 | | | Orange | 2pcs. |
| -5 | Orange | | | 5pcs. | |
| -STD12-2 | 12 | | | Black | 2pcs. |
| -5 | Black | | | 5pcs. | |
| -STD16-2 | 16 | 30mm (2W) | 7 pcs./cutting tools/stand | Blue | 2pcs. |
| -5 | Blue | | | 5pcs. | |
| -STD20-2 | 20 | | | Orange | 2pcs. |
| -5 | Orange | | | 5pcs. | |
| -STD25-2 | 25 | | | Gray | 2pcs. |
| -5 | Gray | | | 5pcs. | |

Base


Container for holding the stands.

Stands can be arranged by changing the combination of stands freely.


| CODE | Q'ty |
|-----------|-------|
| EMO-BAS-1 | 1pc. |
| -3 | 3pcs. |

Note

- 12 rows for the stands of 3mm to 12mm diameter or 6 rows for the stands of 16mm to 25mm diameter.
- The left-right orientation of the stands can be set.

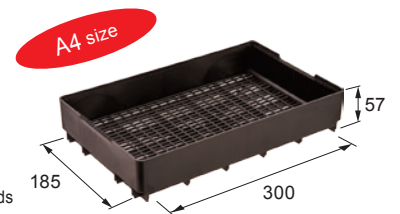


Example of stand arrangement

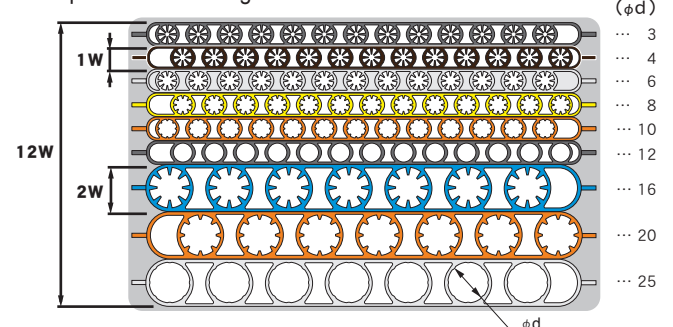

TOOL HOLDER STORING CABINET

Compact Storage Box with Anti-Rust Treatment for tool holders.

Orderly storing with name plate!

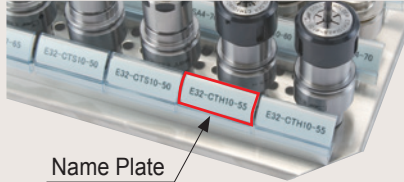


Name Plate

Transparent case!!



Freely arrangeable

Can be used with a variety of holders by changing the pins and combining as you wish.




Horizontal type



Vertical type

HBX

Three types of container boxes.

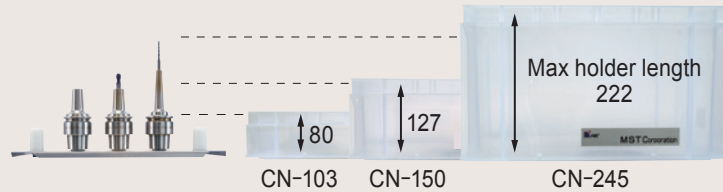

Standard Set

| CODE | max. Q'ty | Container box | Pin | Q'ty | Shank type |
|---------|-----------|---------------|-----------|--------|------------------|
| | | | | | |
| HBX-A40 | 24 | CN-150 | HBX-PNE40 | 18pcs. | HSK-A40 |
| -A50 | 15 | -245 | -PNE50 | 15pcs. | -A50 |
| -E25 | 40 | -150 | -PNE25 | 32pcs. | -E25 |
| -E32 | | | -PNE32 | | -E32 |
| -E40 | 24 | | -PNE40 | 18pcs. | -E40 |
| -E50 | 15 | -245 | -PNE50 | 15pcs. | -E50 |
| -F63 | 10 | | | | -F63 |
| -15T | 40 | -150 | -PN15T | 16pcs. | 15T(BROTHER) |
| -20T | | | -PN20T | | RS20/20T(SUGINO) |

Contents of set

- Base plate ●Container box ●Pin

Option

- Rail ●Name plate
- Lid for container box ●Eyenut


Note

- Knock-down type. A wrench (5mm) is required.

Base plate


A multi-hole base plate is employed. Supports a variety of holder specifications using pins that can be freely changed and relocated.

| CODE |
|----------|
| HBX-BP01 |




Container box

| CODE | H | | Shank type |
|--------|------------------|-----------------|---------------------|
| | Outside diameter | Inside diameter | |
| CN-103 | 103 | 88 | — |
| -150 | 150 | 135 | E25, 32, 40/15T/20T |
| -245 | 245 | 230 | A50, E50, F63 |

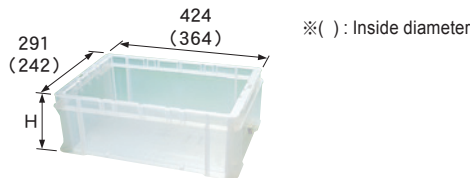

Pin

| CODE | Q'ty | Size |
|-----------|---------|--------------|
| HBX-PNE25 | 10 pcs. | φ 13.5 × H20 |
| -PNE32 | | φ 16.5 × H25 |
| -PNE40 | 5 pcs. | φ 20.5 × H29 |
| -PNE50 | | φ 25.5 × H36 |
| -PN15T | | φ 26.5 × H54 |
| -PN20T | | φ 30.5 × H62 |




Std. Access.

- Mounting bolt (M6)

Eyenut

| CODE | Q'ty |
|----------|-------|
| HBX-ENM6 | 2pcs. |


- Std. Access.
- Mounting bolt (M6)



Rail (for name plate)

| CODE | Q'ty | L | Note |
|----------|-------|-----|-----------------|
| HBX-R210 | 6pcs. | 210 | Vertical type |
| -R330 | 4pcs. | 330 | Horizontal type |


- Std. Access.
- Mounting bolt (M5)
- Required for attaching name plate.



Name plate

| CODE | Q'ty |
|----------|--------|
| HBX-NP01 | 40pcs. |

Useful for organizing tools. Attaches easily to the rail.



Lid for container box

| CODE |
|-------|
| CN-FT |




A work-piece fixture with high-accuracy positioning and short setup time.

MIDDLE VISE

- ▷ Ideal for small work-pieces.
- ▷ High flexibility in choosing installation place compact design.
- ▷ After the work-piece is clamped, horizontal and parallel adjustments are possible due to the independent fine adjustment functionality.
- ▷ Two sliders makes it easy use to use.



Compact design

This product does not use a table corner, allowing it to be installed in any place. Multiple pieces may be installed.



Height adjusting mechanism

The clearance between the zero level of the table and the level of the workpiece can be set to 0 or 1 mm.

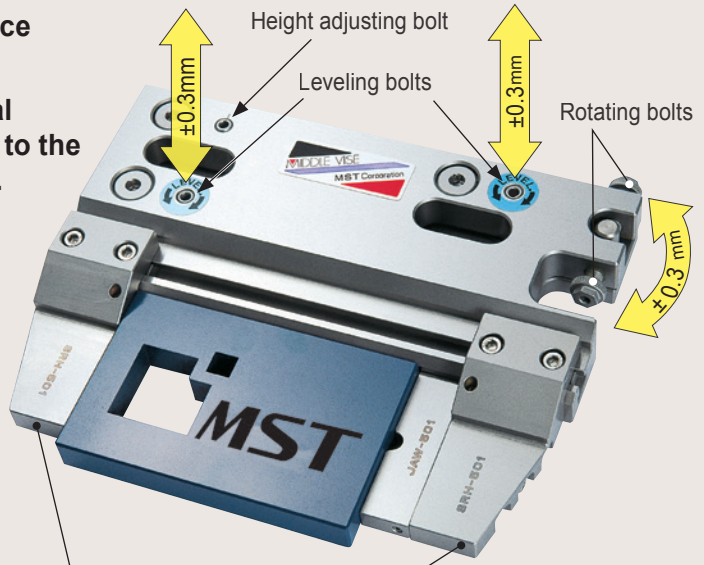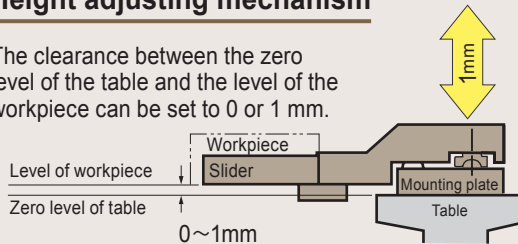

The Two-slider system allows you to set it up anywhere.


Standard set

CODE

MDV-501

Description


1. A complete set of main body (Including 2 sliders and 1 jaw)
2. Allen wrench (1 each: 2.5, 4, and 6 mm)
3. 10 mm spanner (1pc.)
4. M8 mounting bolts and washers (25 ea.)

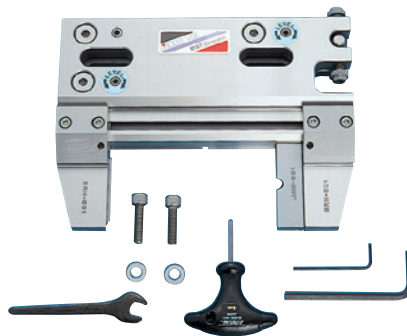











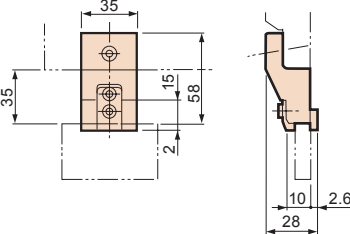

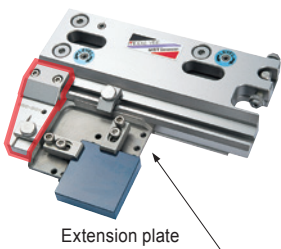
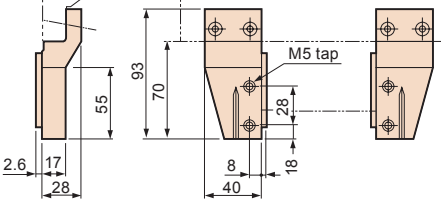

Specification

This unit uses stainless steel that is highly resistant to corrosion and wear.

| | |
|----------------------------------|----------|
| Maximum dimensions of work-piece | 130×100 |
| Maximum weight of work-piece | 3kg |
| Weight of main body | 5kg |
| Material | SUS420J2 |
| Hardness | 50HRC |

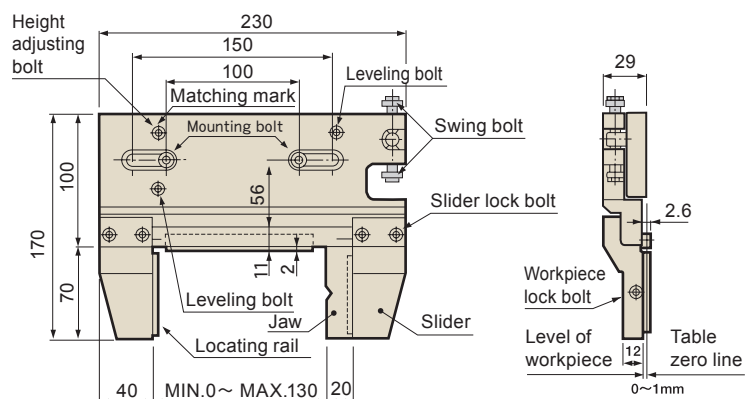

Optional accessories
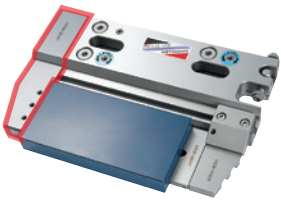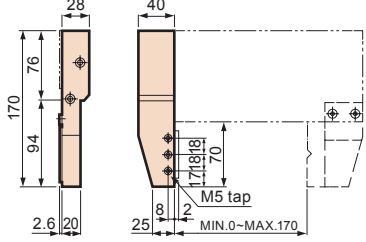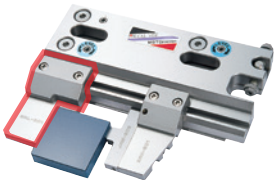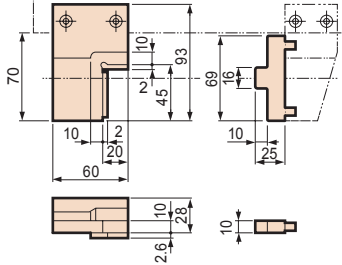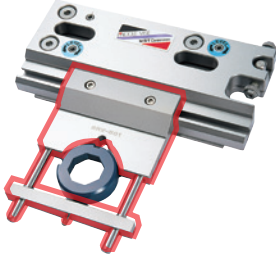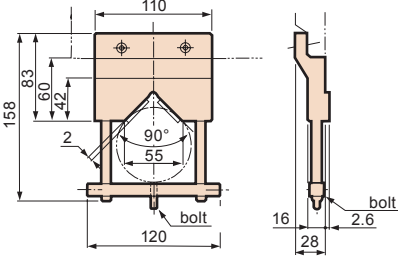
| Name | Model No. | | Dimensions | work-piece size |
|---|-----------|---|--|---|
| Extension Jaw For large work-pieces | JAE-501 |  |  |  |
| L Slider For small work-pieces | SRL-501 |  |  |  |
| V Slider For round work-pieces | SRV-501 |  |  |  |
| Sandwich Slider For small and thin work-pieces | SRS-501 |  |  |  |
| Clamp on Slider The work-piece can be clamped to the jaw using the clamber. The extension plate can also be used. | SRC-501 |  |  |  |

ANGLE HEAD

M/C Tool

HSK-T Tooling Systems for Turning Mill

General Purpose Tool

JIG

Measuring Equipment

Maintenance Tool


Wire EDM fixture

Technical Information

Wire Cut Unit


A work-piece fixture with high-accuracy positioning and short setup time.

- ▷ A work-piece having a datum surface can be accurately attached by merely affixing it to the wire cut unit body.
- ▷ You can clamp a work-piece quickly.
- ▷ After the work-piece is clamped, horizontal and parallel adjustments are possible due to the independent fine adjustment functionality.

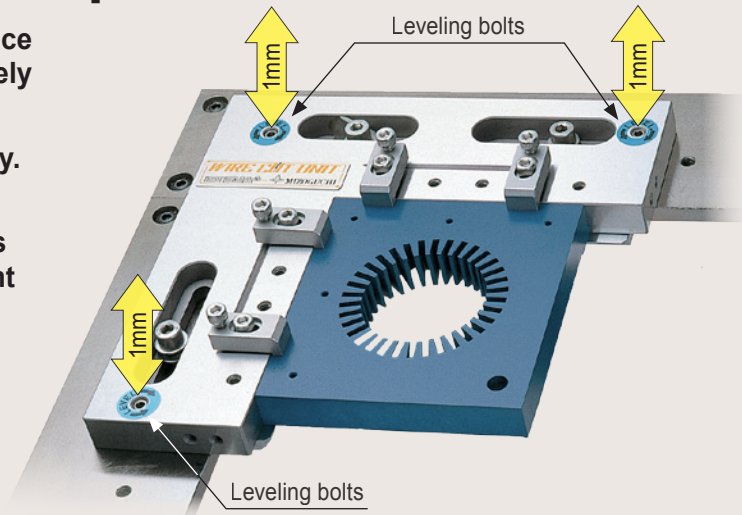

Wire Cut Unit set


WCU - A set

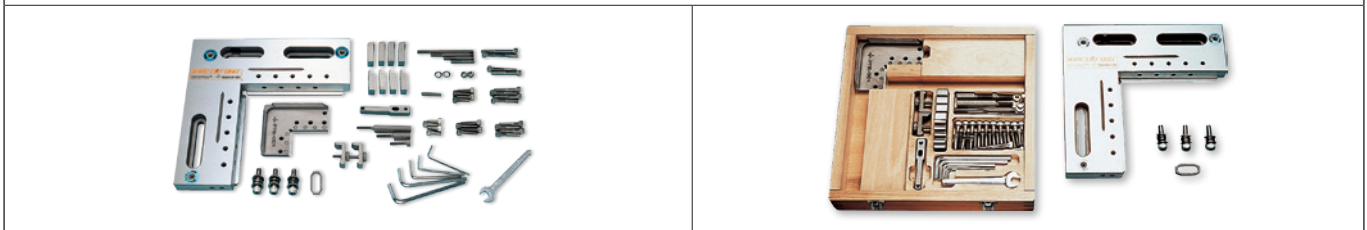

WCU - B set



WCU - C set

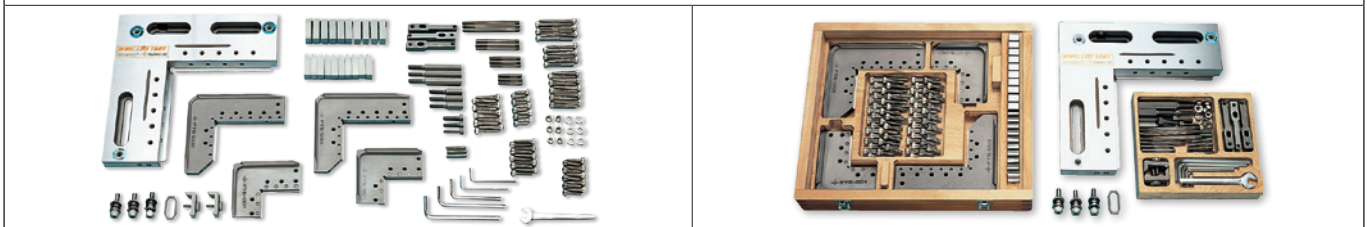


※The right side is the state where set contents are stored in the case.


Extension Plate (Optional accessories)

Case is not included.



PTE-001



PTE-002

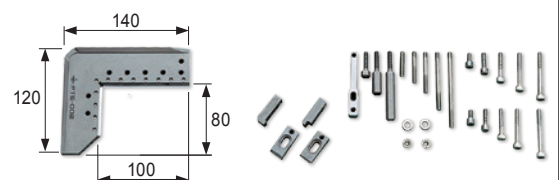

Examples of use

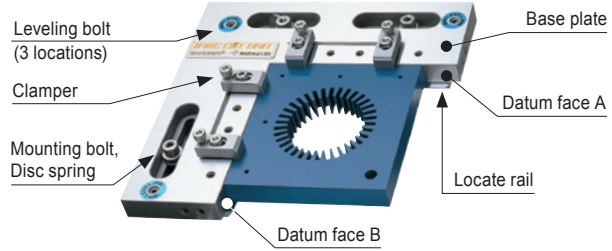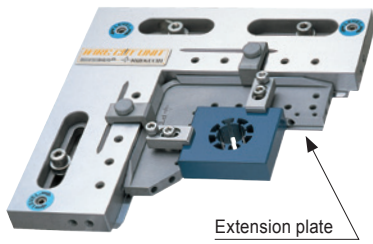


Large work-piece - Clamp on



Square work-piece - Side Clamp



Small round work-piece - Side Clamp with the extension plate




Set Contents

| Name | Model No. | A set | B set | C set | Extension plate (Option) | |
|------------------------------|-----------------------------------|---|---|--|--|--|
| | | WCU-A | WCU-B | WCU-C | PTE-001 | PTE-002 |
| Base plate | — | 1 pc. | 1 pc. | 1 pc. | — | — |
| Extension plate (Only plate) | PTE-001 | 1 pc. | 1 pc. | 2 pcs. | 1 pc. | — |
| | -002 | — | 1 pc. | 2 pcs. | — | 1 pc. |
| Clamper | CLP-101 | 4 pcs. | 6 pcs. | 10 pcs. | 2 pcs. | 2 pcs. |
| | -102 | 4 pcs. | 6 pcs. | 10 pcs. | 2 pcs. | 2 pcs. |
| | -201 | 1 pc. | 2 pcs. | 3 pcs. | — | 1 pc. |
| Grip | GRP-002 | 2 pcs. | 2 pcs. | 2 pcs. | — | — |
| Adjusting bolt | AJB-M6-L (L= 30, 50, 80) | 1 ea. | 2 ea. | 3 ea. | — | 1 ea. |
| Stud bolt | STB-M6-L (L= 40, 50, 70, 90) | 1 ea. | 2 ea. | 3 ea. | — | 1 ea. |
| Cap bolt M6 × L | — | L=16, 20, 25, 30, 35 4 ea. L=40, 50 2 ea. | L=16, 20, 25, 30, 35 6 ea. L=40, 50 4 ea. | L=16, 20, 25, 30, 35 10 ea. L=40, 50 6 ea. | L=16, 20, 25, 30, 35 2 ea. | L=16, 20, 25, 30, 35, 40, 50 2 ea. |
| Set screw (Kultopp) M6×30 | — | 1 ea. | 2 ea. | 3 ea. | — | 1 pc. |
| Nut, Washer M6 | — | 2 ea. | 4 ea. | 6 ea. | — | 2 ea. |
| Hexagonal wrench, spanner | — | 1 set | 1 set | 1 set | — | — |

Specification


This unit uses stainless steel that is highly resistant to corrosion and wear.

| | |
|----------------------------|------------------------------------|
| Max. work-piece dimensions | 160mm(6.30")×160mm(6.30") |
| Max. work-piece weight | 15kg(33lbs) |
| Main body weight | 4.3kg(9.5lbs) |
| Material | SUS420J2(Stainless steel) |
| Hardness | 50HRC |
| Datum surface squareness | 5 μm(.0002")/100mm(3.94") |
| | $M \perp A \cdot B$ $A \perp B$ |

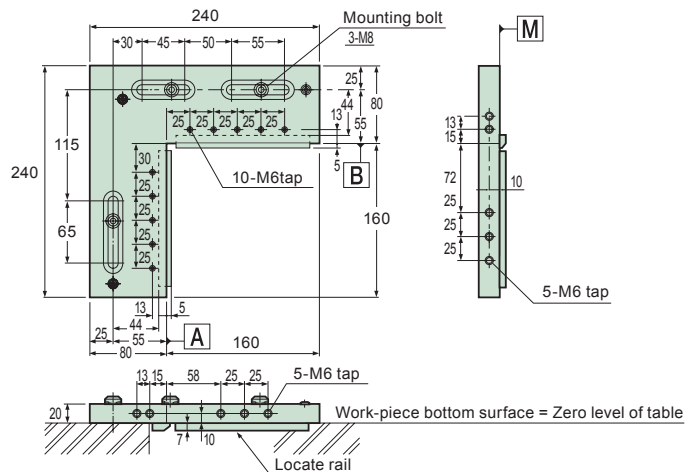

PARTS

Wrench · Spanner

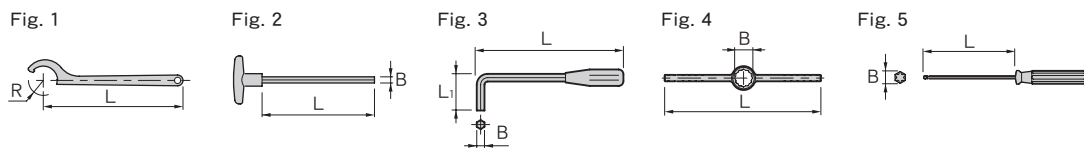


| CODE | Fig. | L | R | B | L ₁ | Holder type |
|------------|------|-------|-------|--------------------------|----------------|--|
| DW-2.5-110 | 5 | 110 | — | 2.5 | — | DTB 3 |
| F - 22 | 1 | 110 | 22 | — | — | DTA 3 |
| - 38 | | 148.5 | 19 | | | DTA 7 |
| - 45 | | 225 | 22.5 | | | DTA12 |
| FC- 32 | 1 | 120 | 16 | — | — | CTH10(A40, E32, E40), HUD, HUA10, AHU10, HUT4 |
| - 36 | | 208 | 18 | | | CTA10, CTH10 |
| - 50 | | 281 | 25 | | | CTA20, CTH20 |
| - 55 | | 284 | 27.5 | | | CTH25(A40) |
| - 62 | | 312 | 31 | | | CTA25, CTH25 |
| - 74 | | 364 | 37 | | | CTA32, CTH32 |
| - 90 | | 45 | CTA40 | | | |
| FF- 50 | | 1 | 165 | | | 22.5 |
| - 60 | 195 | | 26 | FMA25.4(ST42B), FMA31.75 | | |
| FM- 72 | 1 | 204 | 36 | — | — | ART32(BT40, A50M, A63, NT40, H50) |
| - 82 | | 234 | 41 | | | ART32(BT50, A100, NT50) |
| - 97 | | 239 | 48.5 | | | ART42(BT50, A100, NT50) |
| RC- 26 | | 4 | 240 | | | — |
| TW- 4 | 2 | 77 | — | 4 | — | DTB 7(E32) |
| - 5 | | 153 | — | 5 | — | DTB 7 |
| - 6 | | 173 | — | 6 | — | DTB12 |
| W -135 | 3 | 132.5 | — | 5 | 110 | SLK12 (SLIMLINE 2PIECE TYPE) |
| -135 DR | | | | | | DTB 7 (F63M), DTB12(E40, E50, F63M), DTE7, DTE12 |
| -206 | | 200 | | 6 | 30 | SLZ25 |
| -308 | | 300 | | 8 | — | SLZ32, SLZ42 |

Adjustable torque wrench



| Spanner for torque wrench | Adjustable torque wrench | R | Holder type | | | |
|---------------------------|--------------------------|------|-------------------------------|--|---------------|-------------------------|
| | | | Recommended tightening torque | | | |
| F -38AW | AW-1 | 19 | DTA 7 | D7-1.5 : 20N·m D7-2.0~7.0 : 40N·m | | |
| -45AW | | 22.5 | DTA12 | D12(All sizes) : 70N·m | | |
| FC-36AW | AW-1 | 18 | CTA10 / CTH10 | C10-2.6~5.0 : 40N·m C10-5.2~5.8 : 50N·m C10-6~10 : 60N·m | | |
| -50AW | | | | 25 | CTA20 / CTH20 | C20(All sizes) : 120N·m |

Nozzle



| CODE | L | G | W | φD | Holder type | Q'ty |
|-----------|-----|----|-----|-----|------------------|--------|
| NOZ-M4-12 | 6.3 | M4 | 4.5 | 1.2 | BT40-ART | 12pcs. |
| -60 | | | | | A63 -ART -SLK | 60pcs. |
| -M6-12 | 8.5 | M6 | 7 | 1.8 | BT50-ART | 12pcs. |
| -60 | | | | | A100-ART -SLZ | 60pcs. |




■Std. Access.

- Wrench for attachment

■Caution



- Four nozzles are necessary for one tool holder.

Nut (For collet holder)





| CODE | Fig. | φC | H | Holder type |
|-----------|------|----|------|------------------------------|
| NUA-CTA10 | 1 | 36 | 18 | CTA10, AHB10 |
| -CTA20 | | 50 | 25 | CTA20, AHA20, AHU20 |
| -CTA25 | | 62 | 28.5 | CTA25, AHA25 |
| -CTA32 | | 74 | 32 | CTA32 |
| -CTA40 | | 90 | 36 | CTA40 |
| -CTH10 | 2 | 36 | 18 | CTH10 |
| -CTH20 | | 50 | 25 | CTH20 |
| -CTH25 | | 62 | 28.5 | CTH25 |
| -CTH25-55 | | 55 | | CTH25 (A40) |
| -CTH32 | | 74 | 32 | CTH32 |
| -CTH10-32 | 3 | 32 | 18 | CTH10 (A40, E32, E40), AHU10 |
| -CTS10 | | 26 | 21 | CTS10 |

Sukima nut (For collet holder)



| CODE | φC | H | φd | φd1 | S | Holder type | |
|----------------|----|------|----|------|-----|-------------|-------|
| NUB-CTH10- 3.6 | 36 | 23 | 3 | 3.6 | 3.1 | CTH10 | |
| - 4.5 | | | 4 | 4.5 | 3.3 | | |
| - 5.5 | | | 5 | 5.5 | 3.7 | | |
| - 6.4 | | | 6 | 6.4 | 3.9 | | |
| - 8.4 | | | 8 | 8.4 | 4.6 | | |
| -10.3 | 50 | 30 | 6 | 6.4 | 3.9 | CTH20 | |
| -CTH20- 6.4 | | | 8 | 8.4 | 4.6 | | |
| - 8.4 | | | 10 | 10.3 | 4.8 | | |
| -10.3 | | | 12 | 12.3 | | | |
| -12.3 | | | 16 | 16.2 | 5.1 | | |
| -16.2 | 62 | 34.5 | 20 | 20.2 | 5.7 | CTH25 | |
| -20.2 | | | 25 | 25.2 | 5.9 | | |
| -CTH25-20.2 | | | 74 | 38 | | | CTH32 |
| -25.2 | | | | | | | |
| -CTH32-25.2 | | | 32 | 32.1 | 6.0 | | |
| -32.1 | | | | | | | |

Adjust screw






| CODE | Fig. | L | φD | φd | L1 | J | K | G | Holder type |
|----------|------|----|----|----|----|-----|---|---------|---|
| AJC-M14 | 1 | 22 | 10 | - | 8 | 1.5 | 3 | M14×1.5 | CTA10, ST25T-CTA20, SE30M-CTA20 |
| -M24 | | 27 | 20 | | 13 | 5 | 4 | M24×1.5 | CTA20(※1), BT40-CTA25-75, BT40-CTA32-105 |
| -M28 | | | 25 | | | | | M28×1.5 | CTA25(※2) |
| -M18 | | 24 | 15 | | 8 | | | M18×1.5 | BT30-CTA20, ST32T-CTA20 |
| -M18L | 2 | 43 | 23 | | | | | | BT50-CTA32, CTA40, BT50-SLZ25, SLZ32, SLZ42 |
| AJN-M18L | 2 | 38 | 23 | 10 | 8 | - | - | M18×1.5 | BT40-ART32 |
| -M18 | | 63 | | | | | | | BT50-ART32, ART42 |

Use this to adjust the cutter projection length.
 ※1 BT30, SE30M, ST25T and ST32T are excluded.
 ※2 BT40-CTA25-75 is excluded.

Coolant duct



Coolant duct (Fixed)



| CODE | Fig. | φC | φD | L | G | W | Shank type |
|----------|------|----|----|------|---------|---|----------------------------|
| CD40 -01 | 1 | 8 | 4 | 29.5 | M12×1 | 4 | A40, T40 |
| -03 | 3 | | | 35.5 | | | A40-CTH10-75, A40-CTH25-95 |
| -04 | | | | 36.5 | | | |
| CD50 -01 | 1 | 10 | 5 | 33 | M16×1 | 5 | A50, T50 |
| -03 | 3 | | | 39 | | | A50-CTH25-105 |
| -04 | | | | 59 | | | |
| CD63 -01 | 1 | 12 | 6 | 36.5 | M18×1 | 6 | A63, T63 |
| -02 | 2 | | | | | | A63-CTH10-75 |
| -03 | 3 | | | 39.5 | | | A63-CTH20-90 |
| -04 | | | | 60.5 | | | A63-CTH25-105 |
| CD100-01 | 1 | 16 | 8 | 44 | M24×1.5 | 8 | A100, T100 |
| -02 | 2 | | | 10.3 | | | A100-CTH25-135 |

■Note
 • Comes as a standard feature with our holders. However, for the CD50-03 and the CD63-03, CD50-04 and CD63-04 come as options, respectively.


Coolant duct (Adjustable)



| CODE | Fig. | φC | L | φD | G | Replaceable coolant duct |
|-----------|------|----|------|-----|---------|--------------------------|
| CD63 -01F | 1 | 12 | 36.5 | 7 | M18×1 | CD 63-01 |
| -03F | 2 | | 45.5 | 6.5 | | CD 63-03 |
| CD100-01F | 1 | 16 | 44 | 10 | M24×1.5 | CD100-01 |

■Note
 • For some machines, the use of a coolant duct (Adjustable) is recommended. The existing coolant duct is replaced with an adjustable one at your request only when you have placed an order for the holder.
 • If the replacement of the coolant duct is needed after the purchase, use the wrench CD63-01F-RNT.

Dummy duct



| CODE | φC | L | G | W | Replaceable coolant duct |
|----------|----|------|---------|---|--------------------------|
| CD40 -A1 | 8 | 29.5 | M12×1 | 4 | CD 40-01 |
| CD50 -A1 | 10 | 33 | M16×1 | 5 | CD 50-01 |
| CD63 -A1 | 12 | 36.5 | M18×1 | 6 | CD 63-01 |
| CD100-A1 | 16 | 44 | M24×1.5 | 8 | CD100-01 |

ANGLE HEAD HALF PARTS LIST

HFD7 / HFT4 (BT30/40/50, A63, DN40/50, CT40/50)

| CODE (Master holder) | 1 Shank | 2 Orientation Ring | 8 Washer for intermediate bearing B | 9 Intermediate bearing | 19 Head |
|-------------------------|---------------|-----------------------|--|---------------------------|------------|
| BT30 -HFD7-122 | BT30 -FSA-7S | ORR-30 | - | - | FBA-7S |
| -HFT4-122 | | | | | FBA-7L |
| -HFD7-182 | | | | | FBA-7L |
| -HFT4-182 | BT30 -FSA-7L | ORR-40 | FZ-7 | 6804ZZ | FBA-7L |
| BT40 -HFD7-120 | | | | | FBA-7S |
| -HFT4-120 | | | | | |
| -HFD7-180 | BT40 -FSA-7L | ORR-40 | FZ-7 | 6804ZZ | FBA-7L |
| -HFT4-180 | | | | | FBA-7L |
| BT50 -HFD7-195 | BT50 -FSA-7L | ORR-40 | FZ-7 | 6804ZZ | FBA-7L |
| -HFT4-195 | | | | | FBA-7L |
| -HFD7-255 | | | | | FBA-7XL |
| -HFT4-255 | BT50 -FSA-7XL | | | | FBA-7XL |
| A63 -HFD7-183 | A63 -FSA-7L | ORR-40 | FZ-7 | 6804ZZ | FBA-7L |
| -HFT4-183 | | | | | FBA-7L |
| -HFD7-243 | | | | | FBA-7XL |
| -HFT4-243 | A63 -FSA-7XL | | | | FBA-7XL |
| DN40A-HFD7-135 | DN40A-FSA-7S | ORR-40 | - | - | FBA-7S |
| -HFT4-135 | | | | | FBA-7L |
| -HFD7-195 | | | | | FBA-7L |
| -HFT4-195 | DN40A-FSA-7L | ORR-40 | FZ-7 | 6804ZZ | FBA-7L |
| DN50A-HFD7-195 | | | | | FBA-7S |
| -HFT4-195 | | | | | |
| -HFD7-255 | DN50A-FSA-7XL | ORR-40 | FZ-7 | 6804ZZ | FBA-7XL |
| -HFT4-255 | | | | | FBA-7XL |
| CT40 -HFD7-135 | CT40 -FSA-7S | ORR-40 | - | - | FBA-7S |
| -HFT4-135 | | | | | FBA-7L |
| -HFD7-195 | | | | | FBA-7L |
| -HFT4-195 | CT40 -FSA-7L | ORR-40 | FZ-7 | 6804ZZ | FBA-7L |
| CT50 -HFD7-195 | | | | | FBA-7S |
| -HFT4-195 | | | | | |
| -HFD7-255 | CT50 -FSA-7XL | ORR-40 | FZ-7 | 6804ZZ | FBA-7XL |
| -HFT4-255 | | | | | FBA-7XL |

Std. Access.

- Fixing spanner (KS-23) • Hexagonal wrench set (W-1550S)
- Single-ended wrench 13mm (SN-13)

※ 3, 9, 11, 14 and 22 are able to use standard commercial items.

The tools for assembly

Wrench (for shank)

To be used for tightening 11.

| CODE | Image |
|-------|-------|
| FC-32 | |


Wrench (for head)

To be used for tightening 12 and 13.

| CODE | Image |
|---------|-------|
| TSH-HF7 | |

HFD7

Drill
(φ1~7)




23 Angle shaft (for drilling)
CODE FR-D7L

26 Draw bolt
CODE FR-7BL

HFT4

Tap sleeve
(TA4) -> P.8
Tap
(M2~8)




24 Angle shaft (for tapping)
CODE FR-T4

25 Draw nut and spring
CODE FR-T4NS

21 Collar C
CODE FBC-7C

22 Bearing for angle shaft
CODE 71804

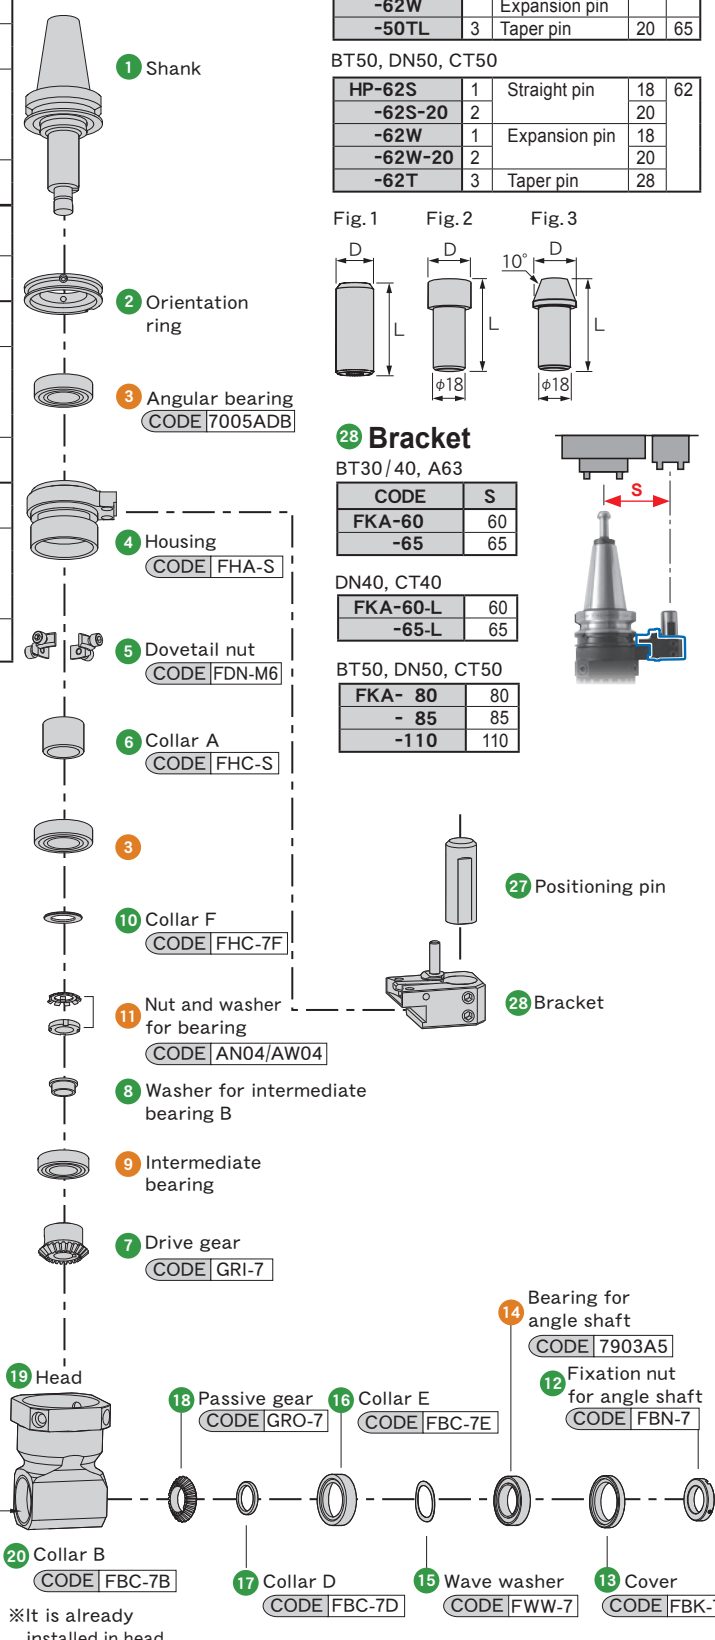

27 Positioning pin

BT30/40, A63

| CODE | Fig. | Pin type | φD | L |
|--------|------|---------------|----|----|
| HP-50S | 1 | Straight pin | 18 | 50 |
| -50W | | Expansion pin | | |
| -50T | 3 | Taper pin | 20 | |

DN40, CT40

| CODE | Fig. | Pin type | φD | L |
|--------|------|---------------|----|----|
| HP-62S | 1 | Straight pin | 18 | 62 |
| -62W | | Expansion pin | | |
| -62TL | 3 | Taper pin | 20 | 65 |

BT50, DN50, CT50

| CODE | Fig. | Pin type | φD | L |
|---------|------|---------------|----|----|
| HP-62S | 1 | Straight pin | 18 | 62 |
| -62S-20 | 2 | | 20 | |
| -62W | 1 | Expansion pin | 18 | |
| -62W-20 | 2 | | 20 | |
| -62T | 3 | Taper pin | 28 | |

Fig. 1




Fig. 2





Fig. 3



28 Bracket

BT30/40, A63

| CODE | S |
|--------|----|
| FKA-60 | 60 |
| -65 | 65 |

DN40, CT40

| CODE | S |
|----------|----|
| FKA-60-L | 60 |
| -65-L | 65 |

BT50, DN50, CT50

| CODE | S |
|--------|-----|
| FKA-80 | 80 |
| -85 | 85 |
| -110 | 110 |

HFD7L / HFA10 / HFT4L (BT30)

| |
|----------------------|
| CODE (Master Holder) |
| BT30-HFD7L-120 |
| -HFA10-120 |
| -HFT4L-120 |


Std. Access.

- Fixing spanner (KS-23) (HFD7L)
- Hexagonal wrench set (W-1550S)
- Single-ended wrench (SN-13) (HFD7L/HFA10)
- Fook spanner (FC-32) (HFA10)

※ 3, 4, 9, 15 and 16 are able to use standard commercial items.


28 Positioning pin

| CODE | Pin type | φD | L |
|---------|--------------|----|----|
| HP-45S | Straight pin | 12 | 45 |
| HP-E50S | Straight pin | 18 | 50 |




29 Bracket

| CODE | S |
|--------|----|
| FKC-50 | 50 |
| FKC-65 | 65 |



Note

- Be sure to use positioning pin (HP-45S) and the bracket (FKC-50) in a combination, and the positioning pin (HP-E50S) and the bracket (FKC-65) in combination.

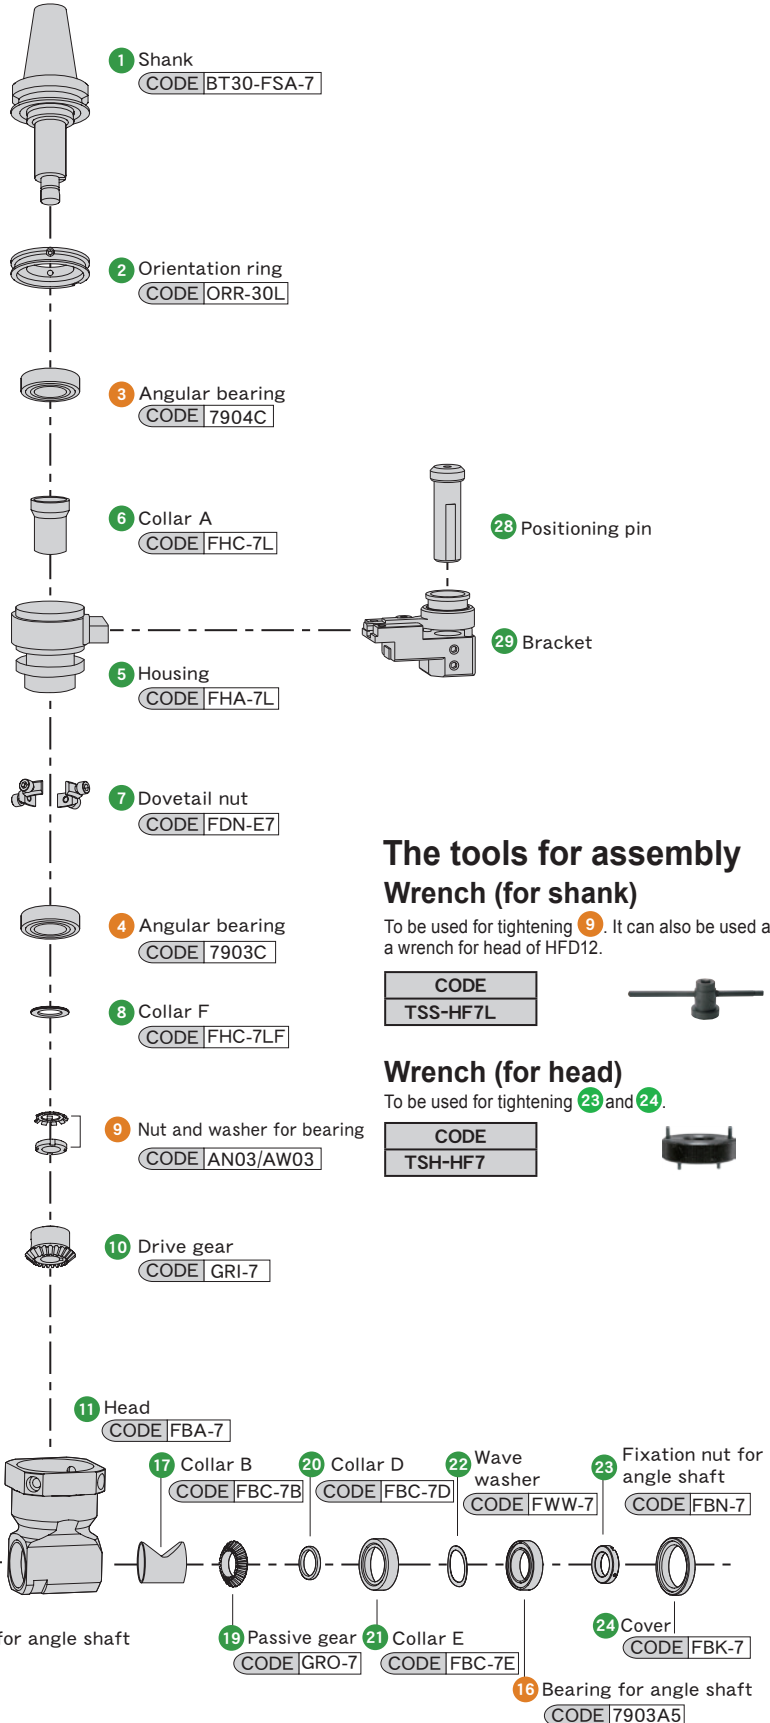

The tools for assembly Wrench (for shank)

To be used for tightening 9. It can also be used as a wrench for head of HFD12.

| |
|----------|
| CODE |
| TSS-HF7L |




Wrench (for head)

To be used for tightening 23 and 24.


| |
|---------|
| CODE |
| TSH-HF7 |




HFD7L

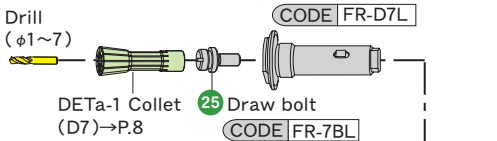

HFA10

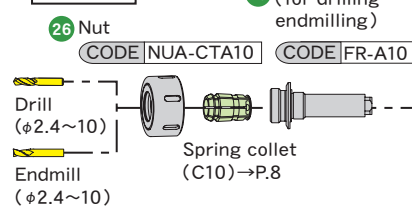

HFT4L

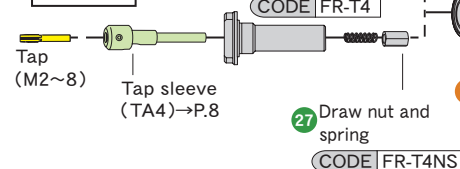

HFD12 / HFT6 (BT30/40/50, A63, DN40/50, CT40/50)

| CODE (Master Holder) | 1 Shank | 2 Orientation Ring | 3 Angular bearing | 4 Housing | 6 Collar A | 7 Collar AXL | 8 Intermediate bearing | |
|-------------------------------|----------------|--------------------|-------------------|-----------|----------------|----------------|------------------------|--------|
| BT30 -HFD12-122 -HFT 6-122 | BT30 -FSA-12S | ORR-30 | 7005ADB | FHA-S | FHC-S | - | - | |
| BT40 -HFD12-120 -HFT 6-120 | BT40 -FSA-12S | ORR-40 | | FHA-L | FHC-L | - | - | |
| -HFD12-180 -HFT 6-180 | BT40 -FSA-12L | | | FHA-S | FHC-S | - | - | |
| BT50 -HFD12-135 -HFT 6-135 | BT50 -FSA-12S | | | FHA-L | FHC-L | - | - | |
| -HFD12-195 -HFT 6-195 | BT50 -FSA-12L | | | 7906A5DB | FHA-XL | FHC-XL1 (※) | FHC-XL2 (※) | 6005VV |
| -HFD12-255 -HFT 6-255 | BT50 -FSA-12XL | | | | | | | |
| A63 -HFD12-123 -HFT 6-123 | A63 -FSA-12S | ORR-40 | 7005ADB | FHA-S | FHC-S | - | - | |
| -HFD12-183 -HFT 6-183 | A63 -FSA-12L | | 7906A5DB | FHA-XL | FHC-XL1 (※) | FHC-XL2 (※) | 6005VV | |
| -HFD12-243 -HFT 6-243 | A63 -FSA-12XL | | | | | | | |
| DN40A-HFD12-135 -HFT 6-135 | DN40A-FSA-12S | ORR-40 | 7005ADB | FHA-S | FHC-S | - | - | |
| -HFD12-195 -HFT 6-195 | DN40A-FSA-12L | | | FHA-L | FHC-L | - | - | |
| DN50A-HFD12-135 -HFT 6-135 | DN50A-FSA-12S | | | FHA-S | FHC-S | - | - | |
| -HFD12-195 -HFT 6-195 | DN50A-FSA-12L | | | FHA-L | FHC-L | - | - | |
| -HFD12-255 -HFT 6-255 | DN50A-FSA-12XL | | 7906A5DB | FHA-XL | FHC-XL1 (※) | FHC-XL2 (※) | 6005VV | |
| CT40 -HFD12-135 -HFT 6-135 | CT40 -FSA-12S | ORR-40 | 7005ADB | FHA-S | FHC-S | - | - | |
| -HFD12-195 -HFT 6-195 | CT40 -FSA-12L | | | FHA-L | FHC-L | - | - | |
| CT50 -HFD12-135 -HFT 6-135 | CT50 -FSA-12S | | | FHA-S | FHC-S | - | - | |
| -HFD12-195 -HFT 6-195 | CT50 -FSA-12L | | | FHA-L | FHC-L | - | - | |
| -HFD12-255 -HFT 6-255 | CT50 -FSA-12XL | | 7906A5DB | FHA-XL | FHC-XL1 (※) | FHC-XL2 (※) | 6005VV | |

(※) FHC-XL1/XL2 FHC-XL1/XL2 Set 2pcs-each

■ Std. Access.

- Fixing spanner (KS-30) • Hexagonal wrench set (W-1550S)
- Single-ended wrench 17mm (SN-17)

※ 3, 8, 10, 13 and 16 are able to use standard commercial items.

The tools for assembly


Wrench (for shank)

To be used for tightening 10.



Wrench (for head)

To be used for tightening 11 and 12.

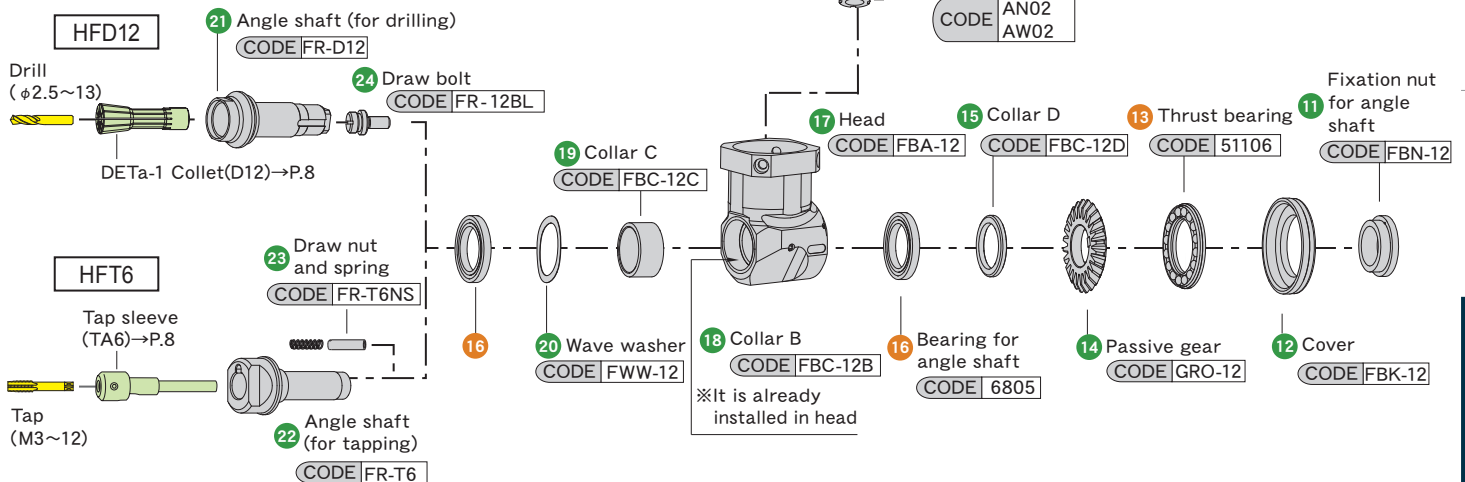

25 Positioning pin

BT30/40, A63


| CODE | Fig. | Pin type | φD | L |
|--------|------|---------------|----|----|
| HP-50S | 1 | Straight pin | 18 | 50 |
| -50W | | Expansion pin | | |
| -50T | 3 | Taper pin | 20 | |

DN40, CT40

| CODE | Fig. | Pin type | φD | L |
|--------|------|---------------|----|----|
| HP-62S | 1 | Straight pin | 18 | 62 |
| -62W | | Expansion pin | | |
| -62TL | 3 | Taper pin | 20 | 65 |

BT50, DN50, CT50

| CODE | Fig. | Pin type | φD | L |
|---------|------|---------------|----|----|
| HP-62S | 1 | Straight pin | 18 | 62 |
| -62S-20 | 2 | | 20 | |
| -62W | 1 | Expansion pin | 18 | |
| -62W-20 | 2 | | 20 | |
| -62T | 3 | Taper pin | 28 | |



26 Bracket

BT30/40, A63


| CODE | S |
|--------|----|
| FKA-60 | 60 |
| -65 | 65 |

DN40, CT40

| CODE | S |
|----------|----|
| FKA-60-L | 60 |
| -65-L | 65 |

BT50, DN50, CT50

| CODE | S |
|--------|-----|
| FKA-80 | 80 |
| -85 | 85 |
| -110 | 110 |



HFA20 / HFT12 (BT40/50, A63, DN40/50, CT40/50)

| CODE (Master Holder) | 1 Shank | 3 Needle bearing | 5 Angular bearing | 6 Collar A | 7 Housing | 8 Angular bearing |
|----------------------|----------------|------------------|-------------------|------------|-----------|-------------------|
| BT40 -HFA20-135 | BT40 -FSA-20S | — | 7906A5 | FHC-20S | FHA-20S | 7905A5 |
| -HFT12-135 | | | | FHC-20L | FHA-20L | |
| -HFA20-195 | BT40 -FSA-20L | | | FHC-20S | FHA-20S | |
| -HFT12-195 | | | | FHC-20L | FHA-20L | |
| BT50 -HFA20-150 | BT50 -FSA-20S | | | FHC-20S | FHA-20S | |
| -HFT12-150 | | | | FHC-20L | FHA-20L | |
| -HFA20-210 | BT50 -FSA-20L | | | FHC-20S | FHA-20S | |
| -HFT12-210 | | | | FHC-20L | FHA-20L | |
| -HFA20-270 | BT50 -FSA-20XL | TAF374720 | 7905A5DB | FHC-20XL | FHA-20XL | — |
| -HFT12-270 | | | | | | |
| A63 -HFA20-198 | A63 -FSA-20L | — | 7906A5 | FHC-20L | FHA-20L | 7905A5 |
| -HFT12-198 | | | | FHC-20S | FHA-20S | |
| -HFA20-258 | A63 -FSA-20XL | TAF374720 | 7905A5DB | FHC-20XL | FHA-20XL | — |
| -HFT12-258 | | | | | | |
| DN40A-HFA20-150 | DN40A-FSA-20S | — | 7906A5 | FHC-20S | FHA-20S | 7905A5 |
| -HFT12-150 | | | | FHC-20L | FHA-20L | |
| -HFA20-210 | DN40A-FSA-20L | | | FHC-20S | FHA-20S | |
| -HFT12-210 | | | | FHC-20L | FHA-20L | |
| DN50A-HFA20-150 | DN50A-FSA-20S | | | FHC-20S | FHA-20S | |
| -HFT12-150 | | | | FHC-20L | FHA-20L | |
| -HFA20-210 | DN50A-FSA-20L | | | FHC-20S | FHA-20S | |
| -HFT12-210 | | | | FHC-20L | FHA-20L | |
| -HFA20-270 | DN50A-FSA-20XL | TAF374720 | 7905A5DB | FHC-20XL | FHA-20XL | — |
| -HFT12-270 | | | | | | |
| CT40 -HFA20-150 | CT40 -FSA-20S | — | 7906A5 | FHC-20S | FHA-20S | 7905A5 |
| -HFT12-150 | | | | FHC-20L | FHA-20L | |
| -HFA20-210 | CT40 -FSA-20L | | | FHC-20S | FHA-20S | |
| -HFT12-210 | | | | FHC-20L | FHA-20L | |
| CT50 -HFA20-150 | CT50 -FSA-20S | | | FHC-20S | FHA-20S | |
| -HFT12-150 | | | | FHC-20L | FHA-20L | |
| -HFA20-210 | CT50 -FSA-20L | | | FHC-20S | FHA-20S | |
| -HFT12-210 | | | | FHC-20L | FHA-20L | |
| -HFA20-270 | CT50 -FSA-20XL | TAF374720 | 7905A5DB | FHC-20XL | FHA-20XL | — |
| -HFT12-270 | | | | | | |

Std. Access.

- Fixing spanner (KS-41) • Hexagonal wrench set (W-1550S)
- Fook spanner (FC-50) (HFA20)

※ 3, 5, 8, 16, 18 and 21 are able to use standard commercial items.

The tools for assembly

Wrench (for shank and head)

To be used for tightening 11 and 17.


| CODE |
|---------|
| TS-HA20 |




Assembling tool for needle bearings

To be used for tightening 21.



| CODE |
|----------|
| TPN-HA20 |



HFA20

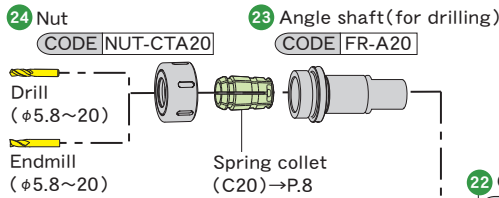

HFT12

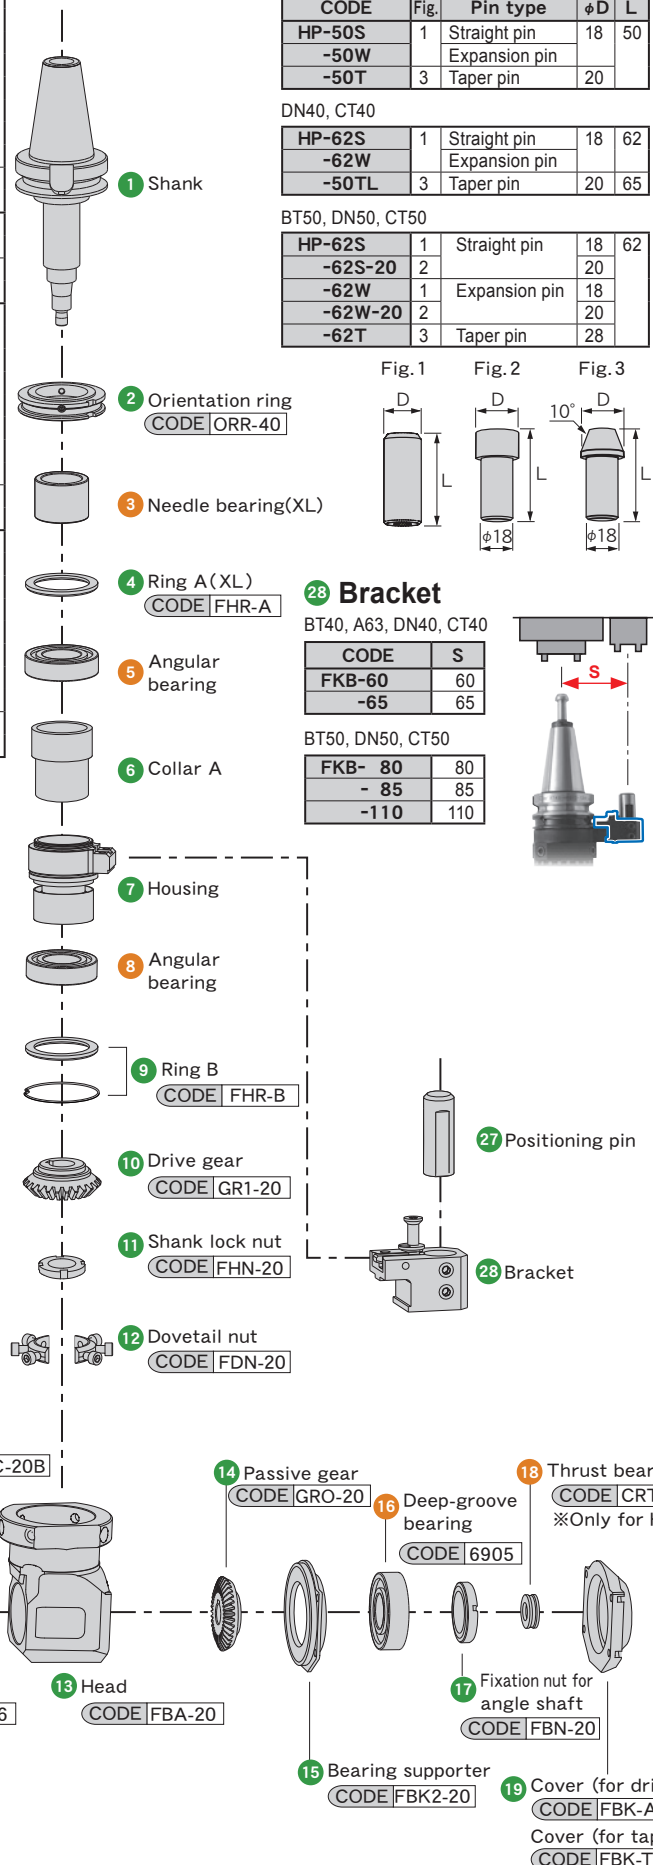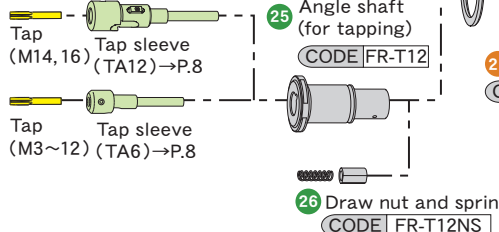

27 Positioning pin

BT40, A63


| CODE | Fig. | Pin type | φD | L |
|--------|------|---------------|----|----|
| HP-50S | 1 | Straight pin | 18 | 50 |
| -50W | | Expansion pin | | |
| -50T | 3 | Taper pin | 20 | |

DN40, CT40

| CODE | Fig. | Pin type | φD | L |
|--------|------|---------------|----|----|
| HP-62S | 1 | Straight pin | 18 | 62 |
| -62W | | Expansion pin | | |
| -50TL | 3 | Taper pin | 20 | 65 |

BT50, DN50, CT50

| CODE | Fig. | Pin type | φD | L |
|---------|------|---------------|----|----|
| HP-62S | 1 | Straight pin | 18 | 62 |
| -62S-20 | 2 | | 20 | |
| -62W | 1 | Expansion pin | 18 | |
| -62W-20 | 2 | | 20 | |
| -62T | 3 | Taper pin | 28 | |




28 Bracket

BT40, A63, DN40, CT40

| CODE | S |
|--------|----|
| FKB-60 | 60 |
| -65 | 65 |

BT50, DN50, CT50

| FKB- | S |
|------|-----|
| 80 | 80 |
| - 85 | 85 |
| -110 | 110 |



HFCS6 (BT30)

| |
|----------------------|
| CODE(Master Holder) |
| BT30-HFCS6-155 |

Std. Access.

- Fixing spanner(PS-21)
- Hexagonal wrench set (W-1550S)
- ※ 3, 7, 9, 14, 15 and 20 are able to use standard commercial items.

The tools for assembly

Wrench (for shank)

To be used for tightening 9.
It can also be used as a wrench for head of HFD12.

| |
|----------|
| CODE |
| TSH-HF12 |



Pliers for Retaining ring


To be used for tightening 28.

| |
|--------|
| CODE |
| TSH-G6 |



29 Positioning pin

| CODE | Pin type | φD | L |
|---------|--------------|----|----|
| HP-45S | Straight pin | 12 | 45 |
| HP-E50S | Straight pin | 18 | 50 |






30 Bracket

| CODE | S |
|--------|----|
| FKC-50 | 50 |
| FKC-65 | 65 |

Note

- Be sure to use positioning pin (HP-45S) and the bracket (FKC-50) in a combination, and the positioning pin (HP-E50S) and the bracket (FKC-65) in combination.

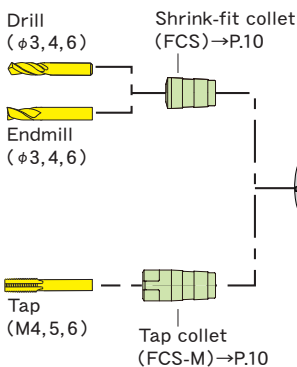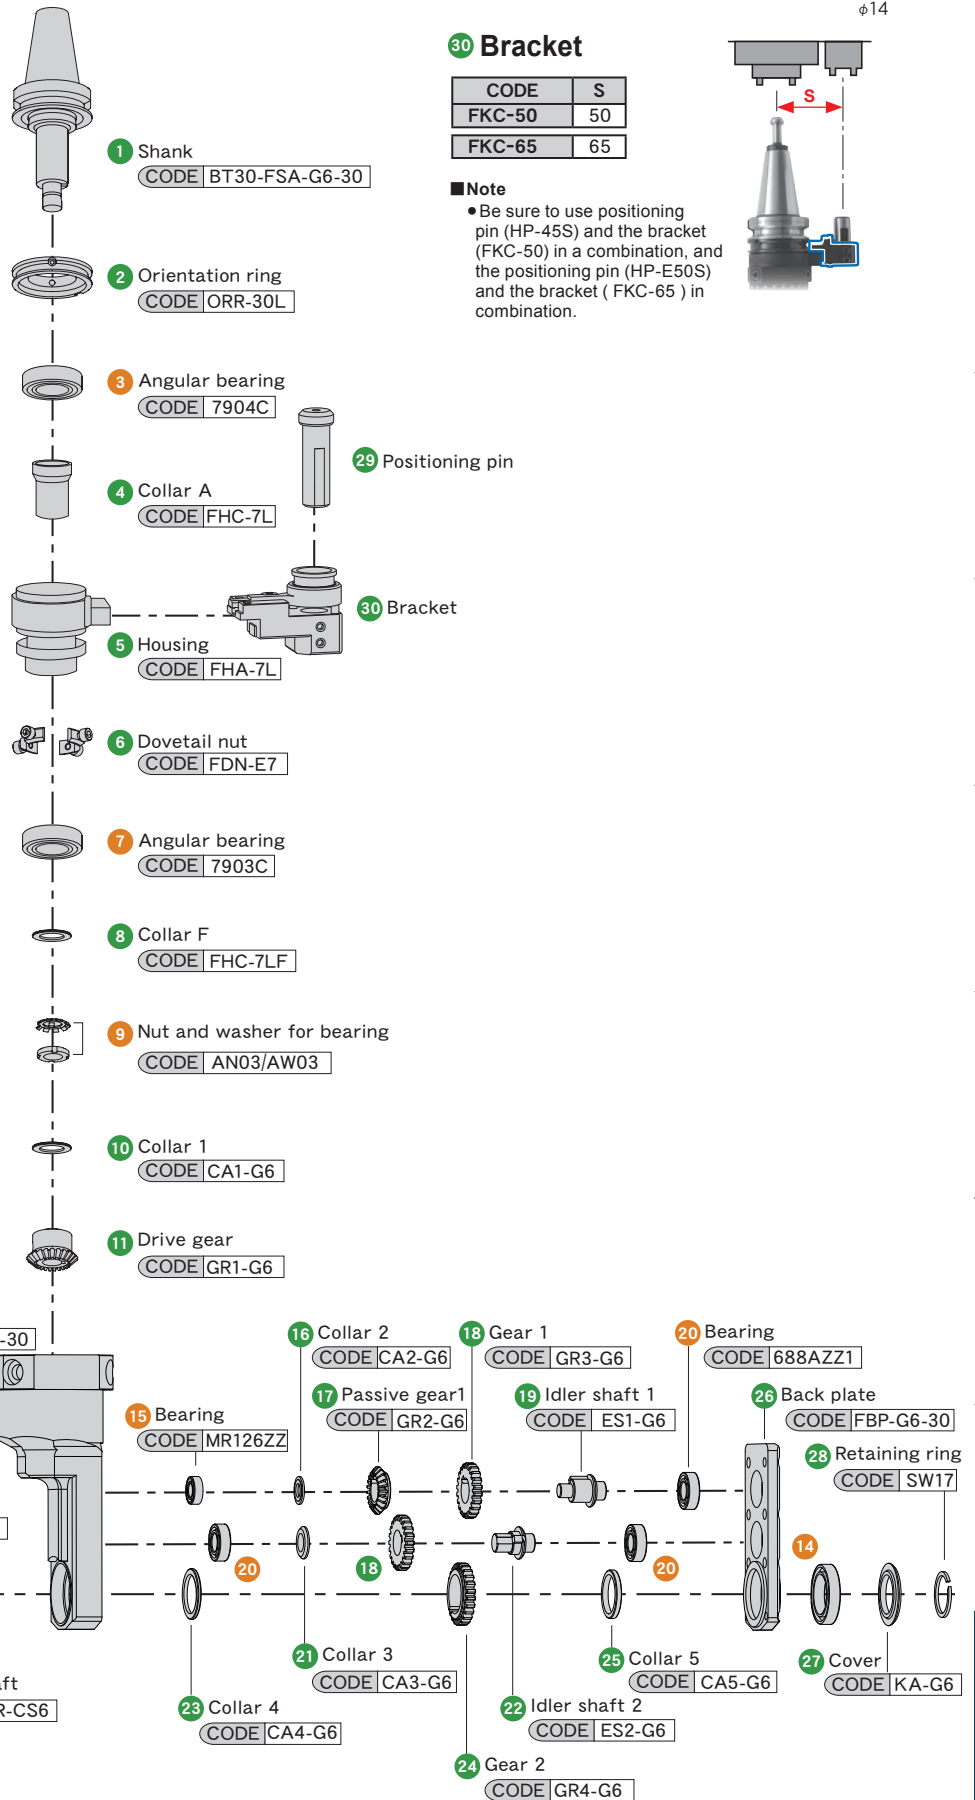

HFCS6 (BT40/50, DN40/50, CT40/50)

| CODE (Master Holder) | 1 Shank | | 11 Head | | 17 Gear 1 | | 18 Gear 3 | | 20 Bearing | | 21 Collar 3 | | 22 Idler shaft 2 | | 26 Back plate | |
|-------------------------|---------|---------|---------|--------|-----------|--------|-----------|---|------------|---|-------------|------|------------------|------|---------------|---------|
| | | | | | Q'ty | | Q'ty | | Q'ty | | Q'ty | Q'ty | | Q'ty | | |
| BT40 -HFCS6-160 -205 | BT40 | -FSA-G6 | FBA-G6 | GR3-G6 | 2 | — | 688AZZ1 | 3 | CA3-G6 | 1 | ES2-G6 | 1 | FBP-G6 | | | |
| | | | FBA-G6L | | 3 | GR5-G6 | | | | | | 7 | | 3 | 3 | FBP-G6L |
| BT50 -HFCS6-175 -220 | BT50 | -FSA-G6 | FBA-G6 | GR3-G6 | 2 | — | 688AZZ1 | 3 | CA3-G6 | 1 | ES2-G6 | 1 | FBP-G6 | | | |
| | | | FBA-G6L | | 3 | GR5-G6 | | | | | | 7 | | 3 | 3 | FBP-G6L |
| DN40A-HFCS6-175 -220 | DN40A | -FSA-G6 | FBA-G6 | GR3-G6 | 2 | — | 688AZZ1 | 3 | CA3-G6 | 1 | ES2-G6 | 1 | FBP-G6 | | | |
| | | | FBA-G6L | | 3 | GR5-G6 | | | | | | 7 | | 3 | 3 | FBP-G6L |
| DN50A-HFCS6-175 -220 | DN50A | -FSA-G6 | FBA-G6 | GR3-G6 | 2 | — | 688AZZ1 | 3 | CA3-G6 | 1 | ES2-G6 | 1 | FBP-G6 | | | |
| | | | FBA-G6L | | 3 | GR5-G6 | | | | | | 7 | | 3 | 3 | FBP-G6L |
| CT40 -HFCS6-175 -220 | CT40 | -FSA-G6 | FBA-G6 | GR3-G6 | 2 | — | 688AZZ1 | 3 | CA3-G6 | 1 | ES2-G6 | 1 | FBP-G6 | | | |
| | | | FBA-G6L | | 3 | GR5-G6 | | | | | | 7 | | 3 | 3 | FBP-G6L |
| CT50 -HFCS6-175 -220 | CT50 | -FSA-G6 | FBA-G6 | GR3-G6 | 2 | — | 688AZZ1 | 3 | CA3-G6 | 1 | ES2-G6 | 1 | FBP-G6 | | | |
| | | | FBA-G6L | | 3 | GR5-G6 | | | | | | 7 | | 3 | 3 | FBP-G6L |

Std. Access.

- Fixing spanner (PS-21)
- Hexagonal wrench set (W-1550S)

※ 3, 8, 13, 14 and 20 are able to use standard commercial items.

29 Positioning pin

BT40


| CODE | Fig. | Pin type | φD | L |
|--------|------|---------------|----|----|
| HP-50S | 1 | Straight pin | 18 | 50 |
| -50W | | Expansion pin | | |
| -50T | 3 | Taper pin | 20 | |

DN40, CT40

| CODE | Fig. | Pin type | φD | L |
|--------|------|---------------|----|----|
| HP-62S | 1 | Straight pin | 18 | 62 |
| -62W | | Expansion pin | | |
| -62TL | 3 | Taper pin | 20 | 65 |

BT50, DN50, CT50

| CODE | Fig. | Pin type | φD | L |
|---------|------|---------------|----|----|
| HP-62S | 1 | Straight pin | 18 | 62 |
| -62S-20 | 2 | | 20 | |
| -62W | 1 | Expansion pin | 18 | |
| -62W-20 | 2 | | 20 | |
| -62T | 3 | Taper pin | 28 | |

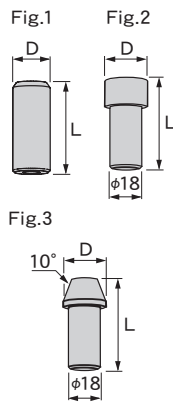

30 Bracket

BT40



| CODE | S |
|--------|----|
| FKA-60 | 60 |
| -65 | 65 |

DN40, CT40

| CODE | S |
|----------|----|
| FKA-60-L | 60 |
| -65-L | 65 |

BT50, DN50, CT50

| CODE | S |
|--------|-----|
| FKA-80 | 80 |
| -85 | 85 |
| -110 | 110 |

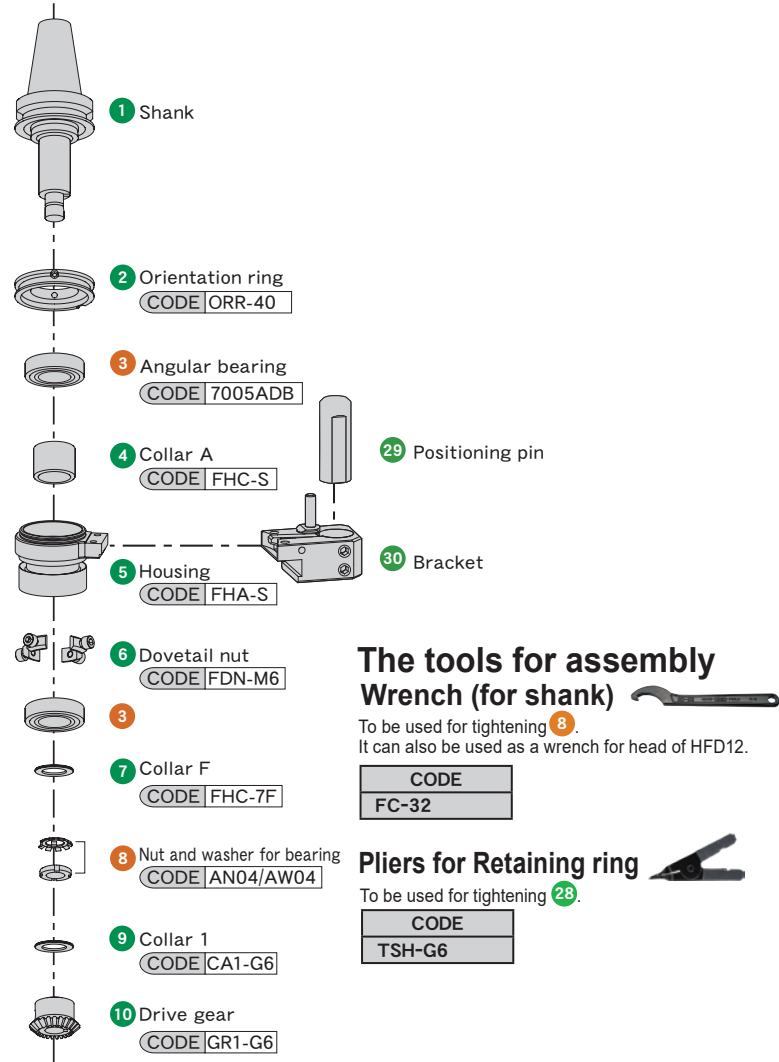

The tools for assembly

Wrench (for shank)



To be used for tightening 8. It can also be used as a wrench for head of HFD12.

| CODE |
|-------|
| FC-32 |

Pliers for Retaining ring

To be used for tightening 28.

| CODE |
|--------|
| TSH-G6 |

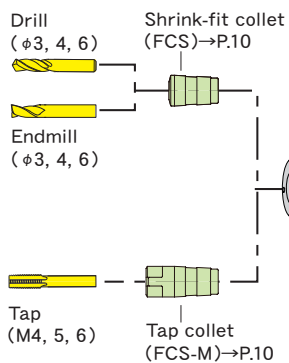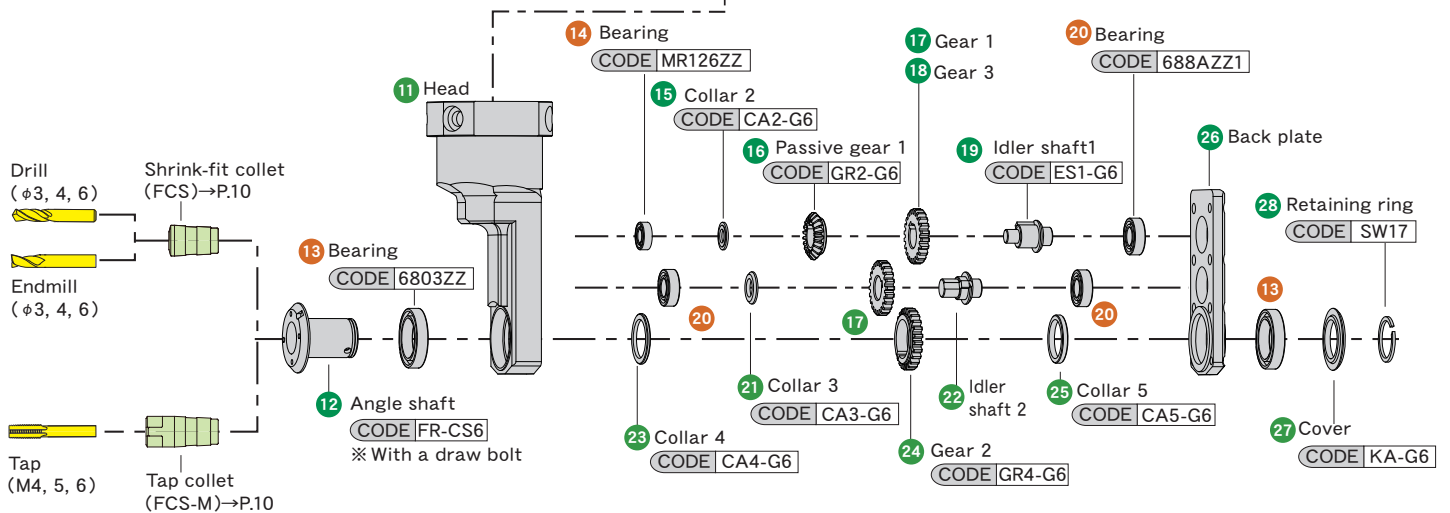


HUD7 / HUT4 (BT30)

| |
|----------------------|
| CODE (Master Holder) |
| BT30-HUD7-102 |
| -HUT4-102 |

- **Std. Access.**
- Fixing spanner (KS-23) (HUD7)
 - Hexagonal wrench set (W-1550S)
- ※ 3, 4, 17, 23 and 30 are able to use standard commercial items.

32 Positioning pin

| CODE | Pin type | φD | L |
|---------|--------------|----|----|
| HP-45S | Straight pin | 12 | 45 |
| HP-E50S | Straight pin | 18 | 50 |





33 Bracket

| CODE | S |
|--------|----|
| FKC-50 | 50 |
| FKC-65 | 65 |

■ **Note**

- Be sure to use positioning pin (HP-45S) and the bracket (FKC-50) in a combination, and the positioning pin (HP-E50S) and the bracket (FKC-65) in combination.

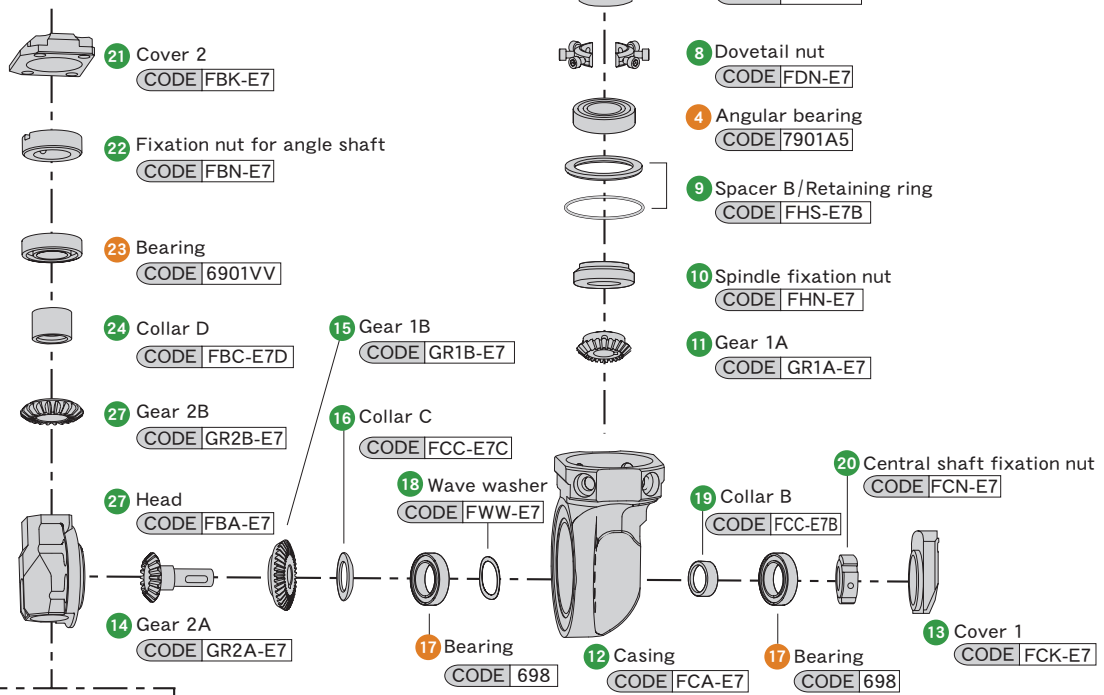

26 Draw nut and washer
CODE | UR-ET4NS



29 Angle shaft (for tapping)
CODE | UR-ET4

Tap sleeve (TA4) → P.8

Tap (M2~8)

HUT4

30 Shell-type needle bearing
CODE | TLA1812Z

28 Angle shaft (for drilling)
CODE | UR-E7

25 Collet draw nut
CODE | UR-ND7

DETa-1 Collet (D7) → P.8

Drill (φ1~7)

HUD7

The tools for assembly

Wrench (for shank and head)

To be used for tightening 10, 20 and 22.

| |
|-------|
| CODE |
| TS-E7 |



Wrench (for head) • Assembling tool for needle bearings

To be used for tightening 30.

| |
|-------|
| CODE |
| TP-U7 |



HUD7 / HUA10 / HUT4 (BT40/50, DN40/50, CT40/50)

| CODE (Master Holder) | ① Shank |
|---|--------------|
| BT40 -HUD 7-135 -HUA10-135 -HUT 4-135 | BT40-FSA-U7 |
| BT50 -HUD 7-150 -HUA10-150 -HUT 4-150 | BT50-FSA-U7 |
| DN40A-HUD 7-150 -HUA10-150 -HUT 4-150 | DN40A-FSA-U7 |
| DN50A-HUD 7-150 -HUA10-150 -HUT 4-150 | DN50A-FSA-U7 |
| CT40 -HUD 7-150 -HUA10-150 -HUT 4-150 | CT40-FSA-U7 |
| CT50 -HUD 7-150 -HUA10-150 -HUT 4-150 | CT50-FSA-U7 |

■ Std. Access.

- Fixing spanner(KS-21)
- Hexagonal wrench set (W-1550S)
- Fook spanner(FC-32) (HUA10)

※ ③, ⑧, ⑬, ⑯, ⑳ and ㉓ are able to use standard commercial items.

The tools for assembly Wrench (for shank)


| CODE | To be used for tightening ⑧. |
|-------|------------------------------|
| FC-32 | |

Wrench (for head) · Assembling tool for needle bearings


To be used for tightening ⑯, ㉒ and ㉓.

| CODE | |
|-------|--|
| TP-U7 | |



HUD7

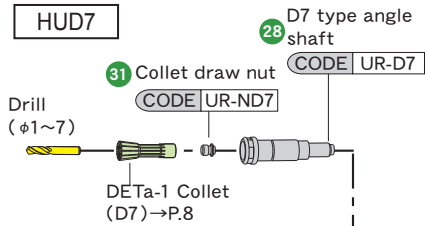

HUA10

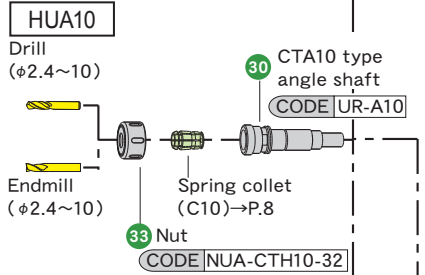

HUT4

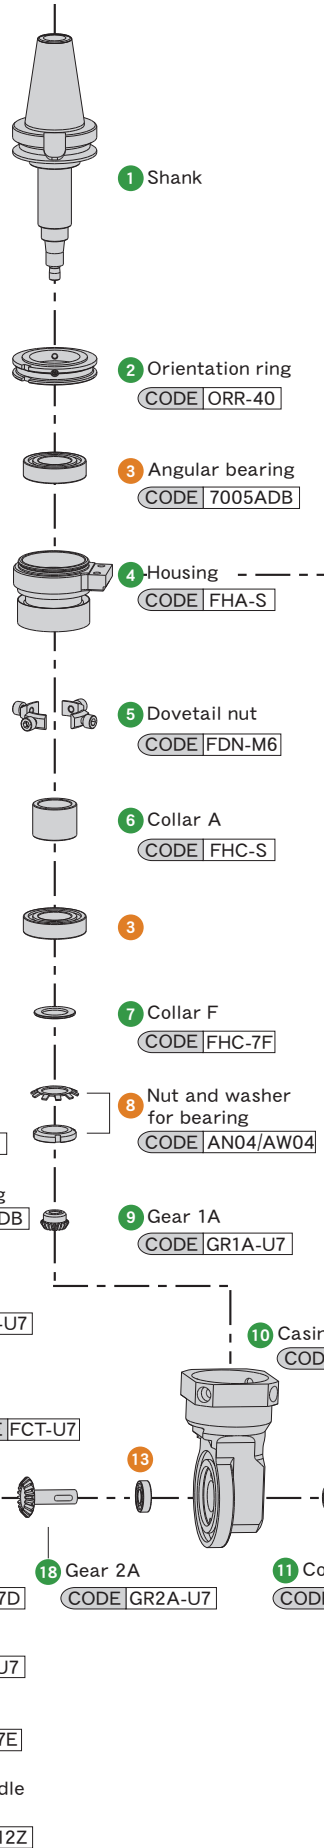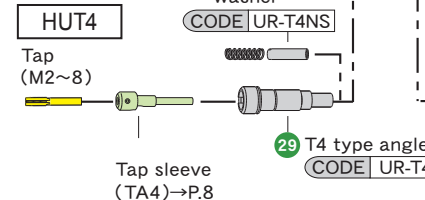

③④ Positioning pin

BT40


| CODE | Fig. | Pin type | φD | L |
|--------|------|---------------|----|----|
| HP-50S | 1 | Straight pin | 18 | 50 |
| -50W | | Expansion pin | | |
| -50T | 3 | Taper pin | 20 | |

DN40, CT40

| CODE | Fig. | Pin type | φD | L |
|--------|------|---------------|----|----|
| HP-62S | 1 | Straight pin | 18 | 62 |
| -62W | | Expansion pin | | |
| -50TL | 3 | Taper pin | 20 | 65 |

BT50, DN50, CT50

| CODE | Fig. | Pin type | φD | L |
|---------|------|---------------|----|----|
| HP-62S | 1 | Straight pin | 18 | 62 |
| -62S-20 | 2 | | 20 | |
| -62W | 1 | Expansion pin | 18 | |
| -62W-20 | 2 | | 20 | |
| -62T | 3 | Taper pin | 28 | |



③⑤ Bracket

BT40


| CODE | S |
|--------|----|
| FKA-60 | 60 |
| -65 | 65 |

DN40, CT40

| CODE | S |
|----------|----|
| FKA-60-L | 60 |
| -65-L | 65 |

BT50, DN50, CT50

| CODE | S |
|---------|-----|
| FKA- 80 | 80 |
| - 85 | 85 |
| -110 | 110 |



HUA20 / HUT6 (BT40/50, DN40/50, CT40/50)

| CODE (Master Holder) | ① Shank |
|-------------------------------|----------------|
| BT40 -HUA20-135 -HUT 6-135 | BT40 -FSA-U20 |
| BT50 -HUA20-150 -HUT 6-150 | BT50 -FSA-U20 |
| DN40A-HUA20-150 -HUT 6-150 | DN40A- FSA-U20 |
| DN50A-HUA20-150 -HUT 6-150 | DN50A- FSA-U20 |
| CT40 -HUA20-150 -HUT 6-150 | CT40 -FSA-U20 |
| CT50 -HUA20-150 -HUT 6-150 | CT50 -FSA-U20 |

■ Std. Access.

- Fixing spanner (KS-33)
- Hexagonal wrench set (W-1560S)
- Hook spanner (FC-50) (HUA20)

※ ③, ⑦, ⑩, ⑭, ⑰, ⑳, ㉓ and ㉔ are able to use standard commercial items.

③⑤ Positioning pin

BT40

| CODE | Fig. | Pin type | φD | L |
|--------|------|---------------|----|----|
| HP-50S | 1 | Straight pin | 18 | 50 |
| -50W | | Expansion pin | | |
| -50T | 3 | Taper pin | 20 | |

DN40, CT40

| CODE | Fig. | Pin type | φD | L |
|--------|------|---------------|----|----|
| HP-62S | 1 | Straight pin | 18 | 62 |
| -62W | | Expansion pin | | |
| -50TL | 3 | Taper pin | 20 | 65 |

BT50, DN50, CT50

| CODE | Fig. | Pin type | φD | L |
|---------|------|---------------|----|----|
| HP-62S | 1 | Straight pin | 18 | 62 |
| -62S-20 | 2 | | 20 | |
| -62W | 1 | Expansion pin | 18 | |
| -62W-20 | 2 | | 20 | |
| -62T | 3 | Taper pin | 28 | |


③⑥ Bracket

BT40, DN40, CT40

| CODE | S |
|--------|----|
| FKB-60 | 60 |
| -65 | 65 |

BT50, DN50, CT50

| CODE | S |
|---------|-----|
| FKB- 80 | 80 |
| - 85 | 85 |
| -110 | 110 |

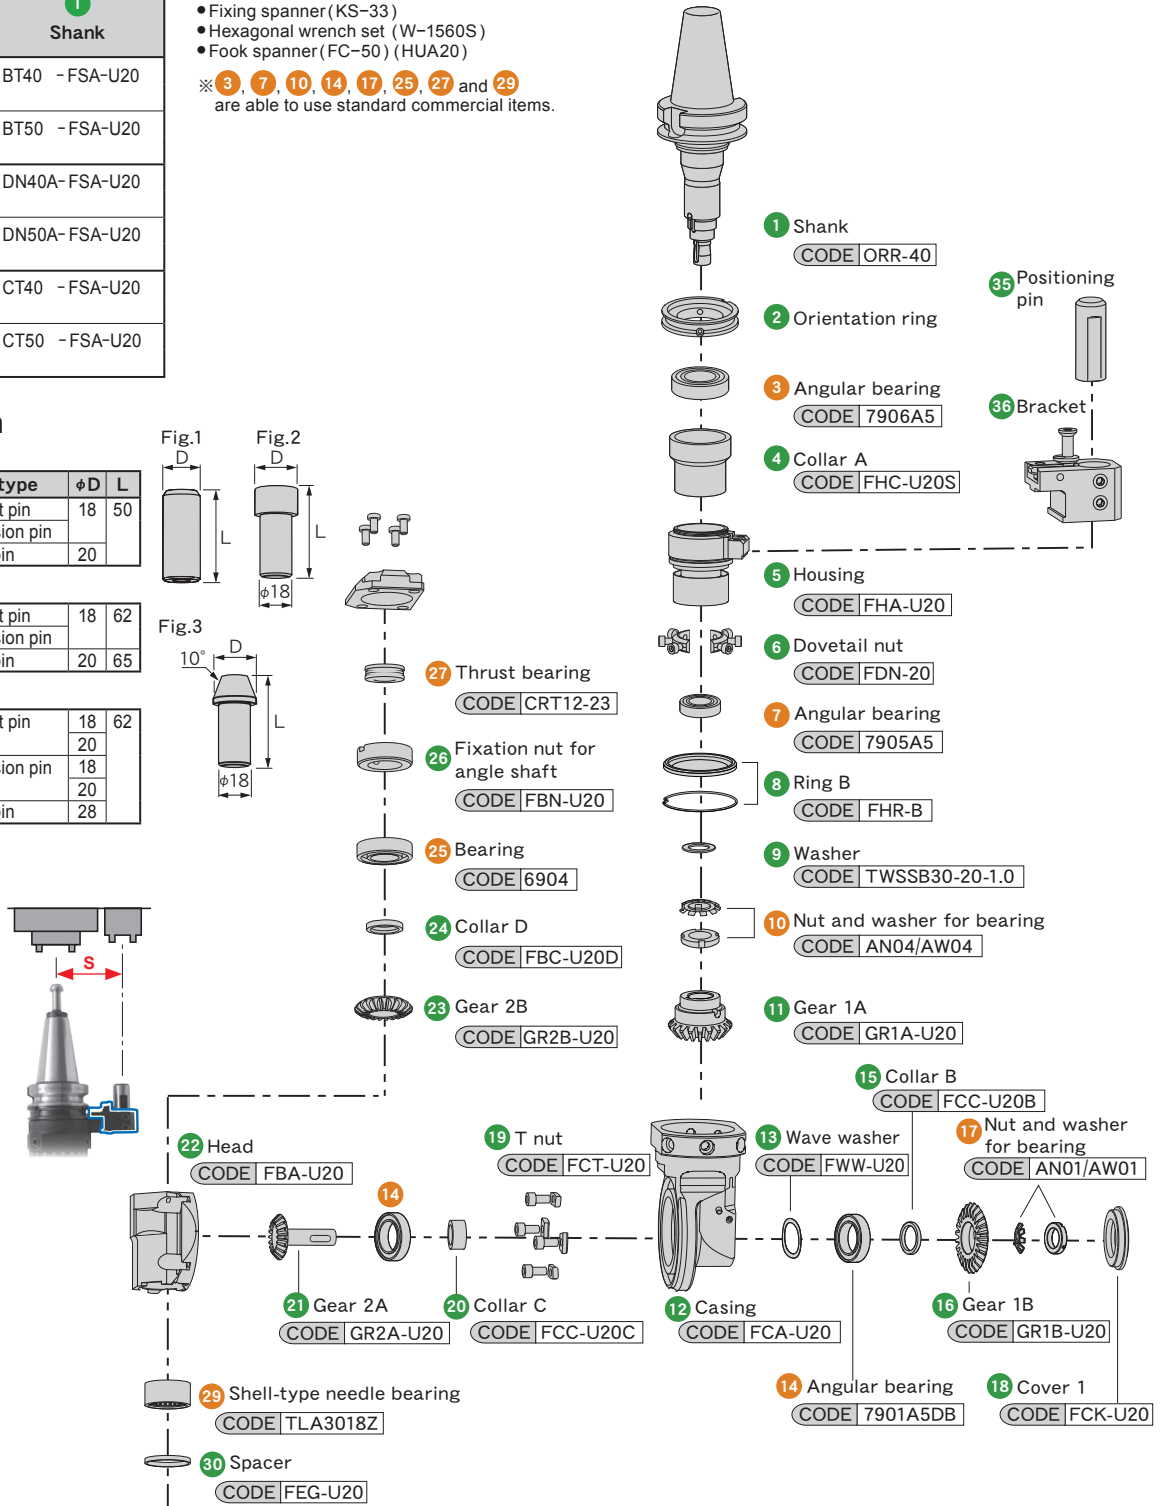

The tools for assembly

Wrench (for shank) Wrench (for head)

To be used for tightening ⑩ and ⑰. To be used for tightening ㉞.

| CODE | Image |
|----------|-------|
| TSS-HU20 | |

| CODE | Image |
|----------|-------|
| TSH-HF12 | |

Assembling tool for needle bearings

To be used for tightening ㉓.

| CODE | Image |
|----------|-------|
| TPN-HU20 | |



Technical support


At MST, we provide the long-term support that allows you to use our products safely and to maintain the high accuracy of our products for your machining.

1. Pre-sales


Provide wide-ranging technical support.



Tool selection

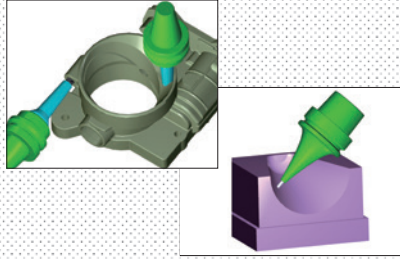


Interference check with 3D drawings

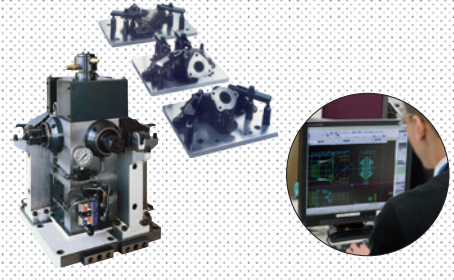

Designing manufacturing jig fixtures

2. On delivery

You will receive instructions.

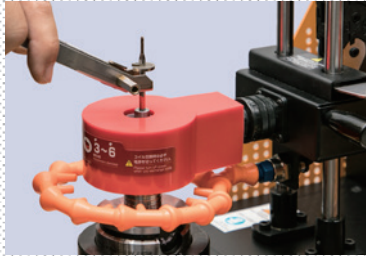


Instructions for a heater



Maintenance instruction

3. Post-sales

Our Tool Clinic experts can visit your factory to demonstrate the correct usage, maintenance and give seminars.

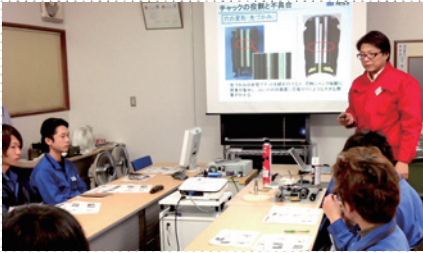

Seminar



Evaluation



Consulting

Substantial peripheral equipment

| | | | | |
|--|--|---|---|--|
| <p>Work table 6S DESK ➔ P.86</p> | <p>Holder, Tool washing machine CLEAN BOX ➔ P.88</p> | <p>TOOL CAP ➔ P.91</p> | <p>Tool set up stand ➔ P.94</p> | <p>Test bar CHECKMATE ➔ P.90</p> |
| | | <p>Tool holder storage cabinet ➔ P.98</p> | <p>Cutter protection box ENDMILL HOUSE ➔ P.97</p> | <p>Cleaning tool ➔ P.31</p> |

Instructions for use

To ensure optimum, trouble-free performance, please read this operation manual carefully before using the unit. Please contact us if your holder is damaged. We are ready to help you.

Instructions for using tool holder

Pay attention to scratches and rust.

Before using, be sure to remove anti-rust oil on the holder. Scratches and dust can reduce performance and accuracy. Please keep your holders clean with rags. Our CLEAN BOX is available for your cleaning needs.



CLEAN BOX
➔ P. 88

Storage.

Please use tool protection covers if you store holders with cutters. Cutting edges may be damaged by coming in contact with each other, and you may get injured by sharp cutting edges.



TOOL CAP
➔ P. 91



Tool holder shank.

If you insert holder shanks with scratches and dust into machine spindles, the accuracy of the spindle is reduced and the spindle can be damaged. For shank maintenance, use an oil grinding stone or sandpaper to remove scratches and rust. We cannot re-grind shank since it changes the position of gauge line, so we recommend you to purchase new holders.



Retention knob is consumable.

Exchange the retention knob regularly. (Usage period is depend on the frequency and cutting condition. Approximately 6 months for heavy duty cutting. 18 months for standard cutting.)



ANGLE HEAD

- The gear and bearing in the angle head are consumables. Periodic maintenance is required. The inside of the head can be checked by taking off the aluminum cover and the name plate.
- Be careful about the spindle rotating direction. If used in a wrong rotating direction, it will damage the gears.



DETa-1 Collet Holder

Tighten with the proper torque.

- Excessive tightening will reduce the accuracy and damage the internal components.
- An adjustable torque wrench, which can tighten the nut with the appropriate torque, is available for DTA type holders.



Adjustable torque wrench



The nut-tightening torque can be adjusted more properly.


➔ P. 31

- For the DTB3, the torque is adequate when the wrench starts to bend. Do not use T-type or L-type wrenches for tightening. If a commercially-available torque wrench is used, use a screwdriver type.



Firmly attach the DETa-1 collet to a rod.


Use a collet driver when screwing in the collet all the way until it stops. If the collet is not screwed in enough, the rod might break. The rod is replaceable.

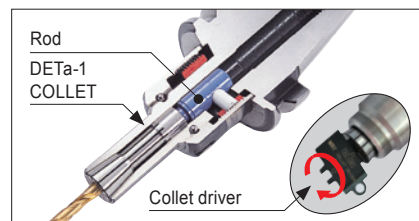

COLLET HOLDER

Do not use a collet that has a notch or nick (flaw) on its tapered surface.

In order to maintain the accuracy of the main unit, the hardness of the collet is less than that of the main unit. If the collet is used with its tapered surface having a notch or nick (flaw) in it, poor accuracy or insufficient tightening can cause an accident. Replacing the collet will allow you to restore the holder to more or less its initial precision level.



Tighten with the proper torque.

Excessive tightening will damage the holder. Clean the tool holder thoroughly inside and out when setting it up. When coolant or chips remain on the thread of the tool holder or the nut, the frictional resistance decreases. This will cause the torque to be similar to the torque experienced when over-tightening. Therefore, even if the tightening torque is correct, it might lead to breakage.



Adjustable torque wrench



The nut-tightening torque can be adjusted more properly.

➔ P.38

Hi-ART MILLING CHUCK

Do not tighten the collet without inserting a cutting tool.

Tightening the nut without inserting a cutter will cause the clamping portion of the holder to change shape and make it difficult to insert a cutter.



Be sure to insert the cutter shank deeper than the minimum clamping depth.


If the internal bore gets damaged, accuracy degradation, gripping torque degradation and unable insertion of the cutter might occur. Refer to "Cutter insertion length" on the chart.

| Cutter shank dia. | Min. holding length | |
|-------------------|---------------------|-------|
| | ART32 | ART42 |
| φ 6, 8 | 30 | 35 |
| φ 10, 12 | 40 | 45 |
| φ 16, 20 | 50 | 55 |
| φ 25 | | |
| φ 32 | 66 | 60 |
| φ 42 | - | 76 |

RED screw arbor

Confirm if a screw-in tool can be used.


Some of the screw-in end mills cannot be attached to the RED screw arbor. Please check your screw-in end mills for conformance to the dimensions, or please contact MST.



| Holder type | M | φd1 | A | B |
|-------------|-----|------|----|----|
| RSG8 | M 8 | 8.5 | 10 | 18 |
| RSG10 | M10 | 10.5 | 10 | 22 |
| RSG12 | M12 | 12.5 | 10 | 22 |
| RSG16 | M16 | 17 | 10 | 25 |

Precautions for collet tightening.

First set the collet into the nut. Do not first put the collet into the tool holder. The collet might get stuck in the tool holder when tightened by the nut.

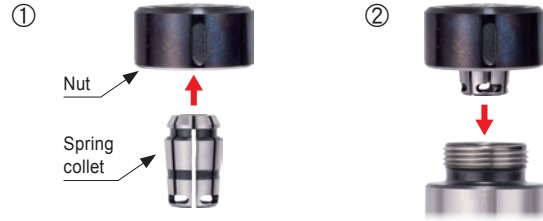

Be sure to keep the clamping length of the cutter insertion to a minimum.

Not clamping the cutter with the entire clamping length will cause degradation of accuracy, slipping out of the cutter, and breakage of the tool holder and the nut.


| Collet inner diameter | Min. holding length | HOLDER CODE |
|-----------------------|---------------------|--------------|
| φ 2.6~10 | 20 | CTA10, CTH10 |
| φ 6 ~20 | 40 | CTA20, CTH20 |
| φ 6 ~ 9.5 | 38 | CTA25, CTH25 |
| φ 10 ~ 15 | 48 | |
| φ 15.5~25 | 57 | CTA32, CTH32 |
| φ 25, 28, 30, 32 | 68 | |
| φ 32, 40, 42 | 70 | CTA40 |

Use the holder within the allowable spindle speed.

| HOLDER | MAX.min ⁻¹ |
|------------------|-----------------------|
| BT40, A 63-ART32 | 6000 |
| BT50, A100-ART32 | 5000 |
| BT50, A100-ART42 | 3000 |

After removing the tool, loosen the nut by another one turn or more.


Otherwise, the next time the tool is clamped, the component of the nut might be damaged. This will also prevent you from being able to grip the tool with sufficient strength, causing the tool to slip during machining.

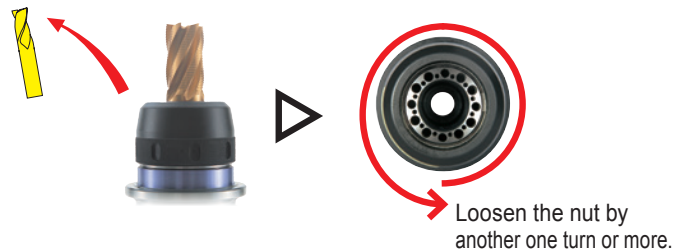

SUMMIT

Tighten the all bolts at least twice.

Tighten the bolts in the order of the numbers marked on them.




Precautions for tightening the bolts.

If you are unable to loosen the last one or two bolts, tighten all the bolts again and then try to loosen all the bolts again little by little. (This occurs when the bolts are not loosened equally and little by little from the first step.)

When loosened slowly, the wrench might bend, so loosen the bolts with instantaneous torque.


Cutter life comparison depending on different run-out accuracy

When the cutter run-out accuracy is $10\mu\text{m}$, cutter life is 2.2 times longer than with $40\mu\text{m}$ run-out accuracy.

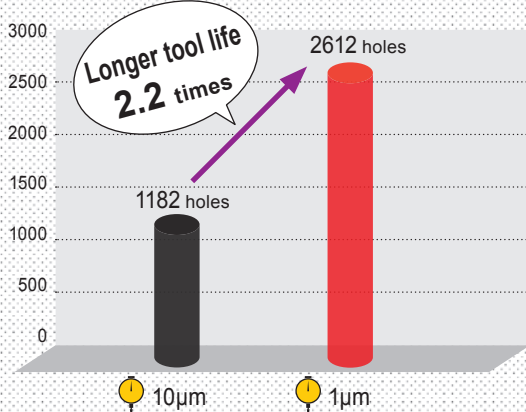

Cutting condition

Cutting tool : $\phi 0.1\text{ mm}$ drill
 Material : NAK80(40HRC)
 Coolant : Water solubility coolant
 Revolution : $20,000\text{min}^{-1}$
 Feed : 60 mm/min
 Step feed : Non-step
 Depth : 0.4 mm





Cutter life comparison when using cutter-through coolant and external coolant

Applying the cutter-through coolant improves the tool life 3.7 times higher than when external coolant is used.

Cutter-through coolant



External coolant


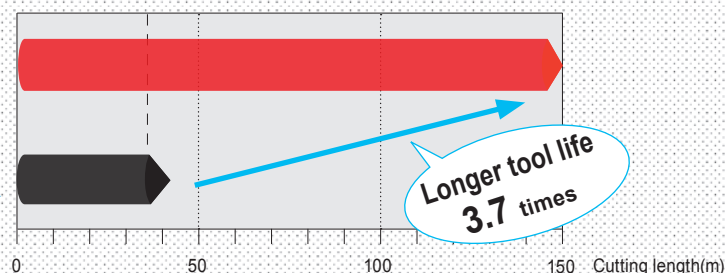



For high-speed spindle rotation

Imbalance value of a machine tool spindle and a tool holder

A tool holder imbalance value (G grade) focuses at high-speed spindle rotation of a machining center. However, it is important to consider the entire rotation body, including the spindle, holder and cutter to determine the high-speed spindle rotation. This is because the holder and cutter weight is much lighter than the spindle weight (less than approx. 1/20th), and thus the effect of a tool holder on the spindle rotating equipment (spindle, tool holder and cutter) becomes significantly smaller.

Spending time and money on balance corrections to the holder alone will not result in significant improvement.

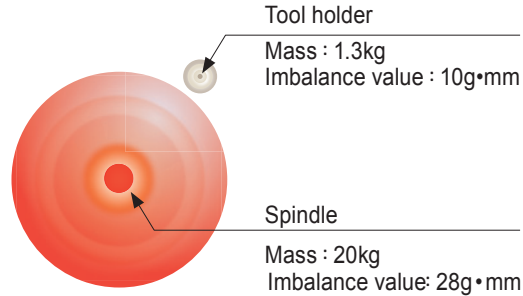

Achieving high-speed, high-efficiency machining requires more than just good balance.

- What is the run-out accuracy of the machine spindle, tool holder and cutting tool?
- Is there taper contact between the machine spindle and tool holder?
- What is the diameter of the cutting tool?
- What is the cutting speed? Spindle rotation?


Points to keep in mind at high-speed rotation.

- Minimize the length of a tool holder and cutting tool as short as possible.
- Use high accuracy and compact design tool holders.
- Optimize the cutting condition(rpm, feed and depth of cut).

MST considers these points carefully and produces a tool holder according to our own pre-balanced design concept.


Pre-balanced design

MST has applied our original pre-balancing to make the tool holders applicable for high-speed spindle rotation. Balancing corrections for our products is not required.

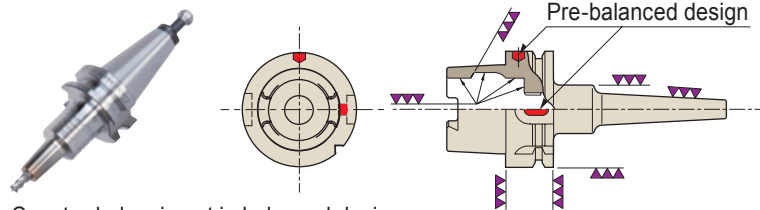


- Counter-balancing at imbalanced design areas.
- O.D finish grinding after heat treatment.

Unbalancing in terms of tolerable residual ration against the balancing grade(G grade value)

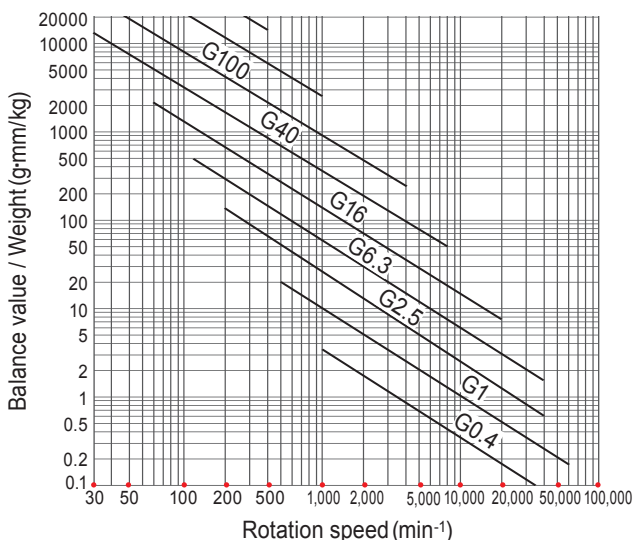

Relationship between a cutter diameter and spindle rotation

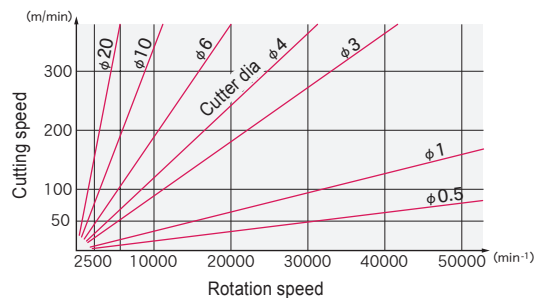

<<Reference >>

Recommend various of G grade of a rotating body

| G grade | G | Rotating body |
|---------|-------|--|
| G40 | ~17 | The car wheel |
| G16 | ~16 | The parts of agricultural machines The parts of truck |
| G 6.3 | ~ 6.3 | Machine tools and aviation gas- turbine rotors after assembling general mechanical parts |
| G 2.5 | ~ 2.5 | The spindle of machine tool Gas turbine Steam turbine |
| G 1 | ~ 1 | The grinding wheel spindle of grinding machine |
| G 0.4 | ~ 0.4 | The grinding wheel spindle of precise grinding machine Gyroscope |

Determining tool holder G grade

$$G = \frac{\text{Imbalance value(g·mm)}}{\text{Weight (kg)}} \times \frac{\text{Spindle rotation speed}}{9,550}$$

Holders for high-speed operation include "Imbalance value" and "holder weight" columns in the dimensions table.

Determining G grade of rotating equipment (spindle · tool holder · cutting tool)

$$G = \frac{(\text{Spindle + Holder + Cutter}) \cdot \text{Imbalance value(g·mm)}}{\text{Weight (kg)}} \times \frac{\text{Spindle rotation speed}}{9,550}$$

HSK SHANK

MST uses DIN-HSK standard shanks, which are widely used in Japan and other countries as “2-face contact tooling” for high-speed, high-efficiency machining.

- ▷ The close contact of the end faces (2-face contact) of the HSK shank results in high rigidity for transverse feed, which minimizes vibrations during machining and improves the operating life of the cutting tool and the finished surface.
- ▷ Even if the spindle expands during high-speed rotations, the tapered hollow portion comes up with that expansion, thereby maintaining high precision.



A type

The most common type in use today.



E type

This type has no drive keyway and is suitable for high-speed machining.



F type

This type uses a combination of different sizes of tapers and flanges.




T type

This type is for turning with multiple machining

Pre-Balanced design

The HSK-A-type shank is unbalanced in its standard form, but at MST we have applied our original pre-balancing to make the tool holders applicable for high-speed machining. According to DIN standards, only the area marked with ※ in the hollow shank needs to be finished. However, MST provides perfect finishing for all areas after heat treatment in order to improve balance.


| | MST | DIN standard |
|------|---------|--------------|
| A63 | 15 g·mm | 75 g·mm |
| A100 | 28 g·mm | 170 g·mm |



Three times stronger clamping force

HSK uses a clamping mechanism, which utilizes the wedge effect, to provide a tool gripping power 2.5 to 3.0 times greater than in the retention knob system (BT40 and BT50), thereby increasing rigidity.

| | Tensile strength of draw bar | Tool clamping force |
|------|------------------------------|---------------------|
| BT40 | 10~15kN | 10~15kN |
| A63 | 5.8kN | 18.4kN |
| BT50 | 20~25kN | 20~25kN |
| A100 | 14.5kN | 45.9kN |

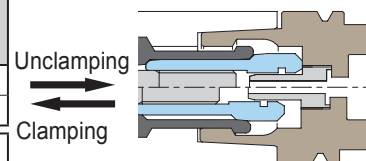

Rigidity comparison with BT shank

The HSK shank is effective when longer overhang or higher transverse feed rigidity is required. The higher rigidity greatly contributes to improve the operating life of the cutting tool and the smoothness of the finished surface.




Taper gauge

MST establishes the optimal value within the tolerance in accordance with the DIN standard and manufacturers master gauges for tool shanks and those for spindle tapers accordingly.



Coolant duct


This is a coolant feed part exclusively for the HSK-A type. MST's HSK-A type holder comes standard with each coolant duct.



!
For some machines, the use of a coolant duct (Adjustable) is recommended. The existing coolant duct is replaced with an adjustable one at your request only when you have placed an order for the holder. →P. 104

TOOLING SYSTEMS for HSK-T

Collaborative development with 17 Japanese manufacturers has resulted in an interface for mill-turning machines based on the HSK-A type. With its 2008 ISO accreditation, it has become popular standard around the world.



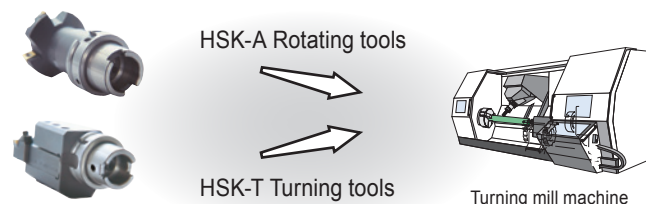


Technical data

The shank dimensions



HSK-A (Extracts from DIN 69893-1;1993-07)

| Shank | A40 | A50 | A63 | A100 | A125 |
|-----------------------------|------------------|------------------|------------------|------------------|------------------|
| b1 (H10) | 8 | 10.5 | 12.5 | 20 | 25 |
| b2 (H10) | 9 | 12 | 16 | 20 | 25 |
| b3 (H10) | 11 | 14 | 18 | 22 | 28 |
| d1 (h10) | 40 | 50 | 63 | 100 | 125 |
| d2 | 30 | 38 | 48 | 75 | 95 |
| d3 | +0.007 +0.005 | +0.009 +0.006 | +0.011 +0.007 | +0.015 +0.009 | +0.018 +0.011 |
| d4 | 29.05 | 36.9 | 46.53 | 72.6 | 91.95 |
| d5 | +0.005 +0.003 | +0.006 +0.003 | +0.007 +0.003 | +0.009 +0.003 | +0.011 +0.004 |
| d4 (Max.) | 34 | 42 | 53 | 85 | 105 |
| d8 (H10) | 21 | 26 | 34 | 53 | 67 |
| d9 (H11) | 25.5 | 32 | 40 | 63 | 80 |
| d10 | 23 | 29 | 37 | 58 | 73 |
| d11 | M12 × 1 | M16 × 1 | M18 × 1 | M24 × 1.5 | M30 × 1.5 |
| d14 (Max.) | 5 | 6.8 | 8.4 | 12 | 14 |
| e1 | 10.88 | 13.797 | 17.862 | 27.329 | 35.324 |
| f1 (-0.1) | 20 | 26 | 26 | 29 | 29 |
| f2 (min.) | 35 | 42 | 42 | 45 | 45 |
| f3 (± 0.1) | 16 | 18 | 18 | 20 | 20 |
| f4 (+0.15) | 2 | 3.75 | 3.75 | 3.75 | 3.75 |
| h1 (-0.2) | 17 | 21 | 26.5 | 44 | 55.5 |
| h2 (-0.3) | 12 | 15.5 | 20 | 31.5 | 39.5 |
| l1 (-0.2) | 20 | 25 | 32 | 50 | 63 |
| l2 | 4 | 5 | 6.3 | 10 | 12.5 |
| l3 | 9.5 | 11 | 14.7 | 24 | 30.5 |
| l4 (+0.2) | 6 | 7.5 | 10 | 15 | 19 |
| l5 (+0.2) | 3.5 | 4.5 | 6 | 10 | 12 |
| l6 (JS10) | 11.42 | 14.13 | 18.13 | 28.56 | 36.27 |
| l7 (-0.1) | 8 | 10 | 10 | 12.5 | 16 |
| l8 (-0.3) | 8 | 10 | 12 | 16 | 18 |
| l12 | 12 | 19 | 21 | 24 | 24 |
| r3 (+0.05 / -0.05) | 1.88 | 2.38 | 2.88 | 4.88 | 5.88 |
| r8 | 4.5 | 6 | 8 | 10 | 5 |

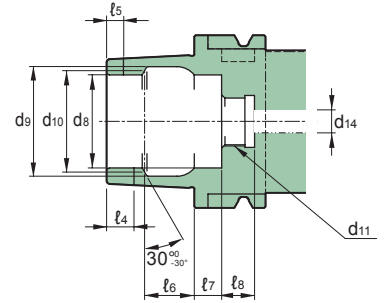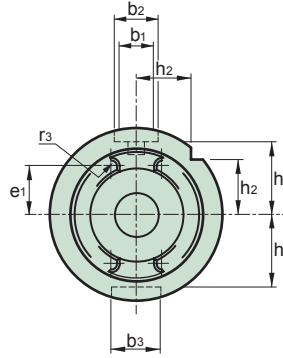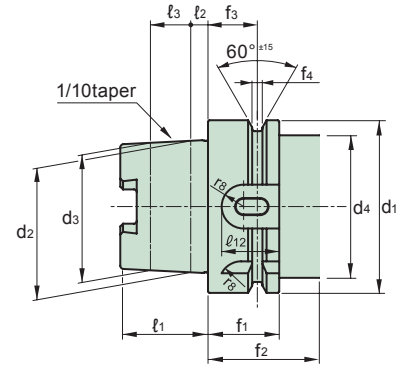



HSK-E (Extracts from DIN V 69893-5;1996-01)

| Shank | E25 | E32 | E40 | E50 |
|---------------------|------------------|------------------|------------------|------------------|
| d1 (h10) | 25 | 32 | 40 | 50 |
| d2 | 19 | 24 | 30 | 38 |
| d3 | +0.006 +0.004 | +0.007 +0.005 | +0.007 +0.005 | +0.009 +0.006 |
| d4 | 18.15 | 23.27 | 29.05 | 36.90 |
| d5 | +0.004 +0.002 | +0.005 +0.003 | +0.005 +0.003 | +0.006 +0.003 |
| d4 (Max.) | 20 | 26 | 34 | 42 |
| d8 (H10) | 14 | 17 | 21 | 26 |
| d9 (H11) | 16.4 | 21 | 25.5 | 32 |
| d10 | 15 | 19 | 23 | 29 |
| d11 (Max.) | 3 | 4.2 | 5 | 6.8 |
| l1 (-0.2) | 13 | 16 | 20 | 25 |
| l2 | 2.5 | 3.2 | 4 | 5 |
| l3 | 8.5 | 7.3 | 9.5 | 11 |
| l4 (JS10) | 7.21 | 8.92 | 11.42 | 14.13 |
| l5 (-0.1) | 6 | 8 | 8 | 10 |
| f1 (-0.1) | 10 | 20 | 20 | 26 |
| f2 (min.) | 20 | 35 | 35 | 42 |
| f3 (± 0.1) | 4.5 | 16 | 16 | 18 |
| f4 (+0.15) | 2 | 2 | 2 | 3.75 |

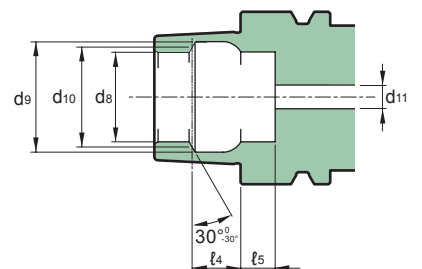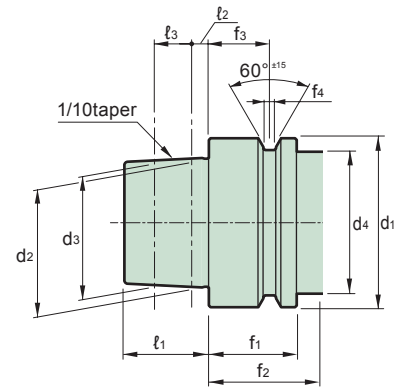


HSK-F (Extracts from DIN 69893-1;1993-07)

| Shank | F63 | F80 |
|------------------------|------------------|------------------|
| d1 (h10) | 63 | 80 |
| d2 | 38 | 48 |
| | +0.009 +0.006 | +0.011 +0.007 |
| d3 | 36.9 | 46.53 |
| d3 | +0.006 +0.003 | +0.007 +0.003 |
| | | |
| d4 (Max.) | 53 | 67 |
| d8 (H10) | 26 | 34 |
| d9 (H11) | 32 | 40 |
| d10 | 29 | 37 |
| f1 (-0.1) | 26 | 26 |
| f2 (min.) | 42 | 42 |
| f3 (± 0.1) | 18 | 18 |
| f4 (+0.15 0) | 3.75 | 3.75 |
| ℓ1 (-0.2 0) | 25 | 32 |
| ℓ2 | 5 | 6.3 |
| ℓ3 | 11 | 14.7 |
| ℓ4 (Js10) | 14.13 | 18.13 |
| ℓ5 (-0.1 0) | 10 | 10 |
| f1 (-0.1) | 26 | 26 |
| f2 (min.) | 42 | 42 |
| f3 (± 0.1) | 18 | 18 |
| f4 (+0.15 0) | 3.75 | 3.75 |

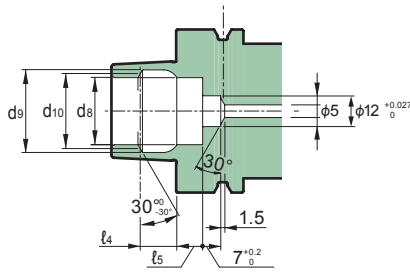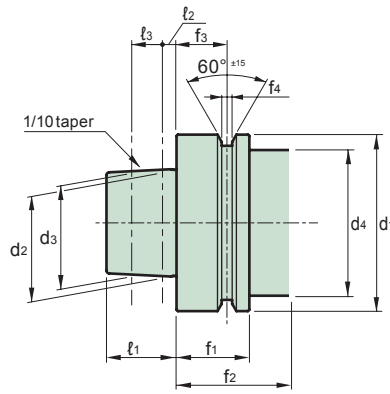


HSK-T (Extracts from DIN 69893-1;1993-07) For turning with turning mill machines

| Shank | T40 | T50 | T63 | T100 | T125 |
|----------------------------|------------|---------|-------------|-----------|------------|
| b1 (+0.04 -0.04) | 8.05 | 10.54 | 12.54 | 20.02 | 25.02 |
| b2 (H10) | 9 | 12 | 16 | 20 | 25 |
| b3 (H10) | 11 | 14 | 18 | 22 | 28 |
| b5 | 7.932 | 10.425 | 12.425 | 19.91 | 24.915 |
| | +0.03 0 | | +0.035 0 | | +0.04 0 |
| d1 (h10) | 40 | 50 | 63 | 100 | 125 |
| d2 | 30.007 | 38.009 | 48.010 | 75.013 | 95.016 |
| d3 (H10) | 21 | 26 | 34 | 53 | 67 |
| d4 (H11) | 25.5 | 32 | 40 | 63 | 80 |
| d5 | 23 | 29 | 37 | 58 | 73 |
| d6 (Max.) | 5 | 6.8 | 8.4 | 12 | 14 |
| d9 (Max.) | 39 | 49 | 62 | 99 | 124 |
| d15 | M12 × 1 | M16 × 1 | M18 × 1 | M24 × 1.5 | M30 × 1.5 |
| e1 | 11 | 13.88 | 17.99 | 27.37 | 35.37 |
| f1 (-0.1) | 20 | 26 | 26 | 29 | 29 |
| f2 (min.) | 23 | 30 | 30 | 34 | 34 |
| f3 (± 0.1) | 16 | 18 | 18 | 20 | 20 |
| f4 (+0.15 0) | 2 | 3.75 | 3.75 | 3.75 | 3.75 |
| h1 (-0.2 0) | 17 | 21 | 26.5 | 44 | 55.5 |
| h2 (-0.2 0) | 12 | 15.5 | 20 | 31.5 | 39.5 |
| ℓ1 (-0.2 0) | 20 | 25 | 32 | 50 | 63 |
| ℓ2 | 4 | 5 | 6.3 | 10 | 12.5 |
| ℓ3 (+0.2 0) | 6 | 7.5 | 10 | 15 | 19 |
| ℓ4 (-0.2 0) | 3.5 | 4.5 | 6 | 10 | 12 |
| ℓ5 (JS10) | 11.42 | 14.13 | 18.13 | 28.56 | 36.27 |
| ℓ6 (-0.1 0) | 8 | 10 | 10 | 12.5 | 16 |
| ℓ9 (-0.1 0) | 8 | 10 | 12 | 16 | 18 |
| ℓ12 | 12 | 19 | 21 | 24 | 24 |
| r3 (+0.05 -0.05) | 1.88 | 2.38 | 2.88 | 4.88 | 5.88 |
| r9 | 4.5 | 6 | 8 | 10 | 5 |

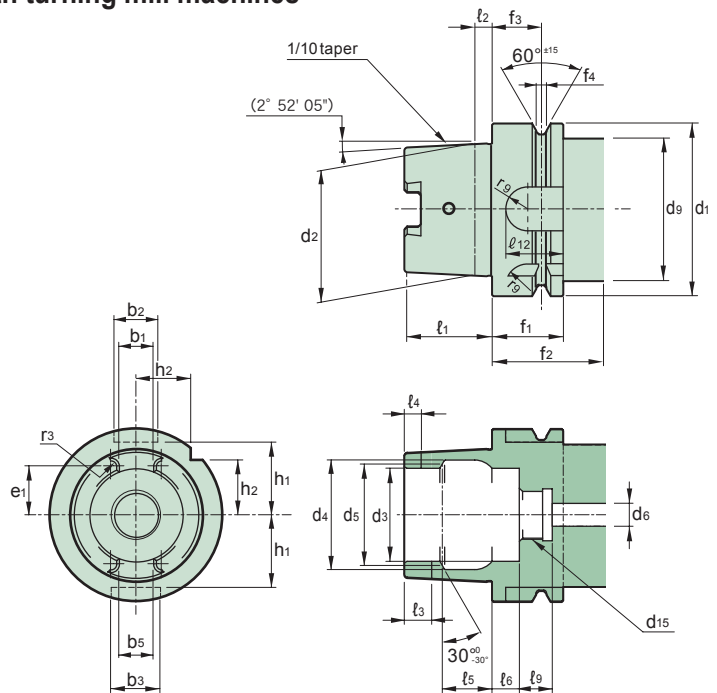


BT (Extracts from MAS 403)

| Shank | BT30 | BT40 | BT50 |
|-------------------------------|-------|-------|-------|
| D₁ | 31.75 | 44.45 | 69.85 |
| ℓ₁ (± 0.15) | 48.4 | 65.4 | 101.8 |
| d₂ (H8) | 12.5 | 17 | 25 |
| g (6H) | M12 | M16 | M24 |
| ℓ₂ (min.) | 24 | 30 | 45 |
| ℓ₃ (min.) | 34 | 43 | 62 |
| ℓ₄ | 7 | 9 | 13 |
| b (H12) | 16.1 | 16.1 | 25.7 |
| ℓ₅ (min.) | 17 | 21 | 31 |
| t (-0.2) | 16.3 | 22.6 | 35.4 |
| D₅ (h8) | 46 | 63 | 100 |
| f | 20 | 25 | 35 |
| v (± 0.1) | 13.6 | 16.6 | 23.2 |
| y (± 0.4) | 2 | 2 | 3 |

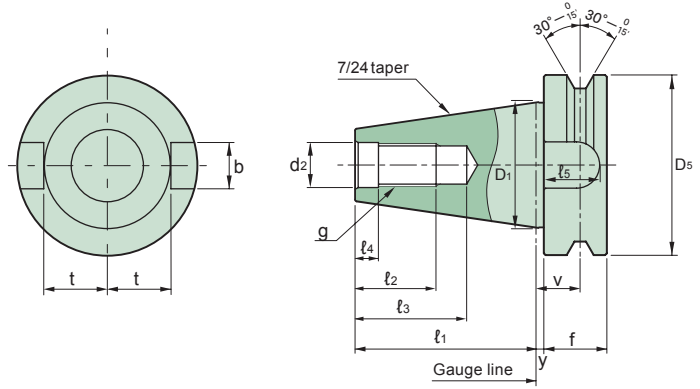


DIN (DIN69871-1)

| Shank | DN40 | DN50 |
|----------------------|-------|--------|
| D₁ | 44.45 | 69.85 |
| D₂ | 63.55 | 97.5 |
| D₃ | 56.25 | 91.25 |
| D₄ | 50 | 80 |
| L₁ | 68.4 | 101.75 |
| L₃ | 3.75 | 6.495 |
| b₁ | 16.1 | 25.7 |
| d₁ | 17 | 25 |
| t₁ | 22.8 | 35.5 |
| t₂ | 25 | 37.7 |
| t₃ | 18.5 | 30 |

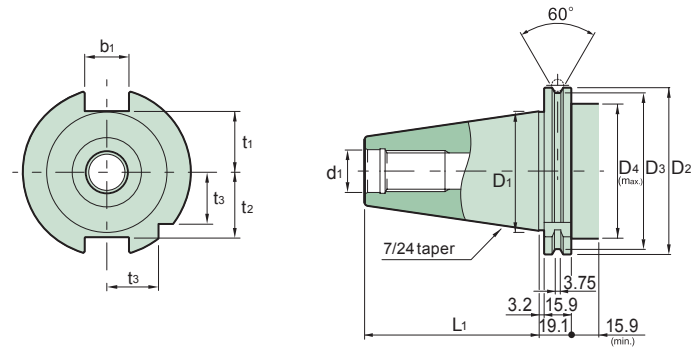


CAT.

| Shank | CT40 | CT50 |
|----------------------|------|------|
| D₁ | 1.75 | 2.75 |
| D₂ | 2.5 | 3.88 |
| D₃ | 2.22 | 3.59 |
| D₄ | 1.75 | 2.75 |
| L₁ | 2.69 | 4 |
| b₁ | .65 | 1.06 |
| d₁ | .64 | 1.03 |
| t₁ | .99 | 1.49 |
| t₂ | .84 | 1.39 |

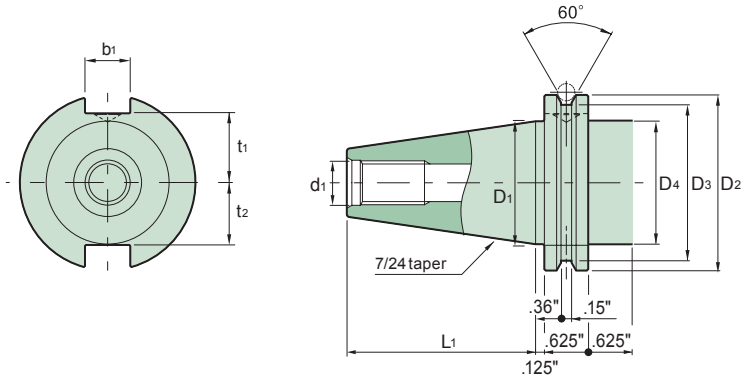

HSK-A125/ F80PD are also available as standard products.

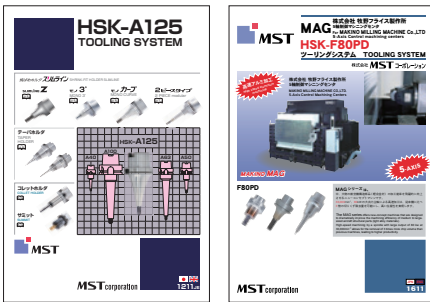

If you would like more detailed information, please contact MST and ask for a catalog.

Drill hole size in metric coarse screw thread

| Nominal size x pitch | Drill hole dia. |
|----------------------|-----------------|
| M 1 ×0.25 | 0.75 |
| M 1.2×0.25 | 0.95 |
| M 1.6×0.35 | 1.25 |
| M 2 ×0.4 | 1.6 |
| M 2.5×0.45 | 2.1 |
| M 3 ×0.5 | 2.5 |
| M 4 ×0.7 | 3.3 |
| M 5 ×0.8 | 4.2 |
| M 6 ×1 | 5 |
| M 8 ×1.25 | 6.8 |
| M10 ×1.5 | 8.5 |
| M12 ×1.75 | 10.3 |
| M16 ×2 | 14 |
| M20 ×2.5 | 17.5 |
| M24 ×3 | 21 |
| M30 ×3.5 | 26.5 |
| M33 ×3.5 | 29.5 |
| M36 ×4 | 32 |
| M39 ×4 | 35 |
| M42 ×4.5 | 37.5 |
| M45 ×4.5 | 40.5 |
| M48 ×5 | 43 |

Drill hole size in unified screw threads

| Nominal size x pitch | Drill hole dia. |
|----------------------|-----------------|
| NO. 1 - 64UNC | 1.55 |
| NO. 2 - 56UNC | 1.8 |
| NO. 3 - 48UNC | 2.1 |
| NO. 4 - 40UNC | 2.3 |
| NO. 5 - 40UNC | 2.6 |
| NO. 6 - 32UNC | 2.8 |
| NO. 8 - 32UNC | 3.4 |
| NO.10 - 24UNC | 3.9 |
| NO.12 - 24UNC | 4.5 |
| 1/4 - 20UNC | 5.1 |
| 5/16 - 18UNC | 6.6 |
| 3/8 - 16UNC | 8 |
| 7/16 - 14UNC | 9.4 |
| 1/2 - 13UNC | 10.8 |
| 9/16 - 12UNC | 12.2 |
| 5/8 - 11UNC | 13.6 |
| 3/4 - 10UNC | 16.5 |
| 7/8 - 9UNC | 19.5 |
| 1 - 8UNC | 22.2 |
| 1 1/8 - 7UNC | 25 |
| 1 1/4 - 7UNC | 28.2 |
| 1 3/8 - 6UNC | 30.8 |
| 1 1/2 - 6UNC | 34 |
| 1 3/4 - 5UNC | 39.5 |

Drill hole size in screw for pipe

| Nominal size | Rc(PT) | Rp(PS) | G(PF) |
|--------------|--------|--------|-------|
| 1/8 | 8.2 | 8.5 | 8.8 |
| 1/4 | 10.9 | 11.4 | 11.87 |
| 3/8 | 14.4 | 14.9 | 15.38 |
| 1/2 | 18 | 18.5 | 19.1 |
| 5/8 | — | — | 21 |
| 3/4 | 23 | 24 | 24.6 |
| 7/8 | — | — | 28.3 |
| 1 | 29 | 30 | 30.9 |
| 1 1/8 | — | — | 35.5 |
| 1 1/4 | 38 | 39 | 39.4 |
| 1 1/2 | 44 | 45 | 45.4 |

Dia. of tap shank



| Metric screw threads | Unified screw threads | Gas screw threads | φD2 |
|----------------------|-----------------------|-------------------|------|
| φD1 | | | |
| M 1~M 2.6 | UNo. 0~ 4 | | 3 |
| M 3~M 3.5 | UNo. 5 · 6 | | 4 |
| M 4~M 4.5 | UNo. 8 | | 5 |
| M 5~M 5.5 | UNo.10 ·12 | | 5.5 |
| M 6 | U 1/4 | | 6 |
| | U 5/16 | | 6.1 |
| M 7~M 8 | | | 6.2 |
| M 9~M10 | U 3/8 | | 7 |
| M11 | U 7/16 | P1/16 · 1/8 | 8 |
| M12 | | | 8.5 |
| | U 1/2 | | 9 |
| M13 | | | 9.5 |
| M14~M15 | U 9/16 | | 10.5 |
| | | P 1/4 | 11 |
| | U 5/8 | | 12 |
| M16 | | | 12.5 |
| M17 | | | 13 |
| M18 | U 3/4 | P 3/8 | 14 |
| M20 | | | 15 |
| M22 | U 7/8 | | 17 |
| | | P 1/2 | 18 |
| M24~M25 | | P 5/8 | 19 |
| M26~M27 | U1 | | 20 |
| M28 | | | 21 |
| | U1 1/8 | | 22 |
| M30 | | P 3/4 | 23 |
| M32 | U1 1/4 | P 7/8 | 24 |
| M33 | | | 25 |
| M35 | U1 3/8 | P1 | 26 |
| M36~M38 | | P1 1/8 | 28 |
| M39~M40 | U1 1/2 | | 30 |
| M42 | U1 5/8 | P1 1/4 | 32 |
| M45 | U1 3/4 | P1 3/8 | 35 |
| M48 | | P1 1/2 | 38 |
| M50 | U2 | P1 5/8 | 40 |
| M52 | | P1 3/4 | 42 |

Dimensional tolerance of typically used mating (JIS B 0401)

| The class of dimension(mm) | | The tolerance of the hole dimension(μm) | | | | | | The tolerance of the shaft dimension(μm) | | | | | |
|----------------------------|-----------|---|----------|----------|----------|----------|-----------|--|----------|----------|----------|----------|-----------|
| More than | Less than | H4 | H5 | H6 | H7 | H8 | H9 | h4 | h5 | h6 | h7 | h8 | h9 |
| — | 3 | +3 0 | +4 0 | +6 0 | +10 0 | +14 0 | +25 0 | 0 -3 | 0 -4 | 0 -6 | 0 -10 | 0 -14 | 0 -25 |
| 3 | 6 | +4 0 | +5 0 | +8 0 | +12 0 | +18 0 | +30 0 | 0 -4 | 0 -5 | 0 -8 | 0 -12 | 0 -18 | 0 -30 |
| 6 | 10 | +4 0 | +6 0 | +9 0 | +15 0 | +22 0 | +36 0 | 0 -4 | 0 -6 | 0 -9 | 0 -15 | 0 -22 | 0 -36 |
| 10 | 18 | +5 0 | +8 0 | +11 0 | +18 0 | +27 0 | +43 0 | 0 -5 | 0 -8 | 0 -11 | 0 -18 | 0 -27 | 0 -43 |
| 18 | 30 | +6 0 | +9 0 | +13 0 | +21 0 | +33 0 | +52 0 | 0 -6 | 0 -9 | 0 -13 | 0 -21 | 0 -33 | 0 -52 |
| 30 | 50 | +7 0 | +11 0 | +16 0 | +25 0 | +39 0 | +62 0 | 0 -7 | 0 -11 | 0 -16 | 0 -25 | 0 -39 | 0 -62 |
| 50 | 80 | +8 0 | +13 0 | +19 0 | +30 0 | +46 0 | +74 0 | 0 -8 | 0 -13 | 0 -19 | 0 -30 | 0 -46 | 0 -74 |
| 80 | 120 | +10 0 | +15 0 | +22 0 | +35 0 | +54 0 | +87 0 | 0 -10 | 0 -15 | 0 -22 | 0 -35 | 0 -54 | 0 -87 |
| 120 | 180 | +12 0 | +18 0 | +25 0 | +40 0 | +63 0 | +100 0 | 0 -12 | 0 -18 | 0 -25 | 0 -40 | 0 -63 | 0 -100 |
| 180 | 250 | +14 0 | +20 0 | +29 0 | +46 0 | +72 0 | +115 0 | 0 -14 | 0 -20 | 0 -29 | 0 -46 | 0 -72 | 0 -115 |
| 250 | 315 | +16 0 | +23 0 | +32 0 | +52 0 | +81 0 | +130 0 | 0 -16 | 0 -23 | 0 -32 | 0 -52 | 0 -81 | 0 -130 |
| 315 | 400 | +18 0 | +25 0 | +36 0 | +57 0 | +89 0 | +140 0 | 0 -18 | 0 -25 | 0 -36 | 0 -57 | 0 -89 | 0 -140 |
| 400 | 500 | +20 0 | +27 0 | +40 0 | +63 0 | +97 0 | +155 0 | 0 -20 | 0 -27 | 0 -40 | 0 -63 | 0 -97 | 0 -155 |

Conversion table for International System of Units

| Force | | Pressure | | Stress | |
|---------|--------------------------|-------------------------|--------------------------|-------------------------|--------------------------|
| N | kgf | Pa | kgf/cm ² | Pa | kgf/mm ² |
| 1 | 1.01972×10 ⁻¹ | 1 | 1.01972×10 ⁻⁵ | 1 | 1.01972×10 ⁻⁷ |
| 9.80665 | 1 | 9.80665×10 ⁴ | 1 | 9.80665×10 ⁶ | 1 |

INDEX

| | CODE | NAME | Page | | |
|-----------------------|--------------------------|------------------------------------|-----------------------------------|---------------|----|
| ANGLE HEAD | AB - 15 | Semi-finished positioning block | 19 | | |
| | ABF005 | Positioning block for machines | 7 | | |
| | BT40 - AHA20 - 160 | ANGLE HEAD SOLID type | 16 | | |
| | F190 - AHA20 - 200 | ANGLE HEAD FLANGE type | 17 | | |
| | BT50 - AHB5 - 225 | ANGLE HEAD MODULAR type | 15 | | |
| | BT50 - AHC10 - 245 | | | | |
| | BT50 - AHA25 - 250 | ANGLE HEAD SOLID type | 16 | | |
| | BT50 - AHD30 - 195 | | | | |
| | BT40 - AHU10 - 175 | ANGLE HEAD UNIVERSAL type | 18 | | |
| | AJB - M6 - L | Adjust bolt(WIRE CUT UNIT) | 102 | | |
| | AJC - M14 | Adjust screw(COLLET HOLDER) | 37 | | |
| | AJN - M18L | Adjust screw(Hi-ART Milling chuck) | 44 | | |
| | AP40 - T30V | Adapter(Petit Ball / MY CUBE) | 95 | | |
| | BT50 - ART32 - 105 | Hi-ART Milling chuck | 42, 104 | | |
| AW - 1 | Adjustable torque wrench | 31,38,103 | | | |
| M/C Tool | T50 - BL40 - 42 | BLANK TOOL (Tool for turning mill) | 72 | | |
| | C10 - 6 | SPRING COLLET | 8, 38 | | |
| | C10 - A set | SPRING COLLET Standard set | 38 | | |
| | C10 - RM | Collet remover | 38 | | |
| | T63 - CAAx52 - 150 | CHECKING ARBOR | 72 | | |
| | CAP2022 | Cap dispenser | 92 | | |
| | CBX - 01 | CLEAN BOX | 88 | | |
| | T63 - CC32 - 90 | Set screw holders for Round shank | 69 | | |
| | CCD094 - PA | Insert | 62 | | |
| | CD40 - 01 | Coolant duct (fixed) | 104 | | |
| | CD50 - A1 | Coolant duct (Dummy duct) | 104 | | |
| | CD63 - 01F | Coolant duct (Adjustable) | 104 | | |
| | CE - CTS10 | Collet remover | 38 | | |
| | ST6 - CEB102 | Centering bar | 84 | | |
| General Purpose Tool | C | CF12 - 4 - 35 | SLIMLINE collet | ※ | |
| | | CLP - 7E | Coolant cap | 30 | |
| | | CLP - 101 | Clamper(WIRE CUT UNIT) | 102 | |
| | | NT30 - CMA - 20 - 125 | TEST BAR CHECKMATE | 90 | |
| | | HSK32 - CMB - 25 - 175 | | | |
| | | CN - 103 | Container box | 98 | |
| | | T100 - CN40 - 115 | Set screw holders for Round shank | 69 | |
| | | CP - 14M | Coolant screw | 39 | |
| | | CR12.6.55 | SLIMLINE collet | ※ | |
| | | CS12.3.80 | | | |
| | | CSA - M14 | Coolant screw | 39 | |
| | | CSR - 14 | Coolant screw(COLLET HOLDER) | 39 | |
| | | BT30 - CTA10 - 45 | COLLET HOLDER | 36 | |
| | | BT50 - CTH10 - 105 | COLLET HOLDER for high-speed | 34 | |
| | E32 - CTS10 - 50 | | 35 | | |
| JIG | D | D7 - 1.5 | DETA-1 COLLET | 31 | |
| | | A40 - DOC17.5 - 55 | Dovetail clamping (SMART GRIP) | 78 | |
| | | A63 - DOV110I | Dovetail vise (SMART GRIP) | 79 | |
| | | DR - 1 | Collet driver | 31 | |
| | | BT40 - DTA3 - 95 | DETA-1 COLLET HOLDER A type | 24 | |
| | | BT50 - DTB7 - 75 | DETA-1 COLLET HOLDER B type | 26 | |
| | | A50 - DTE7 - 105 | DETA-1 COLLET HOLDER E type | 28 | |
| | | DW - 2.5 - 110 | Wrench | 31, 103 | |
| | Measuring Equipment | E | 7EA - 3.5 - 3 | Spacer | 30 |
| | | | 12EBF - BL - 5 | | |
| | | | 12EBM - 3 - 3 | | |
| | | | 12EBS - 3.6 - 3 | | |
| | | | EMO - STD3 - 2 | ENDMILL HOUSE | 97 |
| | | | ER8 - 4 | SPRING COLLET | 19 |
| | | 7ES - A | Spacer set | 30 | |
| | | ESX12 - 6 | SPRING COLLET | 19 | |
| Maintenance Tool | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| Wire EDM fixture | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| Technical Information | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

| | CODE | NAME | Page | |
|--------------------------|------------------------------|--|------------------------------|---------|
| F | F - 38 | Spanner | 38, 103 | |
| | F - 38AW | Spanner for torque wrench | 31, 103 | |
| | F160H32 - A40 | Mounting plate (SMART GRIP) | 78 | |
| | F100H21 - A40 - 50 | The Manual clamping head (SMART GRIP) | 78 | |
| | F100S65 - A63 - 89 | The Automation clamping head (SMART GRIP) | 81 | |
| | FC - 32 | Spanner | 38, 103 | |
| | FC - 36AW | Spanner for torque wrench | 38, 103 | |
| | FCS6 - 3 | Shrink-fit collet | 10 | |
| | FCS6 - M4 | Tap collet | 10 | |
| | FKA - 60 | Stationary bracket (ANGLE HEAD HALF) | 105 ~ | |
| | FKB - 60 | | | |
| | FKC - 50 | | | |
| | FM - 72 | Spanner with ejection hook (Hi-ART MILLING CHUCK) | 42, 103 | |
| | BT40 - FMH16 - 29 - 45 | Cutter arbor with spindle-through coolant | 53 | |
| BT50 - FMH22 - 47 - 165H | FMH RIGID type | 47 | | |
| A40 - FP40-35 | Flange clamping (SMART GRIP) | 79 | | |
| G | GRP - 002 | Grip | 102 | |
| H | HB - 01 | Semi-finished positioning block (ANGLE HEAD HALF) | 7 | |
| | HBX - A40 | TOOL HOLDER STORING CABINET | 98 | |
| | HF - BT30 | Tool set up stand (Vice clamping type) | 95 | |
| | BT30 - HFA10 - 120 | ANGLE HEAD HALF 90° type | 9 | |
| | BT30 - HFCS6 - 155 | ANGLE HEAD HALF mini type | 10 | |
| | BT40 - HFD7 - 120 | ANGLE HEAD HALF 90° type | 9 | |
| | BT30 - HFT4 - 122 | | | |
| | HP-50S | Positioning pin (ANGLE HEAD HALF) | 105 ~ | |
| | BT40 - HUA10 - 135 | ANGLE HEAD HALF UNIVERSAL type | 12 | |
| | BT30 - HUD7 - 102 | | | |
| | BT30 - HUT4 - 102 | | | |
| | I | IR 15 - A40FP | Positioner boss (SMART GRIP) | 79 |
| | J | JAE - 501 | Extension Jaw | 100 |
| | K | KJ - 45 | Insert and insert holder set | 62 |
| M | MB5 - 112 | Head | 15 | |
| | MBF-M12 | Clamp bolt (Cutter arbor with spindle-through coolant) | 54 | |
| | BT40 - MBH50 - 150 | MICRO HEAD MBH type | 59 | |
| | BT30 - MBJ45 - 120 | MICRO HEAD MBJ45 type | 61 | |
| | BT50 - MBJ70 - 165 | MICRO HEAD MBJ70 type | 62 | |
| | MC10 - 132 | Head | 15 | |
| | MDV - 501 | MIDDLE VISE | 99 | |
| | BT50 - MFA20 - 165 | MICRO HEAD MFA type | 57 | |
| | BT40 - MS - 98 | Shank | 15 | |
| | MS2 - 30 | Extension | 57 | |
| | MU - S6H | UNIVERSAL FACING BORING HEAD | 73 | |
| | MY CUBE50 | MY CUBE | 95 | |
| | NOZ - M6 - 12 | Nozzle | 42,44,103 | |
| | N | NUA - CTA10 | Nut | 37, 104 |
| NUB - CTH10 - 3.6 | SUKIMA nut | 39, 104 | | |
| P | P30T - 1 | Retention knob | 64 | |
| | P - 445 | | | |
| | P - 535/538 | Retention knob (BT30-DTB12) | 27 | |
| | PA - R - 1 | PALETTE | 96 | |
| | PCT01 - 10 | Cleaning tool felt type | 31 | |
| | PETIT BALL40 | Petit Ball | 95 | |
| | PJ - 45 | Insert and insert holder set | 62 | |
| | PR - DTA3 | Rod (DETA-1 COLLET HOLDER DTA3 type) | 25 | |
| | PTC10 | Cartridge (MICRO HEAD MBH type) | 60 | |
| | PTE - 001 | Extension Plate | 101 | |
| | RC - 26 | CTS Special wrench | 38, 103 | |
| | R | RS - A63 - A40 | Adapter (SMART GRIP) | 79 |
| | BT40 - RSG8 - 105 - M25 | RED SCREW arbor | 49 | |

| | CODE | NAME | Page |
|--------------------|---------------------------------|--|---------------------------|
| S | S42 - 6F | Straight collet | 42 |
| | S - STA12 | Insert holder | 62 |
| | S - STV1&22 | | |
| | T63 - SA2525 - 105 | Insert holders for Square-shank | 70 |
| | T63 - SB2525 - 95 | | 71 |
| | T50 - SC2020R - 95 | | |
| | T40 - SH2020 - 75 | | 72 |
| | A40 - SCD20 - 55 | | Side clamp B(SMART GRIP) |
| | A40 - SCS10 - 40 | Side clamp A(SMART GRIP) | 80 |
| | BT50 - SLFB4 - 90 - M22 | SLIMLINE MONO series | ※ |
| | BT50 - SLK12 - 75 | SLIMLINE 2PIECE type Master holder | ※ |
| | BT50 - SLRA4 - 110 - M42 | SLIMLINE MONO series SLIMLINE STRAIGHT ARBOR | ※ |
| | BT50 - SLRB8 - 110 - M42 | | |
| | BT50 - SLSA4 - 140 - M42 | | |
| | BT50 - SLSB8 - 140 - M42 | | |
| | A100 - SLZ25 - 135 | SUMMIT | 44 |
| | T50 - SN2020R - 110 | Insert holders for Square-shank | 71 |
| | SRC - 501 | Clamp on Slider | 100 |
| | SRL - 501 | L Slider | |
| | SRS - 501 | Sandwich Slider | |
| | SRV - 501 | V Slider | |
| | SRV - 01 | Dedicated bracket | 92 |
| | SS32 - 8 | Sleeve for a set screw holders | 69 |
| STB - M6 - L | Stud bolt | 102 | |
| STGP10 | Cartridge | 60 | |
| STH18 | Insert holder | 62 | |
| STV - C12055 | | 61 | |
| T40 - SV2020R - 90 | Insert holders for Square-shank | 70 | |
| T | TA4 - M2 | Tap sleeve | 8 |
| | TBU10 | Test bar | 18 |
| | TCA2022 - 10 | TOOL CAP TCA type | 92 |
| | TCB0820 - 10 | TOOL CAP TCB type | |
| | TCC0607 - 50 | TOOL CAP TCC type | 93 |
| | TCC - F | Variety set | 93 |
| | TNB114 - PB | MICRO HEAD MBH type | 60 |
| | TPA082 - PA | MICRO HEAD MFA type | 57 |
| | TPC112 - PA | MICRO HEAD MBJ/MBH type | 62 |
| | TPE042 - PA | MICRO HEAD MBJ type | 61 |
| | TR - 5 | Tap rod (DETA-1 COLLET HOLDERDEtype) | 30 |
| TW - 4 | Wrench | 31, 103 | |
| W | W - 206 | Wrench | 44, 103 |
| | W - 135DR | Spanner · Wrench | 31, 103 |
| | WCU - A | WIRE CUT UNIT | 101 |
| Z | BT40 - ZPB - 200 | Goo CHECKER | 83 |
| | BT40 - ZPM - 150 | (Set up the original point on the Z axis / measuring tool for reference position) | |
| 123 | 6SD - 01 | 6S DESK | 86 |

※See our dedicated catalog for shrink-fit holder SLIMLINE.
For details, please contact us.

INDEX

| | NAME | CODE | Page | |
|---|--|--------------------------------|--------------------|----|
| ANGLE HEAD | Adapter(Petit Ball / MY CUBE) | AP40 - T30V | 95 | |
| | Adapter(SMART GRIP) | RS - A63 - A40 | 79 | |
| | Adjust bolt (WIRE CUT UNIT) | AJB - M6 - L | 102 | |
| | Adjust screw (SUMMIT) | AJN - M18L | 44 | |
| | Adjust screw (COLLET HOLDER) | AJC - M14 | 37 | |
| | Adjustable torque wrench | AW - 1 | 103 | |
| | ANGLE HEAD HALF 90°type | BT30 - HFA10 - 120 | 9 | |
| | | BT40 - HFD7 - 120 | | |
| | | BT30 - HFT4 - 122 | | |
| | ANGLE HEAD HALF mini type | BT30 - HFCS6 - 155 | 10 | |
| | | ANGLE HEAD HALF UNIVERSAL type | BT40 - HUA10 - 135 | 12 |
| | | | BT30 - HUD7 - 102 | |
| | | | BT30 - HUT4 - 102 | |
| ANGLE HEAD FLANGE type | F190 - AHA20 - 200 | 17 | | |
| ANGLE HEAD MODULAR type | BT50 - AHB5 - 225 | 15 | | |
| | BT50 - AHC10 - 245 | | | |
| ANGLE HEAD SOLID type | BT40 - AHA20 - 160 | 16 | | |
| ANGLE HEAD UNIVERSAL type | BT50 - AHD30 - 195 | | | |
| | BT40 - AHU10 - 175 | 18 | | |
| The Automatic clamping head (SMART GRIP) | F100S65 - A63 - 89 | 81 | | |
| M/C Tool | B BLANK TOOL (Tool for turning mill) | T50 - BL40 - 42 | 72 | |
| | Cap dispenser | CAP2022 | 92 | |
| | Cartridge (MICRO HEAD MBH type) | PTC10 | 60 | |
| | | STGP10 | | |
| | Centering bar | ST6 - CEB102 | 84 | |
| | CHECKING ARBOR | T63 - CAAX52 - 150 | 72 | |
| | Clamp bolt (Cutter arbor with spindle-through coolant) | MBF - M12 | 54 | |
| | Clamper (WIRE CUT UNIT) | CLP - 101 | 102 | |
| | CLEAN BOX | CBX - 01 | 88 | |
| | Cleaning tool wiper type | PCT01 - 10 | 31 | |
| | Collet driver | DR - 1 | 31 | |
| | COLLET HOLDER | BT30 - CTA10 - 45 | 36 | |
| | COLLET HOLDER for high-speed | BT50 - CTH10 - 105 | 34 | |
| E32 - CTS10 - 50 | | 35 | | |
| Collet remover | | CE - CTS10 | 38 | |
| | C10 - RM | | | |
| Container box | CN - 103 | 98 | | |
| Coolant screw (COLLET HOLDER) | CSA - M14 | 39 | | |
| | CP - 14M | | | |
| | CSR - 14 | | | |
| Coolant cap | CLP - 7E | 30 | | |
| Coolant duct (Adjustable) | CD63 - 01F | 104 | | |
| Coolant duct (Dummy duct) | CD50 - A1 | | | |
| Coolant duct (fixed) | CD40 - 01 | | | |
| Cutter arbor with spindle-through coolant | BT40 - FMH16 - 29 - 45 | 53 | | |
| Dedicated bracket (TOOL CAP TCA type) | SRV - 01 | 92 | | |
| | DETa-1 COLLET | D7 - 1.5 | 31 | |
| | DETa-1 COLLET HOLDER A type | BT40 - DTA3 - 95 | 24 | |
| | DETa-1 COLLET HOLDER B type | BT50 - DTB7 - 75 | 26 | |
| | DETa-1 COLLET HOLDER E type | A50 - DTE7 - 105 | 28 | |
| | Dovetail clamping (SMART GRIP) | A40 - DOC17.5 - 55 | 78 | |
| Dovetail vise A,B (SMART GRIP) | A63 - DOV110I | 79 | | |
| ENDMILL HOUSE | EMO - STD3 - 2 | 97 | | |
| | Extension (MICRO HEAD MFA type) | MS2 - 30 | 57 | |
| | Extension Jaw (MIDDLE VISE) | JAE - 501 | 100 | |
| Extension Plate (WIRE CUT UNIT) | PTE - 001 | 101 | | |
| Flange clamping (SMART GRIP) | A40 - FP40-35 | 79 | | |
| | FMH RIGID type | BT50 - FMH22 - 47 - 165H | 47 | |

| | NAME | CODE | Page |
|---|---|-------------------------|-------------|
| G | Goo Checker | BT40 - ZPB - 200 | 83 |
| | | BT40 - ZPM - 150 | |
| Grip | GRP - 002 | 102 | |
| H | Head (ANGLE HEAD MODULAR type) | MB5 - 112 | 15 |
| | | MC10 - 132 | |
| Hi-ART MILLING CHUCK | BT50 - ART32 - 105 | 41 | |
| I | Insert holder(MICRO HEAD) | S - STA12 | 62 |
| | | STH18 | |
| | | STV - C12055 | 61 |
| | s-STV1822 | 62 | |
| | Insert and insert holder set (MICRO HEAD) | KJ - 45 | 62 |
| Insert holders for Square-shank | T63 - SA2525 - 105 | 70 | |
| | T63 - SB2525 - 95 | 71 | |
| | T50 - SC2020R - 95 | | |
| | T40 - SH2020 - 75 | 72 | |
| | T50 - SN2020R - 110 | 71 | |
| | T40 - SV2020R - 90 | 70 | |
| MICRO HEAD MBH type | BT40 - MBH50 - 150 | 59 | |
| | TNB114 - PB | 60 | |
| MICRO HEAD MBJ45 type | BT30 - MBJ45 - 120 | 61 | |
| | TPE042 - PA | | |
| MICRO HEAD MBJ70 type | BT50 - MBJ70 - 165 | 62 | |
| MICRO HEAD MBJ/MBH type | TPC114 - PA | 62 | |
| MICRO HEAD MFA type | BT50 - MFA20 - 165 | 57 | |
| | TPA082 - PA | | |
| MIDDLE VISE | MDV - 501 | 99 | |
| Mounting plate (SMART GRIP) | F160H32 - A40 | 78 | |
| MY CUBE | MY CUBE50 | 95 | |
| N | Nozzle | NOZ - M6 - 12 | 42, 44, 103 |
| | Nut (COLLET HOLDER) | NUA - CTA10 | 37, 104 |
| P | PALETTE (Collet stand) | PA - R - 1 | 96 |
| | PETIT BALL | PETIT BALL40 | 95 |
| | Positioner boss (SMART GRIP) | IR15 - A40FP | 79 |
| | Positioning block (ANGLE HEAD HALF) | ABF005 | 7 |
| Positioning pin (ANGLE HEAD HALF) | HP - 50S | 105 ~ | |
| R | RED SCREW arbor | BT40 - RSG8 - 105 - M25 | 49 |
| | Retention knob | P30T - 1 | 64 |
| | | P - 455 | |
| | Rod (DETa-1 COLLET HOLDER DTA3 type) | PR - DTA3 | 25 |
| | Retention knob (BT30-DTB12) | P - 535/538 | 27 |
| Semi-finished positioning block | AB - 15 | 19 | |
| Semi-finished positioning block (ANGLE HEAD HALF) | HB - 01 | 7 | |
| Set screw holders for Round shank | T63 - CC32 - 90 | 69 | |
| | T100 - CN40 - 115 | | |
| Shank (ANGLE HEAD) | BT40 - MS - 98 | 15 | |
| Shrink-fit collet (ANGLE HEAD HALF mini type) | FCS6 - 3 | 10 | |
| Side clamp A (SMART GRIP) | A40 - SCS10 - 40 | 80 | |
| | A40 - SCD20 - 55 | | |
| Sleeve for a set screw holder | SS32 - 8 | 69 | |
| Slider (MIDDLE VISE) | SRC/SRL/SRS/SRV | 100 | |
| SLIMLINE 2PIECE type Master holder | BT50 - SLK12 - 75 | ※ | |
| SLIMLINE collet | CF12 - 4 - 35 | | |
| | CR12-6-55 | | |
| | CS12-3-80 | | |
| SLIMLINE MONO series | BT50 - SLFB4 - 90 - M22 | | |
| | BT50 - SLRA4 - 110 - M42 | | |
| | BT50 - SLRB4 - 110 - M42 | | |
| | BT50 - SLSA4 - 140 - M42 | | |
| SLIMLINE STRAIGHT ARBOR | BT50 - SLSB4 - 140 - M42 | | |
| | BT50 - SLSC4 - 140 - M42 | | |
| Spacer (DETa-1 COLLET HOLDER DTE type) | 7EA - 3.5 - 3 | 30 | |
| | 12EBF - BL - 5 | | |
| | 12EBM - 3 - 3 | | |
| Spacer set (DETa-1 COLLET HOLDER DTE type) | 12EBS - 3.6 - 3 | | |
| | 7ES - A | 30 | |

| | NAME | CODE | Page |
|------------|--|------------------------|---------|
| | Spanner | F/FC/FF/FM | 103 |
| | SPRING COLLET (COLLET HOLDER) | C10 - 6 | 8, 38 |
| | | ER8 - 4 | 19 |
| | | ESX12 - 6 | |
| | SPRING COLLET Standard set (COLLET HOLDER) | C10 - A set | 38 |
| S | Stationary bracket (ANGLE HEAD HALF) | FKA - 60 | 105 ~ |
| | | FKB - 60 | |
| | | FKC - 50 | |
| | Straight collet (Hi-ART MILLING CHUCK) | S42 - 6F | 42 |
| | Stud bolt (WIRE CUT UNIT) | STB - M6 - L | 102 |
| | Sukima nut (COLLET HOLDER) | NUB - CTH10 - 3.6 | 39, 104 |
| | SUMMIT | A100 - SLZ25 - 135 | 44 |
| | Tap collet (ANGLE HEAD HALF mini type) | FCS6 - M4 | 10 |
| | Tap rod (DETA-1 COLLET HOLDER DTE type) | TR - 5 | 30 |
| | Tap sleeve (ANGLE HEAD HALF) | TA4 - M2 | 8 |
| | TEST BAR (ANGLE HEAD UNIVERSAL type) | TBU10 | 18 |
| | TEST BAR CHECKMATE | NT30 - CMA - 20 - 125 | 90 |
| | | HSK32 - CMB - 25 - 175 | |
| T | The Manual clamping head (SMART GRIP) | F160H32 - A40 - 50 | 78 |
| | Throw-away tip (MICRO HEAD MBJ type) | CCD094 - PA | 62 |
| | TOOL CAP TCA type | TCA2022 - 10 | 92 |
| | TOOL CAP TCB type | TCB0820 - 10 | |
| | TOOL CAP TCC type | TCC0607 - 50 | 93 |
| | TOOL HOLDER STORING CABINET | HBX - A40 | 98 |
| | Tool set up stand (Vice clamping type) | HF - BT30 | 95 |
| | | | |
| U | UNIVERSAL FACING BORING HEAD | MU - S6H | 73 |
| V | Variety set (TOOL CAP TCC type) | TCC - F | 93 |
| W | WIRE CUT UNIT | WCU - A | 101 |
| | Wrench | DW/RC/TW/W | 103 |
| 123 | 6S DESK | 6SD - 01 | 86 |

※See our dedicated catalog for shrink-fit holder SLIMLINE.
For details, please contact us.

OVERSEAS NETWORK

Logistic center (J-COMPO) • USA/Chicago • Germany/Nuremburg • Thai



1809

< Europe >

| | | | |
|---|--|---|--|
| AUSTRIA 1 distributor | | BELGIUM 2 distributors | |
| STEINDL Vertriebs GmbH Söding info@steindl.at TEL 43-3137272240 FAX 43-3137272246 | | DIATOOl BVBA TURNHOUT MR. GELDHOF TEL 32-14401830 info@diatool.be FAX 32-14438880 | |
| | | MachinImmo BVBA LOKEREN MR. MANU COPPENS TEL 32-93288811 mc@machinimmo.com | |
| CZECH REPUBLIC 2 distributors | | FINLAND 1 distributor | |
| Creative Tools s.r.o. SKALKKA MR. PETR CHYTL TEL 420-725588988 info@creative-tools.cz FAX 420-582384485 | | OSG BRATISLAVA MR. AKINORI FUJIYAMA TEL 421-43291295 afujiyama@osgeurope.com | |
| | | OY FMS TOOLS AB HELSINKI info@fmstools.fi TEL 358-98190950 FAX 358-98190950 | |
| DENMARK 2 distributors | | GERMANY 3 distributors | |
| Balling Maskiner ApS KOLDING MR. MICHAEL BALLING PETERSEN TEL 45-24790300 mbp@balling-maskiner.dk | | OSG SCANDINAVIA A/S ROSKILDE osg@osg-scandinavia.com TEL 45-46756555 FAX 45-46756700 | |
| | | Aura Frästechnik GMBH BREIDENBACH MR. MAIK BRADO TEL 49-64659119414 kontakt@aura-tools.de FAX 49-64659119429 | |
| FRANCE 2 distributors | | MAKINO GMBH | |
| DOGA S.A. MAUREPAS MR. ANTY TEL 33-130664141 laurent.anty@doga.fr FAX 33-130664199 | | TEL 49-7021503201 | |
| | | OSG GMBH | |
| OSG France s.a.r.l. ROISSY sales@osg-france.com TEL 33-149901010 FAX 33-149901015 | | Göppingen TEL 49-716160640 info@osg-germany.de FAX 49-7161606444 | |
| ITALY 6 distributors | | | |
| FEBAMETAL S.P.A. TORINO febametal@tin.it TEL 39-0117701412 FAX 39-0117701524 | | MAKINO ITALIA S.R.L. Cavenago di Brianza TEL 39-0295948290 FAX 39-0295948240 | |
| | | MMC ITALIA SRL MILANO info@mmc-italia.it TEL 39-029377031 FAX 39-0293589093 | |
| MMC EMILIA ROMAGNA SRL MODENA MR. GIOVANNI FACCHINI TEL 39-0536946687 facchini@mmcemilia.it FAX 39-0536946695 | | OSG ITALIA SRL TORINO MR. VINCENZO RAGO TEL 39-0117705211 vincenzo.rago@osg-italia.it FAX 39-0117071402 | |
| | | TECNOR MACCHINE SPA MILANO info@tecnormacchine.it TEL 39-028242851 FAX 39-028255408 | |
| NETHERLANDS 2 distributors | | NORWAY 1 distributor | |
| Machining Innovations NL bv-Machinno MERSELO MR. MARK CAMPS TEL 32-93288811 info@machinno.com | | AS NOR-SWISS OSLO MR. JAN EGE TEL 47-23241020 jan.ege@ege.no FAX 47-23241021 | |
| | | | |
| POLAND 3 distributors | | | |
| Aura Frästechnik GMBH MR. KRZYSZTOF KOSLA TEL 48-666011225 k.kosla@aura-tools.de FAX 49-64659119429 | | MB Michał Rzepka OBORNIKI MR. BARTOSZ RZEPKA TEL 48-504647666 mb@mb-frezy.pl FAX 48-61622339 | |
| | | MMC HARDMETAL POLAND Sp. z o.o. WROCLAW MR. BOGUMIŁ ŁOZOWICKI TEL 48-655467284 blozowicki@mitsubishicarbide.com.pl FAX 48-655467283 | |
| PORTUGAL 2 distributors | | ROMANIA 1 distributor | |
| AMTOOLS MARINHA GRANDE geral@amtools.pt TEL 351-244560456 FAX 351-244560668 | | SIMPLEFER-COMERCIO DE FERRAMENTAS, LDA. MARINHA GRANDE MR. CARLOS ALVES TEL 351-244575350 carlos.alves@simplefer.pt FAX 351-244575359 | |
| | | MAZAROM IMPEX SRL BUCHAREST MR. ADRIAN TOTU TEL 40-212328001 adrian.totu@mazarom.ro FAX 40-212328002 | |
| RUSSIA 2 distributors | | | |
| SodicoM-Center MOSCOW info@sodick.ru TEL 7-4957870970 | | SOLDREAM SPB SAINT-PETERSBURG soldream-spb@soldream-spb.com TEL 7-8123737456 | |
| | | STREULI TECHNOLOGIES AG BIRMENS DORF MR. STREULI TEL 41-17394070 w.streuli@streuli-techno.ch FAX 41-17394077 | |
| SLOVAKIA 2 distributors | | SWEDEN 1 distributor | |
| MAKINO S.R.O. BRATISLAVA TEL 421-249612100 FAX 421-249612400 | | OSG SCANDINAVIA A/S BROMÖLLA osg@osg-scandinavia.com TEL 46-40412255 FAX 46-40413255 | |
| | | | |
| SLOVENIA 2 distributors | | | |
| Aura Frästechnik GMBH ŽALEC MR. SAMO KAČ TEL 386-37104080 info@kactrade.si | | BTS COMPANY d.o.o. LJUBLJANA MR. BORIS POZAR TEL 386-15841400 boris.pozar@bts-company.si FAX 386-15249224 | |

SPAIN 3 distributors**DELFIN COMPONENTES S.L.****VIZCAYA**

MR. JON AZCUE TEL 34-944105544
 deflincomponentes@delfincomponentes.com FAX 34-944105544

JANA TOOLS SL**SONDIKA**

MR. JUAN JOSE JORDE TEL 34-944538224
 info@jana-tools.com FAX 34-944538225

UTILTALL S.A.**BARCELONA**

comercial@utiltall.es TEL 34-934984465
 FAX 34-933086993

TURKEY 3 distributors**FORM TEKNIK****ISTANBUL**

MR. ISMAIL CINAR TEL 90-2122973397
 info@form-teknik.com FAX 90-2122566215

TANDEM TAKIM TEZGAHLARI**ISTANBUL**

MR. TANKUT KOCAK TEL 90-2163131413
 tankut.kocak@tandem.com.tr FAX 90-2163131411

TEKNIKA HIRDAVAT SANAVI VE TICARET LTD. STL.**ISTANBUL**

MR. MEHMET AKKAYA TEL 90-2126742864
 info@teknikatools.com FAX 90-2126742863

UK 4 distributors**MATSUURA MACHINERY LTD****LEICESTERSHIRE**

MR. DAVID SPENCER TEL 44-1530511400
 dspencer@matsuura.co.uk FAX 44-1530511442

MMC HARDMETAL U.K. LTD**TAMWORTH**

MR. ADRIAN BARNACLE TEL 44-1827312312
 abarnacle@mitsubishicarbide.co.uk FAX 44-1827312314

OSG UK LTD.**ESSEX**

sales@osg-uk.com TEL 44-8453051066
 FAX 44-8453051067

KYOCERA SGS PRECISION TOOLS EUROPE LTD.**BERKSHIRE**

SalesEU@kyocera-sgstool.com TEL 44-1189795200
 FAX 44-1189795295

<North America>

U.S.A 8 distributors**MITSUBISHI MATERIALS USA CORP.****ILLINOIS**

TECHNICAL SERVICE TEL 1-800-486-2341
 marketingservices@mmus.com FAX 1-847-519-1732

ON TARGET TOOLING LLC**WISCONSIN**

MR. SCOTT SHIPPELL TEL 1-847-628-9942
 Scott@cimtekllc.com FAX 1-847-628-1987

OSG TAP & DIE, INC.**ILLINOIS**

MR. DAN VOLPE TEL 1-630-790-5141
 dan.volpe@osgtool.com FAX 1-630-800-837-3334

SINGLE SOURCE TECHNOLOGIES, INC.**MICHIGAN**

MR. RICK GRABAREK TEL 1-248-232-6268
 rgrabarek@singlesourcetechnology.com FAX 1-248-232-6261

WISCONSIN

MR. STEVE KLUG TEL 1-262-212-3825
 Steve.Klug@singlesourcetechnology.com FAX 1-262-574-7551

SOUTH CAROLINA

MS. CARA KELSO TEL 1-704-896-6000
 cara.kelso@singlesourcetechnology.com FAX 1-704-896-6002

ALABAMA

MR. BOB ASH TEL 1-256-301-0040
 bob.ash@singlesourcetechnology.com FAX 1-256-301-0059

PRECISION TOOLS SERVICE INC.**INDIANA**

MR. PAUL SCHNEPP TEL 1-812-342-1234
 pschnepp@ptservice.com FAX 1-812-342-1235

TECNARA TOOLING SYSTEMS, INC.**LOS ANGELES**

MR. DAVID TAKAHASHI TEL 1-562-941-2000
 la@tecnaratools.com FAX 1-562-946-0506

EAST COAST

MR. MATT GENOVESE TEL 1-203-912-8906
 la@tecnaratools.com FAX 1-562-946-0506

TOMITA USA INC.**OHIO**

1-614-873-6509
 FAX 1-614-873-6806

YAMAZEN INC. INC.**ILLINOIS**

MR. RYAN JACOBSON TEL 1-800-228-2969
 ryanjacobson@yamazen.com

LOS ANGELES

MR. MARK O'DONNELL TEL 1-800-882-8558
 markodonnell@yamazen.com

INDIANA

MR. BILL HAFLEY TEL 1-800-882-8558
 billhafley@yamazen.com

CONNECTICUT

MR. JON MORASUTTI TEL 1-800-882-8558
 jonmorasutti@yamazen.com

MICHIGAN

MR. RON HICKS TEL 1-800-882-8558
 ronhicks@yamazen.com

PHOENIX

MR. CLARENCE WAGNER TEL 1-800-882-8558
 clarencewagner@yamazen.com

CANADA 2 distributors**OSG CANADA LTD.****ONTARIO, Burlington**

MR. ROB ADKINS TEL 1-905-632-8032
 rob.adkins@osgcanada.com FAX 1-905-632-8466

SINGLE SOURCE TECHNOLOGIES, INC.**ONTARIO, Windsor**

MR. SHAWN LESPERANCE TEL 1-519-737-8999
 slesperance@singlesourcetechnology.com FAX 1-519-737-8939

MEXICO 5 distributors**AHNSA TOOLS s.a.****MONTERREY**

MR. HORACIO CAMPOS TEL 52-81-8126-1000
 hcampos@ahnsa.com FAX 52-81-8126-1001

MMC METAL DE MEXICO S.A. DE C.V.**QUERETARO**

MR. GUILLERMO ORTIZ TEL 52-442 192 6800
 lortiz@mmcex.com FAX 52-442 221 6134

OSG /ROYCO, S.A. DE C.V.**MEXICO CITY**

MR. TOSHITAKA YOSHIZAKI TEL 52-55-51-19-3363
 toshi@osgroyc.com.mx FAX 52-55-51-19-3370

SINGLE SOURCE TECHNOLOGIES, de R.L.de C.V.**QUERETARO**

MR. MANUEL RUIZ TEL 52-442-1016000
 manuel.ruiz@singlesourcetechnology.com FAX 52-442-2531355

MONTERREY

MS. JUTZILL MANON TEL 52-442-101-6000
 Jutzill.Manon@singlesourcetechnology.com

YAMZEN MEXICANA SA DE CV**LEON**

MR. GERARDO PLASCENCIA TEL 52-477-3910280
 gerardo.perez@yamazen.com.mx FAX 52-477-3910278

<South America>

BRAZIL 2 distributors**OSG FERRAMENTAS DE PRECISAO LTDA.****SAN PAULO**

SALES DEPARTMENT TEL 55-11-6190-0900
 osgsp@nethall.com.br FAX 55-11-6190-0901

HeadlandMT Ltd**Auckland**

TEL 64-2152265

INNOVATE TECHNOLOGIES Brasil LTDA**SAN PAULO**

MR. LUCIANO CHIQUETTE TEL 55-19-3829-9280
 luciano.chiquette@innovatech.com.br

TOTAL CNC PRODUCTS**AUCKLAND**

MS. MARGARET WILLIAMS TEL 64-92745890
 admin@totalcnc.co.nz FAX 64-92745867

<Oceania>

New Zealand 2 distributors

<East Asia>

CHINA 23 distributors

| | | | | | | | |
|--|--|--|--|--|--|--|--|
| AUTOFACT MACHINERY LTD. 亞動機械有限公司 DONGGUAN 東莞 ■ MS. LILY GUAN 关星 TEL 86-769-81157228 ☐ lily@autofact.com.hk FAX 86-769-81157229 | | BBPC CO., LTD 上海阪商機床刀具有限公司 SHANGHAI 上海 ■ MR. AMAYAMA 天山 TEL 86-21-6253-1219 ☐ osaka@bbpc.biz FAX 86-21-6256-3539 | | BEIJIN 北京 ■ MS. CHANG YAOHUA 常耀华 TEL 86-10-6348-5150 ☐ osaka@bbpc.biz FAX 86-10-6348-5152 | | | |
| DIJET INDUSTRIAL CO.,LTD. 黛傑工業株式會社 SHANGHAI 上海 ■ MR. GAO YONGMING 高永明 TEL 86-21-5058-1698 ☐ dijetsh@yahoo.com.cn FAX 86-21-5058-1699 | | Dongguan Integrity Precision Machinery Co.,Ltd. 东莞市城晉精密機械有限公司 DONGGUAN 東莞 ■ MR. YANG YABIN 楊亞兵 TEL 86-769-82288607 ☐ frank1_yang@126.com FAX 86-769-82288609 | | DONGGUAN YAJIYA Precision machinery Co., Ltd 東莞八字屋精密機械有限公司 DONGGUAN 東莞 ■ MR. Jason lee 李忠信 TEL 86-769-8530-7420 ☐ yajiyasales@163.com FAX 86-769-8530-7470 | | | |
| Fineness Corporation 匯穎國際貿易(上海)有限公司 SHANGHAI 上海 ■ MR. STEVE HU 胡上干/MR. ROY LU 呂旺動 TEL 86-21-64282885 ☐ steve@fct-tools.com FAX 86-21-64391906 | | DONGGUAN 東莞 ■ MR. ALAN CHEN 陳宏儒 TEL 86-769-82284785 ☐ alan@fct-tools.com FAX 86-769-82284797 | | DONGLI MACHINE CO.,LTD. 東立機械有限公司 DALIAN 大連 ■ MS. ZHOU PING 周萍 TEL 86-411-87324719 ☐ zhou@dl-dongli.com.cn FAX 86-411-87324721 | | | |
| TIANJIN 天津 ■ MR. YANG JIAN 楊建 TEL 86-22-87395825 ☐ isabat_yang@fct-tools.com FAX 86-22-87395827 | | CHENGDU 成都 ■ MR. JASON HUANG 黃琳琳 TEL 86-28-83112969 ☐ jasonhuang1121@163.com FAX 86-28-8311-2969 | | GALAXY PRECISION MACHINERY LTD 佳力精密機械有限公司 HONGKONG 香港 ■ MR. KENNETH NG 吳志良 TEL 852-31505889 ☐ gp610@galaxy-mt.com FAX 852-23729093 | | | |
| JECO PRECISION LTD. 捷高精機有限公司 HONGKONG 香港 ■ MS. CATHY WONG 黃玉珍 TEL 852-2428-8328 ☐ cathy@jeco.hk FAX 852-2428-3683 | | SHENZHEN 深圳 ■ MR. ERIC CHOW 周奔行 TEL 86-755-6116-2522 ☐ eric@jeco.hk FAX 86-755-6116-2533 | | JIANZE MACHINERY TECHNOLOGY CO.,LTD 上海建澤機械技術有限公司 SHANGHAI 上海 ■ MR. XUE JIANMING 薛建明 TEL 86-21-51557657 ☐ xuejianming@jianze.net FAX 86-21-51557668 | | | |
| KUNSHAN KUNQIAO TRADING CO.,LTD. 坤僑貿易有限公司 KUNSHAN 昆山 ■ MR. CHOU TING SHENG 周廷升 TEL 86-512-57507151 ☐ kjcorp@ms56.hinet.net FAX 86-512-57507153 | | SHENZHEN 深圳 ■ MR. GHENG-NAN, YEH 葉正勇 TEL 86-755-81786391~2 ☐ kj.com@msa.hinet.net FAX 86-755-8178-6670 | | MAKINO CHINA CO.,LTD. 牧野機床(中國)有限公司 KUNSHAN 昆山 ■ MR. LIU HAORAN 劉浩然 TEL 86-512-5777-8000 ☐ info@makino.com.cn FAX 86-512-5777-9900 | | | |
| PRO-TECHNIC MACHINERY LTD. 寶力機械有限公司 HONG KONG 香港 ■ MR. ALDO, S.K. CHEUNG 張四 TEL 852-2428-2727 ☐ aldocheung@protechnic.com.hk FAX 852-2480-4764 | | RSE (DALIAN) INTERNATIONALTRADING CO LTD 美立吉(大連)國際貿易有限公司 DALIAN 大連 ■ MR. LI GANG 李剛 TEL 86-411-8750-8552 ☐ 01@chinarse.com FAX 86-411-8750-8553 | | OSG SHANGHAI 歐士機(上海)精密工具有限公司 SHANGHAI 上海 ■ MS. JI MIN 嵇敏 TEL 86-21-5888-6600 ☐ jimin@chinaosg.com FAX 86-21-5888-3300 | | | |
| SONDER TOOLS & MACHINERY(HK)LTD. 晨達(香港)有限公司 HONG KONG 香港 ■ MR. JOHNNY NG 吳偉良 TEL 852-2-964-0233 ☐ johnnyng@sondertools.com FAX 852-2-964-0604 | | DONGGUAN 東莞 ■ MR. JOHNNY NG 吳偉良 TEL 86-769-22699687 ☐ johnnyng@sondertools.com FAX 86-769-22699487 | | SHANGHAI HERLY INTERNATIONAL TRADING CO.,LTD. 上海賀立國際貿易有限公司 SHANGHAI 上海 ■ MR. YOU JUNHA 由俊哈 TEL 86-21-3921-5609 ☐ import@herly.com FAX 86-21-3921-5606 | | | |
| SHANGHAI 上海 ■ MR. VICTOR LAU 劉曉炎 TEL 86-21-5109-6048 ☐ sonderbj@sonder.com.cn FAX 86-21-5111-3216 | | BEIJIN 北京 ■ MS. LILIAN WANG ZHE 王浙 TEL 86-10-5862 2040 ☐ sonderbj@sonder.com.cn FAX 86-10-5862 2037 | | SHANGHAI REBAR CUTTINGTOOLS CO., LTD 上海銳霸切削工具有限公司 SHANGHAI 上海 ■ MR. CUI YANJUN 崔岩軍 TEL 86-21-5108-5980 ☐ steven_rb@126.com FAX 86-21-5763-2329 | | | |
| SHENZHENSHI YINGFENGDA TRADING CO.,LTD 深圳市盈峰達貿易有限公司 SHENZHEN 深圳 ■ MR. ZHANG CHENGZHONG 張承忠 TEL 86-755-25109822 ☐ Kelvin@yfd-group.com.cn FAX 86-755-23286077 | | TOJU MACHINE-ELECTRICITY CO.,LTD 上海東住機電科技有限公司 SHANGHAI 上海 ■ MR. TIAN JUN 田軍 TEL 86-21-6413-8038 ☐ sh_toju@163.com FAX 86-21-5230-8016 | | SHICHENG Electromechanical Technology Co., Ltd 思誠機電科技有限公司 DONGGUAN 東莞 ■ MR. Fly ZHONG 鐘飛泰 TEL 86-769-22186189 ☐ customercare@ec-sourcing.com FAX 86-769-22186191 | | | |
| YAMAZEN CORPORATION 山善(上海)貿易有限公司 SHANGHAI 上海 ■ MR. KOZAWA 小澤 TEL 86-21-5445-2266 ☐ kozawa@yamazensh.com. FAX 86-21-5445-2066 | | SHENZHEN 深圳 ■ MR. YASUNO 安野 TEL 86-755-8280-5000 ☐ yasuno@yamazen.com.cn FAX 86-755-8280-5100 | | ZHE JIANG RI JIN CNC TOOLS CO., LTD. 浙江日進數控刀具有限公司 ZHEJIANG 浙江 ■ MS. YE LI HONG 叶丽红 TEL 86-576-84232178 ☐ cnrijin15@126.com FAX 86-576-84115612 | | | |
| DALIAN 大連 ■ MR. ZHUANG 庄震 TEL 86-411-8762-6323 ☐ zhuangzhen@yamazensh.com FAX 86-411-8762-6332 | | CHONGQING 重慶 ■ MR. HIROSE 廣瀨 TEL 86-23-8906-1951 ☐ hirose@yamazensh.com FAX 86-23-8906-1953 | | GUANGZHOU 廣州 ■ MR. YAMASHITA 山下 TEL 86-20-8732-1601 ☐ yamashita@yamazen.com.cn FAX 86-20-8732-1232 | | TIANJIN 天津 ■ MR. ZHUANG 庄震 TEL 86-22-2840-8710 ☐ zhuangzhen@yamazensh.com FAX 86-22-2840-8712 | |

TAIWAN 3 distributors

| | | | | | |
|---|--|--|--|---|--|
| KUNJUNG CORPORATION 坤嶸企業有限公司 TAIPEI 台北 ■ MR. CHUNG-WEI, HUANG 黃崇維 TEL 886-2-22902500 ☐ kjcorp@ms56.hinet.net FAX 886-2-22902515 | | KAOSHUNG 高雄 ■ MR. TSUNG-LIEH, HO 何宗烈 TEL 886-7-7231101 ☐ chdhor@pchome.com.tw FAX 886-7-7236088 | | TAICHUNG 台中 ■ MR. MING-CHIEH, YEN 顏明傑 TEL 886-4-27026477 ☐ kj.com@msa.hinet.net FAX 886-4-24520439 | |
| CENTURY TRADING CORPORATION 世紀貿易股份有限公司 TAIPEI 台北 ■ MR. YAN YUNGTA 顏永達 TEL 886-2-2298-8336 ☐ tytan@centra.com.tw FAX 886-2-2298-8338 | | TAIHO TOOL MFG. CO.,LTD. 大寶精密工具股份有限公司 KAOSHUNG 高雄 ☐ yung-feng@mail.taihotool.co.tw TEL 886-7-621-6136 FAX 886-7-621-6140 | | | |

KOREA 9 distributors

KUK SUNG INTERNATIONAL CO.,LTD.
 국성인터내셔널주식회사
DAEGU 대구
 ■ MR. CHOI BYUNG HOON 최병훈 TEL 82-53-604-0521
 ✉ kuksung1@unitel.co.kr FAX 82-53-604-0525

DOO REE TRADING CO.,LTD.
 (유)두리무역
CHANGWON 창원
 ■ MR. J.K. CHO 조재관 TEL 82-55-286-5310
 ✉ dooree0909@naver.com FAX 82-55-284-5313

IGPNET CO.,LTD.
 주식회사 아이지피넷
SEOUL 서울
 ■ MR. KIM MOON KI 김문기 TEL 82-2-2026-5100
 ✉ mk-kim@igpnet.co.kr FAX 82-2-2026-5101

ITM KOREA
SUWON 수원
 ■ MR. LEE SANGKWANG 이상관 TEL 82-31-497-0917
 ✉ itmktorea2015@gmail.com FAX 82-50-4465-7218

KAMI CO.,LTD.
SEOUL 서울
 ■ MR. YOUNG L., KIM, PH. D. 김영림 TEL 82-2-6670-4114
 ✉ info@kami.biz FAX 82-2-6670-4110

MIRAE TECHNO
 미래테크노
GWANGMYEONG 광명
 ■ MR. PARK HO SUNG 박호성 TEL 82-31-479-5301
 ✉ miraetechno@hanmail.net FAX 82-31-479-5302

NS KOREA
 엔에스코리아
ANYANG 안양
 ■ MR. BAI JAMES 배성진 TEL 82-31-479-1207
 ✉ jamesbai@ns-korea.com FAX 82-31-479-1208

OSG KOREA CORPORATION
 한국OSG주식회사
DAEGU 대구
 ■ MR. JANG JUN YOUNG 장준영 TEL 82-53-589-2054
 ✉ jyjjang1@osg.co.kr FAX 82-53-583-5553

YAMAZEN (KOREA)LTD.
 (주)야마젠코리아
SEOUL 서울
 ■ MR. HORIKAWA MASAHIRO TEL 82-2-864-1755
 ✉ yamazem@yamazenkorea.co.kr FAX 82-2-864-1758

<South Asia>

INDIA 10 distributors

MAKINO INDIA PVT LTD.
BANGALORE
 ■ MR. B.V. SRIDHAR TEL 91-8067419500
 ✉ sridhar@makino.co.in FAX 91-8067419523
Delhi
 ■ MR. SHASHANK TOMAR TEL 91-1244652200
 ✉ shashankt@makino.co.in FAX 91-1244365217
Pune
 ✉ info@makino.co.in TEL 91-2138673600
 FAX 91-2138673623

ASSOCIATED ENGINEERING SERVICES CO.,LTD.
CHENNAI
 ■ MR. N MURALI TEL 91-4423821581
 ✉ murali@associatedengg.com FAX 91-4423821584

CUTTING EDGE TECHNOLOGIES
HYDERABAD
 ■ MR. PARDHA SARADHI TEL 91-9966133869
 ✉ cuttingedge.hyd@gmail.com

HSM CONSULTANTS INDIA Pvt. Ltd.
BANGALORE
 ■ MR. SREEDHAR SHENOY TEL 91-8023515220
 ✉ shenoy@hsmcil.com FAX 91-8023515220

MMC HARDMETAL INDIA PVT. LTD.
BANGALORE
 ✉ mmcindia@mmc.co.jp TEL 91-802308-3400

NETRA TECHNOLOGIES
AHMEDABAD
 ■ MR. CHIRAG PATEL TEL 91-9722323111
 ✉ info@netratechnologies.in

Orion Innotech Pvt. Limited
GURGAON
 ■ MR. VISHAL VERMA TEL 91-1244225210
 ✉ vishal@oriongroup.in FAX 91-1244225211

OSG (INDIA) PVT. LTD.
GURGAON
 TEL 91-1244009737
 FAX 91-1244207761

VALIANT INDIA
PUNE
 ■ MR. VIRENDRA MAYNALE TEL 91-9371672785
 ✉ sales@valiantindia.in

Yamazen Machinery & Tools India Pvt. Ltd.
Bangalore / Chennai / Gurgaon / Pune
 ✉ tooling@yamazen.in TEL 91-1244605900
 FAX 91-1244605921

INDONESIA 4 distributors

PT. JAVATEC TRIMITRA UTAMA
JAKARTA
 ■ MR. STEFANUS DIBYO TEL 62-21-458-77288
 ✉ tools@javatec.co.id FAX 62-21-458-77289

PT. JAVATEC TRIMITRA MACHINERY
JAKARTA
 ■ MR. JONATAN ARIF SANTOSO TEL 62-21-4584-9988
 ✉ jonatan@javatec-machinery.com FAX 62-21-4584-8899

YAMAZEN MACHINERY & TOOLS PHILIPPINES, INC.
LAGUNA
 ■ MR. SHIN ISHIDA TEL 63-49-543-1958
 ✉ s.ishida@yamazen.com.ph FAX 63-49-508-0893

PT. RUKUN SEJAHTERA TEKNIK
JAKARTA
 ■ MR. FRANKIE ANGGADHA TEL 62-21-628-1615
 ✉ marketing@rsttools.com FAX 62-21-626-5559

PT. YAMAZEN INDONESIA
JAKARTA
 ■ MR. KAZUHIKO UDA TEL 62-21-451-3345
 ✉ uda@yamazen.co.id FAX 62-21-451-3346

KAMOGAWA LAGUNA PHILIPPINES, INC
LAGUNA
 ■ MR. TAKAHIRO FUNAKUBO TEL 63-49-576-4931
 ✉ t.funakubo@kamog.co.jp FAX 63-49-508-3199

SINGAPORE 5 distributors

A-TECH MARKETING PTE LTD
 ■ MR. IAN SOH TEL 65-6773-3148
 ✉ iansoh@a-tech.com.sg FAX 65-6234-4826

MAKINO ASIA PTE LTD.
 ■ MR. SAM SHUKOR TEL 65-6861-5722
 ✉ sam@makino.com.sg FAX 65-6861-1600

NOBELTECH PTE LTD
 ■ MR. ERIC CHAN TEL 65-6749-3636
 ✉ eric@nbel.com.sg FAX 65-6749-0303

OSG ASIA PTE LTD.
 ■ MR. YASUTAKA YONEDA TEL 65-6844-4350
 ✉ yasuyoneda@osgasia.com.sg FAX 65-6844-4351

YAMAZEN (SINGAPORE)PTE LTD.
 ■ MR. YOSHIYUKI ENDO TEL 65-6276-9488
 ✉ endo@yamazen.com.sg FAX 65-6276-9688

MALAYSIA 2 distributors

NEWLINE MACHINE TOOL SDN.BHD.
KUALA LUMPUR
 ■ MR. JEFFREY PW CHOON TEL 60-3-8961-1973
 ✉ jeff@newlinemachine.com FAX 60-3-8961-1971

YAMAZEN (MALAYSIA)SDN.BHD.
KUALA LUMPUR
 ■ MR. AKIRA KATO TEL 60-3-5569-5099
 ✉ kato@yamazen.com.my FAX 60-3-5569-5011
PENANG
 ■ MR. CHENG TEL 60-4-399-4021
 ✉ mecheng@yamazen.com.my FAX 60-4-399-3025

THAILAND 4 distributors

FACTORY MAX CO.,LTD.
BANGKOK
 ■ MR. S. TANGTARATORN TEL 66-2-759-9100
 ✉ surapong@factorymax.co.th FAX 66-2-759-9009

MAKINO (THAILAND) CO.,LTD.
BANGKOK
 ■ MR. JUNYA YOSHIMURA TEL 66-2-971-5750
 ✉ junya.yoshimura@makino.co.th FAX 66-2-971-5751

PRECISION TOOLS SERVICE (THAILAND) CO.,LTD.
BANGKOK
 ■ MR. YOSHIAKI KATO TEL 66-2-308-2470
 ✉ sales@ptsthai.com FAX 66-2-308-2471

YAMAZEN (THAILAND) CO.,LTD.
BANGKOK
 ■ MR. TOMOKI YAMADA TEL 66-2-374-5522
 ✉ yamada@yamazen.co.th FAX 66-2-374-3192

VIETNAM 3 distributors

KAMOGAWA VIETNAM CO.,LTD
Hanoi
 ■ MR. TOMOHIRO YAMAMOTO TEL 84-24-378-550-22/23
 ✉ yamamoto@kamog.co.jp FAX 84-24-378-550-23



Ho Chi Minh
 ■ MR. SHINJI KUSUMOTO TEL 84-28-391-054/77/78/79
 ✉ kusumoto@kamog.co.jp FAX 84-28-3910-5480

T&B TECHNICAL SERVICES AND TRADING CO.,LTD
Hanoi
 ■ MR. LUU QUANG THOA TEL 84-24-6659-5103
 ✉ thoa-luu@tbvn.com.vn

YAMAZEN VIETNAM CO.,LTD
Hanoi
 ■ MR. DAISUKE TOCHIGI TEL 84-4-3728 6292
 ✉ tochigi@yamazenvn.com FAX 84-4-3766-4137

Ho Chi Minh
 ■ MR. TAKEHITO NAKAJIMA TEL 84-8-54179 229
 ✉ tn790717@yamazenvn.com FAX 84-8-3820-2784



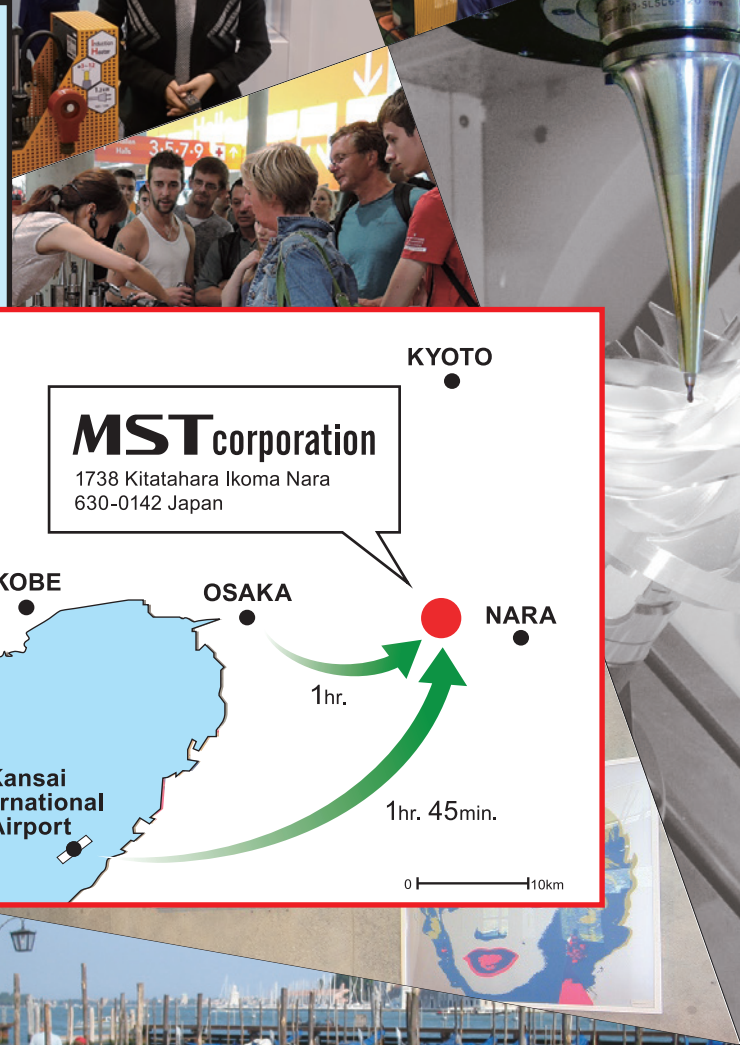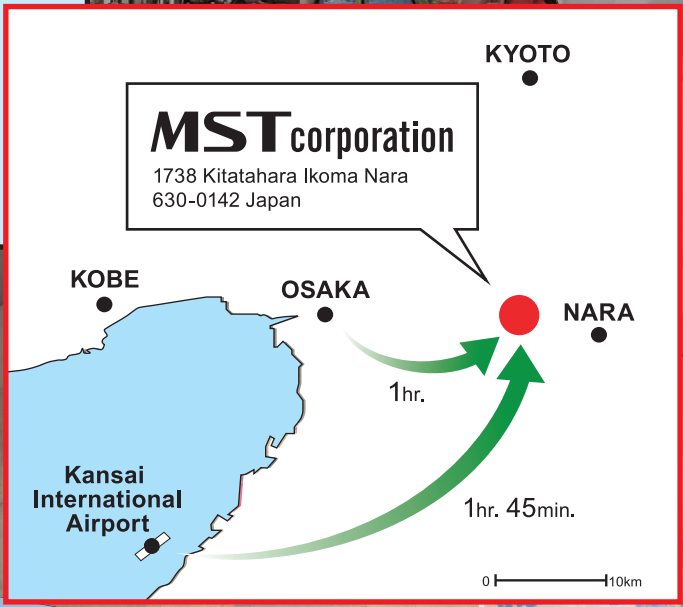



HEAD OFFICE & FACTORY

1738 Kita-tahara, Ikoma,
Nara 630-0142 Japan
Tel : +81 743 78 1931
Fax : +81 743 78 3854
✉ : info@mst-corp.co.jp

MSTcorporation
<http://www.mst-corp.co.jp>